

# ANALYTICAL COMPARISON OF PATH LOSS MODELS FOR RADIO WAVE PROPAGATION OVER YENAGOA – SOUTHERN NIGERIA

Abstract- Planning communication systems and making the best use of the radio spectrum, a finite natural resource, benefit from using propagation models. Here is an analysis of the best propagation model for Yenagoa Southern, Nigeria. Electric field strength measurements made during drive tests for two television transmitters operating at 210.25 MHz and 577.10 MHz make up the experimental data. Analytical comparisons were made between verified predictions for the free space, Okumura, and Hata models. The results demonstrate that these empirical models fail to take into account Yenagoa's actual terrain profile for television broadcast. The Okumura model is the best fit, with ideal values for root mean square error (RMSE) of 34.9136 and 33.2841 and average relative error of 0.13212 and 0.4327 for 210.25 MHz and 577.10 MHz, respectively. However, if the Okumura model is tailored for Yenagoa to improve electric field strength prediction and coverage estimation, better results can be attained.

Comment [1]: Use a simpler and clearer sentence

Comment [2]: I suggest you replace the word best with some

Comment [3]: I suggest these.....Here is a comparative analysis between some propagation models and actual measurements from Yenagoa, Southern Nigeria.

Comment [4]: and Hata models and actual measurements or measured data

**Keywords-** Path loss, propagation, electric field strength, broadcast, coverage, transmission

## I. INTRODUCTION

Path loss models are an important aspect of radio wave propagation that helps predict the reduction of signal strength over a given transmission distance. This is crucial in designing wireless communication systems for various applications such as cellular communication, satellite communication, radio broadcasting, and more [1-6]. In general, radio waves experience various types of losses as they propagate through a medium or along a path such as free space, air, water, or buildings. These losses can be attributed to various factors such as absorption, reflection, diffraction, scattering, and refraction, among others [7-11]. Path loss models provide a standardized approach to calculate the attenuation of radio waves in a specific environment over a given distance. These models take critical factors such as frequency, distance, and environmental obstacles into consideration to evaluate the expected power level at a particular location [12-20]. Such models can be classified into two broad categories: empirical models and theoretical models. Empirical models are derived based on measured data in real environments, while theoretical models are based on fundamental electromagnetic principles. Several path loss models are available, including the Hata model, Okumura-Hata model, COST231-Hata model, Extended Hata model, Lee model, and more. Each model has its own set of advantages and limitations, and the choice of the model depends on the specific requirements and characteristics of the communication system. Overall, path loss models play a significant role in optimizing wireless communication systems and in ensuring an optimal signal strength and coverage [20-25]. However, their suitability for television broadcast service has not been established, especially for coverage estimates in Yenagoa, Southern Nigeria.

A drive test measurement of the electric field strength over two transmitters—one VHF (210.25MHz) and one UHF (577.10MHz)—performed inside their respective primary coverage

Comment [5]: transmitter - one (separate them)

Comment [6]: (577.10MHz) - performed [separate them]

regions is presented in this work. The best propagation prediction model for the chosen location, Yenagoa, Southern-Nigeria, was discovered by measurement. The free-space model put out by Friis, as described in [20], the Okumura model created by Okumura, and the modified Okumura model created by Hata, as published in [26], were compared to the measured data. They were chosen over a number of others due to their simplicity and the compatibility of their necessary parameters with those offered by the chosen transmitters. They both depend on frequency and distance, but the applicability of each varies depending on the region. According to a report in [27], they failed to account for the topographical profile between the transmitter and the receiver, which results in forecasts that are overly optimistic [26]. The various adjustments made to current models are efforts to address these flaws. The optimization of the Hata model for television planning in Lagos State, Nigeria, was described in [28] as a similar endeavor.

## II. VERY HIGH FREQUENCY (VHF) AND ULTRA HIGH FREQUENCY (UHF) BANDS OF THE RADIO SPECTRUM

Under the broader ITU classifications for the radio spectrum, the VHF, or very high frequency, band has a frequency range of 30 to 300 MHz and a wavelength range of 10 to 1 meter. The lower frequencies are occasionally affected by the ionosphere, but not as much as the bands. Although they can be affected by tropospheric conditions, they are typically thought to exhibit more line-of-sight radio propagation. VHF FM transmission and more modern digital audio broadcasting typically utilise this part of the radio spectrum. There are some television broadcast in various nations as well. This part of the spectrum has radio bands, which are used for point-to-point radio communications, aviation and maritime radio communications, among others.

On the other hand, it is clear that the UHF band has a higher frequency than the VHF band. Since it spans 300 to 3000 MHz, frequency allocations in this band provide a wider bandwidth. Several radio applications are suited for radio propagation because it provides a link that is more akin to line of sight. UHF is utilized for numerous short-range wireless networks, including Wi-Fi and other wireless LAN applications, as well as mobile phone communications and television broadcasts. Moreover, it is used for a number of point-to-point radio communication systems and for distant sensors, nodes, and other components of the Internet of Things. Within this band, there are also allocations for amateur radio.

## III. PATH LOSS EQUATION

Path loss equations are mathematical formulas used to determine the attenuation or reduction of signal strength as electromagnetic waves are propagated through a medium. Knowledge about path loss equations is essential in the design of efficient wireless communication systems. The basic formula for the path loss equation is as follows:

$$\text{Path loss} = \left( \frac{P_t}{P_r} \right) \quad 1$$

where  $P_t$  is the transmitted power

$P_r$  is the received power.

Comment [7]: the VHF (Very High Frequency) band has a frequency.....

Comment [8]: VHF-FM

Comment [9]: This statement can't stand alone. Kindly combine it with the previous statement.

The path loss equation can be derived in different ways depending on the type of signal transmitting medium. The following are the most common derivation methods used in wireless communication systems.

1. **Free Space Path Loss (FSPL):** The free space path loss model assumes that the transmission medium is free from any obstacles or obstructions. The signal propagates in a straight line from the transmitter to the receiver in a vacuum. In this case, the path loss equation is derived from the Friis transmission equation, given by:

$$P_r = P_t G_t G_r \left(\frac{\lambda}{4\pi d}\right)^2 \quad 2$$

where  $P_r$  is the received power

$P_t$  is the transmitted power

$G_t$  and  $G_r$  are the gains of the transmitting and receiver antennas respectively

$\lambda$  is the wavelength of the transmitted signal, and

$d$  is the distance between the transmitter and receiver.

The path loss is then calculated as:

$$Path\ loss = 10 \log \left(\frac{P_r}{P_t}\right) = -20 \log \log (d) - 20 \log \log \left(\frac{\lambda}{4\pi}\right) + G_t + G_r \quad 3$$

In equation 3, the first term represents the loss due to distance, while the second term represents losses due to the environment. The last two terms represent the gain factors of the transmitting and receiver antennas.

2. **Two-Ray Ground Reflection Model:** This model is commonly used in radio wave propagation near the earth's surface. It assumes that the transmitted signal is reflected off the ground, resulting in two paths with different phases. The path loss equation is derived as follows:

$$P_r = (P_t G_t G_r H_t H_r) / [(d^2) \times (\lambda^2)] \quad 4$$

where  $H_t$  and  $H_r$  are the heights of the transmitting and receiver antennas respectively.

The path loss equation is then calculated as:

$$Path\ loss = 10 \log \log \left[ \frac{(H_t \times H_r)^2}{(d^2) \times (\lambda^2)} \right] + G_t + G_r \quad 5$$

The first term represents the loss due to distance and reflection, while the last two terms represent the gain factors of the transmitting and receiver antennas.

3. **Log-Distance Path Loss Model:** The log-distance model is mainly used in urban areas where the signal propagation is affected by numerous obstructions such as buildings, trees, and other structures. The path loss equation is derived using empirical measurements and constants. The equation is given by:

$$Path\ loss(dB) = 10n \log \log \left(\frac{d}{d_0}\right) + A \quad 6$$

where  $n$  is the path loss exponent

$d$  is the distance between the transmitting and receiving antennas

$d_0$  is a reference distance, and

$A$  is the path loss intercept.

The path loss exponent,  $n$ , is a constant that depends on the environment, frequency of the signal, and building materials. The path loss intercept,  $A$ , represents the path loss for a reference distance,  $d_0$ .

4. **Okumura-Hata Path Loss Model:** The Okumura-Hata model is a modification of the log-distance model and is commonly used in urban and suburban areas. The path loss equation can be derived by the following formula:

$$Path\ loss = A + B \times \log \log 10(d) + C \times \log \log 10(f) + D \times \log \log 10(h)$$

where  $f$  is the frequency in MHz,

$d$  is the distance between the transmitter and receiver,

$h$  is the height of the transmitting antenna in meters, and

$A$ ,  $B$ ,  $C$ , and  $D$  are constants that vary based on the location and environment.

Conclusion

Path loss equations are instrumental in designing wireless communication systems. The derivation and the type of model used depend on the type of transmission medium and signal frequency. Free space path loss, two-ray ground reflection, log-distance, and Okumura-Hata models are some of the most commonly used methods for deriving path loss equations. Therefore, knowledge about path loss equations is essential in managing and optimizing wireless communication systems.

#### IV. ASSESSMENT OF FIELD STRENGTH

The measuring setup included a mobile GPS receiver (GERMIN GPS 76), a portable spectrum analyzer/field strength meter operating at 2 GHz, and a laptop computer for data logging. On 210.25 MHz and 577.10 MHz, respectively, the electric field strengths for the Niger Delta Television (NDTV) and Nigerian Television Authority (NTA Yenagoa) were experimentally measured.

Comment [10]: Kindly add after 'measured.' Table 1 shows the transmitter parameters.

Table 1.: Transmitter Parameters

Station	Transmission Frequency (MHz)	Transmitter Height (m)	Transmission Frequency band
NTA Yenagoa	210.25	150	VHF
NDTV	577.10	175	UHF

#### V. RESULTS

Yenagoa's electric field strength was calculated as a suburban region. Figures 1 and 2 compare the measured and anticipated field strengths for two terrestrial television lines in Yenagoa. These models produce comparable findings because they make predictions without taking into account the actual terrain profile for propagation. However, as a result of Yenagoa's terrain and clutter, the measured field strength reveals the true variation of the

transmitted signal. Lower distances, particularly between 1 and 3 Km for the two transmitters, show good agreement between the predictions of Hata and free space. [They] both overestimate the field strength for television transmissions in Yenagoa, making it impossible for them to correctly anticipate the measured field strength. On the other hand, despite the topographical carelessness, Okumura's prognosis is near to those measured. On the two transmitters, it gave a decent performance.

Comment [11]: Rephrase.....Generally, the aforesaid models overestimated.....

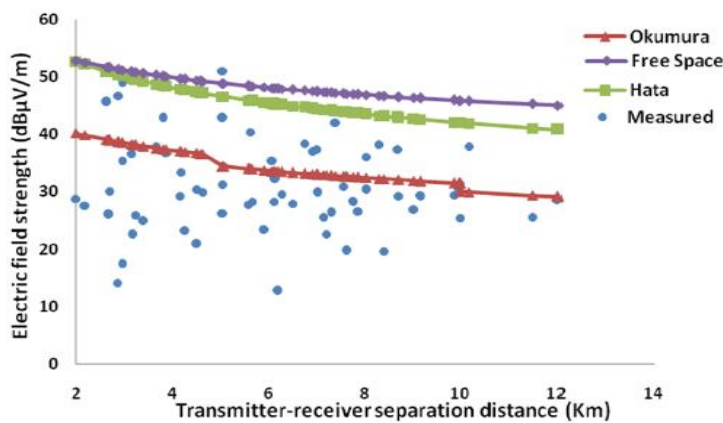


Figure 1.: Comparison of the Measured and Predicted Field Strength of NTA Yenagoa

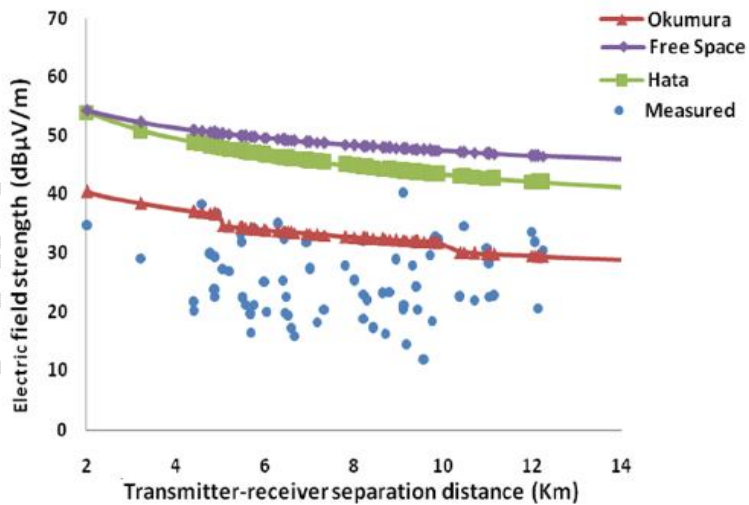


Figure 2.: Comparison of the Measured and Predicted Field Strength of NDTV

Table 11.: Statistics of the models

Transmission Frequency	Propagation model	Standard Deviation	Root Mean Square	Average Relative Error
210.25 MHz	Okumura	3.7374	34.9136	0.1321
	Free Space	2.4119	48.6218	0.5811
	Hata	3.7012	46.2736	0.5017
577.10MHz	Okumura	3.4026	33.2841	0.4327
	Free Space	2.1622	48.8601	1.1186
	Hata	3.3144	45.6125	0.9274

The comparison statistics for the three models and the measured data are shown in Table II. The test models were ranked according to the root mean square (RMS) error and the average relative error. The RMS is calculated as:

$$RMS = \sqrt{\mu^2 + \sigma^2} \quad 8$$

where  $\mu$  is the mean and

$\sigma$  is the standard deviation

and the average relative error used to evaluate the performance of the models is given as:

$$E = \frac{E_P - E_M}{E_M} \quad 9$$

where  $E_M$  denotes the measured field strength and

$E_P$  denotes the anticipated field strength.

It was noted that empty space had the lowest standard deviation. For the two transmitters, free space also had the largest root mean square and average relative inaccuracy. Hata's forecast was shown to perform better, despite the fact that it did not deliver the best outcome when compared. The performance of the Okumura model, however, stands out since it has the lowest average relative errors for the two transmitters as well as the lowest root mean square error. Losses were found to be larger at higher frequencies. The topography's influence on electrical field strength is shown by the dramatic fluctuation in the observed electrical field strength. The chosen propagation models with their too optimistic projections ignored this. This is consistent with the findings of [6], which state that the Okumura model is inappropriate for terrains with erratic topography. The Okumura model can be adjusted to the surroundings, nevertheless, to produce a superior performance.

**Comment [12]:** Why did it perform better? The results from the graph is contrary to claim. Kindly revisit and revise your analysis in this regard.

**Comment [13]:** New paragraph

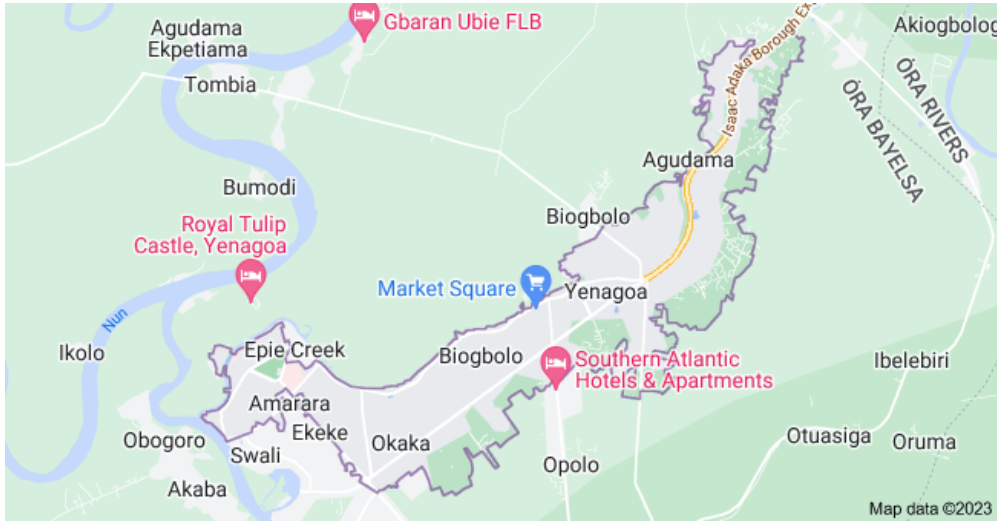


Figure 3.: Map of Study Area (Yenagoa)

## VI. CONCLUSION

In Yenagoa, Southern Nigeria, two terrestrial television transmitters operating on 210.25 MHz and 577.10 MHz have been used to measure field strength within the primary coverage. By comparing the measured electric field intensity with the equivalent predictions made by the free space, Okumura, and Hata models for the identical reference sites, it was determined whether certain empirical propagation models were applicable. The selected models' predictions of electric field strength are overly optimistic due to their evident ignoring of the topography profiles of the propagation environment, as demonstrated by experimental results. However, the study shows that the Okumura model is the most appropriate for Yenagoa-specific VHF and UHF communication system designs, as well as for television broadcast services and other communication system designs in general. However, if carefully optimized for accurate electric field strength prediction and coverage estimation for the preferred location, the Okumura model can perform better.

**Comment [14]:** I suggest that the highlighted statements be removed. Conclusion is the key discovery made not a summary of the research.

## VII. REFERENCES

- [1] Iloke, J., Ekah, U. J. & Ewona, I. (2022). Tropospheric Influence on Ultra-High Frequency (UHF) Radio Waves. *Asian Journal of Research and Reviews in Physics*, 6(3): 48-57.
- [2] Ekah, U. J., Obi, E. & Ewona, I. (2022). Tropospheric Influence on Low-band Very High Frequency (VHF) Radio Waves. *Asian Journal of Advanced Research and Reports*, 16(11): 25-36.

- [3] Ekah, U. J. and Onuu, M. U. (2022). Tropospheric Influence on Call Setup in Mobile Networks. *Journal of Engineering Research and Reports*, 22(2): 14-26.
- [4] Ekah, B. J., Iloke, J. and Ekah, U. J. (2022). Tropospheric Influence on Dropped Calls. *Global Journal of Engineering and Technology Advances*, 10(2): 83-93.
- [5] Ekah, U. J., Adebayo A. O. and Shogo, O. E. (2022). Spatial Distribution of Frequency Modulated Signals in Uyo, Nigeria. *World Journal of Advanced Engineering Technology and Sciences*, 5(1): 39-46.
- [6] Obiyemi, O. O., Ibiyemi, T. S., Gbenga-Ilori, A. O., & Ojo, J. S. (2012, December). Path loss model for radio wave propagation at VHF/UHF bands using electric field strength measurement over Ilorin middle-belt, Nigeria. In *2012 2nd International Conference on Advances in Computational Tools for Engineering Applications (ACTEA)* (pp. 43-46). IEEE.
- [7] Emeruwa, C., & Iwuji, P. (2018). Determination Of A Pathloss Model For Long Term Evolution (Lte) In Yenagoa. *Engineering and Science*, 7(10), 38-44.
- [8] Ewona, I. and Ekah, U. (2021). Influence of Tropospheric Variables on Signal Strengths of Mobile Networks in Calabar, Nigeria. *Journal of Scientific and Engineering Research*, 8(9): 137-45.
- [9] Iloke, J., Utoda, R. and Ekah, U. (2018). Evaluation of Radio Wave Propagation through Foliage in Parts of Calabar, Nigeria. *International Journal of Scientific & Engineering Research*, 9(11): 244-249.
- [10] Emeruwa, C. and Ekah, U. J. (2018). Pathloss Model Evaluation for Long Term Evolution in Owerri. *International Journal of Innovative Science and Research Technology*, 3(11): 491-496.
- [11] Emeruwa, C. and Ekah, U. J. (2018). Investigation of the Variability of Signal strength of Wireless Services in Umuahia, Eastern Nigeria. *IOSR Journal of Applied Physics*, 10(3): 11-17.
- [12] Alim, M. A., Rahman, M. M., Hossain, M. M. & Al-Nahid, A. (2010). Analysis of Large-Scale Propagation Models for Mobile Communications in Urban Area. *International Journal of Computer Science and Information Security*, 7(1): 135-139.
- [13] Nadir, Z., Elfadhil, N. and F. Touati, F. (2008). Pathloss Determination Using Okumura-Hata Model and Spline Interpolation for Missing Data for Oman. In *Proceedings of the World Congress on Engineering. 2008. Vol I. July, 2008, London, U.K.*
- [14] Purnima K. Sharma and R.K.Singh, "Comparative Analysis of Propagation Path loss Models with Field Measured Data," *International Journal of Engineering Science and Technology*. Vol. 2, no 6, 2010.

- [15] Iloke, J., Ekah, U. J., Uduobuk, E. J., Ewona, I. & Obi, E. (2022). Quality of Service Reliability: A study of Received Signal Quality in GSM Networks. *Asian Journal of Physical and Chemical Sciences*, 10(3): 25-34.
- [16] Ewona, I., Ekah, U. J., Ikoi, A.O. & Obi, E. (2022). Measurement and Performance Assessment of GSM Networks using Received Signal Level. *Journal of Contemporary Research*, 1(1): 88-98.
- [17] Ekah, U. J., Iloke, J., Ewona, I. & Obi, E. (2022). Measurement and Performance Analysis of Signal-to-Interference Ratio in Wireless Networks. *Asian Journal of Advanced Research and Reports*, 16(3): 22-31.
- [18] Abhayawardhana, V. S.; Wassell, I. J.; Crosby, D.; Sellars, M. P.; Brown, M. G. "Comparison of empirical propagation path loss for fixed wireless access systems," *Proc. IEEE Veh. Tech. Conf.* 2005, pp. 73-77.
- [19] Iwuji, P. C., & Emeruwa, C. (2018). Investigation of Signal Strength-Level Generated by Orient 94.4 FM Transmitter in Imo State, Nigeria. *International Journal of Science and Research (IJSR)*, 7(5), 1089-1094.
- [20] Sarkar, T.K., Z. Ji, K.J. Kim, A. Medour, and M. Salazar-Palma, "A Survey of various propagation models for mobile communication," *IEEE Antennas and Propagation Magazine*, Vol. 45, no. 3, 51-82, June 2003.
- [21] Emeruwa, C. and Ekah, U. J. (2022). Improved Algorithm of Equation Error Model of Active Noise Control. *Journal of Multidisciplinary Engineering Science and Technology*, 9(1): 15067-15072.
- [22] Ekah, U. J. and Iloke, J. (2022). Performance Evaluation of UMTS Key Performance Indicators in Calabar, Nigeria. *GSC Journal of Advanced Research and Reviews*, 10(1): 47-52.
- [23] Ekah, U. J. and Emeruwa, C. (2022). A Comparative Assessment of GSM & UMTS Networks. *World Journal of Advanced Research and Reviews*, 13(1): 187-196.
- [24] Ekah, U. J. and Emeruwa, C. (2021). Gauging of Key Performance Indicators for 2G Mobile Networks in Calabar, Nigeria. *World Journal of Advanced Research and Reviews*, 12(2): 157-163.
- [25] Obi, E., Ekah, U. and Ewona, I. (2021). Real-Time Assessment of Cellular Network Signal Strengths in Calabar. *International Journal of Engineering Sciences & Research Technology*, 10(7): 47-57.
- [26] M. A. Nisirat, M. Ismail, L. Nissirat and S. Al-Khawaldeh. "A Terrain Roughness Correction Factor for Hata Path Loss Model at 900MHz," *Progress In Electromagnetics Research C*, Vol. 22, pp. 11-22, 2011.

[27] Armoogun V., Soyjaudah K.M.S., Mohamudally N. and Fogarty T. "Propagation models and their applications in digital television broadcast network design and implementation," *Trends in Communications Technology*, 2010. pp 165-184, DOI: 10.5772/8471.

[28] Gbenga-Ilori A.O and Obiyemi O.O., "Optimization of Hata Path Loss Model for Broadcast Communication Systems in Lagos State," in *Proc. Int. Conf. Innovations in Engineering and Technology*, Lagos, Nigeria, August, 2011, pp. 335-342

UNDER PEER REVIEW