

Original Research Article

Performance Evaluation of Olorunsogo Gas-Fired Power Plant Phase I

ABSTRACT

Aim: The aim of this research is to evaluate the performance of the Olorunsogo gas-fired power plant phase 1, examines the reason(s) for not operating at full capacity, and proffers possible solution(s).

Study of the design: The power plant comprises of eight (8) numbers of 42MW unit capable of evacuating 277MW.

Methodology: To obtain electrical parameters from the gas turbine, a mathematical model for pressure using a simple open-cycle gas turbine was developed. The pressure was further converted to energy using principles of kinetic theory of gases. Hence, the efficiency and other performance indicators were calculated.

Results: The study revealed an average operating capacity of 31.28MW. The average efficiency of the power plant in the period under review was 50.88%, as compared to the international standard practice of 65% and above. The average load factor and capacity factor was 11.25% and 11.54% respectively as compared to international standard practice of 50-80%, while the average reliability was 55.79%, as compared to international standard practice of 95%.

Conclusion: The study further reveals that wastage of gas, downtime, and inadequate gas supply are the major factors against the full capacity operation of the power plant. The proffered possible solutions articulated in this study if implemented, will optimize the power plant's full-capacity operation.

Keywords: Performance evaluation, efficiency, gas plant, reliability and installed capacity

1. INTRODUCTION

The erratic power supply in Nigeria is no longer a story and is generally believed to be the bane of economic and industrial development in Nigeria [1]. In Nigeria, irregular power, or simply "a power outage", has reached a very high level of embarrassment. There are various regions in a country where a power outage should never occur, however, power outages lasting several days are typical in Nigeria and can occur everywhere. In 2009, the presidential palace was not spared of this power outage [2]. Nigeria is not an exception to this trend rotating around the world as electricity is the most used and desired energy source because it is a vital driver for economic development and helps raise the standard of living for humans generally [3].

Gas power generating station accounts for twenty-three power stations out of the thirty power stations generated for the national grid in Nigeria, which account for 65% of the total power generated in Nigeria. Nigeria has been incredibly fortunate to have natural resources (gas) but has not utilized these resources for its energy supply [4]. Gas turbines nowadays are essential components of combined power plants, Gas turbine process, and exhaust gas parameters play a major role in both the operation of the combined power plant's steam component and all of its constituents [5].

This paper focuses on evaluating the performance of Olorunsogo gas-fired power plant phase 1 from 2015 to 2021, know why the power plants is not functioning at full capacity, and proffer possible solution(s) to the discovered problem(s).

2. LITERATURE REVIEW

The Olorunsogo gas-fired power plant is located within longitude $3^{\circ} 15' 0''\text{E}$ to $3^{\circ} 20' 0''\text{E}$ and latitude $6^{\circ} 50' 0''\text{N}$ to $6^{\circ} 55' 0''\text{N}$ and is 17km from Papalanto in Owode Local Government Area of Ogun State. The plant was required in boosting the stability of the electric power generation in the country within the shortest possible time. The construction works of Olorunsogo gas-fired power plant phase 1 commenced on 28th November 2005, and was completed in April 2007 with a capacity of 277MW, comprising of eight (8) numbers GT (gas turbine) unit of 42MW. The Olorunsogo gas power

Comment [S.1]: The abstract template needs improvement

Comment [S.2]: literature needs to be added according to the topic

Comment [S.3]: It is worth adding to address the specific problem statement in the area you are researching.

plant phase 1 project was built by the NIPP (as a joint investment of the three tiers of governments of Nigeria).

[6] presented a study and performance assessment of the Olorunsogo gas-fired power plant phase 1 which shows that the power generated in 2016 was far below what was generated in 2013. This suggests that rather than helping Nigeria's energy situation, the gas power plant made things worse, as the original intention of the establishment of the gas power plant.

[7] show that Nigeria's electrical industry is largely natural gas-based thermal power plants, and fossil fuel (gas) consists of 65% of the grid-connected power plants. The research shows that the average operational capacity of the Olorunsogo gas power plant is low. The basic motive of their study was a systematic investigation of the relationship between energy generation and real aggregate output in Nigeria, based on annual data between 1980 and 2017. The reason why the operating capacity of the power plant is low was not mentioned or discussed in the research.

[8] look at the performance of thermal power plants fired by natural gas. The research pointed out that the open gas turbine power plant comprises three major components: the compressor, combustion chamber, and turbine. The first law of thermodynamics model was used in their research for predicting the thermodynamic performance of the thermal power plant. The result shows that gas turbine performance is impacted by component performance and turbine operating conditions, and the plant's efficiency, power production, precise fuel usage, and work ratio can all be used to evaluate its performance. Moreover, the investigation of their research did not provide the reason(s) why individual gas-fired power plant was not working to its full potentials.

Comment [S.4]: Based on the literature, is this a parameter for your research?

3. METHODOLOGY

The primary data collection method was employed in this research due to its uniqueness to research works. This involves visit to the Olorunsogo gas-fired power plant phase 1 in Ogun State, southwest, Nigeria where empirical data prepared by the performance management department of the gas power station were collated spanning from 2015 to 2021.

The main data obtained from the Olorunsogo power plant phase 1 were all electrical parameters, while the parameters associated with gas turbines are pressure, volume, and temperature. Therefore, to obtain electrical parameters from the gas turbine, a mathematical model for pressure using a simple open-cycle gas turbine was developed. The pressure is further converted to energy using the fundamental principle of the kinetic theory of gases.

Comment [S.5]: The specifications of the Olorunsogo gas power plant, this must be highlighted. Equipped with data collection methods and instruments.

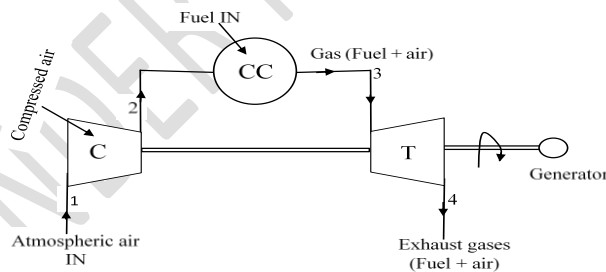


Figure 1: A schematic diagram for a simple open-cycle gas turbine

C is compressor
CC is the combustion chamber
T is turbine

Four processes take place in the Brayton cycle in a gas turbine.

- (i) Process 1-2: Reversible isentropic compression
- (ii) Process 2-3: Constant pressure heat addition.
- (iii) Process 3-4: Reversible isentropic expansion
- (iv) Process 4-1: Constant heat rejection.

Comment [S.6]: remove one space and pay attention to the period.

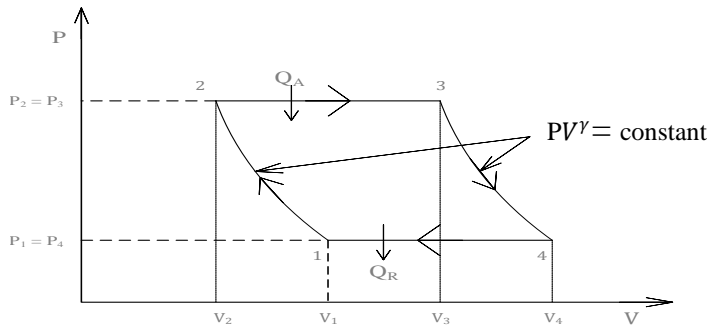


Figure 2: Pressure-volume (P-V) graph

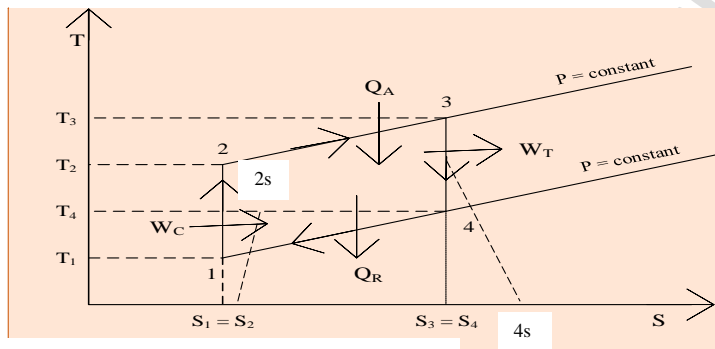


Figure 3: Temperature-Isentropic (T-S) graph

Comment [S.7]: Figure not clear.

- 1 – 2 – 3 – 4 Ideal cycle
- 1 – 2s – 3 – 4s Actual cycle

3.1 Ideal Cycle of The Turbine

The efficiency of the gas turbine is given as;

$$\text{Efficiency} = \text{Efficiency } \eta = \frac{WD}{Q_A} \quad (1)$$

Where WD is work done

Q_A is heat supply or added

$$\text{Work done } WD = Q_A - Q_R \quad (2)$$

Where Q_A is heat added at constant pressure.

Q_R is heat rejected at constant pressure.

Heat added at constant pressure is given as;

$$Q_A = mC_p(T_3 - T_2) \quad (3)$$

$$= C_p(T_3 - T_2) \text{ kJ/kg, } C_p \text{ is the specific heat at constant pressure.}$$

Similarly, Heat rejected at constant pressure is given as;

$$Q_R = mC_p(T_4 - T_1) \quad (4)$$

$$= C_p(T_4 - T_1) \text{ kJ/kg}$$

Comment [S.8]: It is necessary to add an explanation of the function of the equation. For example, m (mass flowrate) is evaluated using a flow meter instrument.

Substitute equations (3) and (4) in equation (2)

$$\text{Therefore, } WD = C_p(T_3 - T_2) - C_p(T_4 - T_1) \text{ kJ/kg} \quad (5)$$

Substitute for WD in equation (v) and Q_A in equation (iii) into equation (i)

$$\begin{aligned} \therefore \text{Efficiency } \eta &= \frac{C_p(T_3 - T_2) - C_p(T_4 - T_1)}{C_p(T_3 - T_2)} \\ &= \frac{C_p(T_3 - T_2)}{C_p(T_3 - T_2)} - \frac{C_p(T_4 - T_1)}{C_p(T_3 - T_2)} \\ &= 1 - \frac{(T_4 - T_1)}{(T_3 - T_2)} \end{aligned} \quad (6)$$

For processes 1 to 2; reversible isentropic compression process and using the PVT (pressure, volume, temperature) relationship,

$$\frac{T_2}{T_1} = \left(\frac{P_2}{P_1}\right)^{\frac{\gamma-1}{\gamma}} \quad (7)$$

$$= (r_p)^{\frac{\gamma-1}{\gamma}}$$

$$\therefore T_2 = T_1(r_p)^{\frac{\gamma-1}{\gamma}} \quad (8)$$

Where γ is the specific heat ratio $\left(\frac{C_p}{C_v}\right)$

C_p is the specific heat at constant pressure

C_v is the specific heat at a constant volume

For processes 3 to 4, the reversible isentropic expansion process

$$\frac{T_3}{T_4} = \left(\frac{P_3}{P_4}\right)^{\frac{\gamma-1}{\gamma}} \quad (9)$$

$$= (r_p)^{\frac{\gamma-1}{\gamma}}$$

$$\therefore T_3 = T_4(r_p)^{\frac{\gamma-1}{\gamma}} \quad (10)$$

Substitute for T_2 and T_3 in equation (vi)

$$\begin{aligned} \text{Efficiency } \eta &= 1 - \frac{(T_4 - T_1)}{T_4(r_p)^{\frac{\gamma-1}{\gamma}} - T_1(r_p)^{\frac{\gamma-1}{\gamma}}} \\ &= 1 - \frac{(T_4 - T_1)}{(r_p)^{\frac{\gamma-1}{\gamma}} (T_4 - T_1)} \\ &= 1 - \frac{1}{(r_p)^{\frac{\gamma-1}{\gamma}}} = \text{The efficiency of the gas turbine, (Ideal cycle)} \end{aligned} \quad (11)$$

Where r_p is pressure ratio $\left(\frac{P_2}{P_1}\right)$

γ is the specific heat ratio $\left(\frac{C_p}{C_v}\right)$

P_1 is the input pressure of the compressor.

P_2 is the exhausting pressure of the compressor.

C_p is the specific heat at constant pressure.

C_v is the specific heat at constant volume.

Based on the kinetic theory of gases, it is known that the pressure exerted by gas molecules on the walls of the container depends on: (i) the mass of the molecules, (ii) the molecules' rate of motion, and (iii) how many molecules are present in the container [9].

Mathematically, it is expressed as;

$$P = \frac{1}{3} \rho c^2 \quad (12)$$

Where P is the pressure

ρ is the density

c is the r.m.s velocity of gas molecules.

Since the molecules of gases are in constant motion, they possess kinetic energy. The value of the kinetic energy can be determined using a formula derived from the ideal gas equation as will be shown in this section [9].

Mathematically, the mean kinetic energy of translation per unit volume of the gas is;

$$E = \frac{1}{2} \rho c^2 \quad (13)$$

Where E is kinetic energy

Dividing equation (14) by (15), we have;

$$\begin{aligned} \frac{P}{E} &= \frac{\rho c^2}{3} \times \frac{2}{\rho c^2} \\ &= \frac{2}{3} \\ \therefore P &= \frac{2E}{3} \quad (14) \end{aligned}$$

This implies that;

$$P_1 = \frac{2E_1}{3} \text{ and } P_2 = \frac{2E_2}{3} \quad (15)$$

Where P_1 is the input pressure of the compressor

P_2 is exhausting pressure of the compressor

E_1 is energy installed in MW

E_2 is energy generated in MW

But r_p = pressure ratio = $\frac{P_2}{P_1}$

$$\begin{aligned} \therefore r_p &= \frac{\frac{2E_2}{3}}{\frac{2E_1}{3}} \\ &= \frac{2E_2}{3} \div \frac{2E_1}{3} \\ \therefore r_p &= \text{pressure ratio} = \frac{E_2}{E_1} \quad (16) \end{aligned}$$

Heat capacity ratios for gases ($\frac{C_p}{C_v}$)

The equipartition theorem states that any quadratic energy term such as kinetic energy contributes equally to the internal energy of a system in thermal equilibrium. This means that for a gas each degree of freedom contributes $\frac{1}{2} RT$ to the internal energy on a molar basis (R is the ideal gas constant) [9,10].

Assuming an atom of a monoatomic gas that moves in three independent directions, the gas has three degrees of freedom due to its translational motion. The rotation of gas molecules adds additional degrees of freedom. A linear molecule rotates along two independent axes. Assuming a linear molecule, it is therefore means that a linear molecule has two rotational degrees of freedom.

The total number of degrees of freedom for a linear molecule is 5 so its internal energy is $e = 5/2 RT$, its molar heat capacity at constant volume is $C_v = 5/2 R$ and its molar heat capacity at constant pressure will be $C_p = 7/2 R$ [9,11].

But $\gamma = \text{specific heat ratio} = \frac{C_p}{C_v}$

$$\begin{aligned} \therefore \gamma &= \frac{7R/2}{5R/2} \\ &= \frac{7R}{2} \times \frac{2}{5R} \\ &= \frac{7}{5} = 1.4 \end{aligned} \quad (17)$$

$$\therefore \text{Efficiency } \eta = 1 - \frac{1}{(r_p)^{\frac{1.4-1}{1.4}}} - \frac{1}{r_p^{0.286}} \quad (\text{Ideal cycle}) \quad (18)$$

3.2 Actual Cycle of The Turbine

An actual cycle of the gas turbine has to be considered since there is no ideal machine anywhere.

$$\text{Efficiency } \eta = \frac{\text{Actual workdone}}{\text{Ideal workdone}} \times 100\% \quad (19)$$

$$\begin{aligned} &= \frac{C_p(T_3 - T_{4s})}{C_p(T_3 - T_4)} \\ &= \frac{(T_3 - T_{4s})}{(T_3 - T_4)} \end{aligned} \quad (20)$$

Process 3-4s reversible adiabatic process

$$\therefore P^{1-\gamma} T^\gamma = \text{constant}$$

$$P_3^{1-\gamma} T_3^\gamma = P_4^{1-\gamma} T_4^\gamma \quad (21)$$

$$\text{Also, } \frac{T_4}{T_3} = \left(\frac{P_4}{P_3}\right)^{\frac{\gamma-1}{\gamma}} = \left(\frac{P_1}{P_2}\right)^{\frac{\gamma-1}{\gamma}} = \left(\frac{1}{r_p}\right)^{\frac{\gamma-1}{\gamma}} \quad (22)$$

Again, $P_4 = P_1$ and $P_3 = P_2$

$$\therefore \frac{P_2}{P_1} = r_p \quad (23)$$

$$\begin{aligned} \text{Now, Efficiency } \eta &= \frac{(T_3 - T_{4s})}{T_3(1 - \frac{T_4}{T_3})} \\ &= \frac{T_3(1 - \frac{T_{4s}}{T_3})}{T_3(1 - \frac{T_4}{T_3})} \\ \therefore \text{Efficiency } \eta &= \frac{1 - (r_p)^{\frac{\gamma-1}{\gamma}}}{1 - (\frac{1}{r_p})^{\frac{\gamma-1}{\gamma}}} \end{aligned} \quad (24)$$

Rationalizing the denominator

$$\text{Efficiency } \eta = \frac{1 - (r_p)^{\frac{\gamma-1}{\gamma}}}{(\frac{1}{r_p})^{\frac{\gamma-1}{\gamma}} - 1} \quad (\text{Actual cycle})$$

$$= \frac{1 - (r_p)^{\frac{1.4-1}{1.4}}}{(\frac{1}{r_p})^{\frac{1.4-1}{1.4}} - 1}$$

$$\therefore \text{Efficiency } \eta = \frac{1 - (r_p)^{0.286}}{(\frac{1}{r_p})^{0.286} - 1} \times 100\% \quad (25)$$

Where r_p is the pressure ratio $(\frac{E_2}{E_1})$

E_1 is the energy installed in MW.

E_2 is the energy generated in MW.

3.3 Reliability: Reliability is the probability that a device or system will operate for a given period without failure, and under given operating conditions.

$$\text{Reliability } R(t) = \frac{\text{Expected running hours} - \text{downtime}}{\text{Expected running hours}} \times 100\% \quad (26)$$

3.4 Load Factor: The load factor measures the variation in the loads a plant draws and the load it is capable of drawing. It is essential in evaluating the cost per unit generated since it shows how well the plant is using its capacity [12].

$$\text{Load factor (LF)} = \frac{\text{Energy exported in MWh}}{\text{Installed capacity in MW} \times \text{actual running time}} \times 100\% \quad (27)$$

3.5 Capacity Factor: The capacity factor serves as a gauge for the plant's level of utilization. It measures the amount of the potential energy created at full capacity during the same time period in relation to the net electricity generated during that time [12].

$$\text{Capacity Factor (CF)} = \frac{\text{Energy generated in MWh}}{\text{Installed capacity in MW} \times \text{actual running time}} \times 100\% \quad (28)$$

4. RESULT AND DISCUSSION

Table 1 shows the collated data from Olorunsogo gas-fired power plant phase 1 as compiled by the record management department. Figure 4 shows the graphical representation of the key performance indicators, calculated from the collated data for the year 2015 – 2021 under review.


The average percentage of efficiency, load factor, capacity factor, and reliability are 50.88%, 11.25%, 11.54% and 55.79% respectively. It shows that all the key performance indicators are low compared to the gas power plant standard practice.

A gas-fired power plant's acceptable standard practice load factor is 50-80% [13]. The standard practice reliability and availability of a gas-fired power plant is 95% and above [12]. A gas-fired power plant's acceptable standard practice efficiency is 65% and above [6]. The research reveals that all the key performance indicators are low compared to the gas power plant international standard practice.

Table 1: Olorunsogo power plant collated data with installed capacity of 277MW

YEAR	Running time (Hours)	Power Generated (MWh)	Power Generated (MW)	Power Exported (MWh)	Power Exported (MW)	Gas Consumed (SCF)	Expected running Time (Hours)	Down time (Hours)
2015	48,100.10	1,544,073.71	32.10	1,533,138.00	31.87	17,884,801,666.68	70,080.00	21,979.90
2016	30,458.70	939,946.89	30.86	931,360.45	30.58	11,043,403,382.85	70,080.00	39,621.30
2017	37,679.80	1,174,654.90	31.17	1,165,017.14	30.92	13,138,237,184.95	70,080.00	32,400.20
2018	37,812.90	1,167,184.71	30.87	1,157,295.56	30.61	12,702,525,006.21	70,080.00	32,267.10
2019	43,028.00	1,331,199.58	30.94	1,320,780.58	30.70	15,335,453,079.13	70,080.00	27,052.00
2020	45,218.10	1,413,971.51	31.27	1,403,532.71	31.04	13,293,565,660.79	70,080.00	24,861.90
2021	40,479.40	1,286,253.53	31.78	1,276,542.66	31.54	13,375,361,490.86	70,080.00	29,600.60

Comment [S.9]: The table is not visible clearly

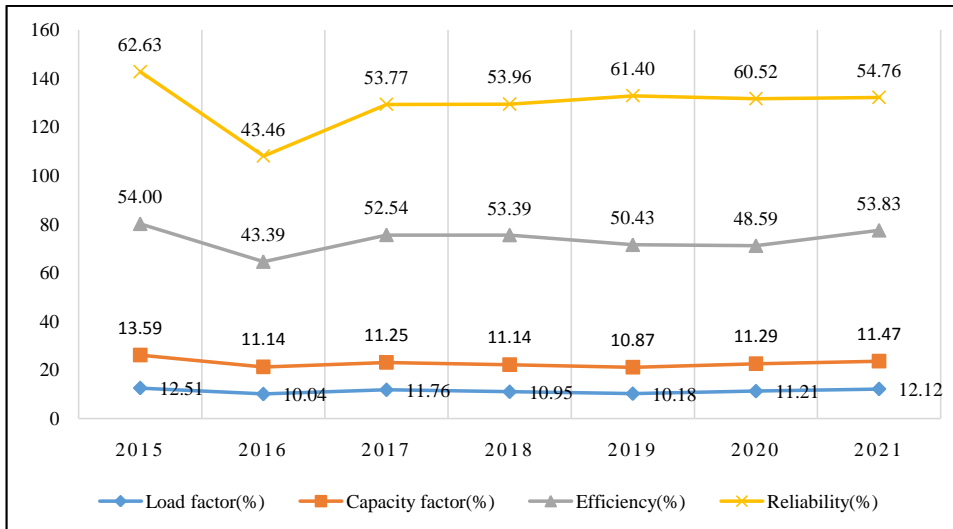

Comment [S.10]: Graph needs to be improved

Figure 4: Key performance indicators

The amount of energy or electricity generated from a cubic volume of gas depends on the generator's efficiency and the efficiency of the conversion. This ranges from 30% for a combustion engine or old single-cycle turbines to over 60% for the most modern gas turbine. On the norms, 1kWh of energy is generated by burning from 0.083 to 0.125 standard cubic feet (SCF) [14].

Assuming 0.125 standard cubic feet (SCF) of gas to generate 1kWh of energy.

$$\therefore 1 \text{ SCF} = \frac{1}{0.125} = 8\text{kWh} = 0.008\text{MWh} \quad (29)$$

This research reveals that the total gas consumed for the years under review is 96,773,347,471.47 SCF while the total energy generated is $0.00886 \times 10^8 \text{MWh}$

The expected energy generated by the power plant is $96,773,347,471.47 \times 0.008$. Therefore, the expected energy to be generated is $7.7429 \times 10^8 \text{MWh}$.

From this analysis, the total energy generated for the years under review is $0.00886 \times 10^8 \text{MWh}$ which is extremely low compared to the expected energy generated of $7.7429 \times 10^8 \text{MWh}$ by the Olorunsogo gas-fired power plant phase 1.

Also, the expected running time for the years under review is 490,560.00 hours, but the actual running time is 282,777.00 hours. This gives a total downtime of 207,783.00 hours. This indicates that the downtime of the power plant is very high.

4.1 Findings

Interviews with some staff, and the results from the analysis of the performance of the Olorunsogo gas-fired power plant phase1, the following findings were obtained.

- (i) **Wastage of gas:** It was observed from the results that, there is a lot of gas wastage as the energy generated from the consumed gas for the years under review is very low compared to what is expected to be generated from the consumed gas. The wastage of gas has been attributed to inefficient combustion, poor maintenance, turbine gas leakage, and inadequate control system.
- (ii) **Downtime:** The downtime period of the Olorunsogo gas-fired power plant phase 1 is very high for the years under review. The downtime was a result of system breakdown, inadequate gas supply, and maintenance activities.
- (iii) **Inadequate gas supply:** The volume or quantity of gas supplied to the gas plant from NGC (Nigeria Gas Company) is insufficient for running the generation plant. This is due to the

frequent shutdown of the gas plant as a result of the vandalization of the gas pipeline by the militant group in response to the government's failure to give them employment and provide basic amenities for their communities.

- (iv) Poor maintenance culture: Lack of maintenance culture has been a big problem in Nigeria. Most of the equipment in the power plant is outdated and needs to be upgraded especially phase II which is still managed by the federal government. Even if maintenance were eventually carried out, it is corrective maintenance instead of preventive maintenance.
- (v) Inadequate staff training: Staff is not exposed to state-of-the-art technology through local and overseas training for the optimal day-to-day running of gas-fired power generation systems.

4.2 Possible Solutions

- (i) The management of the Olorunsogo gas-fired power plant phase 1 must do everything possible to reduce gas wastage. This can be achieved by making sure that, the fuel-air mixture is properly balanced and the combustion process optimized. Also, regular cleaning of turbine blades and prompt replacement of worn-out parts.
- (ii) Urgent and necessary maintenance should be given to the gas turbines in order to reduce downtime periods.
- (iii) There should be an adequate, sufficient, and regular supply of gas from the Nigeria Gas Company. This can be achieved by reducing or eliminating the activities of the Militants or agitators of pipeline vandalization.
- (iv) There must be proper maintenance of gas turbines and other facilities. The surveillance, monitoring, and maintenance units should be equipped with modern technological gadgets to detect and rectify faults on time and probably reduce the incidence of the vandalization of power plant facilities.
- (v) There should be on-time staff training both local and international. This will always introduce the staff to modern technology in power generation, which also serves as a motivating factor for the staff.

5. CONCLUSION

Performance evaluation of the Olorunsogo gas-fired power plant phase 1 has been carried out in this research with more emphasis on the efficiency and reliability of the power plant. For the years under review (2015 to 2021), the power plant had an overall poor performance; the average efficiency of the power plant for the years under review is 50.88%, compare to the standard practice of 65% and above. The average reliability is 55.79%, compare to the standard practices of 95% and above. Several reasons were added to be responsible for these shortfalls in performance. These include; wastage of gas, inadequate gas supply, low staff morale, poor maintenance culture, and inadequate staff training.

REFERENCES

1. Ohajianya, A. C., Abumere, O. E., Owate, I. O., and Osarolube, E. (2014). Erratic Power Supply in Nigeria: Causes and Solutions. *International Journal of Engineering Science invention*, 3(7), 51–55.
2. Arobieke, O., Osafehinti S., Oluwajobi, F., and Oni, O. (2012). *Electrical Power Outage in Nigeria: History, causes, and possible solution. Journal of Energy Technologies and Policy* ISSN 2224-3232 (Paper) ISSN 2225-0573 (Online)2(6).
3. Kolawole, D. O., Oyedepo, S. O., Pina, A., Ferrão, P., Fournier, J., Lacarrière, B., and Corre, O. Le. (2019). Assessing the feasibility of using the heat demand-outdoor Viability of Hydroelectricity in Nigeria and the Future Prospect Viability of Hydroelectricity in Nigeria and the Future Prospect district heat forecast. *Energy Procedia*, 157(18), 871–878. <https://doi.org/10.1016/j.egypro.2018.11.253>.
4. Ugwoke, B., Gershon, O., Becchio, C., Corgnati, S. P., and Leone, P. (2020). A review of Nigerian energy access studies: The story told so far. *Renewable and Sustainable Energy Reviews*, 120(19), 109646. <https://doi.org/10.1016/j.rser.2019.109646>.
5. Mrzljak, V., Anđelić, N., Lorencin, I., and Car, Z. (2019). Analysis of Gas Turbine Operation before and after Major Maintenance. *Journal of Maritime & Transportation Science*, 57(1), 57–70. <https://doi.org/10.18048/2019.57.04>.
6. Okoye, C. U., Adeniji O. A., and Sunmonu, A. O. (2017). A Study and Performance Evaluation of Olorunsogo Thermal. *International Journal of Engineering Sciences &*

Comment [S.11]: Conclusions need to be added to emphasize the results of the discussion which refers to the results.

Comment [S.12]: Literature needs to be added

- Research Technology, 6(December), 151–158. <http://www.ijesrt.com>.
7. Joel, O., and Taiwo, O. (2019). Energy Generation and Economic Growth: Empirical evidence. *Environment, Development, and Sustainability*, 0123456789. <https://doi.org/10.1007/s10668-019-004>.
 8. Udeh, G. T., and Udeh, P. O. (2019). Comparative thermo-economic analysis of multi-fuel fired gas turbine power plant. *Renewable Energy*, 133, 295–306. <https://doi.org/10.1016/j.renene.2018.10.036>
 9. Zakariyah, S. S. (2014). Gas Laws and Kinetic. May. <https://doi.org/10.13140/2.1.4809.6965>.
 10. Physical C. (1961). *Journal of the Franklin Institute*, 272(4), 333–334. [https://doi.org/10.1016/0016-0032\(61\)90576-2](https://doi.org/10.1016/0016-0032(61)90576-2).
 11. Lange, N. A., and Dean, J. A. (1967). *Lange's Handbook of Chemistry*. 10th Edition, McGraw Hill, New York, 1661-1665.
 12. Igbokwe, J. O., Okoro, A .N., and Nwite, D. C. (2018). Performance Evaluation of Alaoji Thermal Power Plant. *International Journal of Advanced Engineering, Management and Science*, 4(2), 112–119. <https://doi.org/10.22161/ijaems.4.2.5>.
 13. Moslem, U., Mohd, F. R. and Mohd F. A. (2019). Performance Assessment and Economic Analysis of a Gas-Fueled Islanded Microgrid. A Malaysian case study. <https://doi.org/10.3390/infrastructures4040>.
 14. Nag, P. K., (2008). *Power Plant Engineering*, Third Edition, Tata McGraw – Hill Publishing Company Ltd.