

## WATER BALANCE ANALYSIS OF ASA LAKE AREA AND ENVIRONS, ILORIN, KWARA STATE.

### ABSTRACT

The study was conducted to examine water availability in Ilorin for Enhanced fisheries production. The data used comprised of rainfall and temperature records for the span of 20 years both collected from NIMET Office, Ilorin. Evapotranspiration data for the three zones were empirically generated while water balance model was computed using MATLAB R2007a version in order to determine the respective water availability and the regression analysis was used to determine rainfall trends. The results showed that rainfall amounts vary from year to year and also increasing trends in the area over the period examined. It was also discovered that in all the periods. It is recommended that strategies be put in place to exploit excess rainwater for various purposes especially by increasing the capacity of water reservoirs and dams across the State for development of pipe borne water network and also, for irrigation farming during dry spells. Further investigation is recommended on water balance and its implications for agricultural practice in the study area.

*Keywords*~~Key words~~: *Water resources management; Water Balance; eEvapotranspiration; Rainfall pattern; Fisheries*

**Comment [O1]:** Please abbreviations and acronyms are often defined the first time they are used within the abstract and again in the main text and then used throughout the remainder of the manuscript.

**Comment [O2]:** Please not in italics

### INTRODUCTION

Knowledge of the available water in space and time is a prerequisite for efficient water resource management. This, however, is under the influence of several factors including climatic and anthropogenic actions(see for instance, Olajuyigbe, 2010). Many failed projects in water planning are partly attributed to inadequate knowledge of water balance-related data. In Nigeria, water balance studies are still limited and this has had tremendous negative implications on many

**Comment [O3]:** It would have been more interested, if the author(s) can recall recent works done in water balance in the world before posing the problem of water balance in Nigeria

water resource development projects as many of such projects depend on crude and unreliable data. Examples of such projects include dam failures (Umaru et al., 2010), poor crop yield (Hoogeveen et al., 2015), poor flood control (Ufoegbune et al., 2011), irrigation failure (Arora, 2006) among others.

According to Ufoegbune et al. (2012), water balance refers to quantitative expression of the hydrological process and its various components over a specified area and period time. It also refers to a balance between the input of water from precipitation, snowmelt and flow of water by ~~runoff, evapotranspiration, and groundwater recharge and stream flow~~. Water balance also implies an accounting of the inputs and outputs of water (Ritter, 2006). Suryatmojo, et al. (2013) observed that understanding the water balance changes in the forested area is important for managing the sustainability of water resources and anticipating potential disturbance caused by the implementation of a particular forest management system (Du et al., 2016). According to Ayoade (1983), the original source of water is precipitation, thus the water resources of a given country is related to rainfall. Furthermore, Ayoade stated that the yearly amount of rainfall incident on the land area of Nigeria is about ~~1400mm~~ ~~1400mm~~. Of this total, about ~~1070mm~~ ~~1070mm~~ is lost through evapotranspiration processes leaving a balance of ~~330mm~~ ~~330mm~~ for surface and subsurface ~~runoff~~ ~~runoff~~. Hoogeveen et al. (2015) revealed water balance analysis is generally conducted on annual basis. However, it may be carried out within any other given period for any specific purpose. Such ~~determination~~ ~~calculation~~ could be done for research purposes by the use of secondary data. Several approaches to the ~~evaluation~~ ~~determination~~ of water balance have been developed by scholars. These include Thornthwaite equation, Penman equation and Penman-Monteith equation. Some of these methods involve many components whose data generation could be prone to errors especially in developing ~~countries~~ ~~nations~~. Thus, most of these water balance models have been modified for ease of computation in different locations and under different conditions, for instance Papadopoulou et al. (2003).

Water balance is computed by the hydrologic equation which is basically a statement of the law of conservation of mass as applied to the hydrologic cycle. In its simplest form, the

equation reads:  $Inflow = Outflow + Change\ in\ storage$ . However, a general water balance model which takes into consideration the components of hydrologic cycle is as given below:

$P = Q + E + \Delta S/\Delta t$  where P is Precipitation, Q is Runoff, E is Evapotranspiration,

$\Delta S/\Delta t$  is Change in storage (in soil or the bedrock) per unit change in time (see Sokolov and Chapman, 1974). Also, water balance can be illustrated using water balance graph which plots levels of precipitation and evapotranspiration often on a monthly scale.

**Comment [O4]:** The introduction id too long; this paragraph can be included into the Materials and Methods section.

Generally, water balance method has four main characteristics (Sokolov and Chapman, 1974). Firstly, it can be assessed for any subsystem of the hydrologic cycle, for any size of area, and for any period of time; secondly, it is used to check whether all flow and storage components involved have been considered quantitatively. Also, it can serve to calculate the one unknown of the balance equation, provided that the other components are known with accuracy and lastly, it can be regarded as a model of the complete hydrologic process under study which means it can be used to predict what effect the changes imposed on certain components will have on the other components of the system or subsystem.

However, the objective of this work are as follow: (i) To determine the trend of rainfall over the period of study in Ilorin; (ii) To examine water in the study area; and (iii) To determine the implication of spatial water balance scenario in the study area

## **MATERIALS AND METHODS**

The Ilorin is located between latitude 80 24' and 80 36' North of the equator and between longitudes 4 10' and 40 36' East of the Greenish meridian (Oyegun, 1983). Ilorin is a transition zone between the deciduous woodland of the south and dry savanna of north of Nigeria (Jimoh,

**Formatted:** Indent: First line: 0.5"

2003). The mean monthly temperatures are usually very high varying between 25.1<sup>0</sup>C in August and 30.3<sup>0</sup>C in March. The diurnal range of temperature is also high in the area. The mean annual rainfall in the area is about ~~1200mm+200mm~~ (Olaniran, 2002). It is mainly drained by River Asa and its tributaries such as Aluko, Alalubosa, Okun, Osere Agba and Atikeke (Jimoh and Iroye, 2009).

Comment [O5]: Please add a full stop at the end of the sentence

Asa Dam constructed in 1984 is a composite dam with earth embankment at its extreme ends. The dam is 597 m long and 27 m high at its deepest section and a crest width of 6 m. Its total catchment area is approximately 1037 km<sup>2</sup> lying within Kwara State and Oyo State of Nigeria with about one third of the basin area located in Oyo State (Fig. 1).

Comment [O6]: Full stop at the end of the sentence

Study Area (Inset: Map of Nigeria)

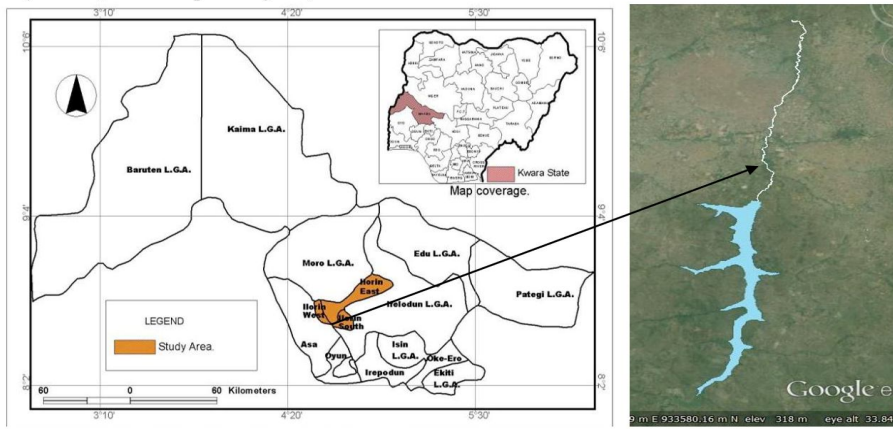


Figure 1: Studying Area (Inset: Map of Nigeria showing the location of Kwara State)

Data used in this study consists of rainfall and temperature and evapotranspiration values. Rainfall and temperature data were collected from Nigerian Metrological Agency (NIMET) at

Ilorin International Airport for a span of 20 years (2001- 2020), while evapotranspiration values were computed from the temperature records obtained from the above named weather station

Comment [O7]: Punctuation (full stop)

Evapotranspiration Data: The empirical model developed by Thornthwaite was adopted to generate Annual Potential Evapotranspiration (PE) data for the three locations. The Thornthwaite's method calculates potential evapotranspiration using observed air temperature and duration of sunlight data. The rationale, according to Papadopoulou et al., (2003) is that air temperature does, to a considerable extent, serve as a parameter of the net radiation. According to Huang et al., (1996), this model is a shortcut of replacing a comprehensive atmospheric model, as well as some interactions by prescribing observed temperature and precipitation. Hence, evapotranspiration values were generated using equation 1

Comment [O8]: References should be harmonized all over the text.

$$E = 16 * (10T/I)^a * \mu N / 360 \text{ ----- Equation 1}$$

where E is monthly potential Evapotranspiration (mm/month), T is mean monthly temperature (°C),

where E is monthly potential Evapotranspiration (mm/month), T is mean monthly temperature (°C), I is an Empirical Annual Heat Index, the sum of 12 monthly index values i, the value of i for each month is derived from mean monthly temperatures using the formula:

$$i_j = 0.09 * (T_j)^{1.5} \text{ -----equation 2}$$

where j is the specific month under investigation,

N is the mean number of daylight hours in a particular month

Comment [O9]: Not present into the equation

μ is the number of days in the month

Comment [O10]: Not present into the equation

a is an empirically derived exponent which is a function of I, and is given by the formula:

$$a = 0.016 * I + 0.5 \text{ -----equation 3}$$

The annual water balance of the study area was computed with the use of MATLAB R20077a

version.. The monthly water balance was summed up to obtain annual values.

However, water balance model in this work considered precipitation as main input and

evapotranspiration as main water loss adopted by Ogunbode (2015). Thus,

$AWB = TAR - AWL_t$ -----equation 4, where

AWB is Annual Water Balance,

TAR is Total Annual Rainfall and

AWL<sub>t</sub> is Total Annual Water Loss via Evapotranspiration

The annual water balance for each of these zones was computed following equation 4. The years were grouped into two namely wet and dry years. The years where rainfall is higher than the evapotranspiration were categorised as wet years while the years with higher evapotranspiration (figures with negative water balance) were categorised as dry years.

## RESULTS AND DISCUSSION

Water Resources Characteristics :The trends of variations in rainfall and the associated  $r^2$  and equation over the period of ~~20years~~20years, shown in Figures 2. The figure revealed that the amount of rainfall fluctuates from year to year while the results of regression analysis indicate increasing trend over the period investigated. Thus, in view of this, water supply and the replenishment of other sources through rainfall in the study area is generally dependable

**Figure 2: Mean Annual Rainfall Pattern of Asa Lake and Environs**

Water Balance Analysis: tables 1, show the annual rainfall ,annual evapotranspiration values and the annual water balance in the study area. The rainfall pattern over the period indicate that the annual totals were generally above ~~1000mm~~1000mm except few years which were incidentally found to be years of water balance deficits (dry years) in the area. The 3 dry years out of the 20years investigated in the area were mostly years of rainfall totals less than 1000mm.

Table 1 :Annual Water Balance in Asa Lake area (2001-2020)

| S/N | Year | Annual Total Rainfall (mm) | PE (mm) | Water balance(mm) | Water Supply |
|-----|------|----------------------------|---------|-------------------|--------------|
| 1.  | 2001 | 1697.1                     | 1212.1  | -515              | Dry year     |
| 2.  | 2002 | 957.1                      | 1212.1  | -225              | Dry year     |
| 3.  | 2003 | 1293.8                     | 1212.1  | 81.7              | Wet year     |
| 4.  | 2004 | 1294.5                     | 1212.1  | 83.8              | Wet year     |
| 5.  | 2005 | 1305.9                     | 1212.1  | 93.8              | Wet year     |
| 6.  | 2006 | 1291.7                     | 1212.1  | 76.6              | Wet year     |
| 7.  | 2007 | 1309                       | 1212.1  | 96.9              | Wet year     |
| 8.  | 2008 | 1469                       | 1212.1  | 256               | Wet year     |
| 9.  | 2009 | 1342.5                     | 1212.1  | 130.4             | Wet year     |
| 10  | 2010 | 953.3                      | 1212.1  | -253.8            | Dry year     |

**Comment [O11]:** The Author (s) should mention in the interpretation of table 1 the per cent of Dry year and Wet year for the period of data collection (2001-2020).

**Comment [O12]:** Meaning

**Comment [O13]:** Meaning

|    |      |        |        |        |          |
|----|------|--------|--------|--------|----------|
| 11 | 2011 | 1187.4 | 1212.1 | -24.7  | Dry year |
| 12 | 2012 | 1239.4 | 1212.1 | -27.3  | Dry year |
| 13 | 2013 | 1013.4 | 1212.1 | -198.7 | Dry year |
| 14 | 2014 | 1430.4 | 1212.1 | 218.3  | Wet year |
| 15 | 2015 | 1384.9 | 1212.1 | 172.8  | Wet year |
| 16 | 2016 | 1179.6 | 1212.1 | -32.5  | Dry year |
| 17 | 2017 | 1118.4 | 1212.1 | -93.7  | Dry year |
| 18 | 2018 | 1365.8 | 1212.1 | 153.7  | Wet year |
| 19 | 2019 | 1223.6 | 1212.1 | 11.5   | Wet year |
| 20 | 2020 | 1201   | 1212.1 | -11.1  | Dry year |

S/N..... PE.....

Source: Nigeria Meteorological Agency (NIMET)

Comment [O14]: Should be defined for more comprehension

It was observed that dryness was experienced in 2001-2002 while on the other hand, cognisance was taken of the rainfall totals of 2014, 2015 and 2018 with 1430.4mm~~1430.4mm~~, 1384.9 mm and 1365.8mm~~1365.8mm~~ respectively. These years were also characterised with the highest record of water balance (218.3mm, 172.8mm and 157.7mm respectively) during the period indicating excess water supply.

### **Figure 3: Annual Waterbalance(mm) of Asa lake and environs (2001-2020)**

The results generally revealed that Ilorin had more years of water surplus between 2001 and 2010 and is consistent with other areas in the zone as noted by Ogunbode and Ifabiye, (2019). The increased rainfall in the areas over the study period as shown by annual water balance (see Fig 3), could be responsible for the increased erosion and consequent siltation of Asa lake. This led to the reduction of the maximum depth from 27 meters to only 17 meters. It could also be the reason for increased aquaculture activities in the Lake Asa catchment.

The results have further shown that water resource is generally in abundance in Ilorin. Thus, an improved way of utilizing rainwater especially for Irrigation, domestic use and fisheries production and should be encouraged. Even though, rainy days/time may not coincide with immediate needs in homes, effort should gear towards its conservation for its immediate future utilisation especially during dry spells. Water resource management strategies should among others include continuous dredging and channelization of streams and rivers as ways of mitigating flooding in Ilorin. Consideration for optimal utilization of abundant rainwater may also include its conservation for use for irrigation farming purpose especially in the period of dry season. The advantage of abundant rainwater could be channelled towards agricultural development particularly in the area of irrigation and fisheries.

### **SUMMARY AND CONCLUSION**

This study examined the availability of water resources in Ilorin, Kwara State. The results of regression analysis revealed that there were positive trends in rainfall in the area indicating the possibility and reliability of abundant water resources in the State. Also, the results showed that there were inconsistencies in water balance as there were years of deficit and surplus. However, the geographical location of the area has effect on its water balance.

### COMPETING INTEREST DISCLAIMER:

Authors have declared that no competing interests exist. The products used for this research are commonly and predominantly used products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these product as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the ~~authors~~ authors.

### REFERENCES

1. Arora, VK. Application of a rice growth and water balance model in an irrigated semi-arid subtropical environment. *Agricultural Water Management*. 2020; 83: 51-57.
2. Ayoade, JO. Water Resources in Oguntoyinbo, J.S., Areola, O. O. and Filani, M. (ed.) *A Geography of Nigerian Development*. Heinemann Educational Books (Nigeria) Ltd, Ibadan. 1983;71-88.
3. Du, C., Sun, F., Yu, J., Liu, X, Chen, Y. New interpretation of the role of water balance in an extended Budyko hypothesis in arid regions. *Hydrology and Earth Systems Sciences*. 2016;20: 393-409.
4. Gbadegesin, N, Olorunfemi, F. Assessment of Rural Water Supply Management in selected Rural Areas of Oyo State, Nigeria. *African Technology Policy Studies Network (ATPS) working paper series*. 2007; 49:61-68.
5. Hoogeveen, J., Faures, J.M., Peiser, L., Bunke, J, van de Glesen, N. ~~(2015)~~ A Global water balance model to assess water use in irrigated agriculture. *Hydrology and Earth System Sciences*. 2015;12:801-838.
6. Jimoh, HI. Erosion Tolerance Range of Land Use Surface: Implication on Land Resource Use and Management Techniques in Ilorin, Nigeria. *Intern. Journal on Environmental Studies*. 2003; 60(5):445-452
7. Jimoh, HI, Iroye KA. Managing High Runoff Discharge in the Urbanized Basin of Asa River Catchment Area of Ilorin, Nigeria. *Canadian Social Science* 2010, 6(4):210-223.
8. Olajuyigbe, A. Some factors impacting on quantity of water used by households in a rapidly urbanizing State capital in southwestern Nigeria. *Journal of Sustainable Development African*. 2010;12(2): 321-337
9. Oyegun, RO. Water resource in Kwara State. Matanmi and sons printing and publishing co. Ltd Ilorin 113pp. Paris: United Nations Educational and Scientific organisations. 1983;113-115.
10. Papadopoulou, E., Varanou, E., Baltas, E., Dassaklis, Mimikou, M. Estimating Potential Evapotranspiration and its Spatial Distribution in Greece Using Empirical Methods. 8th

- International Conference on Environmental Science and Technology, Lemnos Island, Greece.2003; 8-10.
11. Ritter, ME. The Physical Environment: an Introduction to Physical Geography.2006; 45-47.
  12. Sokolov, AA, Chapman, TG. Methods of Water Balance Computations: An International Guide for Research and Practice.A contribution to the International Hydrological Decade.The UNESCO Press.1974; 87-89.
  13. Suryatmojo,H, Yamakawa, M., Kosugi, K., Mizuyama, T. Water balance changes in the tropical rainforest with intensive forest management system. International Journal of Sustainable Future for Human Security. 2013; 1(2): 56-62.
  14. Umaru, A., Ogedengbe, K, Omobowale, MO. ~~(2010)~~ Structural failures of earth dams in Nigeria: A case study of Cham Dam in Gombe State. ARPN Journal of Engineering & Applied Sciences.2010; 5(11): 47-52.