

New equations for energy dissipation down a stepped spillway

ABSTRACT

In this paper, the authors reviewed many previous publications on stepped spillways with a view to formulating new models for the rates of energy losses in stepped spillways. Stepped spillways are current method of choice for safe discharge of flood water due to their inherent ability to employ their stepping nature to safely dissipate substantial energy. Though many researchers have investigated both the hydraulic and geometric relationships that resulted in energy dissipation, quite a few of them had suggested models that could be used to estimate the rates of these energy losses. As a result, the authors, in this paper, obtained and examined more than 200 experimental data from the published works of the researchers like Carosi & Chanson (2006); Felder & Chanson (2009a); Guenther, Felder, & Chanson (2013); Toombes & Chanson (2005); Bung & Schlenkhoff (2009); Chanson & Toombes (2002b); Ohtsu, Yasuda & Takahashi (2004); Thorwarth (2008); Chanson & Toombes (2002a); Gonzalez (2005); Bung (2009); Gonzalez (2005); Stefan & Hubert Chanson (2014) on horizontal stepped channels slopes that ranged from $3.4 \leq \theta \leq 26.6$. They used about 150 of them that had complete information, re-analyzed them, and used them to develop the energy dissipation models that governed skimming flows over a wide range of operating conditions. These models were later calibrated, which upon verification, gave good predictions between the measured and the computed data with high coefficients of correlation that ranged from 0.97 to 0.99. They are simple, easy to use, and render more accurate results than the existing model.

Keywords: Aerated flow, energy dissipation, chute slope, dam height, stepped spillway, skimming flow.

1. INTRODUCTION

Stepped spillways are current method of choice for the safe discharge of flood water due to their inherent ability to employ their stepping nature to safely dissipate substantial energy. Significant damage may occur if the energy of the flow, especially its kinetic energy, is not dissipated safely. One type of flood release facility is the stepped spillway. It is characterized by significant flow resistance and associated energy dissipation caused by the steps. The design yields smaller, more economical dissipation structures at the downstream end of the chute. As the discharge down the chute is increased, a certain critical discharge would be reached beyond which air would be entrained in the flow. This phenomenon is known as a two phase flow or Air-Water flow. These Air-water flows on stepped spillways were investigated experimentally in the last few decades by researchers like Horner, 1969; Peyras et al, 1992; Chanson, 1995, 2001; Ohtsu & Yasuda, 1997; Chamani & Rajaratnam, 1999; Boes, 2000; Matos, 2001; Toombes, 2002. These researchers provided design guidelines for stepped spillway channels with various channel geometries and slopes. Many researchers have investigated both the hydraulic and the geometric relationships of stepped spillways of varying sizes that resulted in significant energy dissipation. These researchers provided design guidelines for stepped spillway channels with various channel geometries

and slopes. Most recent research focused on the air-water flow properties and energy dissipation performances, including some more detailed air-water flow properties such as bubble count rate, turbulence, and microscopic air-water properties (Chanson & Toombes, 2002; Gonzalez, 2005; Chanson & Carosi, 2007; Toombes and Chanson, 2008a, b; Felder & Chanson, 2009b, 2011a); Meireles et al., 2009). However, despite these enormous amounts of information and design guidelines on stepped spillways provided by these scholars to design engineers, huge information gap and design guidelines still existed in the area of stepped spillways with channel slopes equal to or less than 26.6° . It is, therefore, the purpose of this present study to obtain near-prototype scale data on the hydraulic characteristics of stepped spillway flow including air concentration, bulked flow depth, clear water depth, and flow velocity from the published works of the researchers like Carosi & Chanson (2006); Felder & Chanson (2009a); Guenther, Felder, & Chanson (2013); Toombes & Chanson (2005); Bung & Schlenkhoff (2009); Chanson & Toombes (2002b); Ohtsu, Yasuda & Takahashi (2004); Thorwarth (2008); Chanson & Toombes (2002a); Gonzalez (2005); Bung (2009); Gonzalez (2005); Stefan & Hubert Chanson (2014). These collected data were later re-analyzed to quantify energy dissipation and to develop design guidelines and 2 No models on stepped spillways with channel slopes equal to or less than 26.6° that governed skimming flows over a wide range of operating conditions.

These researchers were able to identify three kinds of flows that take place over a stepped spillway such as a) nappe flow regime, b) transition flow regime, and c) skimming flow regime.

In nappe flow regime, sequence of drops from one step to the next step below it with the formation of hydraulic jump at every drop is observed. This type of flow can be likened to a sequence of separates drop structures (Chamani and Rajaratnam 1994; Chanson 1993).

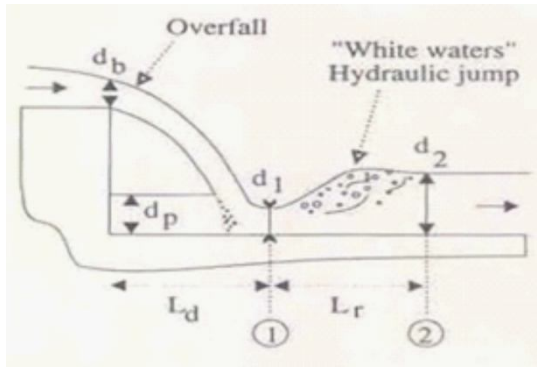


Figure 1: Nappe flow regime (Flow at a drop structure)

The water flows over one step of the spillway and lands on the next step with energy loss happening from a) the disintegration of the spout in the air, and b) the blending of flow on the steps, with or without the development of hydraulic jump on the step (Chanson, 1994; Rajaratnam, 1990) and these energy losses could be computed using equations [1.1] or [1.2].

$$\frac{\Delta H}{H_o} = 1 - \frac{\frac{d_1}{d_c} + \frac{1}{2} \left(\frac{d_c}{d_1}\right)^2}{H_{max} + \frac{3}{2}} \quad [1.1]$$

Where d_1 is the water depth at impact, d_c is the critical water depth, and H_{max} is the dam height, ΔH is the energy loss, H_o is the maximum available energy, h is the height of the

spillway step. Chanson (1994) later expressed this equation in terms of the spillway step height, the critical flow depth, and the dam height as:

$$\frac{\Delta H}{H_o} = 1 - \left[\frac{0.54 \left(\frac{d_c}{h}\right)^{0.275} + \frac{3.43}{2} \left(\frac{d_c}{h}\right)^{-0.55}}{\frac{3}{2} + \frac{H_{dam}}{d_c}} \right] \quad [1.2]$$

Nappe flow with completely established hydraulic jump (Figure 1), usually arises from small discharges with shallow flow depths and flow over the step with formation of supercritical at the edge of the step and returns to subcritical flow downstream of the jump.

In skimming flow regime, the flow occurs with the submergence of the steps with the development of fully aerated uniform flow in the downstream region in a long chute. Along the upstream steps, a non-aerated flow region exists within which a turbulent boundary layer develops. Air entrainment in the flow begins where the boundary layer intersects the free surface, referred to as the point of inception. Downstream from the point of inception, the flow continues to aerate and varies gradually in depth (Figure 2). The flow eventually becomes fully aerated, uniform flow in which the water depth, velocity, and air concentration become constant (Bindo et. al. 1993) (Figure 3).

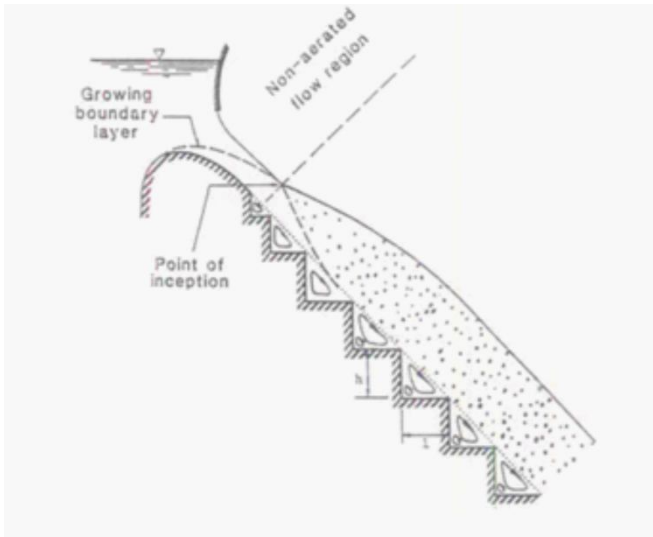


Fig. 2. Skimming flow regime - Sorensen (1985)

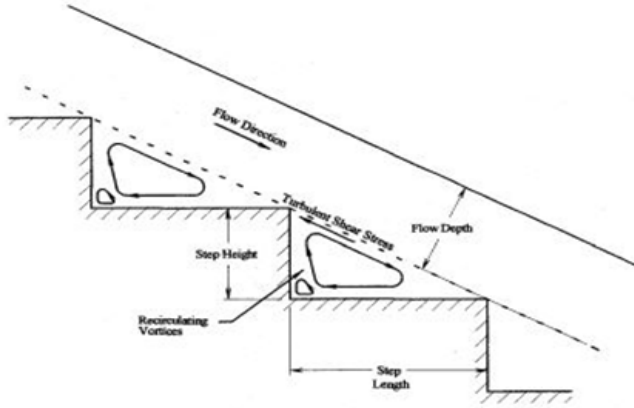


Fig. 3. Skimming flow regime with uniform flow conditions

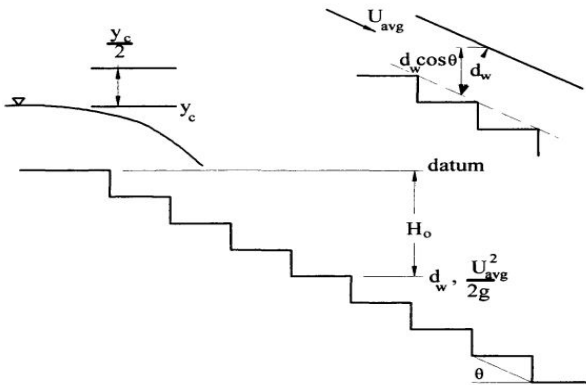


Fig. 4. Arrangement of the spillway with the definition of the variables

In skimming flow, most of the energy is dissipated in the maintenance of stable depression vortices. If uniform flow conditions are reached at the downstream end of the spillway, this energy loss could be computed as follows

$$\frac{\Delta H}{H_{max}} = \frac{d_w \cos \theta + \frac{U_{avg}^2}{2g}}{Nh + \frac{3}{2}d_c} \quad [1.3]$$

Where d_w is the clear water depth, U_{avg} is the average velocity, the total head loss may be rewritten in terms of the friction factor, f , the spillway slope, θ , in degree, the critical depth, d_c , and the dam height, H_{dam} :

$$\frac{\Delta H}{H_{max}} = 1 - \frac{\left(\frac{f}{8\sin\theta}\right)^{1/3} \cos\theta + \frac{E}{2}\left(\frac{f}{8\sin\theta}\right)^{-2/3}}{\frac{H_{dam}}{d_c} + \frac{3}{2}} \quad [1.4]$$

Eq [1.4] was computed for spillway slope with $\theta = 52$ (degrees) and friction factor, $f = 0.03$ and $f = 1.30$, that represent average flow resistance on smooth spillways and stepped

spillways, respectively. where E is the kinetic energy correction coefficient, ϑ is the dam slope in degrees.

2. MATERIAL AND METHODS

The authors obtained and re-analyzed the experimental data from the published works of Bung & Schlenkhoff (2009); Bung (2009); Carosi & Chanson (2006); Chanson & Toombes (2002b); Chanson & Toombes (2002a); Felder & Chanson (2009a); Guenther, Felder, & Chanson (2013); Gonzalez (2005); Gonzalez (2005); Ohtsu, Yasuda & Takahashi (2004); Stefan & Hubert Chanson (2014); Thorwarth (2008); Toombes & Chanson (2005); and used them to obtain them to develop 2 No energy dissipation models that governed skimming flows over a wide range of operating conditions. These improved models were verified with the data sets obtained from the researchers and compared with the results from the existing model. These new models were then verified using part of the experimental data that were not used in the calibration. The extent of fit between the measured and the predicted data sets were statistically found and compared with the existing model.

2.1 Formulation of the models

In modeling, it is necessary to determine the values of the parameters that can fit the model to the system it shall describe (Agunwamba, 2007). By the least square method, the best fit curve for this study was formulated as a function of the channel slope, number of steps, step height, and critical water depth using multiple regression analysis and expressed here as:

$$\frac{\Delta H}{H_{max}} = \left[\alpha_o \frac{Nh}{y_c} \right]^{\alpha_1} N^{\alpha_2} h^{\alpha_2} \theta^{\alpha_3} \quad [2.1]$$

Where

$\frac{\Delta H}{H_{max}}$ is the energy loss ratio,
 H_{max} is the maximum available height,
 N is the number of spillway steps,
 h is the height of the spillway steps,
 θ is the spillway channel slope.

Using this equation and the measured data, the authors used multiple regression analysis and matrix method to solve Equation [2.1], which yielded the values of the constant α_o along with the coefficients α_1 , α_2 , α_3 , and α_4 , which were then substituted in Equation [2.1] to give the developed models in 3.1.

3. RESULTS AND DISCUSSION

3.1 Developed models for skimming flow regimes.

3.1.1 Eq [3.1] is valid for use when h (cm) is not more than 20, N is not more 20, θ (degrees) is between 26.6° and 21.8° , and d_c/h is between 1.0 and 3.7.

$$\frac{\Delta H}{H_{max}} = \left[0.049 \frac{Nh}{d_c} \right]^{0.353} N^{0.06} h^{0.124} \theta^{-0.157} \quad [3.1]$$

3.1.2 Eq [3.2] is valid for use when h (cm) is not more than 20, N is not more 20, θ (degrees) is between 21.8° and 3.4° , and d_c/h is between 1.0 and 3.6.

$$\frac{\Delta H}{H_{\max}} = \left[0.029 \frac{Nh}{d_c} \right]^{0.353} N^{0.06} h^{0.124} \theta^{-0.157} \quad [3.2]$$

3.2. Charts for 3.1.1

Figures 5 to 8 depicted the energy loss rates as a function of the expression of a dam height divided by the critical depth for the measured data, the developed analytical formulation (Eq. [3.1]), the existing model for the computation of energy dissipation (Eq. [1.4]) with the friction factors of $f = 0.30$ and 1.30 . These figures showed some traditional concave shape distributions for all the plotted four data set for energy dissipation for all the flow rates. As indicated in these charts, energy losses increased with decreasing discharges and again increased with increasing dam height for a particular discharge which is in accordance with the earlier investigations (Matos, 2000; Chanson, 2001b; Felder & Chanson, 2009a). The data sets from the field work of these researchers and the developed model (Eq. [3.1]) were in close agreement with the coefficients of correlation than ranged from 0.96 to 0.99. Again, these data sets from these field works were in close agreement with the existing model (Eq. [1.4]) when used with the friction factor, f , of 0.3, yielding the coefficients of correlation of between 0.92 and 0.95.

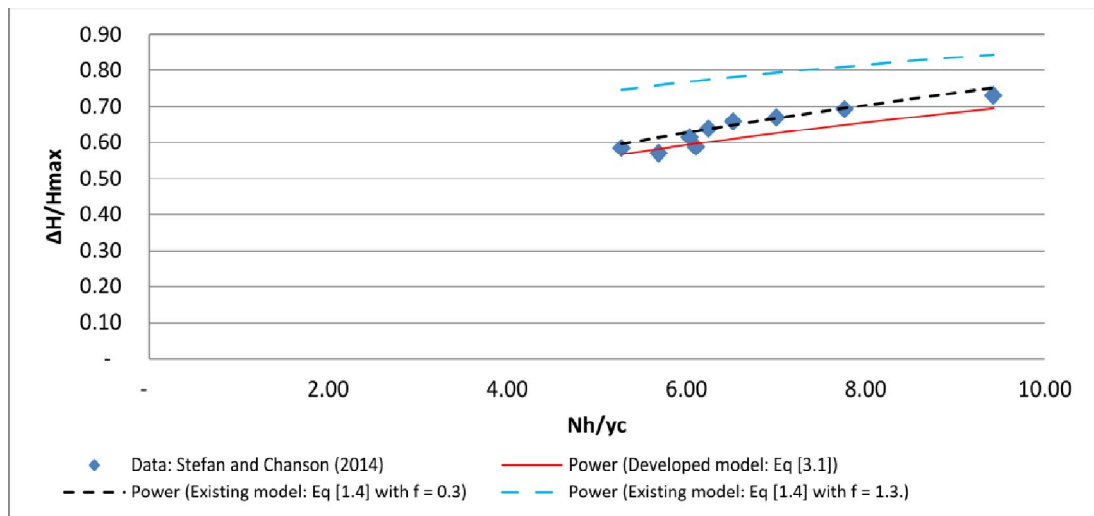


Fig. 5. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 26.6$, $N = 10$, $h = 10$, $q_w = (0.073 - 0.249) \text{ m}^2 \text{ s}^{-1}$ & $Re = (2.92 \times 10^5 - 9.96 \times 10^5)$, flow rate d_o/h of $(0.82 - 1.85)$.

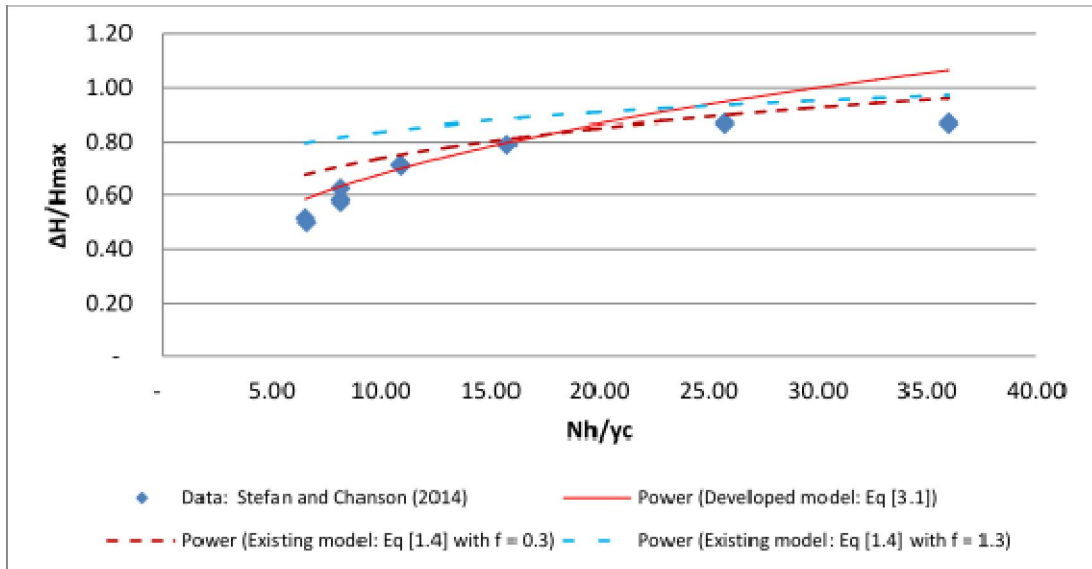


Fig. 6. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 26.6$, $N = 20$, $h = 5$, $q_w = (0.020 - 0.227) \text{ m}^2 \text{ s}^{-1}$ & $Re = (8.0 \times 10^4 - 9.08 \times 10^5)$, flow rate d_c/h , of (0.69 - 3.30).]

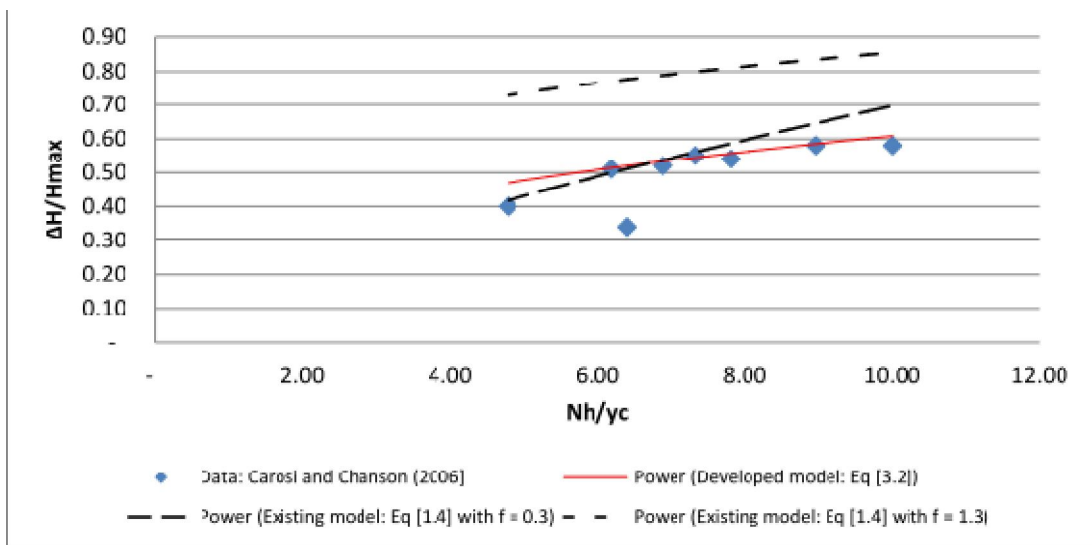


Fig. 7. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 21.8$, $N = 10$, $h = 10$, $q_w = (0.095 - 0.180) \text{ m}^2 \text{ s}^{-1}$, $Re = (3.80 \times 10^5 - 7.20 \times 10^5)$, flow rate, d_c/h , of (1.00 - 1.57).

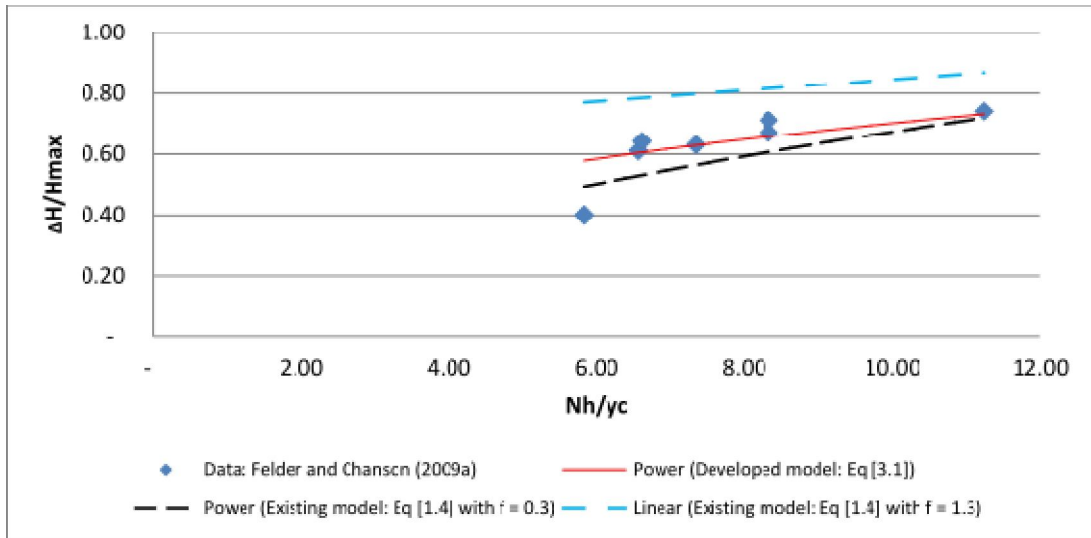


Fig. 8. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 21.8$, $N = 20$, $h = 5$, $q_w = (0.059 - 0.158) \text{ m}^2 \text{ s}^{-1}$, $Re = (2.36 \times 10^5 - 6.32 \times 10^5)$, flow rate, d_c/h , of $(0.80 - 1.85)$.

3.3. Charts for 3.1.2

Figures 9 to 14 depicted the energy loss rates as a function of the expression of a dam height divided by the critical depth for the measured data, the developed analytical formulation (Eq. [3.2]), the existing model for the computation of energy dissipation (Eq. [1.4]) with $f = 0.10$, 0.30 , and 1.3 . The figures showed same traditional concave shape distributions for all the plotted four data set for energy dissipation for all the flow rates. As shown in the charts, energy losses increased with decreasing discharges and increased with increasing dam height for a particular discharge which is in accordance with the earlier investigations (Matos, 2000; Chanson, 2001b; Felder & Chanson, 2009a). The data sets from the field work, the developed model (Eq. [3.2]), and the existing model (Eq. [1.4]) when used with the friction factor, $f = 0.3$, were in close agreement with the coefficients of correlation that ranged from 0.95 to 0.99. Figure 9 showed that the developed model (Eq [3.2]) was slightly higher than the measured data, increasing with increasing discharges. Figure 10 indicated that the developed model was in closer agreement with the measured data than the existing model with $f = 0.10$. Figure 11 showed that the developed model was in close agreement with the measured data. Figures 12 and 13 showed that the developed model were in close agreement with the measured data. Figure 14 showed that the developed model predicted values that were slightly lower than the measured data, while the existing model with $f = 0.10$ produced data that were slightly higher than the measured data.

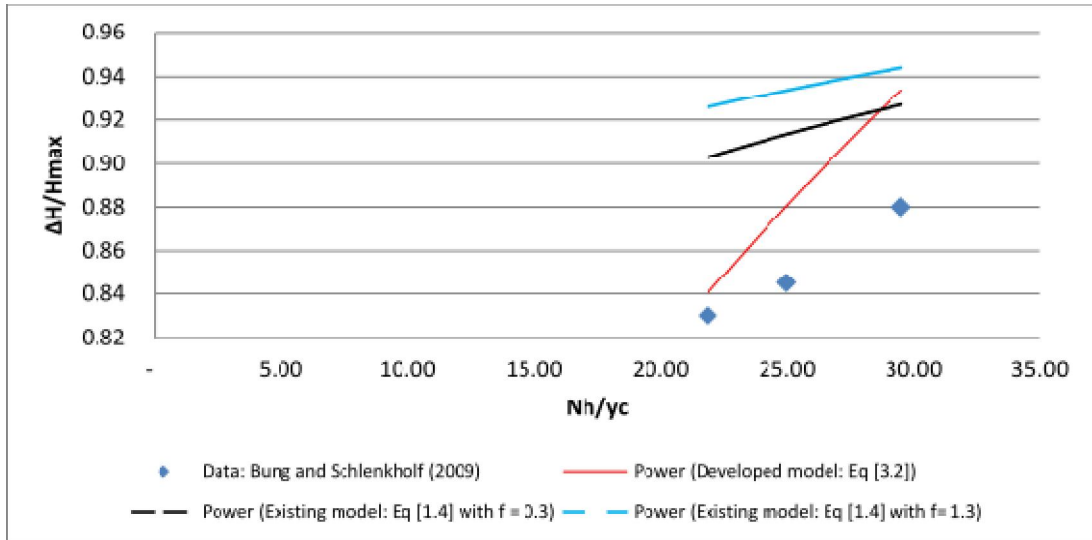


Fig. 9. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 18.4$, $N=40$, $h = 6$, $q_w = (0.059 - 0.158\text{m}) \text{ m}^2 \text{ s}^{-1}$, $Re = (2.36 \times 10^5 - 6.32 \times 10^5)$, flow rate, d_c/h , of $(0.80 - 1.85)$.

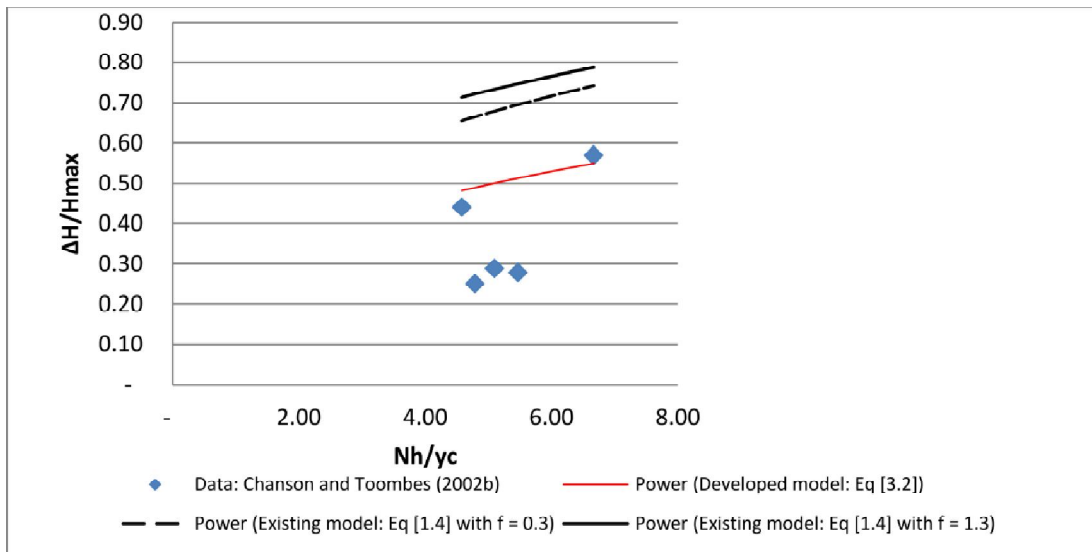


Fig. 10. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 15.9$, $N = 9$, $h = 10$, $q_w = (0.069 - 0.188) \text{ m}^2 \text{ s}^{-1}$, $Re = (2.76 \times 10^5 - 7.52 \times 10^5)$, flow rate, d_c/h , of $(0.78 - 1.53)$

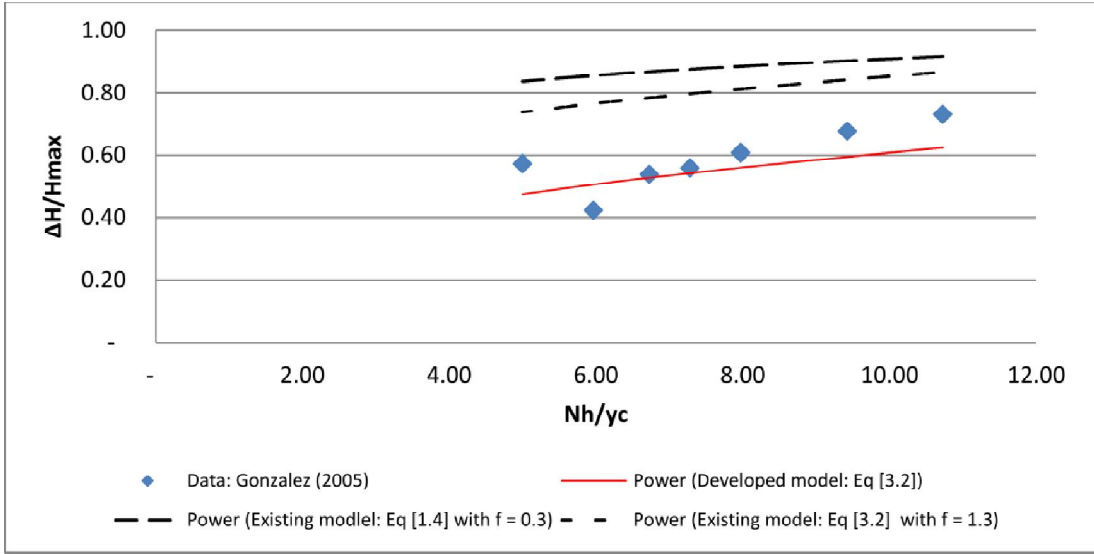


Fig. 11. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 15.9$, $N = 18$, $h = 5$, $q_w = (0.021 - 0.220) \text{ m}^2 \text{ s}^{-1}$, $Re = (8.4 \times 10^3 - 8.8 \times 10^5)$, & flow rate, dc/h of $(0.60 - 3.20)$.

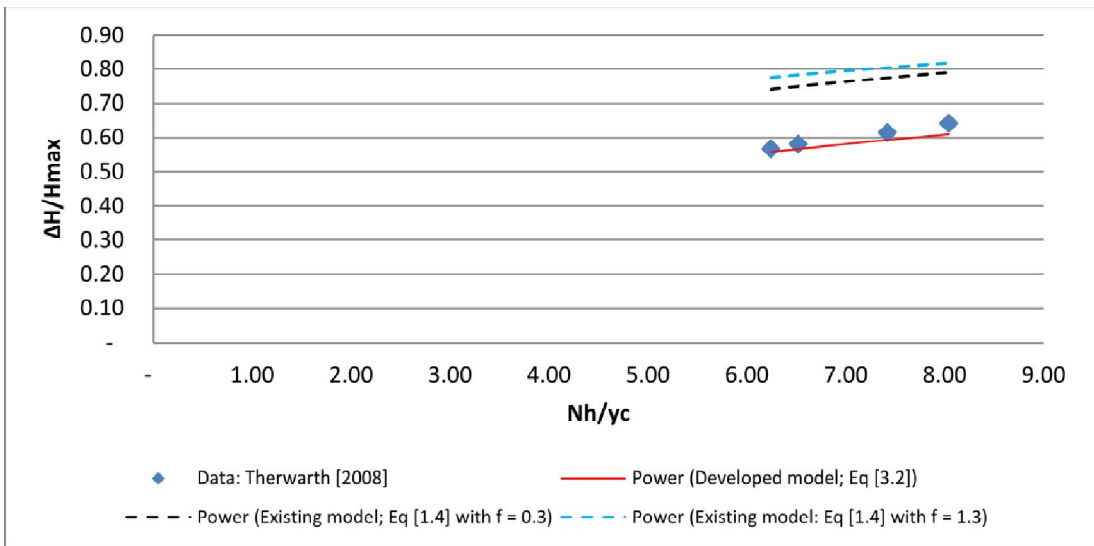


Fig. 12. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 14.6$, $N = 13$, $h = 10$, $q_w = (0.05 - 0.234) \text{ m}^2 \text{ s}^{-1}$, $Re = (2.0 \times 10^5 - 9.36 \times 10^5)$, & flow rate, dc/h , of $(1.27 - 3.55)$.

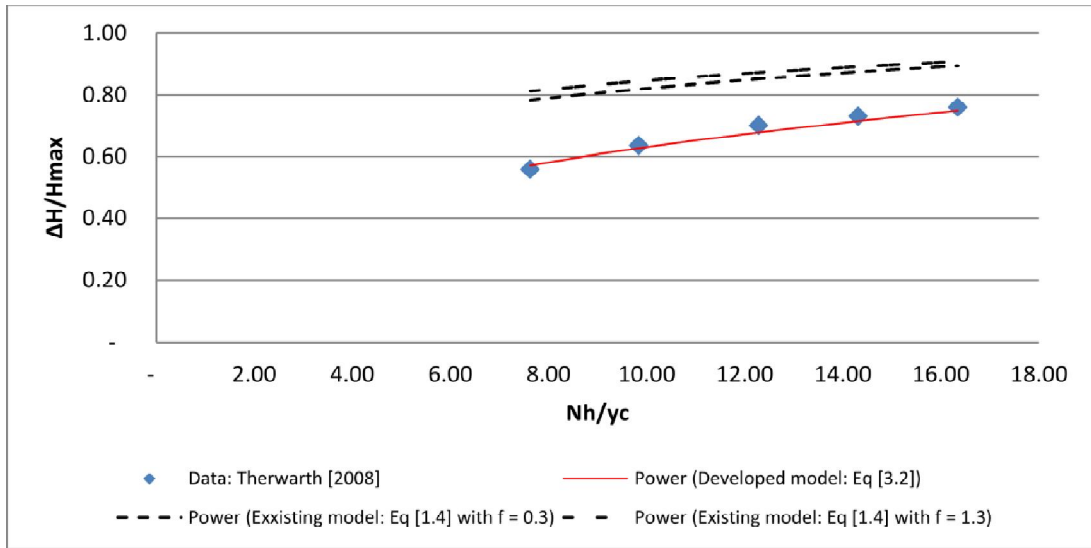


Fig. 13. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 14.6$, $N = 26$, $h = 10.0$, $q_w = (0.05 - 0.234) \text{ m}^2 \text{ s}^{-1}$, $Re = (2.0 \times 10^5 - 9.36 \times 10^5)$, & flow rate, d_c/h , of (1.27 - 3.55).

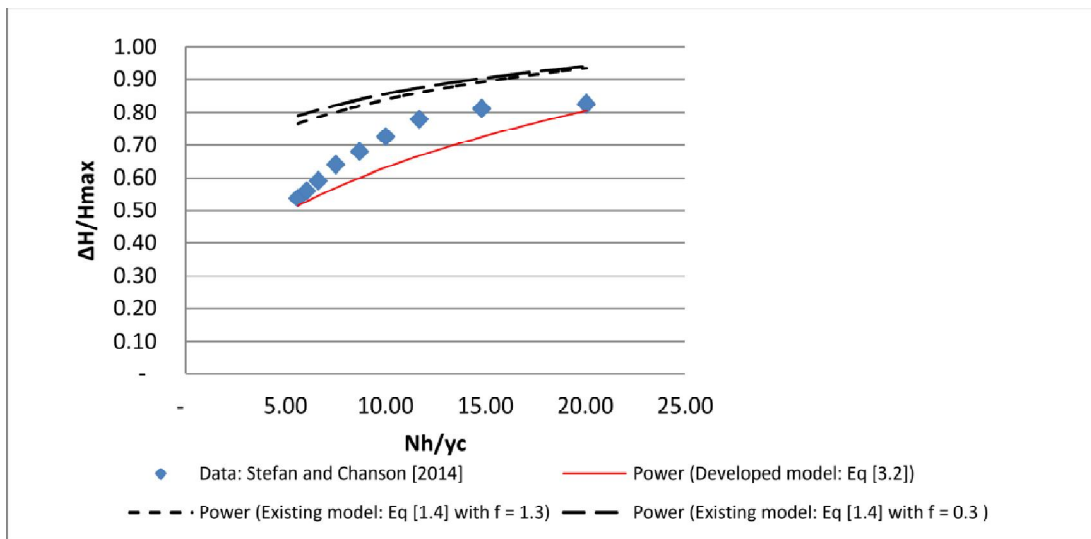


Fig. 14. $\Delta H/H_{\max}$ as a function of Nh/d_c for $\theta = 8.9$, $N = 21$, $h = 3$, $q_w = (0.035 - 0.234) \text{ m}^2 \text{ s}^{-1}$, $Re = (1.40 \times 10^5 - 9.36 \times 10^5)$, & flow rate, d_c/h , of (1.0 - 3.55).

4. CONCLUSION

Experimental data sets were obtained from the published works of 11 No researchers' on eleven stepped spillway configurations with chute slopes between 3.4 (degrees) and 26.6 (degrees), step heights between 3 cm and 14.3 cm, unit discharges between 0.021 and 0.92 m^2/m , Reynolds No between 0.84×10^5 and 36.8×10^5 , discharge rate between 0.60 and 3.55 under skimming flow regime. These data re-analyzed, and used to develop 2 No models that governed skimming flow regime in spillway under wide operating conditions. These new models were calibrated, verified and were found to be in close agreement with the measured data sets. It was also observed that the existing model for estimating energy

losses when used with Darcy's friction factors of 0.10 and 0.30, also yielded results that were in somewhat close agreement with the measured data sets. Design engineers should use these new models for the design of stepped spillways as they provided simpler, easier to use equations that yielded better accuracy than that of the existing equation for the rate of energy dissipation in steeped spillways,

REFERENCES

1. Agunwamba J. C (2007), Engineering Mathematical Analysis, pgs 479 – 510, 674 – 675 (ISSN 978-8137-08-3).
2. Boes RM (2000) Zweiphasenströmung und Energieumsetzung an Grosskaskaden, PhD thesis, VAW-ETH, Zürich, Switzerland (in German)
3. Boes, R. M. (2000). Scale effects in modeling two phase stepped spillway flow. In Proc. Intl. Workshop on Hydraulics of Stepped Spillways, 53 - 60. H. E. Minor and W. H. Hager, eds. Steenwijk, the Netherlands: A. A. Balkema.
4. Boes, R. M., and Hager, W. H. (1998). Fiber optical experimentation in two phase cascade flow. In Proc. Intl. RCC Dams Seminar. K. Hanson, ed. Denver, Colo.: Schnabel Engineering.
5. Bung DB (2009) Zur selbstbelüfteten Gerinneströmung auf Kaskaden mit gemäßigter Neigung. PhD Thesis, Lehr- und Forschungsgebiet Wasserwirtschaft und Wasserbau, Bergische Universität Wuppertal, Germany (in German)
6. Bung DB, Schlenkhoff A (2009) Prediction of oxygen transfer in self-aerated skimming flow on embankment stepped spillways, 33rd IAHR World Congress. Vancouver, Canada
7. Carosi G, Chanson H (2006) Air-water time and length scales in skimming flow on a stepped spillway. Application to the spray characterisation. Report No. CH59/06, Division of Civil Engineering, The University of Queensland, Brisbane, Australia, July
8. Carosi, G. and Chanson, H. (2006). "Air-Water Time and Length Scales in Skimming Flows on a Stepped Spillway. Application to the Spray Characterisation." Report No. CH59/06, Div. of Civil Engineering, The University of Queensland, Brisbane, Australia, July, 142 pages (ISBN 1864998601).
9. Chanson H (1997a) Air bubble entrainment in open channels. Flow structure and bubble size distributions. Int J Multiph Flow 23(1):193–203
10. Chanson H (1997b) Measuring air–water interface area in supercritical open channel flow. Water Res 31(6):1414–1420
11. Chanson H (2001) The hydraulics of stepped chutes and spillways. Balkema, Lisse, p 418
12. Chanson H (2002) Air–water flow measurements with intrusive phase-detection probes. Can we improve their interpretation? J Hydraul Eng ASCE 128(3):252–255
13. Chanson H (2006) Minimum specific energy and critical flow conditions in open channels. J Irrig Drain Eng ASCE 132(5):498–502
14. Chanson H, Carosi G (2007) Advanced post-processing and correlation analyses in high-velocity air– water flows. Environ Fluid Mech 7(6):495–508
15. Chanson H, Toombes L (2002a) Air–water flows down stepped chutes: turbulence and flow structure observations. Int J Multiph Flow 28(11):1737–1761
16. Chanson H, Toombes L (2002b) Energy dissipation and air entrainment in stepped storm waterway: experimental study. J Irrig Drain Eng ASCE 128(5):305–315
17. Chanson, H and Toobes L, "Flow Patterns in Nappe Flow Regime Down Low Gradient Stepped Chutes". Journal of Hydraulic Research No 46, No 1 (2008), pp 4 – 44 @ International Association of Hydraulic Engineering and Research.
18. Chanson, H. Hydraulics of Nappe Flow Regime Above Stepped Chutes And Spillways
19. Chanson, H. (2002). The Hydraulics of Stepped Chutes and Spillways. Steenwijk, The Netherlands: A. A. Balkema.

20. Chanson, H., and Toombes, L. (2002). Energy dissipation and air entrainment in a stepped storm waterway: An experimental study. *J. Irrig. and Drainage Eng. ASCE* 128(5): 305- 315.
21. Chanson, H.(2002) *The Hydraulics of Stepped Chutes and Spillways*. Lisse, the Netherlands: Balkema.
22. Chanson, H (2002), *Hydraulics of Stepped Spillways: Current Status*, *Journal of Hydraulic Engineering*, 126(9), 2000, pp. 636-637.
22. Chanson, H. (2000). Characteristics of skimming flow over stepped spillways: Discussion. *J. Hydraul. Eng. ASCE* 125(4): 862- 865.
23. Chanson, H (1997). "Model Study of a Roller Compacted Concrete Stepped Spillway." *Journal of Hydraulic Engineering, ASCE*, Vol 123, No 10, pp, 931- 933 (ISSN 0733 – 9429).
24. Chanson, H. (1996) "Prediction of the Transition Nappe/Skimming Flow On a Stepped Channel" *Journal of Hydraulic Research*, Vol. 34, 1996 No 3.
25. Chanson, H (1994), Comparison of energy dissipation between nappe and skimming flow regimes on stepped chutes, *Journal of hydraulic research*,32 (2), 1994, pp. 213–218.
- 26 Chanson, H. (1994a). Hydraulics of skimming flows over stepped channels and spillways. *IAHR J. Hydraul. Res.* 32(3): 445- 460.
27. Chanson, H. (1994b). *Hydraulic Design of Stepped Cascades, Channels, Weirs, and Spillways*. Oxford, U.K.: Pergamon.
28. Chanson, H (1994), "Hydraulics of Nappe Flow Regime above Stepped Chutes and Spillways" *Aust, Civil Engg Tranports*, I, E, Aust, CE 36 (1), 69 -76
29. Chanson, H. (1993). "Stepped Spillway Flows and Air Entrainment." *Can. JI of Civil Eng.*, Vol. 20, No. 3, June, pp. 422-435 (ISSN 0315-1468). *JOURNAL DE RECHERCHES HYDRAUQUES*, VOL. 34, 1996, 'Vol. 3 Prediction of the transition nappe/skimming flow on a stepped channel
30. Chanson, H (1988), "A Study of Air Entrainment and Aeration Devices on a Spillway Model". Ph.D Thesis, Ref 88 – 8, "Department of Civil Engineering University of Canterbury,
31. Chow, V. T. (1959). *Open Channel Hydraulics*. Boston, Mass.: McGrawHill.
32. Christodoulou, G. C. (1993). Energy dissipation on stepped spillways. *J. Hydraul. Eng. ASCE* 119(5): 644- 655.
33. Felder S (2013) *Air–water flow properties on stepped spillways for embankment dams: aeration, energy dissipation and turbulence on uniform, non-uniform and pooled stepped chutes*. PhD Thesis, The University of Queensland, Australia
34. Felder S, Chanson H (2009a) Energy dissipation, flow resistance and gas-liquid interfacial area in skimming flows on moderate-slope stepped spillways. *Environ Fluid Mech* 9(4):427–441
35. Felder S, Chanson H (2009b) Turbulence, dynamic similarity and scale effects in high-velocity freesurface flows above a stepped chute. *Exp Fluids* 47(1):1–18
36. Felder S, Chanson H (2011) Air–water flow properties in step cavity down a stepped chute. *Int J Multiph Flow* 37(7):732–745
37. Felder S, Chanson H (2013) Aeration, flow instabilities, and residual energy on pooled stepped spillways of embankment dams. *J Irrig Drain Eng ASCE* 139(10):880–887
38. Felder, S., and Chanson, H. (2008). *Turbulence and turbulent length and time scales in skimming flows on a stepped spillway: Dynamic similarity, physical modeling, and scale effects*. Queensland, Australia: University of Queensland, Division of Civil Engineering.
39. Felder, S and Chanson, H.(2012). "Air-Water Flow Measurements in Instationary Free Surface Flows: a Triple Decomposition Technique." *Hydraulic Model Report No. CH85/12*, School of Civil Engineering, The University of Queensland, Brisbane, Australia
40. Felder, S. and Chanson, H. (2011a). "Air-Water Flow Properties in Step Cavity down a Stepped Chute." *International Journal of Multiphase Flow*, Vol.

41. Felder, S. and Chanson, H. (2011b). "Energy Dissipation down a Stepped Spillway with Non-Uniform Step Heights." *Journal of Hydraulic Engineering, ASCE*, Vol. 137, No. 11, pp. 1543- 1548 (DOI 10.1061/(ASCE)HY.1943-7900.0000455).
42. Felder, S. and Chanson, H. (2009b). "Turbulence, Dynamic Similarity and Scale Effects in High-Velocity Free-Surface Flows above a Stepped Chute." *Experiments in Fluids*, Vol. 47, No. 1, pp. 1-18. 2006 World Environ. and Water Resources Congress, ASCE flow in open channels. *J Hydraul Div ASCE 84(HY7):1–35* paper 1890
43. Ferrell RT, Himmelblau DM (1967) Diffusion coefficients of nitrogen and oxygen in water. *J Chem Eng Data 12(1):111–115*
44. Gonzalez CA (2005) An experimental study of free-surface aeration on embankment stepped chutes. PhD Thesis, Department of Civil Engineering, The University of Queensland, Brisbane, Australia
45. Guenther P, Felder S, Chanson H (2013) Flow aeration, cavity processes and energy dissipation on flat and pooled stepped spillways for embankments. *Environ Fluid Mech 13(5):503–525*
46. Gulliver JS (1990) Introduction to air–water mass transfer. New Zealand. Hydraulic of Nappe Flow Regime Above Stepped Chute and Spillways
In: Proceedings of 2nd international symposium on gas transfer at water surfaces, air–water mass transfer; ASCE Publ., Minneapolis MN, pp 1–7
47. Kawase Y, Moo-Young M (1992) Correlations for liquid-phase mass transfer coefficients in bubble column reactors with newtonian and non-newtonian fluids. *Can J Chem Eng 70:48–54*
48. Matos J (1999) Air entrainment and energy dissipation on stepped spillways. PhD Thesis, Technical University of Lisbon, Portugal
49. Meireles I, Matos J (2009) Skimming flow in the nonaerated region of stepped spillways over embankment dams. *J Hydraul Eng ASCE 135(8):685–689*
50. Ohtsu I, Yasuda Y, Takahashi M (2004) Flow characteristics of skimming flows in stepped channels. *J Hydraul Eng ASCE 130(9):860–869*
51. Straub LG, Anderson AG (1958) Experiments on self-aerated flow in open channels. *J Hydraul Div ASCE 84(HY7):1–35* paper 1890
52. Thorwarth J (2008) *Hydraulisches Verhalten der Treppengerinne mit eingetieften Stufen - Selbstinduzierte Abflussinstationaritäten und Energiedissipation*. PhD Thesis, University of Aachen, Germany (in German)
53. Toombes L (2002) Experimental study of air–water flow properties on low-gradient stepped cascades. PhD Thesis, Dept. of Civil Engineering, University of Queensland, Australia
54. Toombes L, Chanson H (2005) Air–water mass transfer on a stepped waterway. *J Environ Eng ASCE 131(10):1377–1386*
55. Wood I (1983) Uniform region of self-aerated flow. *J Hydraulic Eng 109(3):447–461*

LISTS OF SYMBOLS

- d_c – critical water depth (m);
 h - step height (m),
 H_1 – residual head at the bottom of the spillway (m);
 ΔH – difference between the maximum head and the residual head (m);
 H - total head (m);
 H_{max} - maximum head available (m):
 $H_{max} = H_{dam} + 3/2 * d_c$;
 Q - discharge ($m^2 s^{-1}$);
 q_w - discharge per unit width ($m s^{-1}$);
 Reynolds number defined as : $Re = \rho_w * U_w * D_H / \mu_w$
 U_w - flow velocity (m/s): $U_w = q_w/d$;

W - channel width (m);

Subscript

c – conditions at critical height;

N– number of step;