

Original Research Article

Tropospheric Influence on Ultra-High Frequency (UHF) Radio Waves

Abstract

This research investigates the effects of temperature and relative humidity on UHF signals. A spectrum analyzer was used in measuring UHF signals while a digital thermometer and hygrometer was used in measuring temperature and relative humidity, respectively. From results obtained, relative humidity had no significant effect on UHF signal strengths while a positive correlation coefficient was obtained between temperature and UHF signals. This implies that an increase in temperature will lead to a decrease in received signal strength of UHF signals. Furthermore, a path loss propagation model for Calabar ($P_L = 37.920 + 2.796T + 0.290R + 3.733$) was obtained using multiple regression analysis and we believe that the result obtained in this study will be useful to radio engineers for UHF signal propagation in the study terrain.

Keywords: UHF Signals, Radio Waves, Temperature, Relative Humidity, Path Loss

Introduction

Ultra-High Frequency (UHF) is the International Telecommunications Union (ITU) designation for radio frequencies between 300 megahertz (MHz) and 3 gigahertz (GHz), also known as the decimetre band because its wavelength ranges between one decimetre to one metre [1-5]. They propagate on line-of-sight and are easily blocked by obstacles [6-9].

Waves in the decimetre band are weakly reflected by ionized layers of the upper atmosphere and as a result, they bend around the earth's curvature and are easily obstructed. They can, however, be concentrated into narrow and highly directional signal beams. These characteristics make UHF suitable for line-of-sight applications that require high accuracy. UHF radio waves are used in many facets of life including ship and aircraft navigation systems, satellite communication, GPS, Wi-Fi, bluetooth, walkie-talkies, cordless phones, cell phones and television broadcasting. They typically carry television signals on channels 14 through 83 [8, 9].

Adverse atmospheric conditions absorb, reflect, refract, diffract, depolarize and scatter communication signals [5, 10-23] and these results to substantial path loss and severe degradation in signal coverage and quality of service [24-44]. Atmospheric induced attenuation and impairment is the prominent source of signal degradation in radio wave communication channels, however, they depend on the transmission frequency, transmission links and particularly, the location at which the signal is transmitted [45].

In designing and deploying meaningful communication systems, several attenuation effects owing to different atmospheric conditions need are examined [46, 47]. The knowledge of specific attenuation influenced by different atmospheric variables is essential for efficient fade management [48].

Based on this premise, studies on atmospheric effects on radio signals have become imperative for radio engineers and scientists for the proper planning of reliable radio links, power budget and coverage areas [49]. As such, wireless network designers are concerned about the nature of the atmosphere through which the signal propagates from the transmitter to the receiver [50].

The effect of atmospheric factors on UHF radio signals have been previously explored [51-61]. The authors in [55] investigated the effects of relative humidity on received signal strength for sunny and rainy days and statistical analysis was used to determine the relationship between both variables. The following results for rainy and sunny days at various frequencies were obtained (r_r =correlation on rainy day, r_s = correlation on sunny day): For frequency 382.5 MHz (r_r =-0.423, r_s =-0.382), while for frequency 945 MHz (r_r =-0.512, r_s =-0.631), frequency 1867.5 MHz (r_r =-0.588, r_s =-0.669) and frequency 2160 MHz (r_r = -0.509 r_s =-0.805).

For the authors in [54], the effect of temperature on UHF signals was investigated. Computed result shows that temperature had no significant effect on UHF signal strength. In [59], the effects of temperature and relative humidity on UHF radio waves was investigated. It was concluded that an

increase in temperature and relative humidity led to UHF signal strength drops and vice versa. In [61] the effects of temperature and relative humidity on signals emanating from a mobile network operating at a frequency band of 900MHz was studied. A rise in relative humidity led to a decrease in UHF signal strength while temperature rise was accompanied by an increase in received signal strength and vice versa.

In [60], the authors studied the effects of temperature and humidity on radio signal strength in outdoor wireless sensor networks. Experimental measurements were performed using Atmel ZigBit 2.4GHz wireless modules, both in summer and wintertime. They employed all the radio channels specified by IEEE 802.15.4 for 2.4GHz ISM frequency band with two transmit power levels. The results show that changes in weather conditions affect received signal strength. As temperature rises, there was a reduction in signal strength and vice versa. Also, as relative humidity rises there was a rise in signal strength and vice versa.

With the conflicting results and conclusions, there is a need to study the effect of temperature and relative humidity on UHF signals in order to ease its deployment for signal transmission. Based on this need, this paper aims at determining how temperature and relative humidity affects UHF radio waves, using UHF signals generated at 512.25MHz. Furthermore, the obtained result will be used to develop a propagation model for the study area and make comparison with the free space propagation model. This is done to check the suitability of the free space propagation model for transmission of signals in the study area.

Methodology

Equipment used for data collection

A digital spectrum analyzer (GW-INSTEK) GSP-730 with frequency range of 150 MHz - 3GHz was used in measuring signal strength while a digital thermometer and relative humidity meter (model Htc) was used in measuring temperature and relative humidity. A hand-held GPS (GARMIN 78S) was used

for the measurement of latitude and longitude. This research was carried out in the city of Calabar, Cross River State. Measurements of received signal strength, geographical coordinates (elevation, longitude and latitude) and meteorological variables were simultaneously taken. Measurements were taken in twelve locations, based on the peculiarity of the location.

Data Collection

Signals transmitted from the base station of Cross River Broadcasting Corporation at a frequency of 519.25MHz was measured at Line-of-Sight (LOS) distance at 12 different routes with the base station as reference point. The received signal strength were obtained at the receiver antenna at a height of 3.0 m. During the measurement campaign, latitude and longitude at the various points of data collection were measured using the GPS, which equally measured the elevation. Concurrently, temperature and relative humidity was measured.

Data Analysis

Measured data were grouped according to routes and the average values were used for the analysis. Collected data of received signal strength, temperature and relative humidity were averaged for each location. Line of sight (LOS) distance of each measurement point was calculated, taking the base station as the reference point. Path loss of the measured signals were calculated, various graphs were plotted and **correlation coefficients were obtained** for a proper understanding of the effects of temperature and relative humidity on UHF signals. A path loss model to suit with the terrain of the study area was obtained using multiple regression analysis. Finally, free space path loss was calculated using the free space path loss equation and the calculated values were compared with the measured path loss model. This was done to ascertain its suitability for transmission of UHF signals in the study terrain. Where the

free space path loss model does not suit with the terrain, an optimized free space path loss model was developed.

Results and Discussion

Effect of Temperature and Relative Humidity on UHF Radio Waves

In this section, how temperature and relative humidity affects UHF signal strengths was studied. Average values of temperature and relative humidity at each study route was compared with the measured path losses at each study route. To compute the path losses,

Let transmitted power = P_T

Received power = P_R

Loss in power = P_L

$$P_L = P_T - P_R \quad (1)$$

Where $P_T = 56.0206\text{dBm}$

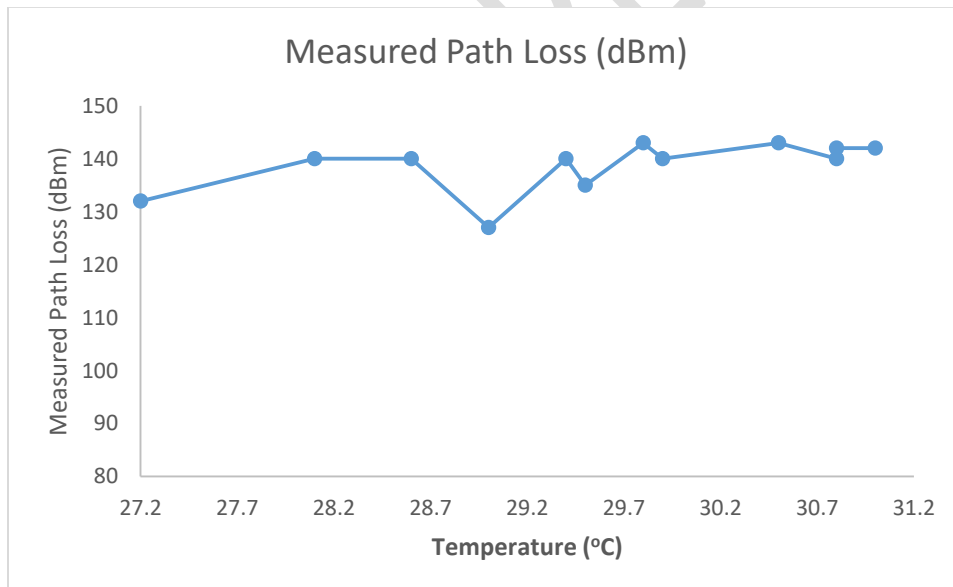


Figure 1: Graph of Measured Path loss against Temperature

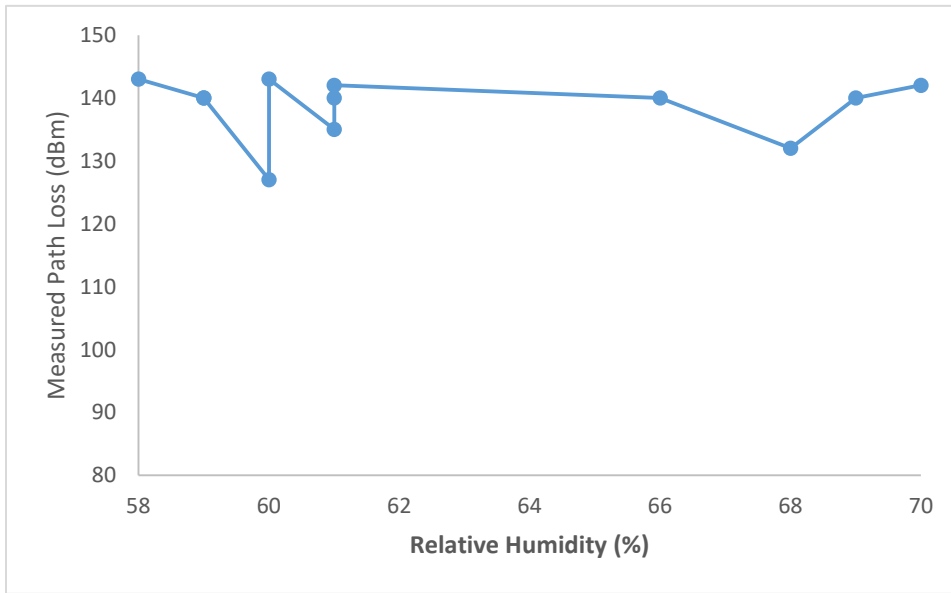


Figure 2: Graph of Measured Path loss against Relative Humidity

From the measured and calculated data, a graph of measured path loss against temperature/relative humidity, as shown in figure 1 and figure 2, with correlation coefficients of 0.56 for temperature and -0.04 for relative humidity, respectively. The low negative correlation coefficient for relative humidity implies that relative humidity does not account for the path losses in the study area and therefore, does not affect UHF signal strength. Also, an increase in temperature led to an increase in path losses, hence, as temperature increases, UHF signal strength decreased. From the available literature, this work agrees with results earlier obtained by the authors in [61], where an increase in temperature led to an increase in received signal strength.

Path Loss Model for Study Area using Multiple Regression Analysis

In this section, multiple regression analysis was used in developing path loss model for the study area. In this model, path loss was considered the dependent variable while temperature and relative humidity were the independent variable. Based on the assumption that temperature and relative humidity influenced radio waves transmission from the transmitter to the receiver. In multiple regression analysis,

$$Y = \beta_0 + \beta_1 T + \beta_2 R + \mu \quad (2)$$

Where, Y = calculated path loss = P , β_0 = constant, β_1 = predictor variable for temperature, β_2 = predictor variable for relative humidity, μ = prediction error, T = temperature and R = relative humidity

Here, $\beta_0 = 37.920$, $\beta_1 = 2.796$, $\beta_2 = 0.290$ and $\mu = 3.733$

Therefore, regression model becomes

$$P_L = 37.920 + 2.796T + 0.290R + 3.733 \quad (3)$$

Equation (3) becomes the developed path loss model for the study area. From the developed path loss, values of relative humidity and temperature were substituted and the developed path loss in each route was obtained. The values, as shown in figure 3 and figure 4, underestimated and overestimated the measured path losses. However, the low prediction error of 3.733, indicates a better fit for the regression model. It was also discovered that a unit increase in temperature resulted to 2.796dBm increase in path loss and a unit increase in relative humidity resulted to 0.290dBm increase in path loss.

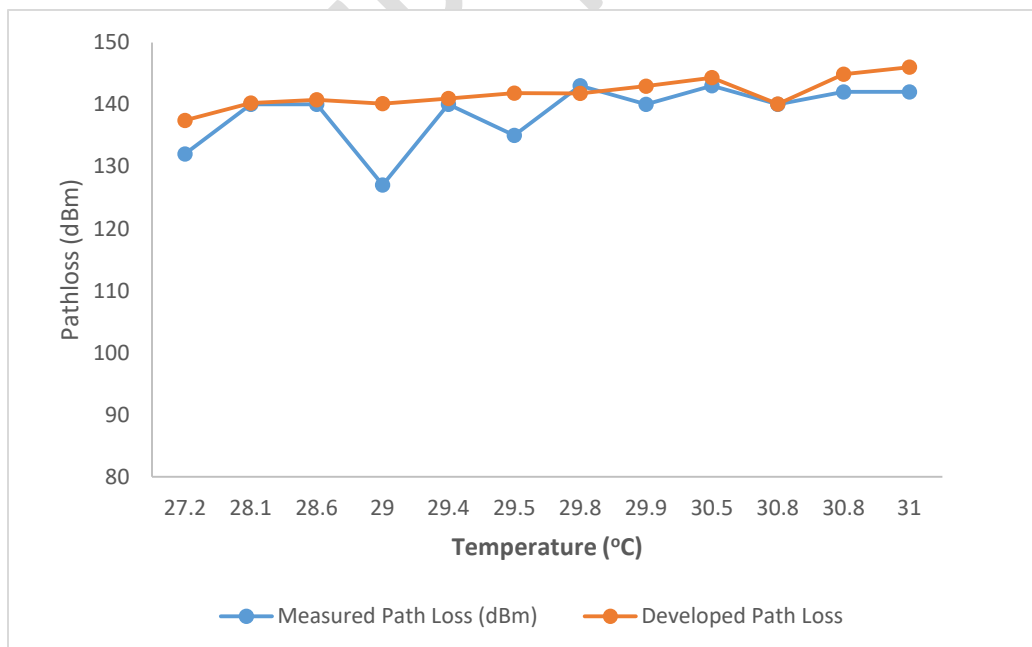


Figure 3: Graph of Measured Path loss/Developed Path Loss against Temperature

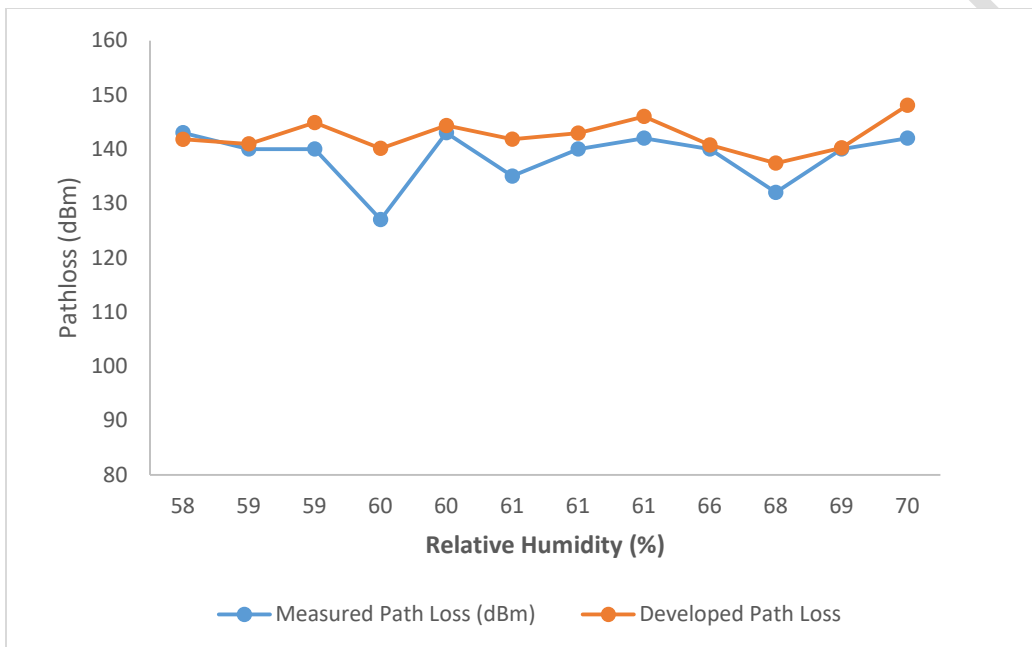


Figure 4: Graph of Measured Path loss/Developed Path Loss against Relative Humidity

Analysis of Free Space Propagation Model

In this section, the longitudes and latitudes of each measured route and that of the base station, which serves as the reference point, is used to calculate the LOS distance of each location from the base station.

The calculated LOS distance is then substituted into the free space propagation equation, given by [62] as

$$L_{FS} = 32.5 + 20 \log d + 20 \log f \quad (4)$$

Where f is in megahertz (MHz) and d in kilometers (km).

Solving for locations the 12 locations and comparing it with the measured path loss model, we obtain figure 5 and figure 6.

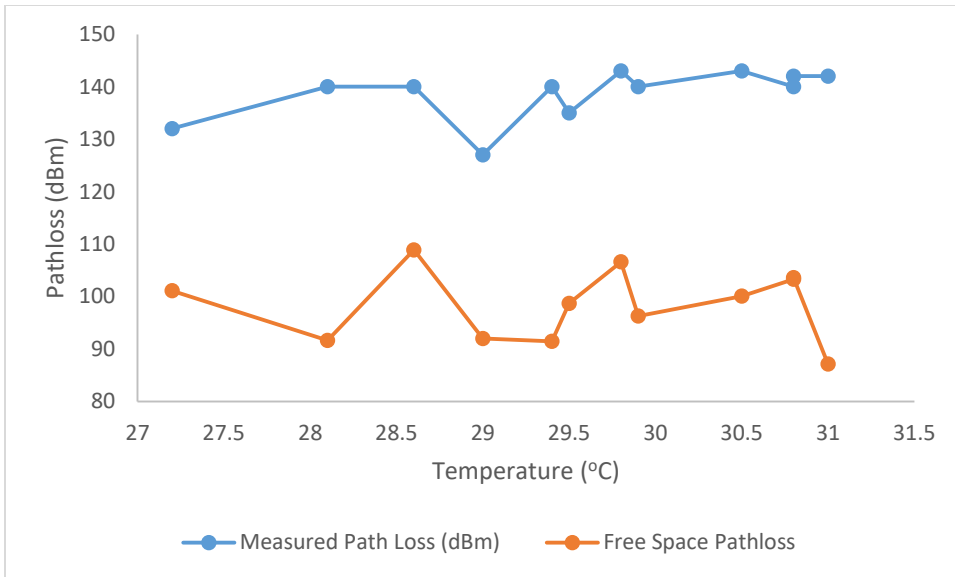


Figure 5: Graph of Measured/Free Space Path Loss against Temperature

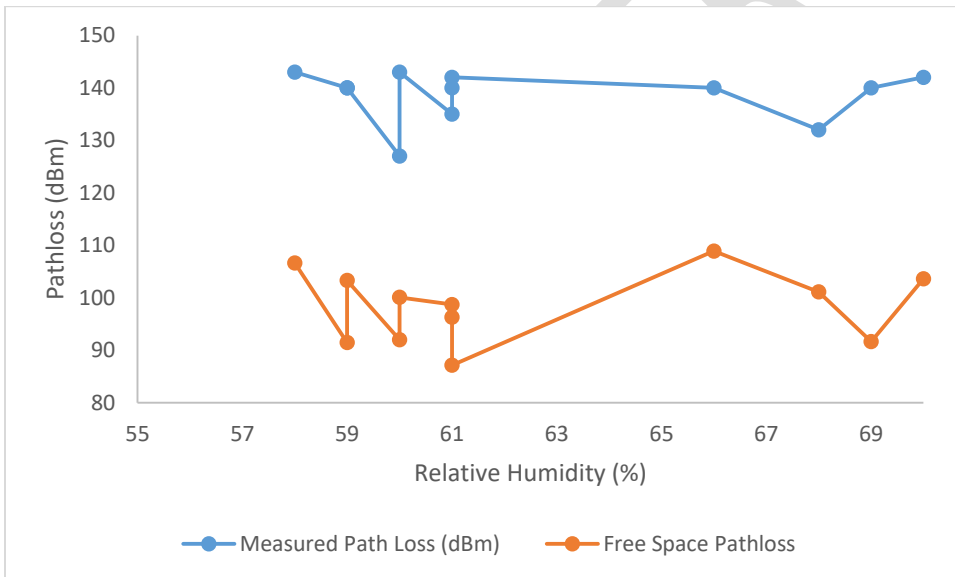


Figure 6: Graph of Measured/Free Space Path Loss against Relative Humidity

As observed in figures 5 and 6, the free space path loss underestimated pathlosses in the study area and therefore, it is not suitable for signal propagation in the study area.

Optimization of Free Space Propagation Model

The unsuitability of the free space path loss model for signal propagation in the study area has given rise for a need for an adjustment to be made for its suitability for signal transmission in the study area.

Recall, in equation (4), free space path loss model is given as

$$L_{FS} = 32.5 + 20 \log d + 20 \log f$$

To optimize the model for its suitability in the study area, we introduce a prediction error C. Therefore,

$$L_{FS} = 32.5 + 20 \log d + 20 \log f + C \quad (5)$$

And

$$C = \sqrt{\frac{(P_m - P_{FS})^2}{N}} \quad (6)$$

Where $C = 53.7\text{dBm}$

Therefore,

$$L_{FS} = 32.5 + 20 \log d + 20 \log f + 53.7 \quad (7)$$

Substituting the values of d and f into (7) and plotting it against temperature/relative humidity, we obtain figures 7 and 8.

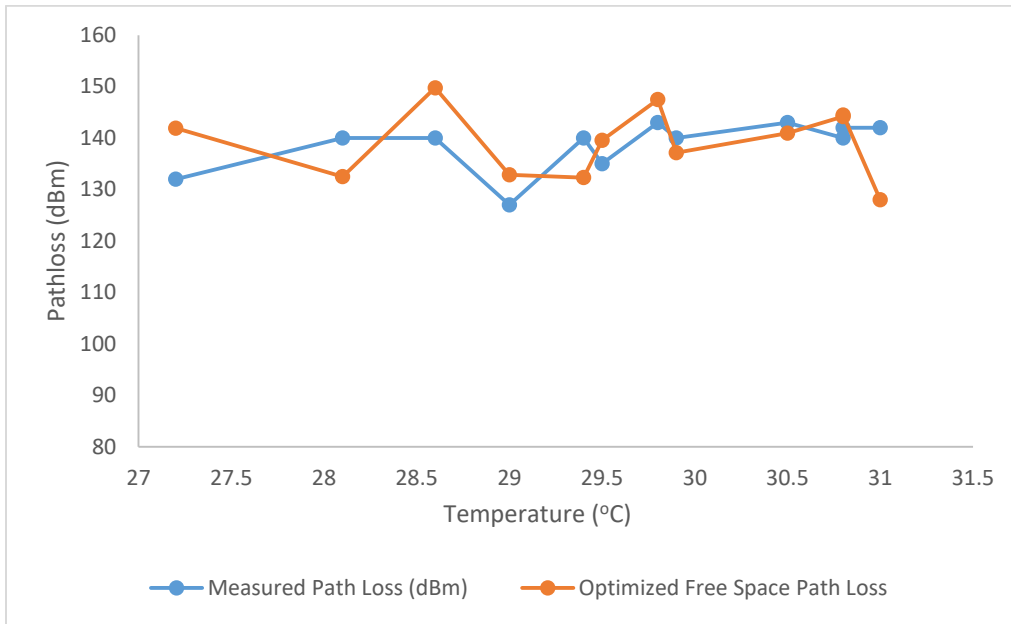


Figure 7: Graph of Measured/Optimized Free Space Path Loss against Temperature



Figure 8: Graph of Measured/Optimized Free Space Path Loss against Relative Humidity

From the plotted graphs, it is observed that the optimized path loss model underestimated and underestimated the measured path losses at each measurement route. In addition to this, since the prediction error was above the recommended threshold of at most 6dBm [41], it is justifiable to say that the optimized free space path loss will not be fit for signal propagation in the area under investigation.

Conclusion

The effects of meteorological variables on UHF signals have been studied, taking temperature and relative humidity as the meteorological variables of importance. Results obtained shows that a rise in temperature led to a rise in received signal strength for UHF signals while relative humidity has no significant effect on UHF signals. The suitability of the free space propagation model for the study terrain failed, as calculated results showed that this model underestimated path losses in the study area. Multiple regression analysis has been used to obtain a suitable path loss model for the study terrain.

References

- [1] Raj A. Wireless communications. 1st ed. Khanna Publishers: Delhi; 2014
- [2] "IEEE 521-2002- IEEE Standard Letter Designations for Radar-Frequency Bands". Standards.ieee.org. Retrieved 17 June 2022
- [3] Rec. ITU-R V.431-8, Nomenclature of the Frequency and Wavelength Bands used in Telecommunications" https://www.itu.int/dms_pubrec/itu-r/rec/v/R-REC-V.431-8-201508-I!!PDF-E.pdf Retrieved December 31, 2021.
- [4] Seybold, John S. (2005). Introduction to RF Propagation. John Wiley and Sons, Inc. New York. 349p
- [5] Olatoye NO, Ekoko EC, Sani OM, Ogungbenro O. The Determination of Pathloss Model for Ultra-High-Frequency Television Transmission in Onitsha, Anambra state, Nigeria. International Journal of Communication Systems. 2021 ;34(5): e4716.
- [6] Akinbolati A, Akinsanmi O, Ekundayo KR. Signal Strength Variation and Propagation Profiles of UHF Radio Wave Channel in Ondo state, Nigeria. International Journal of Wireless and Microwave Technologies. 2016;6(4):12-27.
- [7] Akinbolati A, Joseph E, Okpala C. Propagation Curves and Pathloss Evaluation for UHF Wave (Channel 22, 479.25 MHz) within Katsina Metropolis. Fudma Journal of Sciences. 2017;1(1):189-196.
- [8] Akinbolati A, Ajewole MO. Effect of some Radio Climatic Factors on Digital Terrestrial Television Signal in a Sahel Savannah City of Nigeria. Fudma Journal of Sciences. 2020 Jul 2;4(2):111-118.
- [9] Boithias L. Radio Wave Propagation, McGraw-Hill. New York. 1987.
- [10] Ekah BJ, Iloke J, Ekah UJ. Tropospheric Influence on Dropped Calls. Global Journal of Engineering and Technology Advances. 2022;10(2):83-93.

- [10] Ometan OO, Omotosho TV, Adewusi MO, Akinwumi SA. Evaluation of the Variation in Wind speed during Rainfall in a Tropical Location. In IOP Conference Series: Earth and Environmental Science 2021 Feb 1 (Vol. 655, No. 1, p. 012057). IOP Publishing.
- [11] Shamsan ZA, Al-Saman A. Performance of the DBS satellite receiver under the impact of rainfall and terrestrial interference. *Wireless Communications and Mobile Computing*. 2021;2021: 1-12.
- [12] Alhilal AY, Braud T, Hui P. A Roadmap toward a Unified Space Communication Architecture. *IEEE Access*. 2021;9: 99633-50.
- [13] Rathore NK, Jain NK, Shukla PK, Rawat U, Dubey R. Image Forgery Detection using Singular Value Decomposition with some Attacks. *National Academy Science Letters*. 2021;44(4):331-8.
- [14] Alumona TL, Kelvin NN. Path loss prediction of wireless mobile communication for urban areas of Imo State, South-East region of Nigeria at 910 MHz. *International Journal of Sensor Networks and Data Communications*. 2015;4(1):1-4.
- [15] Ekah UJ, Onuu MU. Tropospheric Influence on Call Setup in Mobile Networks. *Journal of Engineering Research and Reports*. 2022;22(2):14-26.
- [16] Ebhota VC, Isabona J, Srivastava VM. Environment-adaptation based hybrid neural network predictor for signal propagation loss prediction in cluttered and open urban microcells. *Wireless Personal Communications*. 2019;104(3):935-48.
- [17] Ometan OO, Omotosho TV, Adewusi MO, Akinwumi SA. Evaluation of the Variation in Wind speed during Rainfall in a Tropical Location. In IOP Conference Series: Earth and Environmental Science 2021 Feb 1 (Vol. 655, No. 1, p. 012057). IOP Publishing.
- [18] Isabona J. Wavelet generalized regression neural network approach for robust field strength prediction. *Wireless Personal Communications*. 2020;114(4):3635-53.
- [19] Ekah UJ, Adebayo AO, Shogo OE. Spatial Distribution of Frequency Modulated Signals in Uyo, Nigeria. *World Journal of Advanced Engineering Technology and Sciences*, 2022;5(1): 39-46.
- [20] Ewona I, Ekah U. Influence of Tropospheric Variables on Signal Strengths of Mobile Networks in Calabar, Nigeria. *Journal of Scientific and Engineering Research*, 2021;8(9): 137-45.
- [21] Iloke J, Utoda R, Ekah U. Evaluation of Radio Wave Propagation through Foliage in Parts of Calabar, Nigeria. *International Journal of Scientific & Engineering Research*, 2018;9(11): 244-249.
- [22] Emeruwa C, Ekah UJ. Pathloss Model Evaluation for Long Term Evolution in Owerri. *International Journal of Innovative Science and Research Technology*, 2018;3(11): 491-496.
- [23] Emeruwa, C. and Ekah, U. J. (2018). Investigation of the Variability of Signal strength of Wireless Services in Umuahia, Eastern Nigeria. *IOSR Journal of Applied Physics*, 10(3): 11-17.
- [24] Imoize AL, Otuokere EM, Ajose SO, Adegbenro AO. Experimental validation of a best-fit model for predicting radio wave propagation through vegetation. *Arid Zone Journal of Engineering, Technology and Environment*. 2019;15(SPI2):172-86.

- [25] Joshi S, Stalin S, Shukla PK, Shukla PK, Bhatt R, Bhadoria RS, Tiwari B. Unified authentication and access control for future mobile communication-based lightweight IoT systems using blockchain. *Wireless Communications and Mobile Computing*. 2021; 2021 <https://doi.org/10.1155/2021/8621230>.
- [26] Ughegbe GU, Adelabu MA, Imoize AL. Experimental data on radio frequency interference in microwave links using frequency scan measurements at 6 GHz, 7 GHz, and 8 GHz. *Data in Brief*. 2021; 35:106916.
- [27] Adelabu MA, Imoize AL, Ughegbe GU. Performance evaluation of radio frequency interference measurements from microwave links in dense urban cities. *Telecom* 2021; 2021(2): 328-368.
- [28] Butani B, Shukla PK, Silakari S. An exhaustive survey on physical node capture attack in WSN. *International Journal of Computer Applications*. 2014;95(3): 32-39
- [29] Abdulrahman AY, Rahman TA, Olufeagba BJ, Islam MR. Using full rainfall rate distribution for rain attenuation predictions over terrestrial microwave links in Malaysia. *Signal Processing Research*. 2013;2(1):25-8.
- [30] Luini L, Capsoni C. A unified model for the prediction of spatial and temporal rainfall rate statistics. *IEEE Transactions on Antennas and Propagation*. 2013;61(10):5249-54.
- [31] Mello L, Pontes MS. Unified method for the prediction of rain attenuation in satellite and terrestrial links. *Journal of Microwaves, Optoelectronics and Electromagnetic Applications*. 2012;11(1): 1-14.
- [32] Imoize AL, Orolu K, Atayero AA. Analysis of key performance indicators of a 4G LTE network based on experimental data obtained from a densely populated smart city. *Data in brief*. 2020;29:105304.
- [33] Imoize AL, Adegbite OD. Measurements-based performance analysis of a 4G LTE network in and around shopping malls and campus environments in Lagos Nigeria. *Arid Zone Journal of Engineering, Technology and Environment*. 2018;14(2):208-225.
- [34] Imoize AL, Ogunfuwa TE. Propagation measurements of a 4G LTE network in Lagoon environment. *Nigerian Journal of Technological Development*. 2019;16(1):1-9.
- [35] Ogbabor JO, Imoize AL, Atayero AA. Energy efficient design techniques in next-generation wireless communication networks: emerging trends and future directions. *Wireless Communications and Mobile Computing*. 2020;2020: Article ID 7235362, 19 pages
- [36] Khambra G, Shukla P. Novel machine learning applications on fly ash based concrete: an overview. *Materials Today: Proceedings*. 2021 Jul 24.
- [37] Ewona, I., Ekah. U. J., Ikoi, A.O. & Obi, E. (2022). Measurement and Performance Assessment of GSM Networks using Received Signal Level. *Journal of Contemporary Research*. 1(1): 88-98.
- [38] Ekah. U. J., Iloke, J., Ewona, I. & Obi, E. (2022). Measurement and Performance Analysis of Signal-to-Interference Ratio in Wireless Networks. *Asian Journal of Advanced Research and Reports*. 16(3): 22-31.

- [39] Ekah, U. J. and Iloke, J. (2022). Performance Evaluation of UMTS Key Performance Indicators in Calabar, Nigeria. *GSC Journal of Advanced Research and Reviews*, 10(1): 47-52.
- [40] Ekah, U. J. and Emeruwa, C. (2022). A Comparative Assessment of GSM & UMTS Networks . *World Journal of Advanced Research and Reviews*, 13(1): 187-196.
- [41] Ekah, U. J. and Emeruwa C. (2021). Guaging of Key Performance Indicators for 2G Mobile Networks in Calabar, Nigeria. *World Journal of Advanced Research and Reviews*, 12(2): 157-163.
- [42] Obi, E., Ekah, U. and Ewona, I. (2021). Real-Time Assessment of Cellular Network Signal Strengths in Calabar. *International Journal of Engineering Sciences & Research Technology*, 10(7): 47-57.
- [43] Ekah UJ, Emeruwa C. Penetration Depth Analysis of UMTS Networks Using Received Signal Code Power. *Journal of Engineering Research and Reports*, 2022;23(7):16-25.
- [44] Iloke J, Ekah UJ, Uduobuk EJ, Ewona I, Obi E. Quality of Service Reliability: A Study of Received Signal Quality in GSM Networks. *Asian Journal of Physical and Chemical Sciences*, 2022;10(3):25-34.
- [45] Isabona J, Imoize AL, Ojo S, Lee CC, Li CT. Atmospheric Propagation Modelling for Terrestrial Radio Frequency Communication Links in a Tropical Wet and Dry Savanna Climate. *Information*. 2022 Mar 7; 141:1-16
- [46] Ojuh DO, Isabona J. Field electromagnetic strength variability measurement and adaptive prognostic approximation with weighed least regression approach in the ultra-high radio frequency band. *International Journal of Intelligent Systems & Applications*, 2021;4:14-23.
- [47] Isabona J, Imoize AL. Terrain-based adaption of propagation model loss parameters using non-linear square regression. *Journal of Engineering and Applied Science*. 2021;68(33):1-19.
- [48] Isabona J, Imoize AL, Rawat P, Jamal SS, Pant B, Ojo S, Hinga SK. Realistic Prognostic Modeling of Specific Attenuation due to Rain at Microwave Frequency for Tropical Climate Region. *Wireless Communications and Mobile Computing*. 2022 Apr 14;2022, 1-10. <https://doi.org/10.1155/2022/8209256>
- [49] Mmahi NO, Akinbolati A, Ikechiamaka FN, Akpaneno FA, Joseph E, Ekundayo KR. Studies on Surface Radio Refractivity over Some Selected Cities in North-Central, Nigeria. *Fudma Journal of Sciences*. 2021;5(4): 90-9.
- [50] Akinbolati A, Ajewole MO. Investigation of path loss and modeling for digital terrestrial television over Nigeria. *Heliyon*. 2020;6(6): e04101.
- [51] Usman I, Ibrahim MN, Akeem LS, Shehu A. Effects of Radio-Climatic Variables on Signal Propagation in Kebbi State. *Caliphate Journal of Science and Technology*, 2020;2(1):18-24.
- [52] Chima AI, Onyia A, Udegbe SU. The effects of atmospheric temperature and wind speed on UHF radio signal; a case Study of ESUT community and its environs in Enugu State. *IOSR Journal of Applied Physics*. 2018;10(2): 83-90.

- [53] Suleman KO, Bello IT, Tijani LO, Ogunbode AO, Olayiwola WA. Effect of temperature and ground water on VHF radio wave propagation in tropical climate. *International Journal of Scientific & Engineering Research*. 2017 Jan;8(1):1391-6.
- [54] Mat R, Shafie MM, Ahmad S, Umar R, Seok YB, Sabri NH. Temperature effect on the tropospheric radio signal strength for UHF band at Terengganu, Malaysia. *communications*. 2016; 6(5): 770-774
- [55] Mat R, Sabri NH, Umar R, Ahmad S, Zafar SN, Omar A, Mustafa WA. Effect of Humidity on Tropospheric Received Signal Strength (RSS) in Ultra-High Frequency (UHF) Band. In *Journal of Physics: Conference Series 2020 Apr 1 (Vol. 1529, 042048)*. IOP Publishing.
- [56] Mat R, Hazmin SN, Umar R, Ahmad S, Zafar SN, Marhamah MS. The modelling of tropical weather effects on ultra-high frequency (UHF) radio signals using SmartPLS. In *IOP Conference Series: Materials Science and Engineering 2018 Oct 1 (Vol. 440, No. 1, p. 012041)*. IOP Publishing.
- [57] Alade MO. Investigation of the effect of ground and air temperature on very high frequency radio signals. *Journal of Information Engineering and Applications*. 2013;3(9):16-21.
- [58] Ukhurebor KE. Influence of Meteorological Variables on UHF Radio Signal: Recent Findings for EBS, Benin City, South-South, Nigeria. *Discovery*, 2018, 54(269), 157-163
- [59] Alade MO. (2013). Dry Hot and Cool Tropical Climate Attenuation models at VHF. *International Journal of Electronics Communication and Computer Engineering*, 4 (4), 1114 – 1118
- [60] Luomala J, Hakala I. Effects of Temperature and Humidity on Radio Signal Strength in Outdoor Wireless Sensor Networks. *Proceedings of the 2015 Federated Conference on Computer Science and Information Systems* (pp. 1247-1255). IEEE. *Annals of Computer Science and Information Systems*, 5. <https://doi.org/10.15439/2015F241>
- [61] Osahenvemwen OA, Omatahunde BE. Impacts of Weather and Environmental Conditions on Mobile Communication Signals. *Journal of Advances in Science and Engineering*, 2018;1(1):33-38
- [62] Ekah UJ, Obi E, Ewona I. Tropospheric Influence on Low-band Very High Frequency (VHF) Radio Waves. *Asian Journal of Advanced Research and Reports*, 2022;16(11):25-36.