

## Original Research Article

### Remote sensing and GIS aided Land and water resources management plan for a Kotni watershed, Chhattisgarh, India.

#### Abstract

Land and water, the most important resources that support all forms of life. Agriculture or farming is the practice of cultivating plants and livestock. In the study area, these resources are in critical condition; approximately 6.5% is agricultural fallow and 3% is barren land. The majority of agricultural land being unproductive due to poor land and water resource management, which also drives 50 percent of current fallow in Rabi season. This research makes prudent and effective use of the watershed resources to increase productivity and production in the study area. The research area was a sub-watershed of the Kotni watershed, located between latitudes 20°52' to 21°15'N and longitudes 81°07' to 81°26'E. The runoff computation of the watershed was done using the SCS curve number approach for 11 years (2009-2019). which reveals average annual rainfall of 1329 mm, with 41% of runoff generation capacity, which is estimated as 483.95 Mm<sup>3</sup> of generated runoff in the study area. This study also includes Multi-Criteria Decision Analysis (MCDA) techniques, and weighted overlay analysis to delineate suitable zones for water storage and harvesting structures. Finally, suitable sites for 7 check dams, 10 percolation tanks for groundwater recharging and 20 check dams, 61 farm ponds for water harvesting were identified and proposed in the study area. This structure will help to increase the productivity within the watershed along with conserving the crucial resources.

**Keywords:** SCS method, Multi-Criteria Decision Analysis, weighted overlay analysis, Saaty's analysis, groundwater recharging structure, water harvesting, watershed management.

#### Introduction

For millenniums, land and water resources have been benefiting both people and their economies. However, in today's scenarios, resources are being depleted as a result of population expansion, and their consumption is increasing day by day, causing huge problems throughout the world (Falkenmark, 2006, Daily & Ehrlich, 1994). Especially for a country like India, which have to sustain 16% of the world population on 2.42 % geographical area

Comment [Ma1]: reference

Comment [Ma2]: reference

Comment [Ma3]: reference

Comment [Ma4]: I'll suggest a structural adjustment of this highlighted portion to ensure a smooth flow of the information. 'Agriculture is practise of cultivating plants and rearing livestock (reference). Land and water, which are the two most important agricultural resources as they support all life forms are in critical conditions in the study area. About 6.5% of the available land in the study area are agriculturally fallow while approximately 3% is barren'.

Comment [Ma5]: I'm guessing that you meant to write 'current fallow'. Pls go through the manuscript as you used the term fellow a few times.

Comment [Ma6]: generated

Comment [Ma7]: .

Comment [Ma8]: Plural; Millennia

Comment [Ma9]: global


(Kumar, 2012).the same situation has raised in the study area, where the use of various resources are dramatically increasing, resulting in the **sacristy** of primary resource. The annual average precipitation in the study area is 1,323 mm (11 years)(Source) with a high runoff conversion capability of 41% and **due to lack of arrangements** this high amount of runoff cannot be utilized in primary purposes such as agriculture.

In this research, land and water resources were planned for better management and long-term use for mankind to continue to thrive. It combines water availability analysis and **structure** planning at appropriate sites, assisting in enhancing the study area's water recharge and storage capacity and directly supporting farmers with **sustainable agriculture**. Various water recharging and harvesting structures, such as check dams, percolation tanks, and farm ponds, were proposed in the best feasible places. By improving water availability, these structures help increase the production and productivity of the study area fields. **Including alongside agricultural yields may be boosted as a result of the more water gathered and supplied.**

## Materials and methods

### Study Area

The study area belongs to Kotni watershed with its outlet at latitude  $21^{\circ}13' 02''$  and longitude  $81^{\circ}14' 19''$ . It is located in the western part of Chhattisgarh state, within latitudes  $20^{\circ}52'$  to  $21^{\circ}15'N$  and longitudes  $81^{\circ}07'$  to  $81^{\circ}26'E$  and covers an area of 870 km<sup>2</sup>. It is a part of the Seonath river sub-basin of the Mahanadi basin. Fig. 1 shows the boundary of the study area.

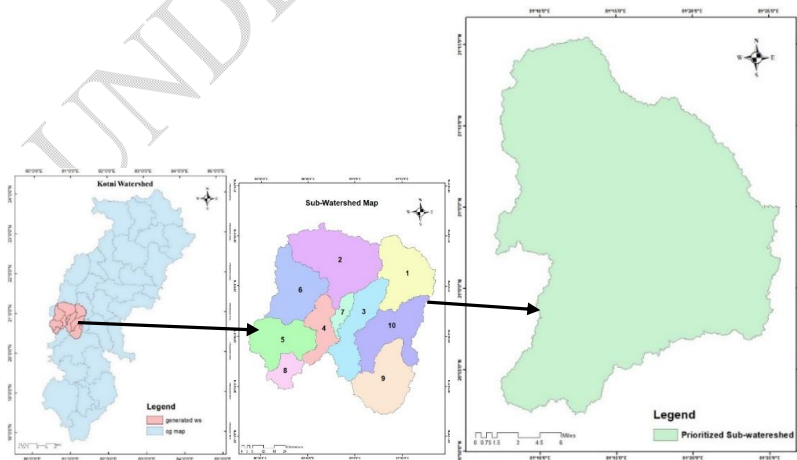

**Comment [Ma11]:** Scarcity.

**Comment [Ma12]:** This scenario is also obtainable in the study area where a geometric rise in the consumption of various resources has resulted in scarcity.

**Comment [Ma13]:** You should state the time frame within which this observation was made. i.e. (2011-2022). also, you should duly cite the source of the information.

**Comment [Ma14]:** I am guessing that you are implying that due to lack of proper geological and engineering structures to increase the runoff conversion capacity, there is a loss of precipitation which could have been diverted for use in agriculture. If so, the statement can be rephrased to reflect that.

**Comment [Ma15]:** structural

**Comment [Ma16]:** Shouldn't this be 'sustainable agricultural practises'?

**Comment [Ma17]:** This statement is simply a repetition of the preceding one. I'll advice that it be expunged

Fig 1: Boundary of the study area

## Data Acquisition

All the data required for the study were acquired from various sources, as mentioned in Table 1.

Table 1: Data acquisition

S. No.	Name	Type	Source
1	Meteorological and Hydrological Data	Daily Rainfall (2009-19)	Web Source: <a href="https://power.larc.nasa.gov/">https://power.larc.nasa.gov/</a>
2	Geology and Geomorphology	Shapefile	Central Ground Water Board (CGWB), NCCR, Raipur
3	Pre and Post monsoon water level map	Groundwater Level	Central Ground Water Board (CGWB), NCCR, Raipur <a href="http://indiawris.com">Indiawris.com</a>
4	Lineament Data	Shapefile	Chhattisgarh State Watershed Management Agency, Govt. of CG, Raipur.
5	Soil Data	Physiochemical properties	Chhattisgarh State Watershed Management Agency, Govt. of CG, Raipur.
6	Digital Elevation Model (D.E.M.) (30 m)	SRTM	Web Source: <a href="http://www.earthexplorer.usgs.gov">www.earthexplorer.usgs.gov</a> .
7	Remote Sensing Data	Sentinal-2 (25-Oct-2020)	<a href="http://www.earthexplorer.usgs.gov">www.earthexplorer.usgs.gov</a> ., <a href="https://scihub.copernicus.eu/">https://scihub.copernicus.eu/</a>

## Methodology

The methodology of this research involves various stages

### Spatial database building/ thematic map generation

Layers such as geomorphology, geology, and lineament obtained from various resources were clipped/ remoulded for the study area. In the GIS context, the SRTM DEM (30 m) was utilised to create contour maps, slope maps, drainage maps, and drainage density maps. The land use and land cover maps were created by Qgis software using semi-automatic categorization add-ins with use of sentinal-2 spatial data, of 25/Oct/2020 downloaded from the USGS website ([www.earthexplorer.usgs.gov](http://www.earthexplorer.usgs.gov)). The groundwater fluctuation and rainfall maps were created in ArcGIS 10.5 using the interpolation technique. For groundwater fluctuation map, The fluctuation data from three locations inside the study area namely Arjunda, Gunderdehi, and Durg were utilized. Likewise, average yearly rainfall data from three separate rainfall recorded sites were interpolated over the watershed for rainfall map. The rainfall-runoff estimation was done by the SCS curve number method developed by the United States Department of Agriculture (USDA) and the Natural Resources Conservation Service (NRCS).

Comment [Ma18]: Do you mean remodelled?

### Delineation of suitable zones for water storage and harvesting structures

The MCDA method provides the optimal solution with which the uncertainties are associated (Durbach & Stewart 2012). GIS-based MCDA approach incorporates and transforms spatial data (input) into the decision (output), where qualitative information on individual themes and characteristics is transformed into quantitative values using Saaty's scale (Saaty, 1980). Through the pairwise comparison matrix the weights were assigned to the themes and features which were based on the views of expert hydrologists and hydrogeologists, along with local experience. The rasterisation and reclassification tool in ArcMap 10.5 was utilized to transform all layers into raster format, and to allocate weightages to the layer and their feature.

### Identification of suitable locations for storage and water harvesting structures

To identify the best suitable structures and their locations, the water storage and harvesting structures suitability zones layer were integrated with LULC, lineament, contour map (1m), and google satellite image in the QGIS software. It helps for better visual interpretation for selecting the best-engaged points for structures. Table 2 shows the criteria for site interpretation and structure recommendation, developed by Indian National Committee on Hydrology (INCOH) (Nigam & Tripathi 2019).

Comment [Ma19]: Tautology. Use either 'best' or 'most suitable'

Comment [Ma20]: They help with

Table 2: Site selection criteria for artificial recharge structures

Type of Structure	Slope (%)	Soil Texture	Rainfall (in mm)	Land use	Drainage
Check Dam	<15%	Sandy Clay Loam	<1000 mm	Barren, Scrubland	Higher-order, i.e., >3 <sup>rd</sup> order
Percolation Tank	<10%	Silt loam, Clay loam	<1000 mm	Barren, Scrubland	2 <sup>nd</sup> to 3 <sup>rd</sup> order
Farm Pond	<5%	Sandy clay loam, Silt loam	>200 mm	Moderately cultivated	1 <sup>st</sup> order

Elevation data from Google Earth can be used for low-cost exploration and early research. Ashmawy (2016) Thus, it was merged with the 1 m contour line created with the SRTM DEM in the ArcGIS environment to estimate the capacity of the proposed structures. The length, width, and depth of stagnated water were determined in Google Earth

pro, and by multiplying these parameters, the volume of water stored in the structure was estimated.

## ResultsAnd Discussion

### Generation of thematic map

#### A. Landuse/cover map

The LULC was created using cloud-free geocoded digital data from Sentinal-2 dated 25/Oct/2020. The principal LULC classes were determined based on the results of image classification of *Kharif* season, includes agricultural (80.65 %), current fellow (6.36 %), barren land (2.73%), settlement (7.21 %), and water body (3.05 %). As shown in Fig2.

#### B. Geologyand geomorphology

The major formation discovered in the research region weremesoproterozoic - neoprotozoic. The Mesoproterozoic era lasted between 1,600 and 1,000 million years ago (Hao, *et al.*, 2012). The research region consists of structural plains of Gondwana rocks with active flood plain, pediment pediplain complex, younger alluvial plain and waterbody as geomorphology. Fig. 3 depicts the research area's geology and geomorphology map.

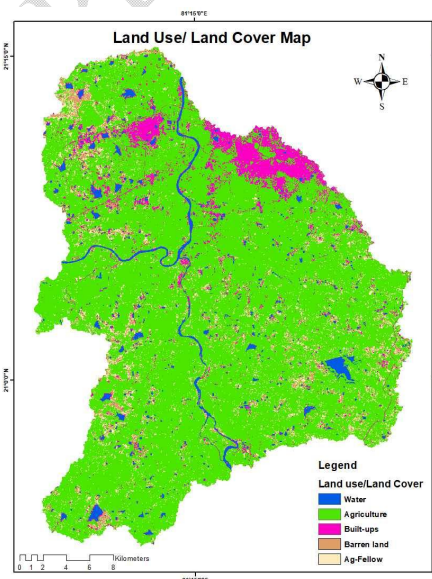


Fig.2: Land use/cover map

Please make these images clearer. The lettering on the legends are barely visible. Also, the inclusion of a geologic map showing the various lithologies is advised.

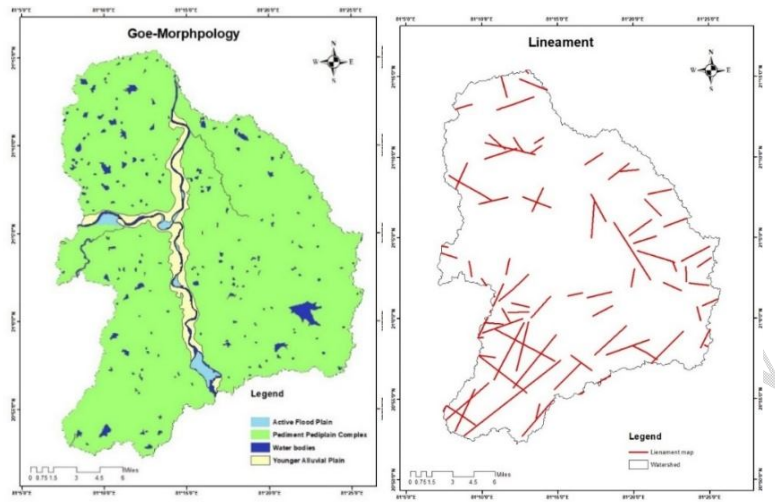


Fig.3:Geomorphology and lineament map

### C. Lineament map

Fractures in the strata of a specific location are referred to as lineament (Soroet *al.* 2017). Lineament map of study areawas obtained from the Central Ground Water Board, Raipur (C.G.). In the GIS context, a 100 m buffer was created around the lineaments. The lineament in the research region was estimated to be 256 km long.

**Comment [Ma21]:** These lineaments serve as reservoirs and conduits for groundwater flow. Hence, the orientation of the lineaments can serve as a pointer to the direction of flow.

### D. Slope map and contour map

The elevation of the study area ranges between 268 to 354 metres above mean sea level (MSL). The slope map exhibited a range of 0 to 49%. It is categorised into five ranges, namely: flat (0%), mild slope (0-2%), low (2-4%), moderate (4-6%), and high slope zones (>6%). Most of the catchment area has a mild slope zone making it ideal for water harvesting, recharge structures and farming. Figure 4 shows a slope map and a contour map with a 10 m interval.

### E. Drainage and drainagedensitymap

In ArcMap 10.5, an SRTM DEM (30 m) was utilized to create the drainage map. There are a total of 1152 streams in the study area, comprising of 586 1<sup>st</sup> order, 277 2<sup>nd</sup>, 187 3<sup>rd</sup>, 60 4<sup>th</sup>, 34 5<sup>th</sup>, and 8 sixth-order streams. The total length of streams was calculated as 973.60 km and drainage density is calculated by dividing the total length of channels (km) by the basin area (km<sup>2</sup>). The study area is categorized into very low, low, moderate and high drainage density zones.

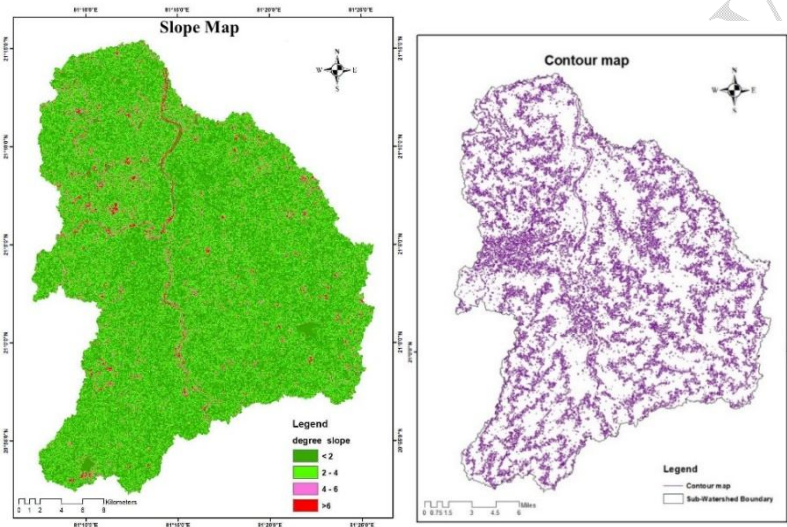


Fig 4: Slope map and Contour map

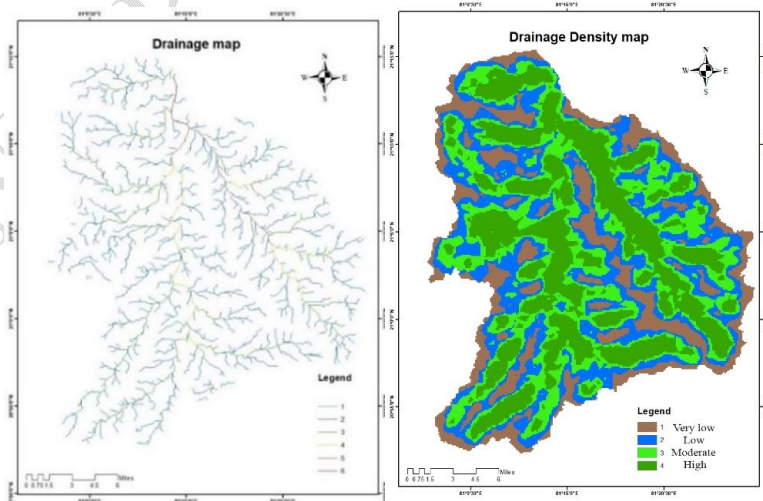


Fig 5: Drainage & drainage density map

### Soil texture map


The Central Groundwater Board, Raipur,(C.G.) provided the study area's soil texture/type map. Table 3 and Fig 6 summarise various soil textures found in the study area.

### Rainfall map and groundwater fluctuation map

In the study area, rainfall and groundwater fluctuation maps were separated into three zones: low, medium, and high. While yearly groundwater fluctuation of Durgblock was obtained as 3.35 m, Arjunda block as 1.573 m and Gunderdehiblock as 3.926 m. Fig 7 shows the rainfall and groundwater fluctuation map of the study area.

Table 5: Area under different soil types

S.no	Soil type	Soil Code	Area	percentage area
1	Clay Loam	CYLM	153.17	17.61
2	Sandy Clay Loam	SCLM	0.04	0.00
3	Silty Clay	SYCY	676.97	77.82
4	Very Gravel Sandy Loam	VGSL	28.89	3.32
5	Water	WATER	10.82	1.24
			869.89	100.00

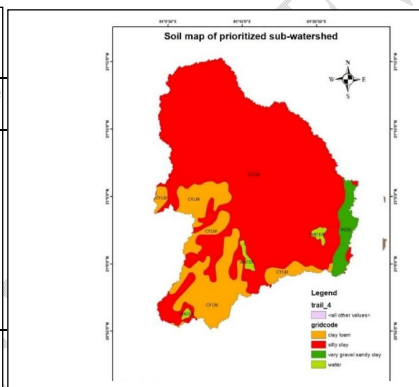

Text on fig.6 is not legible.

Fig 6: Soil texture map of the study area

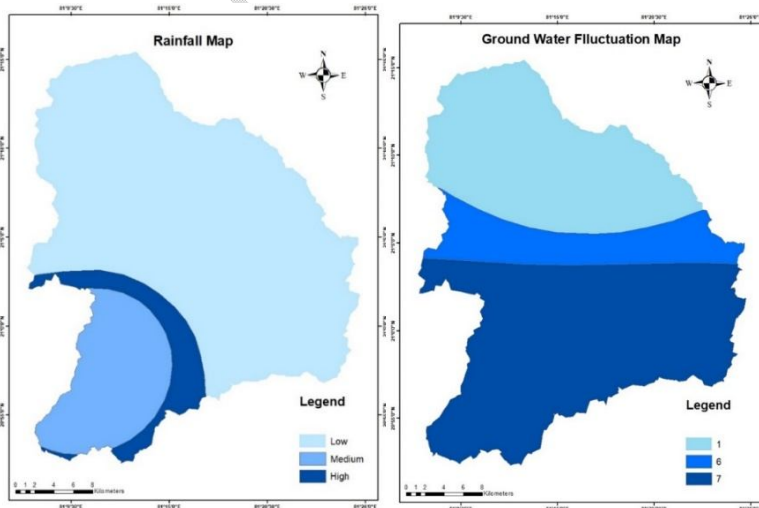



Fig7: Rainfall and groundwater map of the study area

### Surfac runoff assessment

Graph 1 shows the annual rainfall and runoff trend for the study area from 2009 to 2019. Data revealed that the average daily rainfall over the last eleven years was 1329 mm. The hydrological soil group of the watershed allows to generate about 41% runoff; thus, the average annual runoff estimated from eleven years was 483.95 Mm<sup>3</sup>.

Comment [Ma22]: Revealed

Comment [Ma23]: Please state the timeline. i.e. (20xx-20yy)

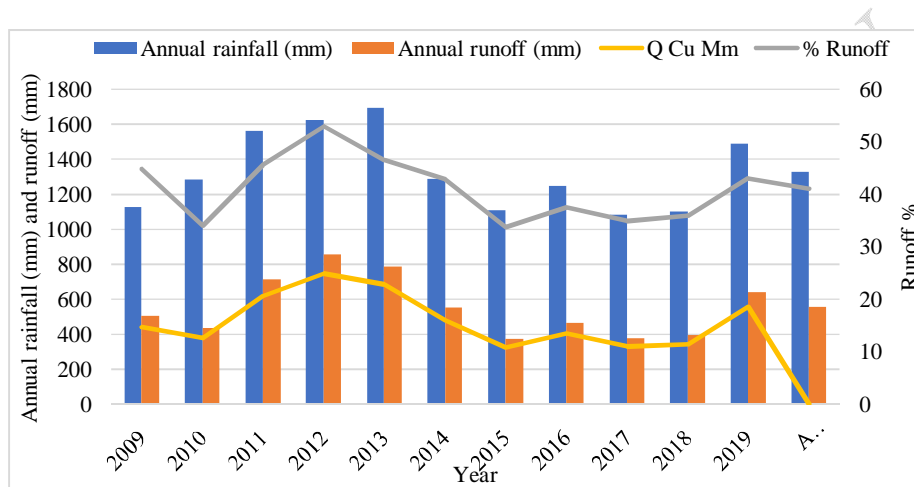

Graph 1: Rainfall-Runoff trend of study area (2009-2019)

Graph shows the annual rainfall- runoff trend for the study area from 2009 to 2019. Data revealed that the average daily rainfall over the last eleven years was 1329 mm. The hydrological soil group of the watershed allows to generate about 41% runoff; thus, the average annual runoff estimated from eleven years was 483.95 Mm<sup>3</sup>.

### Water resources development plan

A water resource development plan was developed by integrating information on surface water availability, land use/land cover, drainage, the current condition of groundwater utilisation, and the study area's present and long-term water demands (Mishra *et al.*, 2014). As described in the methodology, the eight parameters were chosen to identify recharging and harvesting structure's locations. Percentage influence and scale value of individual themes were estimated through Satty's analytical hierarchical process. The suitability map for the water recharge and storage structure sites is shown in Fig 8 and 9. For recharge structures, 07 check dams and 10 percolation tank sites were identified, while 30 check dams and 61 farm

pond sites were estimated to be extremely appropriate for water storage structures. The harvested water and recharged groundwater will be aided by the structures may offer the farmers to expand their agricultures even in the summer season when there is scarcity of water and assist to raise the production and productivity by enhancing water supplies. Agricultural yield might be improved because of the additional harvested and recharged water.

Comment [Ma24]: Scarcity.

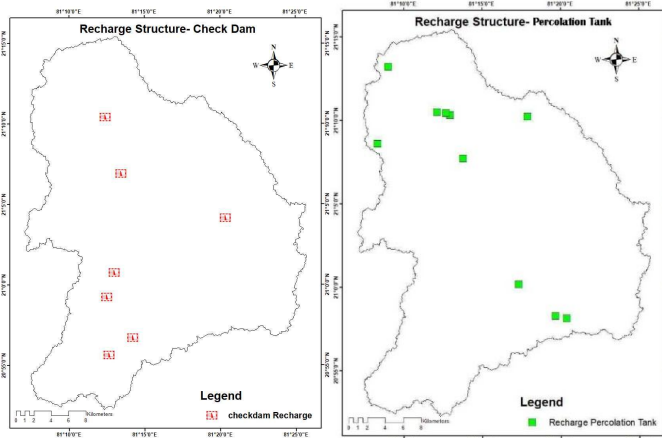


Fig8: Proposed sites for water recharge structures

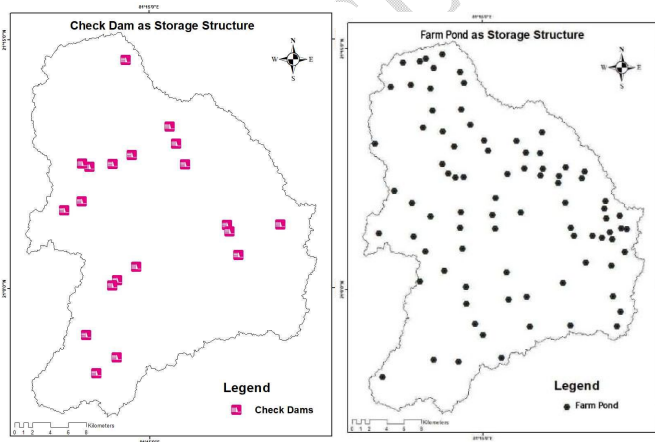


Fig9: Proposed sites for water storage structures

After assessing the suitability of these sites, the proposed structures location were also ground-truthed and validated. It was determined that the total capacity of stagnated water in different recharge and storage structures was 2.313 Mm<sup>3</sup>. Table 3 shows the results.

Table3: Capacity of proposed structures

Proposed structure	Capacity (Mm <sup>3</sup> )
<b>Recharge structure</b>	
Check Dam	0.246
Percolation tank	0.027
<b>Storage structure</b>	
Check Dam	0.78
Farm pond	1.26
total capacity	2.313

## CONCLUSIONS: -

The standard process was used to create thematic maps such as the base map, LULC, slope, contour, drainage, drainage density, groundwater fluctuation and a rainfall map, etc. These maps aid in understanding the study area's behaviour and water resource planning. The appropriate sites for 7 check dams and 10 percolation tanks for groundwater recharging and 20 check dams and 61 farm ponds for water harvesting were identified and proposed in the study area. The water stagnation capacity of the proposed structures was calculated as 2.31 Mm<sup>3</sup>. Due to a lack of water and improper management, only 30% of the area is under agriculture in the summer/rabi season, and about 50% of the area is under current fallow. The research findings will help to conserve water and soil resources through water storage and recharging structures and may increase the agricultural area as well as the production and productivity of the respected field.

## References

Anonymous, 2019, UN fund for population activities (unfpa), United Nations, accessed January 2021, < <https://www.unfpa.org/swop-2019> >

Climate data, 2019, Climate-Data.org / AM OP / OpenStreetMap contributors, accessed January 2021, < <https://en.climate-data.org/asia/india/chhattisgarh/durg-6282>.

Daily, G. C., & Ehrlich, P. R. (1994). Population, sustainability, and Earth's carrying capacity. In *Ecosystem Management* (pp. 435-450). Springer, New York, NY.

Durbach, I. N., & Stewart, T. J. (2012). Modeling uncertainty in multi-criteria decision analysis. *European journal of operational research*, 223(1), 1-14.

El-Ashmawy, K. L. (2016). Investigation of the accuracy of google earth elevation data. *Artificial Satellites*, 51(3), 89.

Falkenmark, M. (2006). Shift in thinking to address the 21st century hunger gap. In *Integrated Assessment of Water Resources and Global Change* (pp. 3-18). Springer, Dordrecht.

**Comment [Ma25]:** The referencing style is not consistent. Please select the appropriate style and stick with it.

**Comment [Ma26]:** Not in text.

**Comment [Ma27]:** Not in text.

Hao, Y., Cao, B., Zhang, P., Wang, Q., Li, Z., & Yeh, T. C. J. (2012). Differences in karst processes between northern and southern China. *Carbonates and Evaporites*, 27(3), 331-342.

Khokhar, 2017, World bank blogs March 22, 2017, accessed January 2021, <  
<https://blogs.worldbank.org/opendata/chart-globally-70-freshwater-used-agriculture> >

Comment [Ma28]: Not in text

Kumar, S. S., Land Accounting in India, 2012, Issues and concerns. Central Statistics Office, Ministry of Statistics & Programme Implementation, New Delhi, India. The views expressed in this article are personal to the author.

Mishra, N., Khare, D., Gupta, K. K., & Shukla, R. (2014). Impact of land use change on groundwater—a review. *Advances in Water Resource and Protection*, 2(28), 28-41.

Nigam, G. K and Tripathi, M. P. 2019. Generation of Groundwater Zones for Selection of Prospective Suitable Water Harvesting Structure Sites for Sustainable Water Supply Towards the Agricultural Development. *Agricultural Research*, 9: 148-160.

Saaty, T.L. 1980. *The Analytic Hierarchy Process*, McGraw-Hill, New York, NY.

Subramanya, K. 2013. *Engineering Hydrology*, 4e. Tata McGraw-Hill Education.

Comment [Ma29]: Not in text

Subramanya, K., 2008, *Engineering Hydrology* 3<sup>rd</sup> edition Engineering Hydrology, McGraw-Hill publishing company limited new Delhi 110032.

Comment [Ma30]: Not in text

United States Department of Agriculture 1999, *Soil Taxonomy A Basic System of Soil Classification for Making and Interpreting Soil Surveys Second Edition*, 1999 U.S. Government Printing Office Washington, DC 20402.

Soro, D. D., Koita, M., Biaou, C. A., Outoumbe, E., Vouillamoz, J. M., Yacouba, H., & Guérin, R. (2017). Geophysical demonstration of the absence of correlation between lineaments and hydrogeologically useful fractures: case study of the Sanon hard rock aquifer (central northern Burkina Faso). *Journal of African Earth Sciences*, 129, 842-852.