

Temperature dependence on transient hydrodynamic gravity driven flow down an inclined plane

Abstract

Transient hydrodynamic gravity driven flow of a viscous incompressible fluid down an inclined plane occupying a semi-infinite region of space bounded by an infinite hot plate is studied. The effect of modified Froude number plays an important role in determining the flow situation. Exact solution is obtained by employing Laplace transform method. This problem is concerned with a car – following theory subjected to traffic flow with a decisive importance to a variation of depth with a slope leading to a flood wave. A reducible influence of a frictional drag has an active influence to the flow reversal characteristics with time variation satisfying the separation due to the existence of a modified Froude number. The stability of a roll wave is determined by the critical Froude number in a time varying flow. Numerical results of velocity distributions and frictional shear stress are depicted graphically for different values of flow parameters. Numerical results of a critical Froude number are presented in tables. Temperature analysis has been presented analytically with a view to point out the expression of Nusselt number at the plate.

Keywords

Gravity driven flow, Modified Froude number, Traffic flow, Flood wave, Frictional drag, Laplace transform method.

1. Introduction

Resonance exerts its influence of a controlled thermonuclear fusion reaction of the Sun subjected to a periodic driving force which oscillates harmonically with time with reference to a resonant condition $\omega > \frac{1}{2} \cos \omega T (16K^4 - M^4 \sin^4 \theta)^{\frac{1}{2}}$ where M^2 is the Hartmann number, K^2 is the rotation parameter which is the reciprocal of Ekman number, ω is the excitation frequency, ωT is the phase angle and θ is the angle of inclination of a magnetic field with the positive direction of the axis of rotation. A magnetic mirror with the Sun corresponds to an inclined magnetic field to exhibit strong ionizing radiation inside the solar atmosphere. Plasma fusion in a controllable region in the presence of a strong magnetic field communicates hottest electron spiraling in a magnetic field. A controlled thermonuclear fusion reaction of the Sun interacts with radio emission in the presence of a magnetic field so that the hottest charged particle is liberated from the Sun with the formation of electron cloud particle and the fusion reaction starts with the charged particle to begin artificial rain fall initiated by the Sun. This implicates the situation of a rotating environment that inscribed by a strong ionizing radiation in the atmosphere. This has been studied by Ghosh [1], Ghosh et al. [2] and Ghosh [3 -5]. A controlled thermonuclear fusion reaction of the Sun at the resonant level communicates an oceanic circulation with the swollen of sea

water in a periodic balance. On the other hand, the movement of sea water in a haphazard direction due to a gravitational pull which is attracted by the Sun as the Earth is put into a vacuum so that the gravity of the Moon becomes unpredictable as soon as fusion reaction starts. In turn, the movement of sea water due to periodicity of the Sun is subjected to a charged particle at the resonant level with a strong evidence of the existence of magnetic field in the deep ocean. Indeed, a radio wave propagation from the Sun attracts wide attention to a periodic behaviour of a river at the resonant level of the Sun so that a time dependent gravity driven flow on a river bed is rolling like an oceanic circulation. This concept plays an important role on the behaviour of a traffic flow. Thus, the roll wave is propagated in a river with a periodic behaviour that depends on time. The importance of a Froude number appears to be a significant manner as the gravitational force is balanced by the viscous force to determine the stability on roll wave. The traffic flow is subjected to a flood wave on a river bed to ensure a pioneer book which was written by Whitham [6]. The importance of a flood wave is represented in a manner down an inclined plane with reference to a slope with depth variation. Nevertheless, a few of references has been highlighted by the authors to describe the structure of a flow behaviour through an inclined plane by mentioning their works of Balmforth [7], Chamkha et al [8] Chen et al. [9-10], Fan et al [11], Fujii and Imura [12], Gudhe et al. [13], Ghosh and Pop [14] and Beg et al [15]. However, several investigations on different aspect of the flow pattern have been studied by the researchers with different conditions and configurations. Mention may be made on their works of Biswas et. al [16], Ahmmed et. al [17], Biswas and Ahmmed [18], Biswas et. al [19], Mondal et. al [20], Biswas et. al [21 – 22], Ahmmed and Biswas [23], Rahaman et. al [24], Gazi et. al [25] and Katun et.al [26].

An attempt has been made to a study of car - following theory to incorporate a traffic flow with a view to analyze a gravity driven flow with reference to a pressure gradient down an inclined plane where the effect of Froude number becomes relevant to the stability on roll wave. A time dependent motion down an inclined plane with a decisive importance to gravity does over the flow medium which is balanced by the viscous force to initiate thermal radiation. The equation of state is balanced by the energy equation subject to a modified pressure gradient to find out the modified Froude number. A stability criterion of roll wave takes place in a critical Froude number which depends on time. The frictional shear stress on the plane exerts its influence of Froude number so that the rolling friction down an inclined plane with the angle of inclination that reveals to a gravity driven flow in the presence of a viscous force. This problem is solved to find out the solutions of the velocity distributions, frictional shear stresses and the critical Froude number by employing Laplace transform method. An analytical approach on the energy equation satisfying the temperature boundary condition has been made. It finds the rate of heat transfer at the surface of the plane subject to the angle of inclination of a plane by making an angle α to the horizon. The importance of a study of this problem lies in its application of a geophysical flow such as oceanic circulation, atmospheric signal observation, stability criteria of roll wave structure and flood wave observation. The physical significance of a temperature difference on time dependent gravity driven flow

down an inclined plane leads to a Froude number with a decisive importance to the origin of a car - following theory to analyze the stability of roll wave structure.

2. Formulation of the problem and its solution

Consider the unsteady flow of a viscous incompressible fluid down an inclined plane at an angle α to the horizon occupying a semi infinite region of space bounded by an infinite hot plate moving with a constant velocity U in its own plane. The x' -axis is oriented along the hot plate and y' - axis is perpendicular to the plate. Since a constant pressure gradient is applied along x' -direction, all physical quantities except pressure will be functions of y' and t only. The temperature difference plays an important role in determining the time varying gravity driven flow down an inclined plane. The flow is considered fully developed into the semi-infinite region of space so that all inertia terms vanish. There arise a slope with a decisive importance to the variation of depth subjected to a time variation to represent a traffic flow problem. This situation reveals to a flood wave with reference to the variation of depth.

The momentum equation under Boussinesq approximation

$$\frac{\partial u'}{\partial t} = -\frac{1}{\rho} \frac{\partial p}{\partial x'} + \nu \frac{\partial^2 u'}{\partial y'^2} + g\beta(T' - T'_\infty) \sin \alpha \quad (1)$$

$$0 = -\frac{1}{\rho} \frac{\partial p}{\partial y'} - g\beta(T' - T'_\infty) \cos \alpha \quad (2)$$

The energy equation reads

$$\frac{\partial T'}{\partial t} = \frac{K}{\rho C_p} \frac{\partial^2 T'}{\partial y'^2} \quad (3)$$

The equation of state becomes

$$\rho = \rho_0 [1 - \beta(T' - T'_\infty)] \quad (4)$$

The initial and the boundary conditions for velocity become

$$\begin{aligned} u' &= 0 \quad \text{for all } y' \geq 0 \text{ and } t \leq 0, \\ u' &= U \quad \text{at } y' = 0 \text{ for } t > 0, \\ u' &\rightarrow 0 \quad \text{as } y' \rightarrow \infty \text{ for } t > 0 \end{aligned} \quad (5)$$

Combining equations (3) and (4) with reference to differentiation with respect to t , the following condition is satisfied.

$$T' - T'_\infty = \frac{1}{\beta} \quad (6)$$

Using equation (2), we have

$$p = (h - y')\rho g \cos \alpha \quad (7)$$

From equation (7), we get

$$\frac{dp}{dx'} = \rho g \frac{dh}{dx'} \cos \alpha \quad (8)$$

Let us assume that the depth variation along x' – direction i.e. $\frac{dh}{dx'} = F$ (say)

Finally, equation (8) becomes

$$\frac{dp}{dx'} = \rho g F \cos \alpha \quad (9)$$

Using equations (6) and (9), equation (1) reads

$$\frac{\partial u'}{\partial t} = \nu \frac{\partial^2 u'}{\partial y'^2} + g(\sin \alpha - F \cos \alpha) \quad (10)$$

u' , ρ , ν , g , β , h , p , t , K , C_p , T' , T'_w , T'_∞ and α are respectively, the velocity component, fluid density, kinematic coefficient of viscosity, gravitational acceleration, coefficient of thermal expansion, depth, pressure, time, thermal conductivity, specific heat of constant pressure, temperature of the fluid, plate temperature, the temperature far away from the plate and the angle of inclination of the plate.

Introducing dimensionless quantities

$$u = \frac{u'}{U} \text{ (Velocity)}, y = \frac{y'U}{\nu} \text{ (distance)}, \tau = \frac{tU^2}{\nu} \text{ (time)} \text{ and } T = \frac{T' - T'_\infty}{T'_w - T'_\infty} \text{ (temperature)} \quad (11)$$

Equation (1) can be represented in a dimensionless form reads

$$\frac{\partial u}{\partial \tau} = \frac{\partial^2 u}{\partial y^2} + \frac{1}{F_r^2} (\sin \alpha - F \cos \alpha) \quad (12)$$

where $F_r = \frac{U^{3/2}}{\sqrt{g\nu}}$ is the modified Froude number.

The corresponding dimensionless velocity boundary conditions become

$$\begin{aligned} u &= 0 && \text{for all } y \geq 0 \text{ and } \tau \leq 0, \\ u &= 1 && \text{at } y = 0 \text{ for } \tau > 0, \\ u &\rightarrow 0 && \text{as } y \rightarrow \infty \text{ for } \tau > 0 \end{aligned} \quad (13)$$

Using Laplace transform method, the equation (12) takes the form

$$s u^* = \frac{\partial^2 u^*}{\partial y^2} + \frac{1}{F_r^2} (\sin \alpha - F \cos \alpha) \frac{1}{s} \quad (14)$$

The corresponding velocity boundary conditions are

$$u^* = 0 \quad \text{for all } y \geq 0 \text{ and } \tau \leq 0,$$

$$u^* = \frac{1}{s} \quad \text{at } y = 0 \text{ for } \tau > 0, \quad (15)$$

$$u^* \rightarrow 0 \quad \text{as } y \rightarrow \infty \text{ for } \tau > 0$$

Equation (14) together with the boundary conditions (15) can be solved and the solution becomes

$$u^* = \frac{1}{s} e^{-y\sqrt{s}} - \frac{1}{F_r^2} (\sin \alpha - F \cos \alpha) \frac{1}{s^2} [e^{-y\sqrt{s}} - e^{-2y\sqrt{s}}] \quad (16)$$

Equation (16) subject to the boundary condition (15), the solution for the velocity distributions can be obtained by applying inverse Laplace transform method such as

$$u(y, \tau) =$$

$$\operatorname{erfc}\left(\frac{y}{2\sqrt{\tau}}\right) + \frac{1}{F_r^2} (\sin \alpha - F \cos \alpha) \left[(\tau + 2y^2) \operatorname{erfc}\left(\frac{y}{\sqrt{\tau}}\right) - 2y \sqrt{\frac{\tau}{\pi}} e^{-\frac{y^2}{\tau}} - \left(\tau + \frac{y^2}{2}\right) \operatorname{erfc}\left(\frac{y}{2\sqrt{\tau}}\right) + y \sqrt{\frac{\tau}{\pi}} e^{-\frac{y^2}{4\tau}} \right] \quad (17)$$

Frictional shear stress τ_x at the plate $y = 0$ becomes

$$\tau_x = \frac{du}{dy} \Big|_{y=0} = -\frac{1}{\sqrt{\pi\tau}} - 2 \sqrt{\frac{\tau}{\pi}} \frac{1}{F_r^2} (\sin \alpha - F \cos \alpha) \quad (18)$$

The point of separation is determined by the condition

$$\frac{du}{dy} \Big|_{y=0} = 0 \quad (19)$$

Hence, from equations (18) and (19), we get the critical Froude number with a decisive importance to the stability of roll wave.

$$F_r^2 \Big|_{critical} = 2\tau (F \cos \alpha - \sin \alpha) \quad (20)$$

Temperature analysis:

The temperature profile in the fluid region

$$T = \frac{T' - T'_\infty}{T'_w - T'_\infty} = \left(1 - \frac{y}{1+y}\right)^2 \quad (21)$$

Equation (21) can be written in the form

$$\psi = \psi_w \left(1 - \frac{y}{1+y}\right)^2 \quad (22)$$

where $\psi = T' - T'_\infty$ and $\psi_w = T'_w - T'_\infty$

The temperature boundary conditions become

$$\psi = \psi_w \quad \text{at } y = 0, \quad (23)$$

$$\psi = 0 \quad \text{at } y \rightarrow \infty$$

The heat transfer coefficient is determined by the equation

$$\alpha = - \frac{K}{T_w - T_\infty} \left(\frac{dT}{dy} \right)_{y=0} \quad (24)$$

From **equation** (22), it follows that

$$\frac{dT}{dy} = - \frac{2}{(1+y)^3} \psi_w \quad (25)$$

$$\text{and } \left. \frac{dT}{dy} \right|_{y=0} = -2 \psi_w \quad (26)$$

Substituting **equation** (26) into **equation** (24), we have

$$\alpha = 2K \quad (27)$$

Therefore, a relation can be obtained by the **equation** (27) to satisfy the heat transfer coefficient at the plate.

From **equation** (3) subject to dimensionless quantities (11) reads

$$\frac{\partial T}{\partial \tau} = \frac{1}{P_r} \frac{6}{(1+y)^4} \quad (28)$$

where P_r is the Prandtl number

Integrating **equation** (28), we get

$$T = \frac{1}{P_r} \frac{6\tau}{(1+y)^4} + C \quad (29)$$

where C is arbitrary constant

Boundary condition at the plate

$$T=1 \quad \text{at } y=0 \quad (30)$$

From **equations** (29) and (30), we have

$$C = 1 - \frac{1}{P_r} 6\tau \quad (31)$$

Using **equation** (31), the **equation** (29) takes the form

$$T(y, \tau) = 1 - \frac{6\tau}{P_r} \left[1 - \frac{1}{(1+y)^4} \right] \quad (32)$$

Therefore, Nusselt number at the plate

$$- \left. \frac{dT}{dy} \right|_{y=0} = 24 \frac{\tau}{P_r} \quad (33)$$

3. Discussions of Results

A physical interpretation takes place of a gravity driven flow down an inclined plane leading to the variation of depth with a decisive importance to a traffic flow followed by a roll wave that exerted by the river bed with a significant effect of circulation of a river in a periodic in nature to determine a stability criteria down an inclined plane. Since Froude number is the measure of gravity, critical Froude number determines the stability criteria that depends on time with the angle of inclination of a plane subjected to the variation of depth. Numerical results are depicted graphically for velocity distributions and frictional shear stresses by using flow parameters in taking into account of various values of F_r (Froude number), α (angle of inclination of a plane), τ (time) and F (variation of depth) in Figures 1 to 7. Numerical results of a critical Froude number (F_r) are presented in Tables -1 and 2 for different values of α , τ and F . It is evident from Figures 1 to 5 that the profiles are skewed in nature and all the profiles converge quickly near the plate. This happens due to a gravity driven flow so that Froude number plays an important role on the flow behaviour with the skewness of all the profiles. Figures 1 and 2 show that the velocities decrease with the increase in small as well as large values of F_r (Froude number). Since gravitational force is balanced by viscous force, the effect of Froude number (F_r) leads to fall the velocity down an inclined plane to deaccelerate the flow particle and dies out near the plate. Since viscosity offers a resistance to its motion, the modified Froude number (F_r) has an active influence to the motion of a river flow. It is convenient to cast that the stability structure of a roll wave is determined by the modified Froude number. It is seen from Figure 3 that the velocity increases with the increase in depth variation (F). since depth varies linearly along the leading edge of the plane, a gravity driven flow tends to increase the velocity down an inclined plane and it converges near the plate. There is a tendency to fluctuate the flow particle on increasing depth variation (F). It is observed that the flow circulation provides a flood wave to represent fluctuation on increasing depth variation (F). Figure 4 demonstrates that the velocity decreases with the increase in angle of inclination (α) of the plane of flow. An occurrence of fluctuation reveals to a gravity driven flow with a decisive importance to the Froude number on increasing α . An interesting situation appears to exert its influence of **unsteady motion** where no fluctuation is observed when $\alpha = \frac{\pi}{2}$. It is evident from Figure 5 that the velocity increases with the increase in time (τ). This happens in the case of flow field that a **car - following theory** is subjected to a traffic flow where the time variation represents to speed up the flow velocity and the fluctuation occurs due to time variation with reference to a slope so that velocity increases with time. Figure 6 reveals that the frictional shear stress (τ_x) down an inclined plane decreases in magnitude with increase in Froude number (F_r) while it increases in magnitude with increase in time (τ) whereas there exists a separation close to the plane of flow. In a realistic situation, a reducible influence on frictional drag communicates with the Froude number (F_r) to determine separation of flow. It is noticed from Figure 7 that all the profiles are almost linear in nature. The frictional shear stress (τ_x) decreases in magnitude with the angle of inclination (α) whereas the frictional shear stress increases in magnitude with the increase in time (τ)

in the range $0 \leq \alpha \leq \pi/4$ but the total separation of flow occurs with the increase in α in the range $\pi/3 \leq \alpha \leq \pi/2$. Here frictional drag is reduced by the angle of inclination (α) so that flow separation becomes predominant. Table 1 shows that the critical Froude number (F_r^2) increases with increase in depth variation (F) for any value of time (τ) whereas it decreases with increase in time (τ) for any value of depth variation (F). This indicates that the stabilization of flow in a time varying motion is characterized by the Critical Froude number (F_r^2) so that a gravity driven flow has become a critical influence to a Froude number. It is notice from Table 2 that the critical Froude number (F_r^2) increases with increase in time (τ) while it decreases with increase in angle of inclination (α) in the range $0 \leq \alpha \leq \pi/3$. The stabilization of flow behaviour is determined by the Critical Froude Number (F_r^2) in a time varying flow. On the other hand, the Critical Froude Number (F_r^2) does not exist due to flow reversal when the angle of inclination $\alpha = \pi/2$ because negative value for $\alpha = \pi/2$ at different values of time (τ) should not appear in the case of the critical influence of a Froude number (F_r^2). Indeed, the importance of a stability on roll wave plays a significant role in determining the effect of Froude number (F_r^2).

4. Conclusion

A gravity driven flow of a viscous incompressible fluid down an inclined plane with the variation of depth subjected to a slope leading to a traffic flow with time variation emerges the backbone of a flood wave. A modified Froude number has an active influence to the flow field with an occurrence of a fluctuation that leads to an instability pattern with the time variation of a flood wave. This problem is solved by employing Laplace transform method. A reducible influence on frictional drag introduces flow reversal criteria with time variation satisfying the separation due to the existence of a modified Froude number. The stability on roll wave is characterized by the critical Froude number in a time varying flow.

In a traffic flow subjected to a car - following theory it is rigorously stated that experimental observation is possible with reference to river flow on a stability of roll wave structure.

Acknowledgement

Author wishes to express his sincere thanks to reviewers for their valuable comments in preparation of revised version.

Table - 1 Critical Froude Number (F_r^2) for $\alpha = \pi/4$

$F \backslash \tau$	0.1	0.5	0.7	1.0
2.0	0.14116	0.70583	0.98816	1.41166
3.0	0.28250	1.41251	1.97751	2.82502
5.0	0.56517	2.82587	3.95622	5.65174
7.0	0.84784	4.23923	5.93492	8.47847

Table - 2 Critical Froude number (F_r^2) for $F = 2.0$

$\alpha \backslash \tau$	0.1	0.5	0.7	1.0
0	0.400	2.0	2.800	4.00
$\pi/6$	0.24626	1.23130	1.72382	2.46260
$\pi/4$	0.14116	0.70583	0.98816	1.41166
$\pi/3$	0.02643	0.13218	0.18505	0.26436
$\pi/2$	-0.200	-1.00	-1.40057	-2.00082

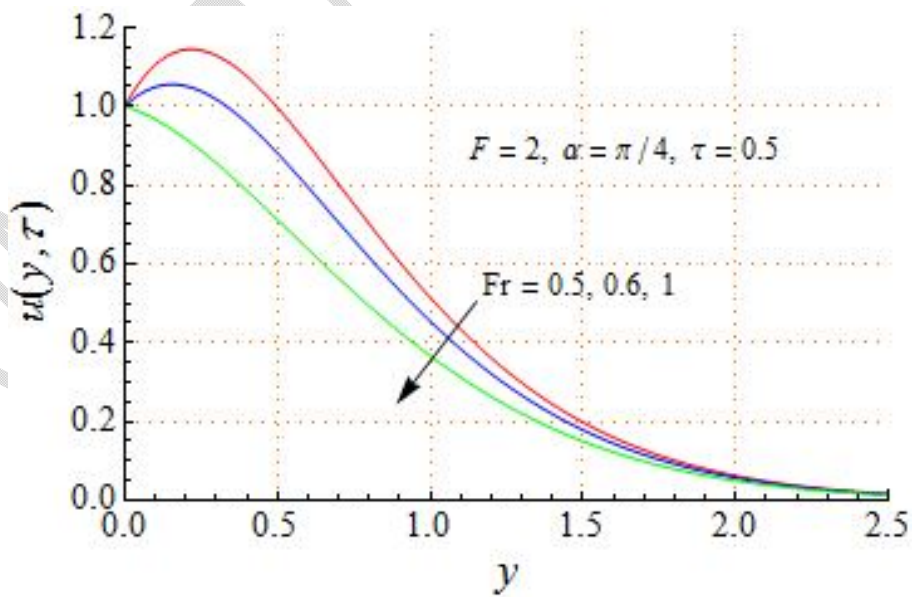


Figure 1. Velocity profile on varying F_r (small)

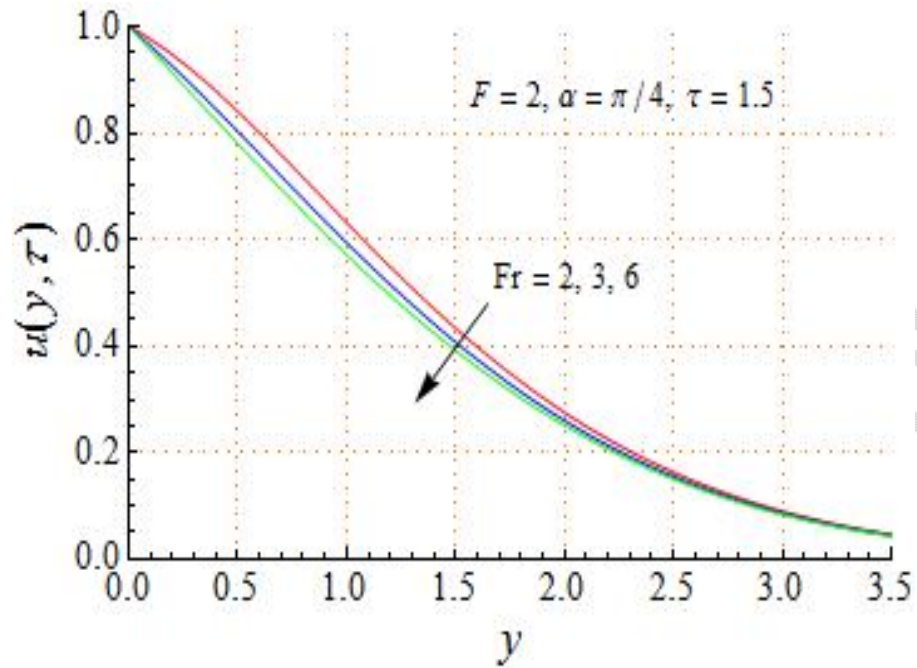


Figure 2. Velocity profile on varying Fr (large)

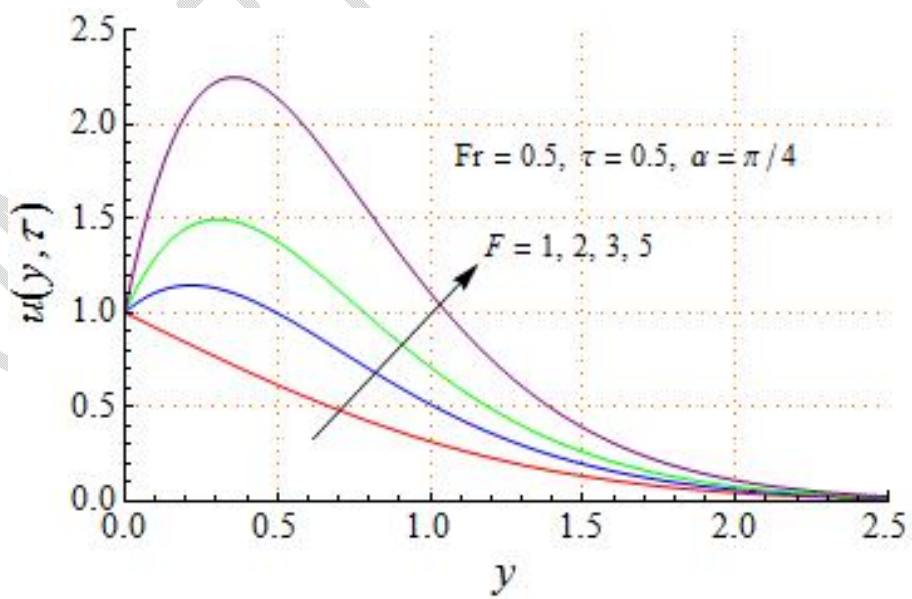


Figure 3. Velocity profile on varying F

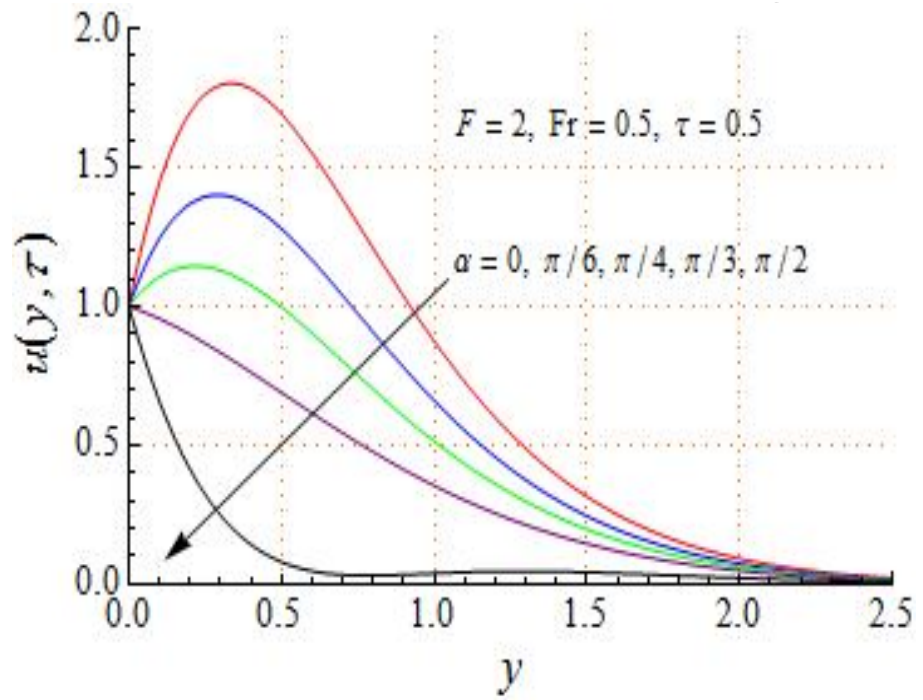


Figure 4. Velocity profile on varying α

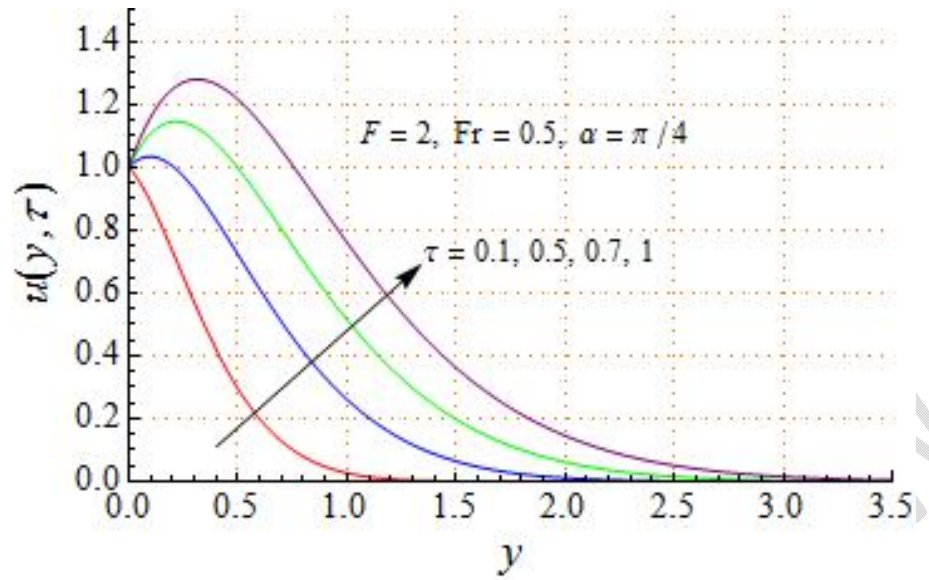


Figure 5. Velocity profile on varying time τ

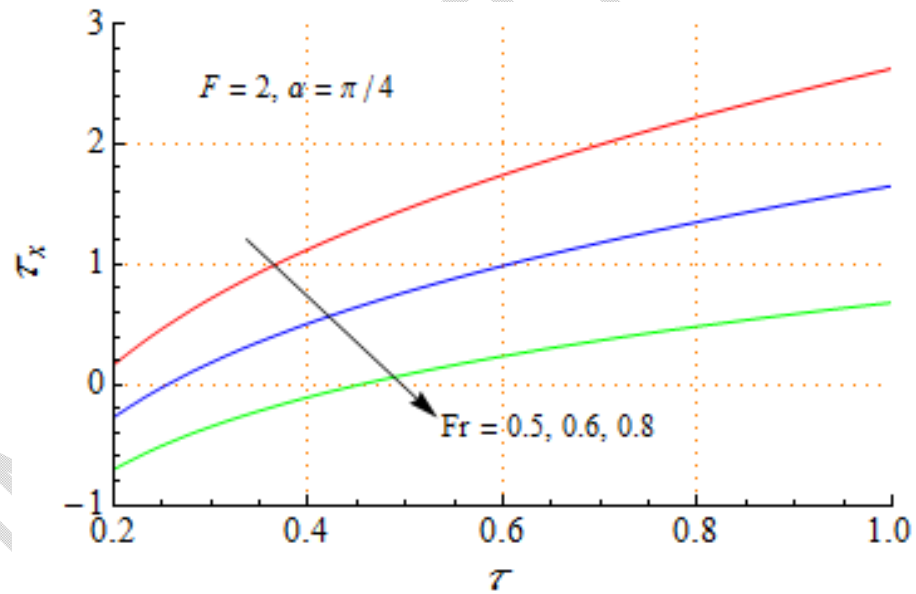


Figure 6. Variation of shear stress on varying Fr and time τ

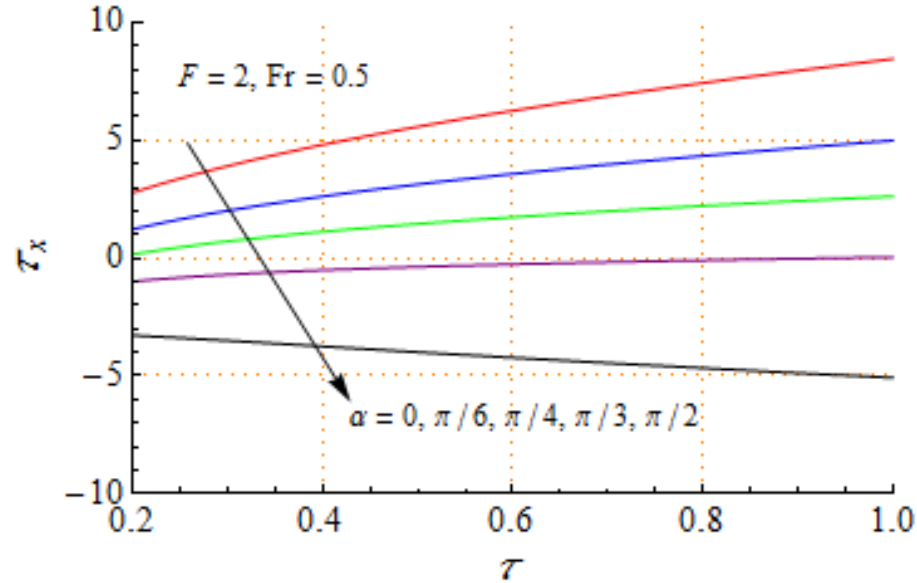


Figure 7. Variation of shear stress on varying α and time τ

REFERENCES:

- [1] Ghosh, S.K., A note on unsteady hydromagnetic flow in a rotating channel permeated by an inclined magnetic field in the presence of an oscillator, Czech. J.Phys., 2001, 51, 799 – 804.
- [2] Ghosh, S.K., Beg, O.A., Zueco, J., Prasad, V.R., Transient hydromagnetic flow in a rotating channel permeated by an inclined magnetic field with magnetic induction and Maxwell displacement current effect, Z.Angew.Math.Phys. (ZAMP), 2010, 61, 147–169.
- [3] Ghosh, S.K., Exploitation of universe with regard to controlled thermonuclear fusion reaction of the Sun, Int. J. Appl. Mech. Eng., 2007, 12, 571 – 573
- [4] Ghosh, S.K., Dynamo mechanism of the Sun with reference to magnetohydrodynamic flows, World Journal of Mechanics, 2014, 4, 112 – 115.
- [5] Ghosh, S.K., Transient MHD Couette flow in a rotating environment permeated by an inclined magnetic field by means of a traveling magnetic field subject to a forced oscillation, World Journal of Mechanics, 2018, 8, 362 – 377.
- [6] Whitham, G.B., Linear and Nonlinear waves, A Wiley – Interscience publication, New York, Wiley, 1974, 68 – 95.
- [7] Balmforth, N.J., Craster, R.V., Sassi, R., Shallow viscoplastic flow on an inclined plane, J.Fluid Mech., 2002, 470, 1 – 29.
- [8] Chamkha, A.J., Issa, C., Khanafer, K., Natural convection from an inclined plate embedded in a variable porous medium due to solar radiation, Int. J. Therm. Sci., 2002, 41, 73 – 81.
- [9] Chen, T.S., Yuh, C.F., Moustoglou, A., Combined heat and mass transfer in mixed convection along vertical and inclined plates, Int. J. Heat Mass Transfer, 1980, 23, 527 – 537.
- [10] Chen, T.S., Tien, H.C., Armaly, B.F., Natural convection on horizontal, inclined and vertical plates with variable surface temperature or heat flux, Int. J. Heat Mass Transfer, 1986, 29, 1465 – 1478
- [11] Fan, J., Shah, L.J., Furbo, S., Flow distribution in a solar collector panel with horizontally inclined absorber strips, Sol. Energy, 2007, 81, 1501 – 1511.
- [12] Fujii, T., Imura, H., Natural convection heat transfer from a plate with arbitrary inclination, Int. J. Heat Mass Transfer, 1972, 15, 755 – 764.
- [13] Gudhe, R., Rajagopal, K.R., Massoudi, M., Fully developed flow of granular materials down a heated inclined plane, Acta Mech., 1994, 103, 63 – 78.
- [14] Ghosh, S.K., Pop, I., A new approach on MHD natural convection boundary layer flow past a flat

- plate of finite dimensions, *J. Heat Mass Transfer*, 2006, 42, 587 – 595.
- [15] Anwar Beg, O., Ghosh, S.K., Narahari, M., Beg, Tasveer A., Mathematical modeling on thermal radiation effects on transient gravity driven optically thick gray convection flow along an inclined plane with pressure gradient, *Chem. Eng. Commun.*, 2011, 1998, 1630 – 1644.
- [16] **Biswas, R.**, Hossain, M.S, M. Afikuzzaman, and Ahmmed S.F. (2022), "Computational treatment of MHD Maxwell nanofluid flow across a stretching sheet considering higher-order chemical reaction and thermal radiation", *Journal of Computational Mathematics and Data Science*, Volume 4, 100048 (Elsevier)
- [17] Ahmmed, S. F., **Biswas, R.** and Afikuzzaman, M. (2018), "Unsteady magnetohydrodynamic free convection flow of nanofluid through an exponentially accelerated inclined plate embedded in a porous medium with variable thermal conductivity in the presence of radiation", *Journal of Nanofluids*. 7: 891-901.
- [18] **Biswas, R.** and Ahmmed, S. F. (2018), "Effects of Hall current and chemical reaction on MHD unsteady heat and mass transfer of Casson nanofluid flow through a vertical plate", *Journal of Heat Transfer(ASME)*, 140/ 092402-1.
- [19] **Biswas, R.** Afikuzzaman, M., Mondal and Ahmmed, S. F. (2018), "MHD free convection and heat transfer flow through a vertical porous plate in the presence of chemical reaction", *Frontiers in Heat and Mass Transfer (FHMT)*, 11: 13.
- [20] M., Mondal, **Biswas, R.**, M. Hasan, Bulbul, F. and Ahmmed, S. F. (2019), "Soret Effect on MHD Unsteady Heat and Mass Transfer of Prandtl Fluid Flow Past an Exponentially Vertical Plate.", *Modelling Measurement and Control B*, 88(2-4):57-63
- [21] **Biswas, R.**, Hasan, M., Jewel Rana, B.M., and Ahmmed, S. F. (2019), "MHD Free Convection Maxwell Nanofluid Flow through an Exponentially Accelerated Vertical Surface in the Presence of Radiation.", *AIP Conference Proceedings* 2121, 030007
- [22] **Biswas, R.**, Mondal, M. and Islam, A. (2019), "A steady MHD natural convection heat transfer fluid flow through a vertical surface in the existence of Hall current and radiation", *Instrumentation, Mesure, Métrologie*. 2: 331-356.
- [23] Ahmmed, S. F. and **Biswas, R.** (2019), "Effects of radiation and chemical reaction on MHD unsteady heat and mass transfer of nanofluid flow through a vertical plate", *Modelling Measurement and Control B*. 87(4): 213-220.
- [24] **Md. Taibur Rahaman, Suma, U. K., Katun, M., Md. Rafiqul Islam, and, Biswas, R. (2022), "Biometric Iris Recognition Based on Dubechies Wavelet Transform", *Asian Journal of Pure and Applied Mathematics*, 4(3), 318-328.**
- [25] Gazi, M.A., Suma, U. K., Katun, M., Md. Taibur Rahaman, Sarder Firoz Ahmmed, and **Biswas, R.** (2022), "A Numerical Evolution of MHD Maxwell Fluid Flow through an Isothermal Radiated Stretching Sheet with Higher Order Chemical Reaction", *Asian Journal of Pure and Applied Mathematics*, 4(3), 329-353.
- [26] Katun, M., Md. Taibur Rahaman, Md Rajib Hossain, Suma, U. K., and **Biswas, R.** (2022), "A Numerical Review: Computational Approach of Heat and Mass Transfer Casson Nanofluid Flow through a Vertical Isothermal Cylinder", *Asian Journal of Research in Biosciences*, 4(2), 98-108.