

Original Research Article

Engine Performance and Exhaust Emissions from Sandbox (*Hura crepitans*) Seed Methyl Ester

ABSTRACT

The finitude and environmental impact of petroleum fuels have led to the search of alternative fuels and biodiesel has proven to be an alternative fuel to petro-diesel with less environmental impact. Engine performance and exhaust emissions of Sandbox Methyl Ester (SBME) fuel were evaluated. Pure SBME (B100) was blended with diesel at 5, 10, 15, 20, 25 and 50% volume designated B5, B10, B15, B20, B25 and B50 respectively. The diesel was used as a reference fuel. The fuel blends (B100-B5) and diesel was used to power a 4-stroke-single-cylinder diesel engine coupled to a dynamometer and a 7.5 kW alternator with varying loads. The brake specific fuel consumption (bsfc), brake power, thermal efficiency, carbon monoxide (CO), oxides of nitrogen (NO_x) and hydrocarbon emissions were evaluated. The results of no-load to full-load indicated that diesel utilized the lowest bsfc of 0.14-0.62 kg/kW.h to produce the highest brake power of 5.6-3.7 kW. Similarly, the range of B5-B25 utilized bsfc of 0.16-0.86 kg/kW.h to produce the brake power of 5.1-2.9 kW. The brake thermal efficiency was 58-14 % for diesel, and 52-10 % for B5-B25. CO emission was reduced to 38.24-11.11 % for B5 and 64.71-55.56 % for B100. HC emission was reduced to 9.09-5.56 % for B5 and 45.45-30.56 % for B100. NO_x emission increased with SBME concentration. The results obtained for the SBME engine performance and exhaust emissions established it as a potential fuel to power internal combustion engines.

Keywords: *Hura crepitans*; Methyl Ester; Diesel; Biodiesel; Engine Performance; Exhaust Emissions.

1. INTRODUCTION

Fossil fuels still supply most of the world's energy, and the demand on these fossil fuels has rapidly increased due to global industrialization and motorization. This development has brought about excessive consumption of these fuels, leading to the reduction in the underground-based carbon resources, thus, causing a global challenge of fossil fuel

depletion in addition to environmental degradation caused by its combustion [49]. The depletion of petroleum fuels reserves and damaging consequences to the environment from their combustion brought about the search for alternative and cleaner energy [12, 4]. A successful alternative fuel is one that guarantees environmental friendliness from lowered exhaust emissions and also ensures efficiency of operation [54]. Biodiesels are considered to be more suitable than conventional diesel because of their bio-component which makes them biodegradable, nontoxic, clean and renewable. The use of biodiesel reduces environmentally degrading emissions such as CO, sulfur compounds and unburned hydrocarbons when compared to diesel. According to [13], biodiesel refers to diesel fuels from biological materials. It is a range of long chain fatty acid esters produced from various edible and non-edible lipids such as vegetable oils, waste or used cooking oils, automobile oils or animal fat [21]. A product of the transesterification reaction between lipids of organic origin and alcohol of low molecular mass in a hydroxide (mainly sodium or potassium) aided catalyst reaction; biodiesel therefore is a renewable biofuel [23]. The advantages of biodiesel over diesel fuel includes: low emission potential, renewability, non-toxic, and its oil origin, density and viscosity gives it better lubrication ability for engine parts [14].

Biodiesel performance on internal combustion engines relatively to diesel has been compared by many authors: [56, 68, 24, 64, 45, 37, 59, 33, 46, 29, 17, 44, 8, 60, 34, 6, 52, 11]. Effects of biodiesel on engine exhaust emission relatively to diesel have been widely reported: according to [65], the combustion of biodiesel in diesel engines brings about complete combustion with significant decline in unburned hydrocarbons, carbon monoxide, and particulate matter, while nitrogen oxides concentration remain the same with diesel or are increased slightly. Reduction in CO emission by biodiesel comparatively to diesel has been reported by many researchers: for sunflower, safflower, peanut, canola and chicken fat biodiesel [9]. Factors responsible for reduced CO in biodiesels were suggested by [26, 10, 62, 68]. Higher NO_x emission for biodiesel has been widely reported when compared to diesel fuel [29, 46, 9, 42]. Reasons for higher NO_x were noted by [15]. The use of biodiesel

in combustion ignition engine reduces hydrocarbon (HC) emissions in comparison to diesel fuel [16]. Causes of this reduction were reported by [29, 42]. Smoke emissions were noted to be higher for diesel and biodiesel blends relatively to pure biodiesel fuel by [59].

The sandbox (*Hura crepitans* Linn.) tree is of the (Euphorbiaceae) family, indigenous to the humid zones of the American continents. Sandbox seeds are flattened, about 2 cm, arranged as carpel of 14-16 seeds in fruit capsules of height 3-5 cm and diameter of 5-8 cm [18, 39]. Sandbox seed has been noted to contain a number of important properties that can be useful for the production of feeds, paints, and cosmetics amongst others [3, 40, 25]. Sandbox seed was noted amongst seeds with high oil content [25, 7, 41]. Sandbox seed properties, proximate composition and its oil's chemical characterization have been studied [19, 25, 39]. However, sandbox has been classified amongst underutilized species of plants, in most parts of the world the trees have been used as shade due to their large spreading branches [25]. In Nigeria, the trees are grown as cover plants, while the seeds were thrown away as waste [2].

The work on engine performance and exhaust emissions of engine running on sandbox seed biodiesel as reported by [1] focused mainly on the effect of blend ratio on engine performance and exhaust emissions. The current work studied engine performance of sandbox biodiesel in terms of brake power, brake specific fuel consumption and thermal efficiency and emissions of carbon monoxide (CO), oxides of nitrogen (NO_x) and hydrocarbon emissions from blends of sandbox biodiesel relatively to engine load.

2. MATERIAL AND METHODS

About 100 kg of mature sandbox fruits were collected from under the trees in Uyo metropolis, Akwa Ibom State, Nigeria between 2016-2018. The fruits were cracked to remove the seeds and the seeds peeled to get the kernels as shown in Figure 1.



Figure 1. Sandbox processing

Oil was extracted from the sandbox seed by solvent method using AOCS 5-04 standard procedure. The transesterification reaction was carried out using methanol in the presence of KOH catalyst. The SBME produced was washed thoroughly and blended with diesel at varying proportions of 5, 10, 15, 20, 25 and 50% denoted as B5, B10, B15, B20, B25, B50 and the pure SBME denoted as B100 as shown in Figure 2.



Figure 2. SBME extraction

These blends and diesel were used to power an 8.5 hp, 4-stroke diesel engine connected to a dynamometer and a 7.5 kVA alternator. A circuit board load of 6000 W made up of thirty lamp holders fixed with 200 W bulbs each grouped in six switch controls was used for the engine loading. A flexible hose was used to connect the engine fuel line to a 50 ml burette installed to measure the fuel intake. The engine was operated for about 10 min to stabilize before readings were taken. All the experiment and the readings were carried out per minute interval and replicated thrice. The engine was evaluated using diesel at no-load condition and the load was added by switching on the control switches which adds 1200 W load to the system up to 6000 W. The volume flow rate of the fuel, the engine speed, and the engine torque were recorded per minute intervals at every load level. The experiment was repeated

with B5, B10, B15, B20, B25, B50 and B100 fuel respectively. The engine torque, speed, and fuel consumption were recorded and the brake horsepower and brake specific fuel consumption and brake thermal efficiency determined.

(a) Fuel consumption

The fuel consumed by the engine in 60 s was determined using Eq. 1 as adopted [58].

$$\dot{m}_f = C[\rho \times V/t] \quad (kg/s) \quad (1)$$

\dot{m}_f = fuel consumption rate (kg/s); C = conversion factor; ρ = fuel density; V = fuel volume; t = time

(b) Fuel Power

The input power of the fuel samples were calculated from Eq. 2 [58].

$$P_f = \dot{m}_f \times HV \quad (2)$$

P_f = Fuel equivalent power (kW); HV = Heating Value of fuel samples (J/kg) [Determined using Gallenkemp ballistic bomb calorimeter in the Department of Agricultural Engineering, University of Ilorin, Nigeria]

(c) Brake power

The brake horsepower, bhp was calculated from Eq. 3 as adopted by [33]

$$bhp = 2\pi NT/60000 \quad (kW) \quad (3)$$

N = speed (rev/min); T = torque (Nm)

(d) Brake Specific Fuel Consumption (BSFC)

The brake specific fuel consumption was calculated from Eq. 4 [33]

$$bsfc = 3600(\dot{m}_f/Brake \ power) \quad (kg/kW.h) \quad (4)$$

(e) Thermal Efficiency

The thermal efficiency was calculated from Eq. 5 [33]

$$Thermal \ Efficiency = (bhp/Power \ Input) \times 100 \quad (\%) \quad (5)$$

The exhaust emissions of carbon monoxide (CO), oxides of nitrogen (NO_x) and hydrocarbon emissions were recorded with digital GX5 exhaust gas analyzer. Engine

exhaust gases emissions concentrations are often represented in parts per million (ppm) of percentage volume which represents the mole fraction multiplied by 1,000,000 or by 100 respectively. Many indicators of emission levels are used; the specific emission is one of them, which represents the mass flow rate of the pollutant of unit power output.

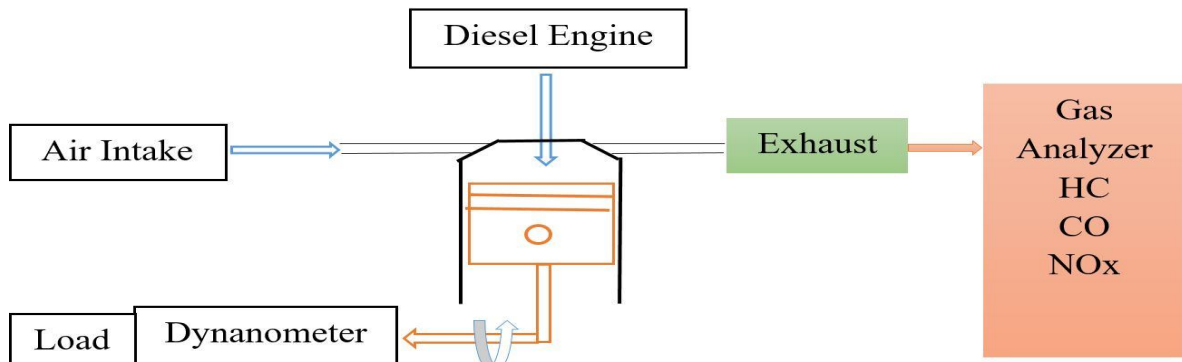


Figure 3. Engine test setup

3. RESULTS AND DISCUSSION

The results of the engine performance of the SBME in terms of brake power (bp), brake specific fuel consumption (bsfc) and thermal efficiency against engine load are presented in Figures 4-6, while the results of the exhaust emissions are presented in Figures 7-9.

The engine brake power decreased with increase in load for all the fuels. At no load to full load as shown in Figure 4, diesel produced the highest brake power of 5.6 kW which decreased to 3.7 kW. Similar to the diesel fuel, B5-B25 produced 5.1 kW brake power which decreased to 3.2 kW. The B100 produced the lowest brake power of 4.6 kW which decreased to 2.9 kW. Minor reduction in engine torque and power as the degree of methyl ester in biodiesel blends increased was observed by [11]. The lower calorific value of biodiesel, higher viscosity and density when compared to diesel has been suggested as been responsible for the lower engine power [68, 64]. However, the higher viscosity, bsfc, oxygen content and combustion rate of biodiesel has been observed to compensate for the engine power loss experienced by engines running on biodiesel blends as against diesel [32]. This trend was corroborated by [45]; that as long as internal combustion engines deliver

charge on volumetric basis, biodiesel with a higher density than diesel, supplies more fuel to compensate for the lower heating value.

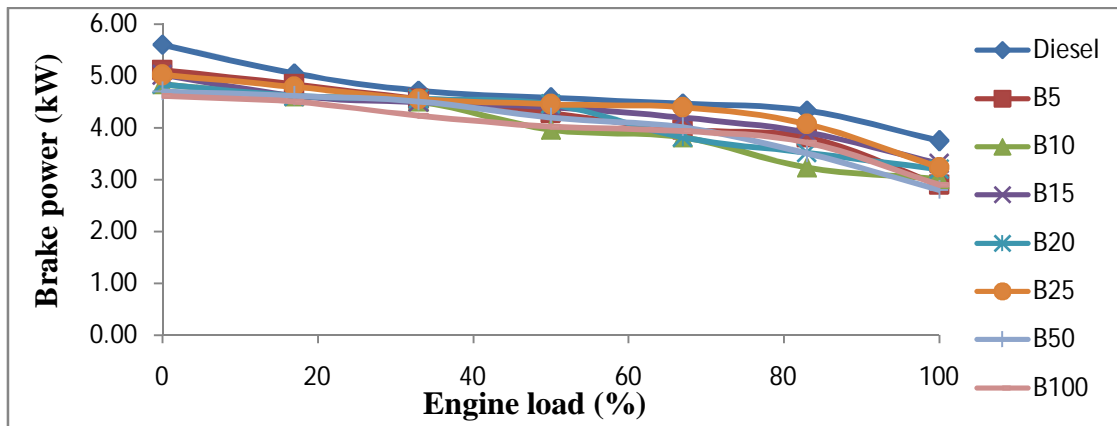


Figure 4. Brake power against Engine load

[22], observed that engine power decreased below that of diesel as the amount of biodiesel in the blend increased beyond B20 and reached a minimum value at B100. Also, [63], observed an initial increase in engine power with increase in biodiesel percentage which later decreased with additional increase in biodiesel content. Comparable outcomes were observed by [20] for (B10, B20, B30, B40, B50) blends of waste cooking biodiesel. In comparison, the trend observed with the SBME is in agreement with these earlier observations.

The bsfc increased with increase in load for all the fuels. At no-load to full-load as shown in Figure 5, diesel had the lowest bsfc of 0.14 kg/kW.h, which increased to 0.62 kg/kW.h. The B5-B25 had bsfc of 0.16 kg/kW.h, which increased to 0.86 kg/kW.h, while B50-B100 had the highest bsfc of 0.22 kg/kW.h, which increased to 1.14 kg/kW.h. According to [44], the lower heating value and higher density of biodiesel requires a larger flow rate to produce the same amount of power a lesser flow rate of diesel would produce at any engine load. Thus, less fuel is consumed by the diesel fuel followed by B5, B10 and B25, with B100 having the highest consumption. The result obtained was similarly to that obtained by [1] for sandbox, who observed that B20 had the lowest bsfc, while B50 had the highest bsfc.

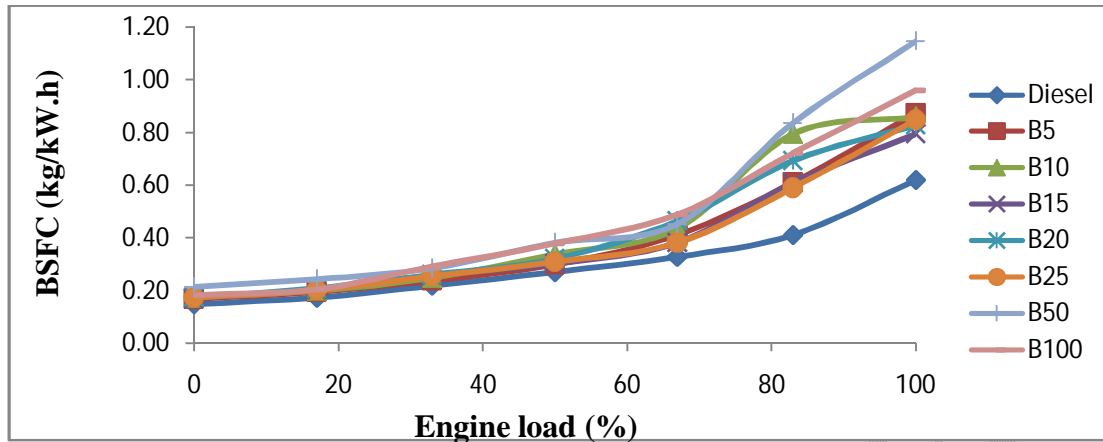


Figure 5. BSFC against Engine load

[60], observed 10% and 15% higher bsfc for B50 and B100 respectively. In comparison to the control (diesel), increase in bsfc with the addition of SBME in the blend at no-load to full-load: the bsfc of B5-B25 increased by 12.5%-29%, B50-B100 increased bsfc by 30%-45%. These trends observed for SBME were in agreement with reports by [15, 57] on biodiesel blends.

The brake thermal efficiency decreased with increase in load (Figure 6). At no-load to full-load, diesel was the most efficient, with 58% thermal efficiency which decreased to 14%. Blends of B5-B25 were next to the diesel with 52% thermal efficiency which decreased to 10%. B50-B100 had an average of 45% thermal efficiency which decreased to about 9%. According to [59], the brake thermal efficiency of neat *Sterculia striata* biodiesel and its blends were lower than that of diesel at all load condition. This lower thermal efficiency of biodiesel was associated to its higher viscosity and density. *Sterculia striata* blend B25 had the thermal efficiency closest to that of the diesel. Similarly, [1], observed that the thermal efficiency decreased as the amount of SBME in the blend increased. [60], observed that the engine brake thermal efficiency was lower in biodiesel blends at low loads when compared to diesel. [33], observed the brake thermal efficiency of B100 and B5 cape chestnut biodiesel to be lower than that of diesel by 20.3% and 7.6% respectively. Brake thermal efficiency as surveyed by [16], suggested that there is no significant difference in the thermal efficiencies

of diesel and biodiesel up to B20, above which slight decrease in thermal efficiency occurs till B100. Similarly, B5-B25 blends of SBME produced the thermal efficiency closest to diesel.

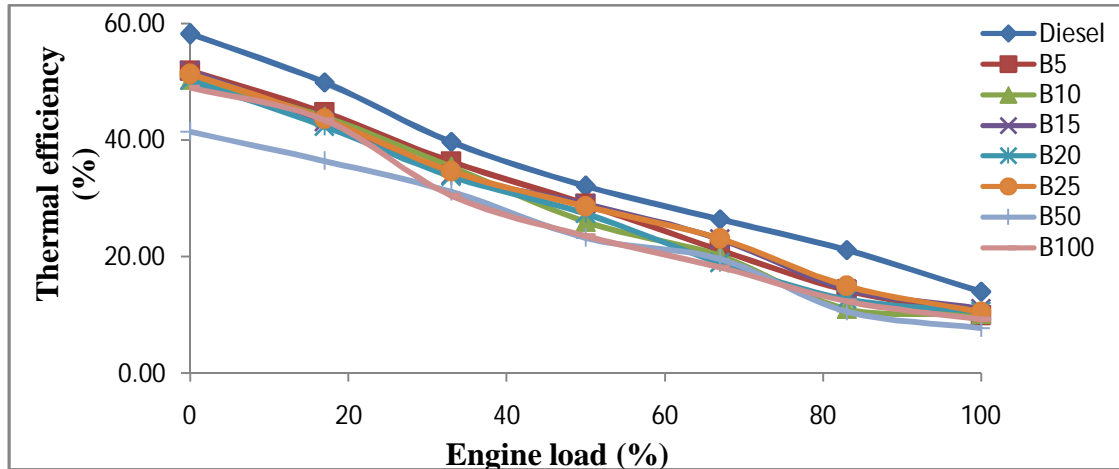


Figure 6. Thermal efficiency against Engine load

Carbon monoxide (CO) increased with increase in engine load. The emission decreased slightly from no-load to about 40 % loading and increased sharply as the load exceeded 50 % (Figure 7). The CO emission was highest in diesel and decreased with addition of SBME. At no load, CO emission was reduced by 38.24 % for B5 and 64.71 % for B100. The gap between CO emission of biodiesel and diesel decreased at full load, as CO emission reduced by 11.11% for B5 and 55.56 % for B100 at full load. Similar result was obtained by [1] that diesel produced the highest CO emission which decreased with addition of SBME to about 60 % for B100. Similar trend was observed for *Jatropha curcus* biodiesel [53]. Improvement in combustion efficiency relatively to the change in brake thermal efficiency against load was suggested as the cause. Increased CO emissions as engine load increased were observed by [63, 48, 31, 22]. This is because there is a decrease in air-fuel ratio as load increases, for all internal combustion engines, resulting to incomplete combustion as load increases. According to [15], the amount of CO at first decreased but increased at maximum load, as a result of biodiesel properties, which ensures improved spraying qualities with uniform charge preparations that gave it better burning conditions at

higher temperature. The oxygen content of biodiesel was suggested as ensuring complete oxidation of the fuel, resulting in lower CO emission.

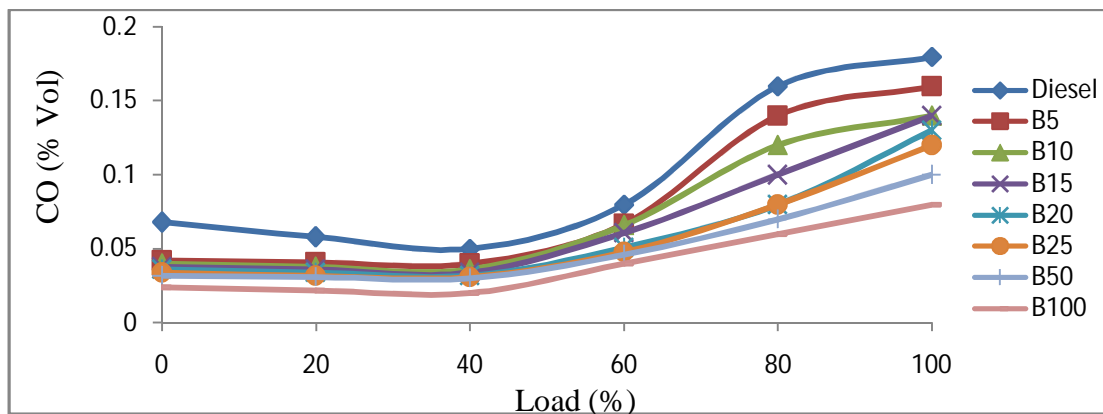


Figure 7. CO Emission against Engine Load

Various percentage reduction in CO by methyl esters have been reported: waste frying oil (17.1 %) [64]; five different biodiesel fuels (4-16 %) [67]; rapeseed, corn, and waste oil (28 %) [60]; rapeseed (50 %) [27]; Karanja (4-73 %) [47]; waste palm oil and canola oil (86.89 % and 72.68 respectively) [43]. The lower CO emissions were credited to the higher oxygen content of biodiesel [5, 26, 10]. According to [61], lesser carbon concentration of methyl esters relatively to diesel is a main factor for reduced CO emissions.

HC emission increased with increase in engine load. It was highest in diesel and decreased with increase in SBME addition to the blend as shown in Figure 8. HC emission was reduced by 9.09 % for B5, which increased to 45.45 % for B100 at no load. HC emission reduced from 5.56 % for B5 to 30.56 % for B100 at full load.

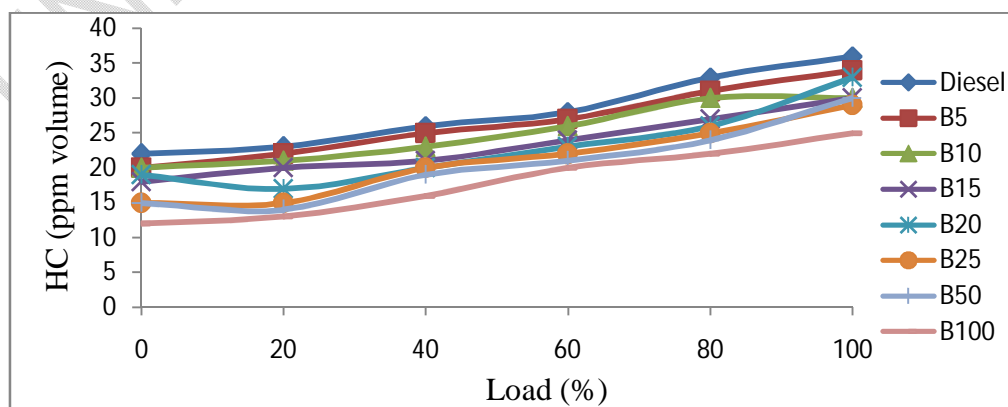


Figure 8. HC Emission against Engine Load

The HC emission was lower than 60 % reduction obtained by [1] for sandbox biodiesel. This might be due to atmospheric differences. They are however similar to the values obtained by [51] for fish oil biodiesel and its blends; 9.8 %, 19.7 %, 21.6 %, 23.4 % and 26.2%, obtained for 20%, 40%, 60%, 80% and 100% biodiesel blends in diesel respectively. Several authors have reported high reduction in HC emissions when engines are fueled with pure biodiesel instead of diesel [43, 10, 32, 30, 55, 35, 22, 38]. HC reduction by methyl esters in comparison to diesel fuel: 45-67 % for five different methyl ester biodiesels [67, 68]; 22.47-33.15 % for eight different kinds of biodiesel [32]; 20.73 %, 20.64 % and 6.75 % respectively for *Jatropha*, *karanja* and *polanga* [50]. The lower HC emission for methyl esters was attributed to higher viscosity and density [28]. The higher oxygen content and Cetane number of biodiesel blends were suggested as the main causes of reduction in HC emissions when compared to conventional diesel [53]. The oxygen content ensures complete combustion of the fuel when burned and the higher Cetane number reduces ignition delay period, thereby leading to reduced HC emission.

NO_x emission increased with increase in engine load. It was lowest in diesel and increased marginally as the percentage of SBME in the blend increased (Figure 9). It increased from 15.93 % for B5 to 32.14 % for B100. However at full load, NO_x emission from the biodiesel blends tends to even up with that of diesel fuel as the biodiesel concentration in the blend only caused a marginal increase in NO_x concentration of 1.54 % for B5 and 8.57 % for B100.

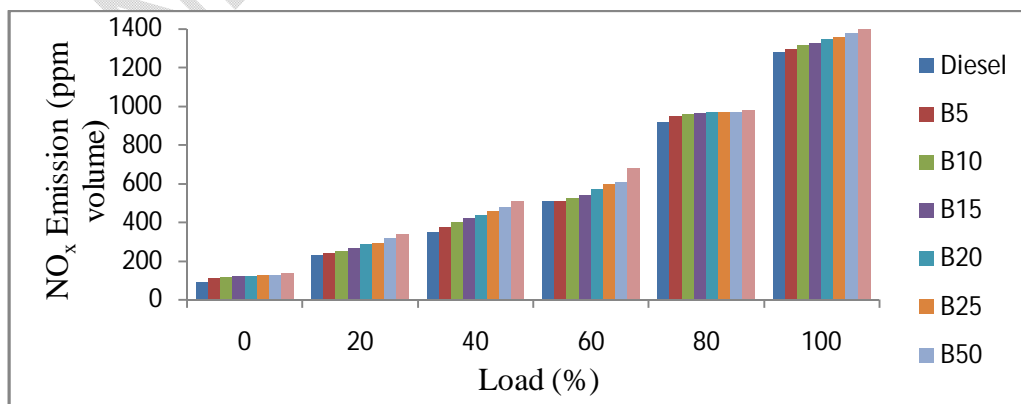


Figure 9. NO_x Emission against Engine Load

The results indicated that as load increased, variation in NO_x emission between the biodiesel blends and diesel tends to decrease. [1], observed that NO_x emissions concentration of sandbox biodiesel blends were all higher than that of diesel. Lowest NO_x concentration was observed for B20, followed by B10, B50 and B100 which had the highest NO_x concentration. Average increased in NO_x emissions from methyl esters are: 10 % and 37 % respectively for B10 and B100 waste oil, rapeseed oil and corn oil [60]. [28, 15, 36] reported that NO_x emission concentration was higher in biodiesel and their blends than the diesel at any given load or speed. This trend was related to the oxygen content of biodiesel blends. The oxygen was responsible for the increase in NO_x emission at increased exhaust gas temperature, caused by lower heat transfer, advance in fuel injection timings of biodiesel which has lower compressibility, and shortened ignition delay which is favors NO_x formation [69].

4. CONCLUSION

The performance of the sandbox seed methyl ester (SBME) on diesel engine indicated that the fuel has good quality to power the diesel engine in its pure or blended forms. Carbon monoxide (CO) and hydrocarbon (HC) emissions were reduced by the biodiesel up to 64.71% and 45.45% respectively by B100. The performance of the sandbox seed biodiesel indicates that it can be a reliable source for biodiesel feedstock, and B5-B25 biodiesel blends offered the most efficient quality. The performance of the sandbox seed oil biodiesel in terms of engine power, fuel utilization, and thermal efficiency and exhaust emissions establishes it as a potential fuel to power internal combustion engines with little or no design modifications.

REFERENCES

1. Adepoju TF, Abiodun A, Okunola AA, Dahunsi OS. Experimental investigation of sand box biodiesel performance in an internal combustion engine. *International Journal of Engineering Research & Technology (IJERT)*. 2013;2(11).
2. Adewuyi A, Paul O, Awolade PO, Oderinde RA. *Hura crepitans* seed oil: an alternative feedstock for biodiesel production. *Journal of Fuels* 2014;464590(8).
3. Allen TF. *Hura crepitans* L. *The Encyclopedia of Pure Material Medical*. Homeopathe International. New Delhi, India, 2000;1-2.
4. Aransiola EF, Ojumu TV, Oyekola TF, Madzimbamuto TF, Ikhu-Omoregbe DOI. A review of current technology for biodiesel production: State of the art. *Biomass and Energy*, Elsevier. 2013;61(276).
5. Aydin H, Bayindir H. Performance and emission analysis of cottonseed oil methyl ester in a diesel engine. *Renewable Energy*. 2010;35:588-592.
6. Banapurmath NR, Tewari PG, Hosmath RS. Effect of biodiesel derived from Honge oil and its blends with diesel when directly injected at different injection pressures and injection timings in single-cylinder water-cooled compression ignition engine. *P I Mech Eng A-J Pow*. 2009;223:31-40.
7. Basumatary S. Non-conventional seed oils as potential feedstocks for future biodiesel industries: A Brief Review *Research Journal of Chemical Sciences*. 2013;3(5):99-103.
8. Bhattacharya TK, Chandra R, Mishra TN. Performance characteristics of a stationary constant speed compression ignition engine on alcohol-diesel micro emulsions. *Agricultural Engineering International: The CIGR Journal of Scientific Research and Development*. 2006;4(2):8.
9. Bjorn SS, Sergio CC. A Comparative Study on the Engine Performance and Exhaust Emissions of Biodiesel from Various Vegetable Oils and Animal Fat. *Journal of Sustainable Bioenergy Systems*. 2015;5:89-103.

10. Buyukkaya E. Effects of biodiesel on a DI diesel engine performance, emission and combustion characteristics. *Fuel*. 2010;89:3099-3105.
11. Carraretto C, Macor A, Mirandola A, Stoppato A, Tonon S. Biodiesel as alternative fuel: experimental analysis and energetic evaluations. *Energy*. 2004;29:2195-211.
12. Deka DC, Basumatary S. High quality biodiesel from yellow oleander (*Thevetia peruviana*) seed oil, *Biomass Bioenergy*. 2011;35(1797).
13. Demirbas A. Diesel fuel from vegetable oil via transesterification and soap pyrolysis. *Energy Sources*. 2012;24(835).
14. Demirbas A. Importance of Biodiesel as Transportation Fuel. *Energy Police*. 2007;35(4661).
15. Dharmadhikar HM, Kumar PR, Srinivasa Rao S. Performance and emissions of C. I. engine using blends of biodiesel and diesel at different injection pressures. *International Journal of Applied Research in Mechanical Engineering (IJARME)*. 2012;2(2).
16. Dwivedi G, Jain S, Sharma MP. Diesel engine performance and emission analysis using biodiesel from various oil sources – Review. *J. Mater. Environ. Sci.* 2013;4(4): 434-447.
17. Eze JI, Ejilah IR. Tested performance parameters of diesel fuel and transesterified sheanut oil blends in compression ignition engine. *Global Journal of Researches in Engineering*. 2010;1(10):84.
18. Feldkamp S. *Modern Biology. United States: Holt, Rinehart, and Winston*. 2006; pg 618.
19. Fowomola MA, Akindahunsi AA. Nutritional quality of sandbox tree (*Hura crepitans* Linn.). *Journal of Medicinal Food*. 2007; 10(1):159-164.
20. Ghobadian B, Rahimi H, Nikbakht AM, Najafi G, Yusaf TF. Diesel engine performance and exhaust emission analysis using waste cooking biodiesel fuel with an artificial neural network. *Renew Energ*. 2009;34:976-82.

21. Gui MM, Lee KT, Bhatia S. Feasibility of edible oil vs. non-edible oil vs. waste edible oil as biodiesel feedstock, *Energy*. 2008;33(1646).
22. Gumus M, Kasifoglu S. Performance and emission evaluation of a compression ignition engine using a biodiesel (apricot seed kernel oil methyl ester) and its blends with diesel fuel. *Biomass Bioenerg*. 2010;34:134-9.
23. Haas MJ, Scott KM, Marmer WN, Foglia TA. In situ alkaline transesterification: an effective method for the production of fatty acid esters from vegetable oils. *Journal of the American Oil Chemists' Society*. 2004;81:83-89.
24. Hansen AC, Gratton MR, Yuan W. Diesel engine performance and NO_x emissions from oxygenated biofuels and blends with diesel fuel, *Trans ASABE*. 2006;49(3).
25. Idowu DO, Abegunrin TP, Ola FA, Adediran AA and Olaniran JA. Measurement of some engineering properties of sandbox seeds (*Hura crepitans*). *Agriculture and Biology Journal of North America*. 2012;3(8):318-325.
26. Karabektas M. The effects of turbocharger on the performance and exhaust emissions of a diesel engine fuelled with biodiesel. *Renewable Energy*. 2009;34:989-993.
27. Krahl J, Munack A, Schroder O, Stein H, Bungler J. Influence of biodiesel and different designed diesel fuels on the exhaust gas emissions and health effects. *SAE Paper*. 2003;1-3199.
28. Kumar S, Chaube A, Jain SK. Experimental evaluation of C.I. engine performance using diesel blended with Jatropha biodiesel. *International journal of Energy and Environment*. 2012;3(3):471-484.
29. Kumar K, Sharma MP. Performance and emission characteristics of a diesel engine fuelled with biodiesel blends. *International Journal of Renewable Energy Research*. 2016;6(2).
30. Lapuerta M, Armas O, Rodriguez-Fernandez J. Effect of biodiesel fuels on diesel engine emissions. *Progress in Energy and Combustion Science*. 2008;34:198-223.

31. Lertsathapornsuka V, Pairintrab R, Aryasukb K, Krisnangkura K. Microwave assisted in continuous biodiesel production from waste frying palm oil and its performance in a 100kW diesel generator. *Fuel Process Technol.* 2008;89:1330-6.
32. Lin BF, Huang JH, Huang DY. Experimental study of the effects of vegetable oil methyl ester on DI diesel engine performance characteristics and pollutant emissions. *Fuel.* 2009;88:1779-85.
33. Maina JW, Gitau AN, James A, Nyang'aya JA. Diesel engine emissions and performance characteristics under cape chestnut biodiesel. *Journal of Power and Energy Engineering.* 2013; 1: 9-14.
34. Mamilla VR, Mallikarjun MV, Lakshmi Narayana Rao G. Performance analysis of IC engines with bio-diesel jatropha methyl ester (JME) blends. *Journal of Petroleum Technology and Alternatives Fuel.* 2013;4(5):90-93.
35. Meng X, Chen G, Wang Y. Biodiesel production from waste cooking oil via alkali catalyst and its engine test. *Fuel Process Technol.* 2008;89:851-7.
36. Mohanty S, Prakash O. Analysis of exhaust emission of internal combustion engine using biodiesel blend. *International Journal of Emerging Technology and Advanced Engineering.* 2013;3(5).
37. Murillo S, Miguez JL, Porteiro J, Granada E, Moran JC. Performance and exhaust emissions in the use of biodiesel in outboard diesel engines. *Fuel.* 2007;86:1765-71.
38. Nwafor OMI. Emission characteristics of diesel engine operating on rapeseed methyl ester. *Renew Energy.* 2004;29:119-29.
39. Okolie PN, Uaboi-Egbenni PO, Ajekwene AE. Extraction and quality evaluation of sandbox tree seed (*Hura crepitans*). *Oil World Journal of Agricultural Sciences.* 2012;8(4):359-365.
40. Olatidoye OP, Adeleke AE, Adegbite SA, Sobowale SS. Chemical composition and nutritional evaluation of sandbox (*Hura crepitans*) seed flour for domestic consumption and industrial. *J Med Appl. Biosciences.* 2010;2:72-83.

41. Onwe DN and Bamgboye AI. Optimization of mechanical oil expression from sandbox (*Hura crepitans Linn.*) seeds. Turkish Journal of Agricultural Engineering Research (TURKAGER). 2021;2(2):434-449.
42. Özcelik AE, Aydogan H, Acaroglu M. Determining the performance, emission and combustion properties of camelina biodiesel blends. Energy Conversion and Management, 2015;96:47-57.
43. Ozsezen AN, Canakci M, Turkcan A, Sayin C. Performance and combustion characteristics of a DI diesel engine fueled with waste palm oil and canola oil methyl esters. Fuel. 2009;88:629-36.
44. Öztürk E. Performance, emissions, combustion and injection characteristics of a diesel engine fuelled with canola oil-hazelnut soap stock biodiesel mixture. Fuel Processing Technology. 2015;129:183-191.
45. Qi DH, Geng LM, Chen H, Bian YZH, Liu J, Ren XCH. Combustion and performance evaluation of a diesel engine fueled with biodiesel produced from soybean crude oil. Renew Energ. 2009; 34:2706-13.
46. Raheman H, Jena PC, Jadav SS. Performance of a diesel engine with blends of biodiesel (from a mixture of oils) and high-speed diesel. International Journal of Energy and Environmental Engineering. 2013;4(6).
47. Raheman H, Phadatare AG. Diesel engine emissions and performance from blends of karanja methyl ester and diesel. Biomass Bioenerg. 2004;27:393-7.
48. Ramadhas AS, Muraleedharan C, Jayaraj S. Performance and emission evaluation of a diesel engine fueled with methyl esters of rubber seed oil. Renew Energ. 2005;30:1789-800.
49. Reyes JF, Sepulveda MA. PM-10 Emissions and power of a diesel engine fuelled with crude and refined biodiesel from salmon oil. Fuel. 2006;85(1714).

50. Sahoo PK, Das LM, Babu MKG, Arora P, Singh VP, Kumar NR, *et al.* Comparative evaluation of performance and emission characteristics of jatropha, karanja and polanga based biodiesel as fuel in a tractor engine. *Fuel*. 2009;88:1698-707.
51. Sakthivel G, Nagarajan G, Ilangkumaran M, Gaikwad AB. Comparative analysis of performance, emission and combustion parameters of diesel engine fuelled with ethyl ester of fish oil and its diesel blends. *Fuel*. 2014;132:116-124.
52. Sharma YC, Singh B. Development of biodiesel: current scenario. *Renew Sustain Energy Rev*. 2009;13(6-7):1646-51.
53. Sharma S, Singh R, Mishra M, Mitra GK, Gangwar RK. Performance and emission analysis of diesel engine using biodiesel and preheated jatropha oil. *International Journal of Current Research and Academic Review*. 2014;2(6):229-239.
54. Shailaja M, Aruna Kumari A, Sita Rama Raju AV. Performance evaluation of a diesel engine with sesame oil biodiesel and its blends with diesel. *International Journal of Current Engineering and Technology*. 2013; p. 10-14.
55. Song JT, Zhang CH. An experimental study on the performance and exhaust emissions of a diesel engine fuelled with soybean oil methyl ester. *P I Mech Eng D.J Aut*, 2008;222:2487-96.
56. Sivaramakrishnan K, Ravikumar P. Optimization of operational parameters on performance and emission of a diesel engine using biodiesel. *International journal of environmental science and technology*. 2014;11(949).
57. Stalin N, Prabhu HJ. Performance and emissions of C.I. engine using blends of biodiesel and diesel at different injection pressures. *Journal of Engineering and Applied Sciences*. 2007;2(5).
58. Srivastava AK, Goering CE, Rohrbach RP, Buckmaster DR. *Engineering Principles of Agricultural Machines*. ASABE. 2005.

59. Sukumar P, Balasubramanian K, Narayana KS. Experimental investigation of performance and emission characteristics of biodiesel from *sterculia striata*. *Asian Journal of Computer Science and Information Technology*. 2013;3:19-25.
60. Tesfa B, Mishra R, Gu F, Ball AD. Combustion characteristics of CI engine running with biodiesel blends. *International Conference on Renewable Energies and Power Quality (ICREPEQ'11) Las Palmas de Gran Canaria (Spain)*. 2011.
61. Tsolakisa A, Megaritis A, Wyszynski ML, Theinnoi K. Engine performance and emissions of a diesel engine operating on diesel-RME (rapeseed methyl ester) blends with EGR (exhaust gas recirculation). *Energy*. 2007;32:2072-80.
62. Tuccar G and Aydin K. Evaluation of methyl ester of microalgae oil as fuel in a diesel engine. *Fuel*. 2013;112:203-7.
63. Usta N, Öztürk E, Can Ö, Conkur ES, Nas S, Çon AH, Can AC, Topcu M. Combustion of biodiesel fuel produced from hazelnut soap stock/waste sunflower oil mixture in a diesel engine. *Energy Convers. Manag.* 2005;46:741-755.
64. Utlü Z, Kocak MS. The effect of biodiesel fuel obtained from waste frying oil on direct injection diesel engine performance and exhaust emissions. *Renewable Energy*. 2008;33:1936-1941.
65. Vicente G, Martinez M, Aracil J. Integrated biodiesel production: a comparison of different homogeneous catalysts systems. *Biores Technol.* 2004; 92: 297.
66. Wail MA, Khaled SA. Performance of diesel engine fuelled by a biodiesel extracted from a waste cooking oil. *Energy Procedia, Elsevier*. 2012;18:1317-1334.
67. Wu F, Wang J, Chen W, Shuai S. A Study on emission performance of a diesel engine fuelled with five typical methyl ester biodiesels. *Atmospheric Environment*. 2009;43:1481-1485.
68. Xue J, Griff TG, Hansena AC. Effect of biodiesel on engine performances and emissions. *Renewable and Sustainable Energy*. 2011;15(2):1098.

69. Kanthasamy, P., Selvan, V.A.M. & Shanmugam, P. Investigation on the performance, emissions and combustion characteristics of CRDI engine fueled with tallow methyl ester biodiesel blends with exhaust gas recirculation. *J Therm Anal Calorim* **141**, 2325–2333 (2020). <https://doi.org/10.1007/s10973-020-09770-0>

UNDER PEER REVIEW