

Original Research Article

Impact of watershed management on streamflow and build-up water storage in Parasai-Sindh watershed of SAT region, India

ABSTRACT

Aims: The study of runoff and base flow estimates and their impact on groundwater status in the semi-arid region of India is typically limited. We are focused on runoff and base flow in the Parasai-Sindh watershed, and impact of rain water harvesting structure on harvesting of stream flow and change ground water status.

Place and Duration of Study: The study site is located in Jhansi district (Bundelkhand region) of Uttar Pradesh and started from 2012 and completed at end of 2013.

Methodology: Total six rainwater harvesting structure (RHS) or checkdams were constructed on the drainage line from ridge to final outlet of watershed. Daily rainfall data was observed with automatic rain gauge during the study period. For discharge estimation, the runoff gauging station was installed at the outlet of watershed. The runoff and base flow of watershed were estimated by subtracting barometric pressure from the stage recorded by Baro and Diver install at outlet to get actual stage of runoff passing over it. The water pressure head of 200 randomly selected open wells were monitored on monthly interval.

Results: The geological area of watershed is 12.46 km² and its main stream is found to be of 4th order. The results indicate that out of 49.2 mm rainfall event, runoff and base flow at outlet of watershed were found as 20.98% and 4.19%, respectively. Whereas, runoff and base flow were recorded 14.12% and 11.18%, respectively against 86.2 mm rainfall. Total runoff and base flow produced from outlet was recorded as 16 and 7%, respectively. The water head pressure of open wells was improved 92.45% after the rainy season as compared to before the rainy season.

Conclusion: The study findings are useful and show how much runoff reduce the runoff and indirectly improve ground water status of open wells which was recharge were recharged through construction of RHS in ephemeral drain of Bundelkhand region.

Comment [U1]: Not clear, what do you mean?

Keywords: [Rainfall, runoff, base flow, Groundwater, Watershed management, Parasai-Sindh watershed]

1. INTRODUCTION

In India, the half of the total precipitation is occurs within a period of 15 days which induced more than 90% of the annual runoff during monsoon period. Runoff is the one of most important hydrological input data in water resource management. However, Base flow is water that sustains a stream after the precipitation occurred and it can be contributed in groundwater or unsaturated soil pool [1, 2]. While, the study on runoff - base flow estimation and its relationship with rainfall are very limited particularly in developing country, especially under meso-scale watershed.

India is implemented large-scale watershed management programs[3] and invested US\$ 14 billion since 1990 by Government of India along with several international donor agencies [4], for helping to improving degraded land, reduce water scarcity, food insecurity and develop rural livelihoods [5,6]. However, very limited study has been done on harvesting of runoff through rainwater harvesting interventions, water balance, upstream and

downstream water balance, groundwater dynamics, change landuse and income [7], with the exception of a few agro-hydrological studies at watershed level [8].

The dryland agriculture is uncertain due to low and unpredictable rainfall, high sloppy land and short crop growing period in Semi Arid tropical region of India. Agricultural production will improve in these areas with adoption of soil and water conservation practices, improve soil health and water holding capacity and use of harvested rainwater as supplemental irrigation in critical growth stages [9]. In India, dryland agriculture covers approximate 66% of the total cultivated area and it produces almost half of the total agricultural production [10, 11]. In arid region, the harvested and stored rainwater is one of the major assets for crop survival by application of life saving irrigations in the dry period [12]. It is a widely used practice, which deals with various engineering approaches like as collection of surface runoff, storage, treatment and distribution [13]. Reduction of surface runoff can be reduced by constructing suitable in- and ex-situ rainwater harvesting structures, which automatically improve other natural resources like soil and vegetation. Harvested rainwater check infiltration and increase soil water content and indirectly improve groundwater status. Series of rainwater harvesting structures enhance water conservation at least 5-8 times than harvested rain water depending upon rainfall dynamic, terrain, soil type, etc [12]. The aim of study was analyzed (a) geomorphology of watershed for identification of suitable site for construction rainwater harvesting structures, (b) the impact of rainwater harvesting structures on landscape hydrology, specifically on runoff, base flow and groundwater recharge.

2. METHODOLOGY

2.1 Description of site

The Parasai-Sindh watershed located in Jhansi district (Bundelkhand region) of Uttar Pradesh was selected for the study purpose from 2012. Its geographical area is 1246 ha, comprising three villages namely Parasai, Chhatpur and Bachhauni located at 25° 23' 47.6" - 25° 27' 05.1" N and 78° 20' 06.5" - 78° 22' 33.0" E, and about 270-315 m above mean sea level (msl) (Figure 1). It comes under agro-climatic zone of Central Plateau Hill Region representing a transitional zone of tropical sub-humid to semi-arid and comes under hot moist semi-arid ecological sub-region. The annual average rainfall is 877 mm (standard deviation, $\sigma = 251$ mm), out of this, 85 % falling from June to September [14] whereas, mean potential evapo-transpiration ranges from 1329 to 1532 mm. Mean annual temperature ranges from 24 to 25°C. The mean summer (April-June) and winter temperature (December-February) temperature are 34 and 16 °C, respectively. The aquifers are either unconfined or perched, having poor storage capacity (porosity of 0.01-0.05). These aquifers were derived primarily from weathering and developed into two layered system (i) unconsolidated fractured layers within 10-15 m, (ii) relatively impermeable basement starting from 15-20 m depth [15]. Soil in the watershed is shallow and comes under Alfisols and Entisols of soil order (10-50 cm soil depth), coarse gravelly, light textured with low water-holding capacity (80-120 mm/m), with low organic carbon (< 1%) [16]. These soils are further classified according to their texture and color into four distinct series namely Rakar and Parwa in red soils and Kabar and Mar in black soils [17].

Comment [U2]: How aquifer can be developed from weathering? Not clear.

Comment [U3]: How impermeable basement can be aquifer?

Comment [U4]: You mean it is thin?

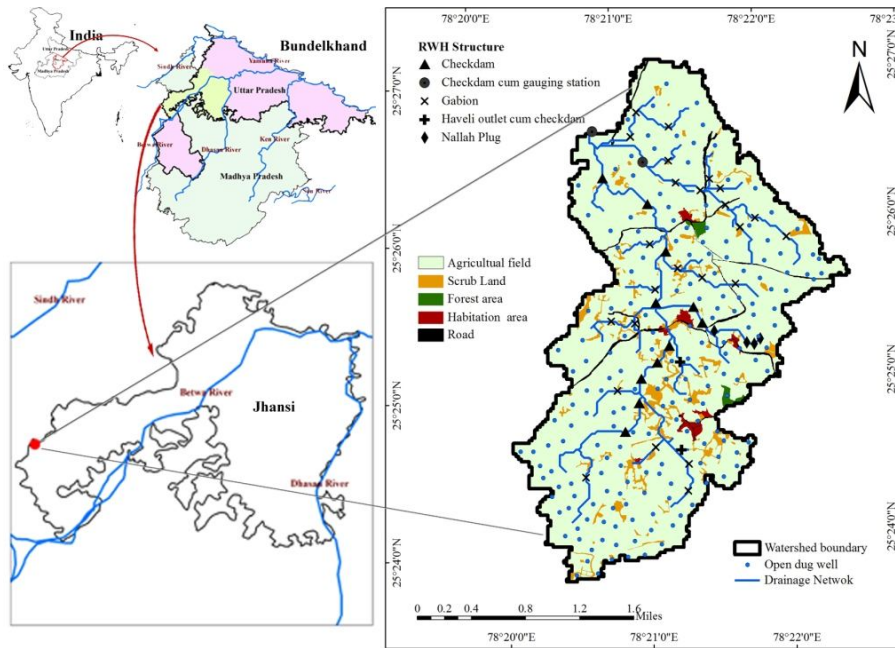


Fig. 1.Location map of Parasi-Sindh watershed

2.2 Estimation of Runoff and base flow

In watershed development, a number of RHS or checkdams were constructed on the drainage line from ridge to final outlet of watershed. For the selection of suitable site, the digital elevation model of watershed was prepared by using ASTER 30 m DEM of satellite imagery and it was used for topographic information, flow pattern, flood risk areas identification and to determine accessibility with the help of G.I.S. software Arc GIS 10. Out of six RHS, the gauging station of flow discharge was installed at the outlet of watershed. The automatic pressure recorded drive was placed at bottom of the sitting well which was constructed at upstream of check dam. The actual flow discharge passing over rectangular weir of check dam, the barometric pressure head was subtracted from the stage recoded by Divers at 10 minute interval. The discharge corresponding to the depth of flow taken at an interval of 10 min was calculated from the discharge-head relationship [18, 19]. This method was based on the continuity and Bernoulli's equations. Discharge over the crest was calculated by equation such as:

$$Q = C_d \left[\frac{2}{3} \left(\frac{2}{3} g \right)^{1/2} \right] B h^{3/2}$$

Where, Q is flow discharge (m^3s^{-1}); g-gravitational acceleration (ms^{-2}); C_d is discharge coefficient; B - the weir's breadth which spans the full channel width; and h - overflow head upstream of the weir (m).

In this study, flow received at watershed outlet within 12 hours (hr) of the rainfall event was referred as runoff and flow received after 12 hr was considered as base flow. The time of

concentration (T_c) in Parasai-Sindh watershed at outlet (gauging station) was estimated as 1.2 hour. Longest path of the Parasai-Sindh watershed is 4.5 km and average velocity of runoff water is 3.75 km hr^{-1} as defined by Kirpich [20]. Thus, considering 12 hour as base time indeed is sufficient enough for partitioning water yield into runoff and base flow at any location in the study area. Singh et al. also reported similar that flow received at watershed outlet within 12 hours of the rainfall event was referred as runoff and flow received after 12 hours was considered as base flow for Garhkundar-Dabar watershed of Bundelkhand region in Central India [14].

2.3 Estimation of rain water harvesting through RHS

The six RHS were constructed in 2012 in different ephemerals drains of watershed. Out of six RHS, one is the traditional rain water harvesting system which is known as haveli checkdam. It is very popular in Bundelkhand region and located at upstream of watershed. It was rejuvenated because it was not harvesting surface water. The volume of harvested water storage capacities of the RHS are estimated by conducting 30m grid topographic survey of the stream channel at the height of the crest. The estimation of change of ground water, 200 open wells of Parasai-Sindh watershed were randomly selected and monitored for water pressure head on monthly interval.

3. RESULTS AND DISCUSSION

3.1 Topographical countenance

A DEM is a digital file of terrain elevations for ground positions. Outlet of the watershed was located at 270 m above msl, whereas land elevation varied from 270 to 315 m in the watershed. The maximum area, 329.02 ha of the watershed falls under 290-295 m elevation followed by area of 290.09 ha under 295-300 m (Figure 2a). The term stream order is a measure of the position of a stream in the hierarchy of tributaries. Natural drainage system of the watershed was classified and the main stream was found as 4th order stream. Number of I, II, III and IV order streams were 31, 7, 2 and 1 respectively and their corresponding mean length of was 0.51, 0.72, 2.54, 0.99 km, respectively (Figure 2c). It was also indicated that there was a negative correlation between frequencies of stream with stream order that means stream frequency is decrease if stream order is increase [21]. The total length of stream segments is highest in first order and decreases with increase stream order. This change may point toward flowing of streams from high elevation, landscape and land slopes [22]. The dominant slope category in the watershed were 5-10 per cent (45.83 %) followed by 3-5 and 10-15 (Figure 2b). the higher watershed area comes under higher slope categories which means the flow of surface water is high and lost through runoff. Slopes of a region are vital parameters in deciding suitable land use, as the degree and direction of the slope decide the land use that it can support. Slope is also very important while determining the land irrigability and capability classification and has direct bearing on runoff [23].

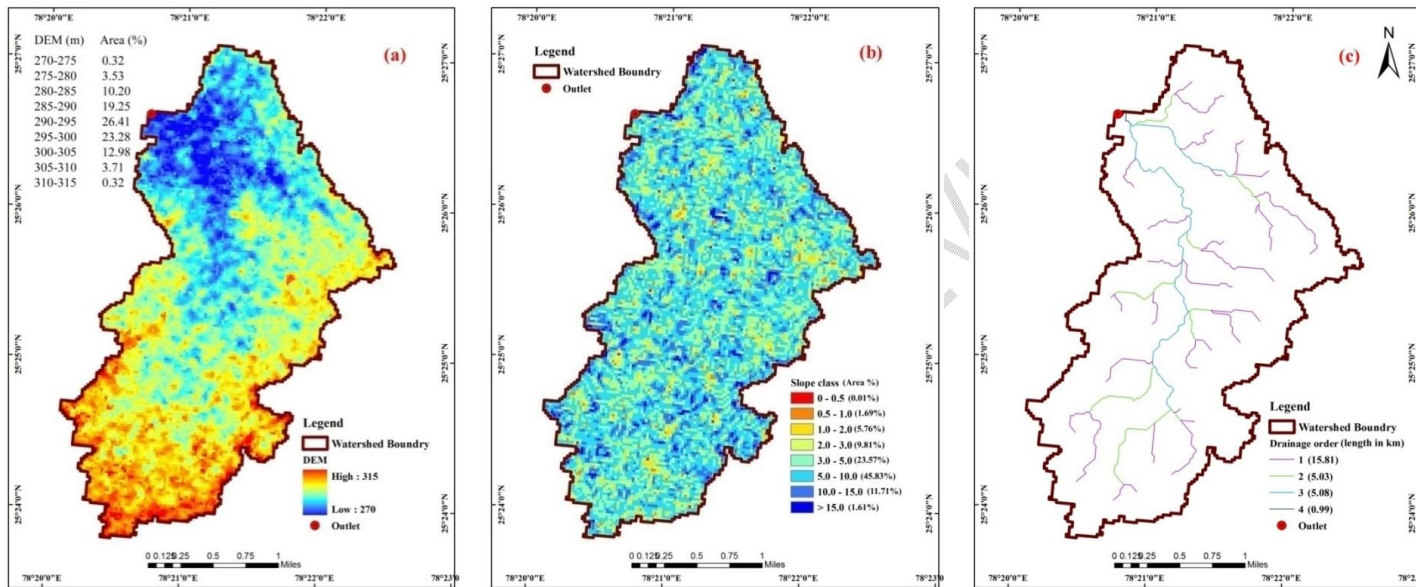


Fig. 2. Digital Elevation Model (a), slope (b) and drainage (c) maps of Parasai-Sindh watershed

3.2 Surface runoff and base flow

During the study, the estimation of runoff and base flow separation were varied and dependent on watershed topographical situation and rainfall variability. The rainfall during rainy season (June-September) was recorded 1052 mm. Total stream flow was recorded 285.3.0 mm whereas runoff was recorded 197.5 mm which was 16% of total rainfall, rest stream flow was considered as baseflow, respectively (Figure 3a). Runoff coefficient changed with rainfall quantity and intervention density both on spatial and temporal scales [6]. Out of all event of rainfall, two event were selected and drawn the hydrograph for estimation of runoff and baseflow. Runoff and baseflow estimated at outlet of watershed for rainfall event-1 were found as 10.32 mm and 2.06 mm, respectively against 49.2 mm rainfall (Figure 3b). Whereas, runoff and base flow of rainfall event-2 were recorded 12.17 mm and 9.64 mm, respectively, against 86.2 mm (Figure 3c) rainfall. Peak discharge of event-1 and event-2 were observed at 2 hrs 20 min and 2 hrs after the occurrence of respective rainfall as the rainfall intensity was higher in case of event-2 as compared to event-1. However, magnitude of peak discharge was found higher in case of event-2 as compared to event-1. A long recession limb (lean flow) of event-2 continued even after 72 hours of the rainfall whereas outflow of event-1 reduced to zero after 40 hours of the rainfall. Number of water harvesting structures constructed at upstream of watershed have also impacted the hydrographs recorded at outlet. Singh et al. also reported similar storm flow and base flow in Garhkundar-Dabar watershed of Bundelkhand region Central India [14].

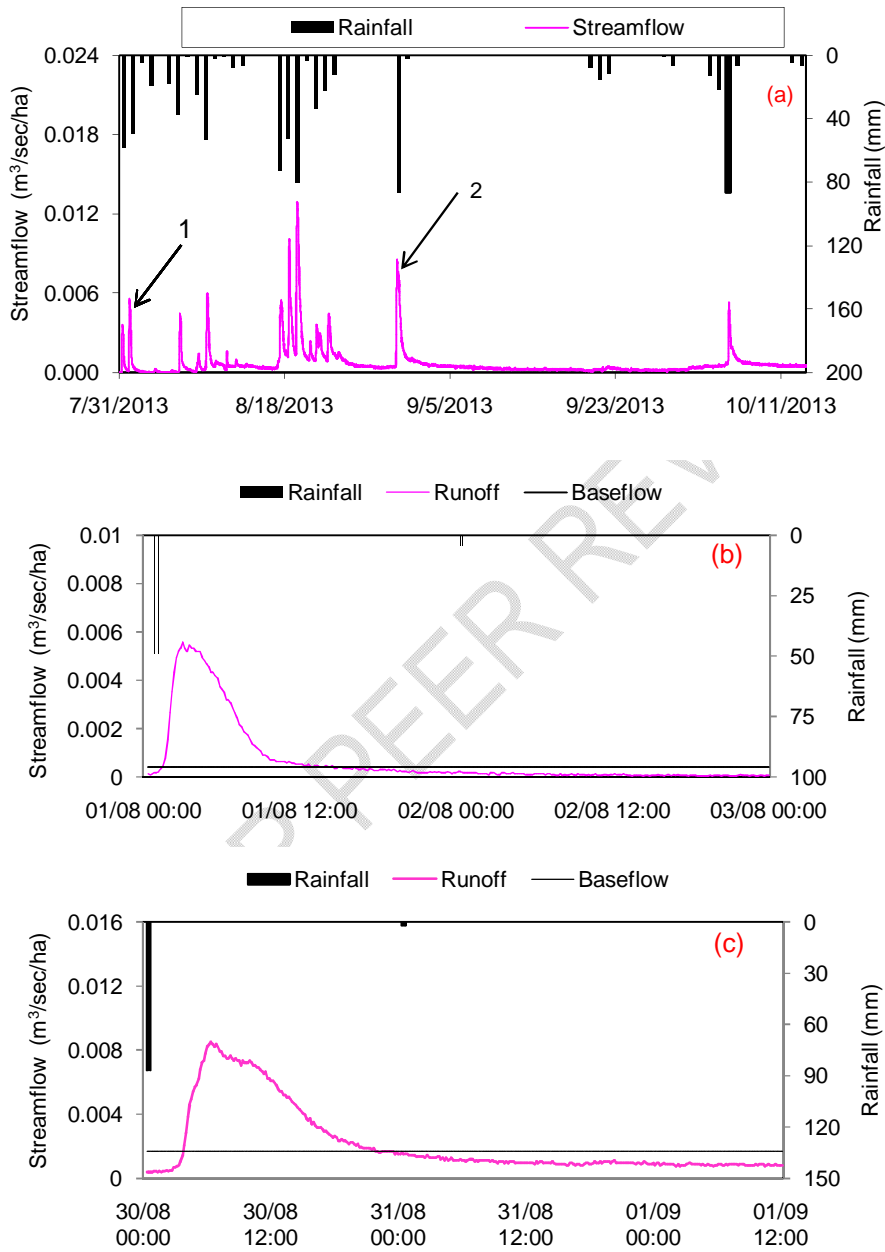


Fig. 3 Study of rainfall and discharge (a), runoff hydrograph and base flow of selected event 1 (b) and 2 (c) at outlet of watershed during rainy season, 2013.

3.3 Rainwater harvesting & Change in Groundwater

Total rainwater stored through check dams except *Haveli* was 92700 m³, out of these *haveli*/RHS was harvested 73000 m³ runoff from 51.4 ha catchment area (table 1). The change in ground water level of watershed was one of the major impacts of rainwater harvesting by construction of RHS in Parasai-Sindh watershed. The result revealed that the average depth of open wells was recorded 9.69 m. Average water pressure head was recorded 1.06 at starting of rainy season and 4.60 m at end of rainy season before implementation of RHS. Compared to pre-intervention, the open well water pressures of the up, middle, downstream and overall watersheds at the beginning of the rainy season after the construction of the RHS had increased by 162.82, 62.02, 77.68 and 92.45%, respectively. Similarly, the water head pressure of open wells of up, mid, downstream and overall watershed was recorded higher by 162.82, 62.02, 77.68 and 92.45% respectively after the rainy season. (Figure 4). The difference in the average pressure head of groundwater could be attributed to the enhanced water availability through implementation of suitable RHS [24]. Singh et al. also reported that the integrated watershed development activities were recharged groundwater and improved water level of open wells situated in Garhkundar-Dabar watershed of Bundelkhand region [14] and similar study done by Sharma et al. at Domagor-Pahuj Watershed [25].

Comment [U5]: How you measure the pressure in open water wells?

Comment [U6]: These are the same numbers, how??

Table 1. Technical specification, Volume of harvested runoff and catchment area of different RHS under Parasai-Sindh Watershed

S. No.	Name of RHS	Crest length (m)	Height of water drop (m)	Weir Height (m)	Relief (m)	Length of Submergence (m)	Volume of harvested runoff (m ³)	Catchment area (ha)
1	CD1 (<i>Haveli</i>)	5.00	1.10	0.65	25	500	73000	51.40
2	CD2	6.00	1.35	1.02	24	-	7500	94.64
3	CD3	6.00	1.50	0.90	27	310	2500	310
4	CD4	6.00	1.30	1.10	30	350	2000	350
5	CD5	6.00	1.13	1.50	34	485	4700	478
6	CD6 (Outlet)	5.00	1.40	0.56	21	290	3000	1246

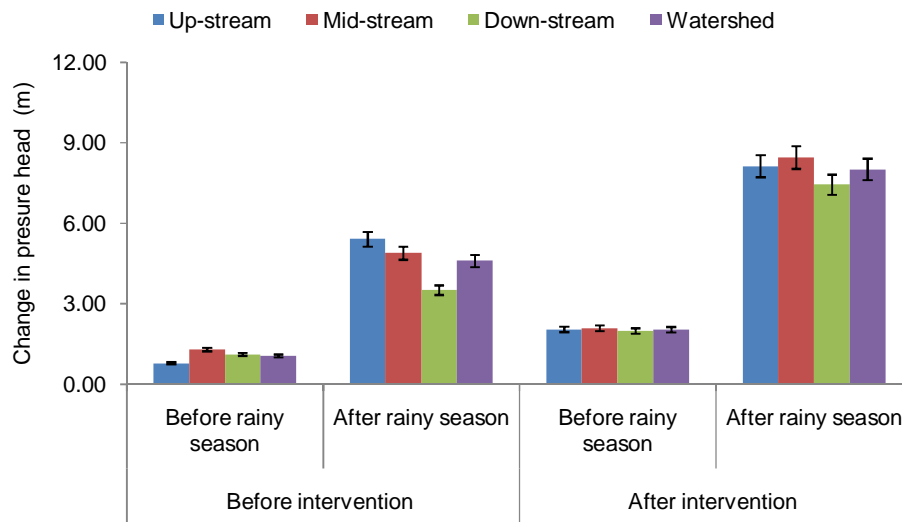


Fig. 4 Comparison of pressure head of open wells in between before and after intervention

4. CONCLUSION

The conclusion of the study was that the maximum area comes under higher slope category and suitable for loss of high amount of rain water through runoff. Out of total rainfall received during the study period, runoff and base flow were recorded 197.5 and 88.35 mm at outlet of watershed. Implementation of RHS in ephemeral streams at appropriate interval was one of the best options to check the stream flow and harvest the surface runoff. Total volume of harvested water through six RHS was 92700 m³. Groundwater level of open wells was improved after development of water harvesting structure in watershed as compared before intervention. This study showed the rainfall and runoff estimation and impact RHS on surface water harvesting and build-up the ground water of rainfed region of India.

REFERENCES

1. Lee J, Kim J, Jang WS, Lim KJ, Engel BA. Assessment of Baseflow Estimates Considering Recession Characteristics in SWAT. *Water*. 2018; 10: 371. DOI: doi:10.3390/w10040371
2. Foks SS, Raffensperger JP, Penn CA, Driscoll JM. Estimation of Baseflow by Optimal Hydrograph Separation for the Conterminous United States and Implications for National-Extent Hydrologic Models. *Water* 2019; 11: 1629. DOI: https://doi.org/10.3390/w11081629.
3. Hope RA. Evaluating social impacts of watershed development in India. *World Develop.* 2007; 35: 1436–1449.

4. Mandal S, Verma VK, Kurian C, Sudheer KP. Improving the crop productivity in rainfed areas with water harvesting structures and deficit irrigation strategies. *J Hydrol.* 2020; 586: 124818.
5. Mondal B, Loganandhan N, Patil SL, Raizada A, Kumar S, Bagdi GL. Institutional performance and participatory paradigms: Comparing two groups of watersheds in semi-arid region of India. *Internat Soil Water Conser Res.* 2020; 8: 164-172. <https://doi.org/10.1016/j.iswcr.2020.04.002>
6. Garg KK, Singh R, Anantha KH, Singh AK, Akuraju VR, Barron J, Dev I, Tewari RK Wani SP, Dhyani SK, Dixit S. Building climate resilience in degraded agricultural landscapes through water management: A case study of Bundelkhand region, Central India. *J Hydr.* 2020; 591: 125592. DOI: <https://doi.org/10.1016/j.jhydrol.2020.125592>
7. Glendenning CJ, van Ogtrop FF, Mishra AK, Vervoot RW. Balancing watershed and local scale impacts of rain water harvesting in India—A review. *Agric Water Manag* 2012; 107: 1-13.
8. Karlberg L, Garg KK, Barron J, Wani SP. Impacts of agricultural water interventions on farm income: An example from the Kothapally watershed, India. *Agric Sys.* 2015; 136: 30-38.
9. Keller A, Sakthivadivel R, Seckler D. Water scarcity and the role of storage in development. *IWMI Research Report 39, IWMI, Colombo.* 2000.
10. Rosegrant M, Cai X, Cline S, Nakagawa N. The role of rainfed agriculture in the future of global food production. *EPTD discussion paper 90, IFPRI: Washington, DC,* 2002.
11. Kumari R, Kumari P, Sharma B, Singh R, Singh RM. Cost-effectiveness and Water Use Efficiency of Groundnut and Wheat under SAT Region of Central India. *Internat J Plant & Soil Sci.* 2018; 21(1): 1-9. <https://doi.org/10.9734/IJPSS/2018/35524>.
12. Kumari R, Sharma B, Kumari P, Singh R. Estimation of storage capacity of traditional rainwater harvesting structure *Haveli* in Parasai-Sindh watershed of Bundelkhand region. *Prog Res–Internat J.* 2017; 12: 2284-2286.
13. Tripathi SK, Sharma B, Raha P. Evaluation of Site Suitability and Storage Capacity of Constructed. Rainwater Harvesting Structure in Vindhyan Region, India. *Ind J Eco.* 2016; 43(1): 39-42.
14. Singh R, Garg KK, Wani SP, Tewari RK, Dhyani SK. Impact of water management interventions on hydrology and ecosystem services in Garhkundar-Dabar watershed of Bundelkhand region, Central India. *J Hydrol.* 2014; 509: 132-149.
15. GOI. Report on Hydrogeology of the Bundelkhand Region. Central Groundwater Development Board, Government of India (GOI). 2000.
16. Kumari R, Sharma B, Singh R, Singh RM, Tewari RK, Dhyani SK. Morphometric and land use analysis of Parasai-Sindh Watershed in Semi-Arid Tropics of Central India. *Environ Ecol.* 2015; 33(1), 28–32.

17. Kumari R, Sharma B, Kumari P. Estimation of Land Use and Crop Economics of Parasai-Sindh Watershed in Semi Arid Tropics of Central India. *Ind J Eco.* 2020; 47: 939-942.
18. Bettez J, Townsend RD, Comeau A. Scale model testing and calibration of City Ottawa sewer weirs. *Can J Civil Engi* 2001; 28: 627–639.
19. Goodarzi E, Farhoudi J, Shokri N. Flow characteristics of rectangular broad-crested weirs with sloped upstream face. *J HydrolHydromech.* 2012; 60(2): 87–100
20. Kirpich ZP. Time of concentration of small agricultural watersheds. *Civil Engi.* 1940; 10(6): 362.
21. Pareta K, Pareta U. Quantitative geomorphological analysis of a watershed of Ravi river basin, HP, India. *Internat J Adv Remote Sensing GIS.* 2012, 1: 41—56.
22. Vittala S, Govindaiah S, Honne GH. Morphometric analysis of sub-watersheds in the Pavagada area of Tumkur district, South India using remote sensing and GIS techniques. *J Ind Soc Remote Sensing.* 2004; 32: 351-362.
23. Singh R, Kushwah A, Tewari RK, Dhyani SK, Sharma B and Kumari R. Landuse and morphometric characterization of Parasai-Chhatpur watershed in drought prone Bundelkhand Region. *Ind J Agrofor.* 2014b; 16(1): 9-14.
24. Kumari R, Sharma B, Singh R, Singh RM, Tewari RK. Estimation of Groundwater Recharge Using Well Recharging Unit in Parasai- Sindh Watershed of SAT Region of India. *Ind J Eco.* 2014; 41(2): 252-256.
25. Sharma, B., Kumari R, Singh R.,Schan RC, Pandey SN, Tewari RK, Dhyani SK. Estimation of Groundwater Recharge Potential of Domagor-Pahuj Watershed Using Water Table Fluctuation Method. *Nat Environ PolluTechn.* 2015; 14(1): 125-128.