

STATIC MODEL FOR THE DRAIN RATE OF CLAY EXTRACTION AND POWER CONSUMPTION FOR SAND WASHING

Abstract. The article discusses some of the main issues of modeling the formation of a two-phase liquid-solid particle system in devices operating on the principle of mixing and dispersion. For this purpose, static formulas have been compiled for such parameters as the rate of discharge of clay extraction and the power consumption for washing sand, the speed of rotation of the liquid with untreated sand, the influence of the ratio of geometric dimensions on the above parameters has been considered. A static model has been compiled that allows us to identify patterns of changes in these parameters. Based on the obtained waveforms from the simulation of the model, conclusions were made according to which, when constructing an automatic control system for sand washing, it is necessary to ensure stabilization by such basic indicators as the required sand-clay ratio, the humidity of the cleaned sand, power consumption.

Keywords: two-phase liquid – solid particles system, mixing and dispersing principle, clay extraction discharge rate, purified sand humidity, power consumption.

INTRODUCTION

Mixing and dispersing are one of the most energy-intensive and expensive operations used in bulk material classifiers, in machines designed for washing sand and separating clay and in other equipment of the relevant field. Therefore, the rational hardware design of these processes has a significant impact on the economy not only of such auxiliary processes as preparation for the use of construction sand, but also on the cost of the product as a whole. Often mixing and dispersion leads to mechanical activation, which allows to obtain products with specified physical, physico-chemical properties, for example, washing sand with the purpose of separation from a mixture of clay, etc.

With the development and improvement of the technology of preparation of construction sand due to the increasing demands on productivity and processing quality, there is a clear tendency to increase the degree of their dispersion. In this sense, the task of modeling the process of mechanical dispersion in newly developed apparatuses and machines, which also includes the development described in [1], is relevant and quite significant, since such a model could allow us to investigate the stability of the process itself, calculate the geometric dimensions of the apparatus or machine, as well as predict undesirable phenomena.

PROBLEM STATEMENT

Figure 1 shows classification examples of typical rotary apparatuses. The main factors when choosing mixers and dispersants, in addition to their productivity, versatility when changing the type of the same type of product, the degree of automation and the cost of a unit of production are: type of housing and its location; the shape of its cross-section; type of agitator; type of agitator guide device; availability and type of jacket for the coolant.

Dispersant mixers with vertically mounted housings (Fig.1.a) are used mainly in stationary shop conditions, for example, in the medical industry and the production of complex granular mineral fertilizers. Dispersant mixers with a horizontal body (Fig.1b) are used for

the preparation of working fluids in agriculture for the draining and hydrophobization of crops [2-4]. In the work [5] it is stated that in apparatuses in whose housings, in addition to agitators, additional guiding devices are installed in the form of ribs, scrapers, or in which the housings are made either in the form of polyhedra or oval, the efficiency of mixing and dispersing heterogeneous systems significantly increases. In the same place, it is said that liquid circulation occurs in rotary-type apparatuses, which should be understood as fluid movement along a closed path in accordance with current lines. The nature of the liquid circulation in the rotary apparatus depends mainly on the type of agitator and whether there are guiding devices in the apparatus.

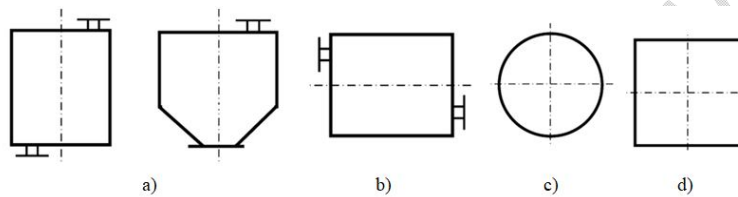


Fig. 1. Typical rotary apparatuses. a) with a vertical body; b) with a horizontal body; with a transverse; cross-sections of mixers-dispersants in the form of c) circles; d) in the form of a square.

Circumferential (primary) circulation is associated with the rotation of the entire mass of liquid around the axis of symmetry of the agitator. Radial-axial (secondary) circulation is associated with the pumping action of the agitator. Secondary circulation is essential for the mixing process, as it convects:

$$V_p = Cnd_m^3, \quad (1)$$

where V_p is the volume flow of liquid through the agitator, m^3/s ; C is a constant depending on the type of agitator; n is the speed of rotation of the agitator, rpm; d_m is the diameter of the agitator, m.

The numerical values of the constant C , for open turbine agitators are within the following limits $C = 0.25-1.2$ (most often $0.5-0.8$), for propeller agitators with $0.3-1$ (most often $0.4-0.8$) [6, 7].

Assuming that the volume of liquid in the apparatus is equal to:

$$V = \frac{\pi D^2}{4} h, \quad (2)$$

where:

$$V = V_p t C. \quad (3)$$

Then we get:

$$\pi D^2 h = 4 t C n d_m^3, \quad (4)$$

or:

$$t = \frac{\pi h D^2}{4 C n d_m^3}. \quad (5)$$

On the basis of equation (5), it is possible to investigate the rotation frequency of a liquid mixture with clay and sand with the condition of reaching their inner wall capacity ($d_m = D$):

$$\frac{\pi}{4 \tau_C C n} = \frac{d_m}{D}, \quad (6)$$

$$\tau_C = \frac{\pi}{4 C n}. \quad (7)$$

The significance of this formula lies in the fact that, with the condition of achieving it, it allows you to study the performance of the rotary apparatus and the process of dispersing solid particles in a liquid. In essence, we are talking about the time of obtaining a two-phase liquid-solid system in a rotary apparatus.

Thus, the main purpose of these studies is to model the properties of a two-phase liquid-solid system produced in a tube apparatus and calculate the power consumed to form a two-phase system.

SOLVING THE PROBLEM

Consider liquid-solid particle systems as a dispersed system. Then, it can be convincingly said that, like the conclusions of [8, 9], the main technological characteristics of processing devices will be determined by the rheological properties of such two-phase dispersed systems. The so-called Khodakov rheological model uses additional parameters to describe the viscosity of dispersed systems: $k(\varphi_0)$ - tortuosity of the layers of the dispersed medium; $V(\varphi_0)$ - the relative volume of the dispersed medium determined with the solid particles enclosed here. In this case, the formula for calculating the dynamic viscosity of this medium has the form:

$$\mu = \frac{\mu_0 k(\varphi_0)}{1 - \left[1.5(1 - \varphi_0)^{1.5} + 1 + V(\varphi_0) \right] \varphi_0},$$

where μ_0 - dynamic viscosity of the dispersion medium, *Pasek*; $k(\varphi_0)$ - the coefficient of tortuosity of the layers of the dispersed medium, which takes the following values.

For low-viscosity liquids, the MPas value (millipascal-second) is used. Although, theoretically, the dynamic viscosity of water at 20 ° C is equal to 1,002 MPas, but in practical calculations, its value can be taken as one, as it was done in the work [10, 11],

φ_0 - the relative volume of the dispersed medium, determined by the following formula:

$$\varphi_0 = \varphi_M \left(\frac{1}{\rho_T} + \frac{S_M \delta}{\rho_J} \right) \frac{1}{\varphi_M \left(\frac{1}{\rho_T} + \frac{S_M \delta}{\rho_J} \right) - \frac{1 - \varphi_M}{\rho_J}}, \quad (8)$$

or:

$$\varphi_0 = \frac{\rho_J + \rho_T S_M \delta}{\rho_J + \rho_T (S_M \delta + \varphi_M - 1)}. \quad (9)$$

Where φ_M - mass fraction of the solid phase; ρ_J ; ρ_T - true density of liquid and solid phase, kg/m^3 ; S_M - specific surface area of the solid phase, m^2 ; δ - thickness of the dispersion medium layer occluded by a solid phase particle, m .

The following conditions and equalities are also valid:

$$\begin{cases} 1 \leq k(\varphi_0) \leq 5 \\ \varphi_0 \leq 0,15; k(\varphi_0) = 1. \\ \varphi_0 \geq 0,5; k(\varphi_0) = 5 \end{cases}$$

The above parameters determine the quality of construction sand processing. But, any technological machine also has such a significant indicator as power. Since the power consumption on the one hand determines the performance of the machine, on the other – the efficiency of use.

The relationship between the power spent on dispersion and the dispersion conditions is represented in the form:

$$N_{\text{disp}} = 3.7 \cdot 10^{-5} 3\pi^3 k_N \rho_{dm} \omega^3 d_M^3,$$

ρ - reduced density of heterogeneous medium, kg/m ; ω - angular velocity of the dispersed medium, $rad/sec.$; d_M diameter of the rotating volume - m ; k_N – a certain coefficient depending on the type of agitator and its geometric parameters.

$$N_{\text{disp}} = \frac{30}{\pi} M_{bf} n,$$

$$M = 3.7 \cdot 10^{-5} 3\pi^3 k_N \rho_{dm} \omega^2 d_M^5. \quad (10)$$

In [12], washing machines were studied and an analysis of modern hydraulic methods for processing and enriching metal-bearing sands was carried out, according to fr. The significance of this information for these studies lies in the fact that definitions are given for such basic indicators as clay plasticity, wash ability coefficient and productivity (mass / time) of the washing process.

The plasticity index is a positive number (plasticity number) determined by the difference in the moisture content of clay, which correspond to the upper and lower (upper lower) limits of plasticity:

$$P = W_u - W_l \quad (11)$$

where P – plasticity number; W_u – the upper limit of plasticity, (characterized by the transition of clay from a plastic to a liquid state), causing the spreading of wet clay along the plane, (%); W_l – the lower limit of plasticity, (characterized by loss of plasticity), causing the scattering of already non-plastic clay under pressure, (%)

Clay with a relatively small number of plasticity (up to 7) easily integrates with sand and vice versa - the higher the plasticity (7-17-medium plasticity; 17- high plasticity), the more difficult the integration process. Similarly, but in the opposite direction, it is necessary to reason when the disintegration of clay with sand is considered.

To assess the flushing characteristics, the so-called flushing coefficient (flushing coefficient) is proposed:

$$k_{fc} = 0.5t_0I_0 + (t_0I_0)^2, \quad (12)$$

where I_0 – максимальное значение скорости слива извлечения примесей, содержащихся глины, которая достигается в момент времени t_0 (характерное время промывки).

To calculate the productivity (tons / hour) of the washing machine according to the consumption of electricity required for washing 1 ton of material, the formula is used

$$Q = \frac{N\eta}{q},$$

N – power consumption of the drive motors, kW; η – power utilization factor (= 0.7-0.8); q – specific power consumption for washing the material (is a tabular value, is taken per unit volume kWh / m^3).

An important factor is the ability to link the specific power consumption with the flushing coefficient. In the literature [13, 14], this relationship is presented in numerical terms as follows: the flushing of the material is estimated by the specific consumption of electricity for disintegration, which is: for easily flushing materials less than 0.25 kWh/t; for medium-washed materials - 0.25 - 0.5 kWh / t. In the literature [11, 13] there is a table showing numerical data for different degrees of wash ability. It should be noted that data on specific electricity consumption have also been added to the table below.

Table1: Assessment of the wash ability of sands

Degree of flushing	Specific power consumption kWh/t	Duration of washing, min.	Screening efficiency according to class 4 mm, %	Relation of the number of clays to sands	Molecular humidity, %	Washout time in the trough sink, min.	Efficiency coefficient
Easily washable	0,25	50	80	1 : 50	7	-	1
Medium - washed	0,25-0,5	70-80	70-75	1 : 20-40	7-15	1-1,5	1-1,5
Hard - to - wash	0,5-0,75	120	50-60	1 : 8-10	15-20	4,0	2

Thus, on the basis of these tabular data, the following ratios can be written for construction sands with a ratio of the number of clays 1:50:

$$k_{fc} = 0.5(0.83x_t)I_0 + ((0.83x_t)I_0)^2 = 1, \quad (13)$$

$$Q = \frac{N\eta}{q} = \frac{N\eta}{0,25}. \quad (14)$$

Similarly, you can write formulas for building sands with the ratio of the number of clays 1:40; 1=20, 1:10; 1-8. Now, having such a table at our disposal, on the basis of equation (12), we can investigate the maximum value of the discharge rate of extraction of impurities contained in clay- I_0 . For this purpose, first you need to write the formula (12) in the form:

$$k_{fc} = 0.5T_{fc}x_T I_0 + (T_{fc}x_T I_0)^2, \quad (15)$$

where T_{fc} - duration of sand washing, hour; x_T -the relative value of the time at which the maximum value of the discharge rate of the extraction of impurities contained in clay is reached (characteristic washing time)

The solution of equation (15) with respect to the discharge rate of extraction of impurities contained in clay- I_0 . will be :

$$I_0 = \frac{1}{Tx_t} 0.5 + \sqrt{0.25 + 4k_{fc}} \cdot$$

For easy-to-clean flushing - $k_{fc} = 1$; $T = 50 \text{ min.}$

$$I_0 = \frac{0.5 + \sqrt{4.25}}{0,83x_t}, \quad (16)$$

for medium wash ($k_{fc} = 1,5$; $T = 80 \text{ min.}$):

$$I_0 = \frac{0.5 + \sqrt{6.25}}{1,33x_t}, \quad (17)$$

and for hard-to-wash flushing ($k_{fc} = 2$; $T = 120 \text{ min.}$)

$$I_0 = \frac{0.5 + \sqrt{8.25}}{2x_t}. \quad (18)$$

Based on equation (5), in which if we take the duration of washing as the time of filling the internal volume of the washing machine: $T = t$:

$$n = \frac{\pi h D^2}{4 C T d_m^3}.$$

Let's move on to the relative values of geometric dimensions. For convenience, we assume that when filling the working volume with liquid, the diameter formed by the rotational movement of the liquid flow is equal to the diameter of the working volume of the washing machine: $D = d_m$; for the height of the working volume, we take a parameter that is a multiple of the diameter. Then:

$$n = \frac{\pi a}{4 C T}. \quad (19)$$

Now that the results on the rotation speed have already been obtained, investigating the power spent on the sand washing process:

$$N_{\text{disp}} = k_N \rho_{dm} n^3 d_M^3. \quad (20)$$

According to the accepted conditions regarding the ratios of geometric dimensions:

$$D = d_m; h = aD, \text{ then: } d_M^3 = (h/a)^3$$

$$N_{\text{disp}} = k_N \rho_{dm} \left(\frac{\pi h}{4 C T} \right)^3. \quad (21)$$

Figure 2-5 shows static models of the process of formation of a two-phase liquid-solid medium and oscillograms showing changes in parameters such as the speed of rotation of a two-phase water-sand system with clay, the rate of discharge of clay extraction and the power of sand washing. Chilen data for parameters included in formulas (5), (7)-(9), (18), (19) and (21) are as follows: $C=0,25-1,2$; ($k_{fc} = 2$; $T = 120 \text{ мин.}$)

($k_{fc} = 1,5$; $T = 80 \text{ мин.}$): $k_{fc} = 1$; $T = 50 \text{ мин.}$ $k_N = 1$; $\rho_{dm} = 1920 \text{ кг/м}^3$ [15].

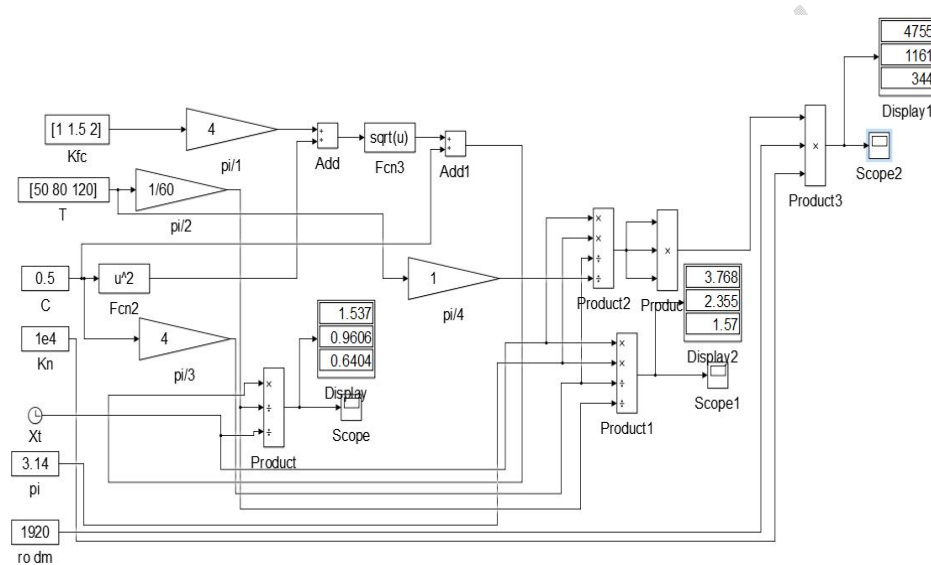


Fig. 2. Static models of the process of formation of a two-phase medium of liquid-solid particles (based on formulas (17)-(21))

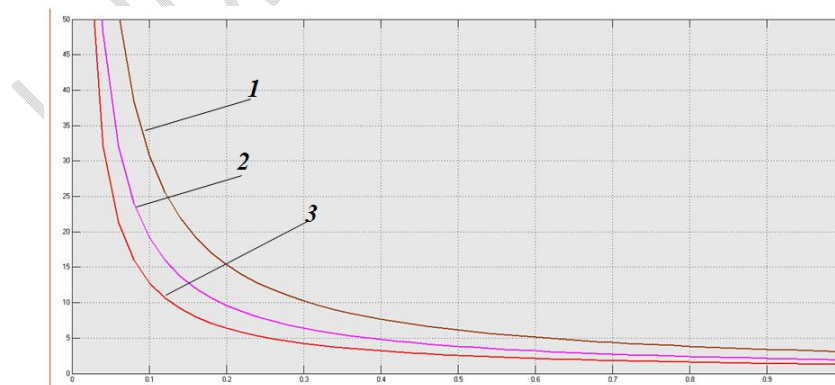


Fig. 3. Oscilloscopes obtained from simulation of the model Fig. Graphs of the function $I_0=f(xT)$ equation (17). 1- $k_{fc} = 1; T = 50 \text{ мин.}$; 2- $k_{fc} = 1,5; T = 80 \text{ мин.}$; 3- $k_{fc} = 2; T = 120 \text{ мин.}$

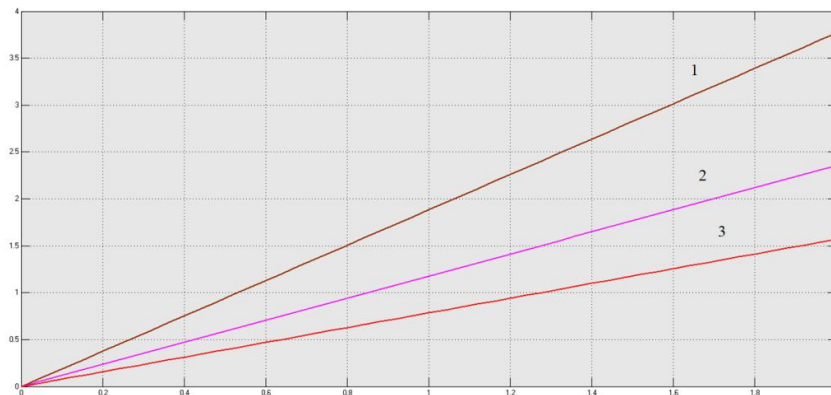


Fig. 4. Oscilloscopes obtained from simulation of the model Graphs of the function $n=f(a)$ equation (19). 1- $k_{fc} = 1; T = 50 \text{ мин.}$; 2- $k_{fc} = 1,5; T = 80 \text{ мин.}$; 3- $k_{fc} = 2; T = 120 \text{ мин.}$

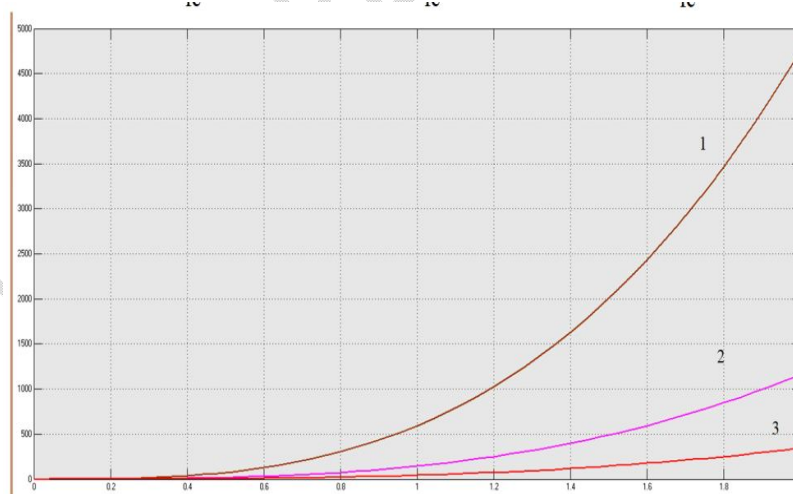


Fig. 5. Oscilloscopes obtained from simulation of the model Graphs of the function $N=f(h)$ equation (21). 1- $k_{fc} = 1; T = 50 \text{ мин.}$;

$$2-k_{fc} = 1,5; T = 80 \text{ мин.}; 3-k_{fc} = 2; T = 120 \text{ мин.}$$

CONCLUSION

The main conclusions of the theoretical studies carried out are as follows:

1. The parameters of the rate of discharge of clay extraction and the power consumed for washing sand do not change linearly depending on the geometric parameters of the working volume, and the parameter of the speed of rotation of the liquid with untreated sand has a linear character of change.
2. The linear nature of the change in the rotation speed of the liquid with uncleaned sand is provided that when filling the working volume with liquid, the diameter formed by the rotational movement of the liquid flow is equal to the diameter of the working volume of the washing machine.
3. When constructing an automatic control system for sand washing, it is necessary to ensure stabilization by such basic indicators as the required sand-clay ratio, the humidity of the cleaned sand, power consumption, etc.

REFERENCES

1. Shirin N. Yu. Method for calculating a rotary mixer for dispersing solid particles in a liquid Thesis for the degree of candidate of technical sciences in special: 05.17.08 - Processes and apparatuses of chemical technologies. Yaroslavl - 2015 120 P.
2. Allahverdiyeva N.M. Determination and diagnosis of construction material quality control problems Sciences. prats. Vip. 41. - Mariupol: DVNZ "Priazov. holding tech. un-t", Ukraine, 2020. pp. 130-135.
3. Zaitsev, A.I. Equipment for applying shells to granular materials / A.I. Zaytsev, V.N. Sidorov, D.O. Bytev. - M.:, 1997. - 272 P.
4. Kozhevnikov, S.O. Overview of the main types of mixing devices for obtaining technological liquids / S.O. Kozhevnikov // Bulletin of the Scientific and Industrial Society. - 2003. - Issue 6. pp. 67-69.
5. Tarshis, M.Yu. To the calculation of a mixer of bulk materials with a complex movement of an elastic working chamber / M.Yu.Tarshis // Izv. universities. Chemistry and chemical technology. - 2008. - v.51. - Issue. 8. pp. 75-77.
6. Mehdiyeva A.M., Jamalov J.Ə., Allahverdiyeva N.M. Research of ways of increasing the reliability and durability of reinforced concrete constructions of operating buildings Sciences of Europe. Vol 1, No 68. 2021. Praha, Czech Republic. pp. 46 - 50
7. Barabash V.M. Dependence of the pumping capacity of the mixing device on the height of its installation in the volume of the apparatus without baffles / V.M. Barabash // Proceedings of the I All-Union Conference on Processes and Apparatuses of Chemical Production. - Chimkent, 1977. pp. 85-87.
8. Khodakov, G.S. Rheology of suspensions. Theory of phase flow and its experimental substantiation. / G.S.Khodakov // Russian Chemical Journal. 2003. T. XLVII. No.2.pp. 33-44.
9. Khodakov, G.S. On the rheology of suspensions / G.S. Khodakov // Teoret. basics of chem. technol. - 2004. - T.38. - No. 4. pp. 456-466

10. Perfil'eva KG Formation, dynamics and evaporation of a cluster of particles of the dispersed phase in the field of gravity. Thesis for the degree of candidate of physical and mathematical sciences in the specialty: "Mechanics of liquid, gas and plasma". Tomsk - 2021. 170 P.
11. Mehdiyeva A.M., Allahverdiyeva N.M., Alekberli S.Y. Modeling of Construction Sand Washing Technological Process. III International Scientific Forum on Computer and Energy Sciences (WFCEs 2022). Alma Ata. AIP Publishing. ISSN: 1551-7616. <https://ide-rus.ru/wfces2022>
12. Karlina A. I. Calculation of the productivity of washing machines and devices Irkutsk State University of Communications Modern technologies. System analysis. Modeling No. 1 (45) 2015. pp. 54-62
13. Basic methods of hydraulic classification. <https://infopedia.su/4xff4.html>
14. Kozin V. Z. The study of ores for washability: a textbook. Ural. state Mining University - Yekaterinburg: Publishing House of USGU, 2008. - 312 P.
15. Density of sand kg m^{-3} : dry and wet, true and bulk, GOST by definition. <https://dostavka-sheben-pesok.ru/stati/plotnost-peska>.