

Forecasting of resin yield and number of blazes of naturally regenerated chir pine (*Pinus roxburghii* Sargent) in Himachal Pradesh by using a single exponential smoothing method.

Abstract

The ~~present~~ investigation entitled “Forecasting of resin yield and number of blazes of naturally regenerated chir pine (*Pinus roxburghii* Sargent) in Himachal Pradesh by using single exponential smoothing method” was carried out during the year 2020-2022. The secondary information was collected regarding the resin yield and number of resin blazes w.e.f. 2005 to 2022 from Himachal Pradesh State Forest Department. Exponential smoothing is a particular moving average technique applied to time series data ~~and~~ to produce smoothed data to make forecasts. In exponential smoothing, one or more smoothing parameters are to be determined explicitly and those choices determine the weights assigned to the observations. Forecasting with the help of various linear and non-linear models is on the assumption that the series is stationary. Often time series is found to be non-stationary which means they are integrated and can be made stationary by differencing the time series. To check the stationarity of the number of blazes and resin yield, the Augmented Dickey Fuller test was used. The results indicated that data was not approaching stationarity even after taking the third difference. So, the prerequisite condition of the ARIMA model is that the data should be stationary and if the time series data does not contain trend and seasonal components, the Single Exponential Smoothing model was used. The Single Exponential Smoothing model was found to be the best fit for the prediction of the number of blazes and resin yield as per the high value of R^2 , low value of MAPE and Normalized BIC.

Keywords: Chir pine, Augmented Dickey Fuller test, Single Exponential Smoothing model

Introduction

Out of the pines occurring naturally in India, viz., *Pinus bhutanica* Grieson, Long and Page, *Pinus merkusii* Jung and De Vr., *Pinus roxburghii* Sargent, *Pinus wallichiana* Jackson, *Pinus geradiana* Wall ex Lamb., and *Pinus Kesia* Royle ex Gord (Sahni, 1990), only *Pinus roxburghii* Sargent (*Pinus longifolia* Roxb.) is tapped commercially for resin as it yields about 3 to 6 kg per tree annually. The tapping is done on the trees having a diameter of 30 cm

Comment [PP1]: Write in full followed by the abbreviation

Comment [PP2]: Refer to comment under PP1

Comment [PP3]: Refer to comment under PP1

Comment [PP4]: Would have loved if the aim and objectives of the investigation was spelt out clearly in this in addition to some of the information contained. Some of the useful definitions included in the section could be moved to the other sections like Introduction or Methods and Materials

Comment [PP5]: How is it with others if at all some investigation was done on those in case this one fails at one point. In other terms, the alternative.

and above D.B.H. cm trees below this diameter are left untapped (Joshi, 1972). Resins are complex oxidation products of various essential oils and vary in their chemical composition. They originate through the reduction and polymerization of carbohydrates, generally occurring as starch derivatives. They are insoluble in water but soluble in alcohol. They are inflammable and burn with smoke flame upon drying. Resins generally remain thick and viscous or sometimes change into a solid form.

Comment [PP6]: Refer to the comment under PP1

Comment [PP7]: The information should be extended to say its importance to the society

Resins are classified into three classes:

- I. True or hard resins: They are solid, brittle, more or less transparent, colourless, and odourless exudations. They are the best source of varnishes and generally lack essential oils e.g. Copals and Dammar.
- II. Gum Resins: They are a mixture of both gums and resins and possess the properties of both groups. They contain traces of essential oils and are usually derived from plants growing in dry regions.
- III. Oleoresins: They are liquids with a considerable amount of essential oil and resinous material. They possess a distinct aroma. The group of oleoresin includes turpentine, balsams, and elemis.

Resinous secretions occur in special cavities or passages in wide ~~varieties~~-variety of plants. Resins originate through the reduction and polymerization of carbohydrates. They may also represent oxidation products of various essential oils. As a scientific practice, trees are tapped for three years and then allowed to rest for three years consecutively. The tapings are done on the trees with diameters of 30 cm and above. As per the altitudinal limits in India, resin-yielding trees grow between 450 to 2300 m amsl. The resin tapping industry plays an important role in the economy of the country. It not only yields additional revenue worth crores of rupees to the country's exchequer but also provides gainful employment to many people, especially the rural folks. India is the second largest producer of resin in Asia, the first being China. In Himachal Pradesh, the important resin-producing districts are Shimla, Kullu, Kinnaur, Chamba, Kangra, Hamirpur, Bilaspur, Mandi, Sirmour, and Solan.

Comment [PP8]: A repeat of what is in the first paragraph of the Introduction section line number 8

Comment [PP9]: A repeat of what is in the Introduction section and line number 5

Comment [PP10]: Something missing in this sentence, consider rephrasing

Comment [PP11]: How. Avoid short and incomplete sentences throughout the document

Comment [PP12]: Would have loved to see an international currency so that worldwide readers can appreciate the impact

Material and Method

The secondary information was collected regarding the resin yield and number of resin blazes w.e.f. 2005 to 2020 from Himachal Pradesh State Forest Department.

Comment [PP13]: What was this secondary information collected. Please list them and give an explanation later in the document in details. Also say why this was considered necessary

Exponential smoothing models

Exponential smoothing is a particular moving average technique applied to time series data and to produce smoothed data to make forecasts. The exponential smoothing method weights past observations by exponentially decreasing weights to forecast future values. In exponential smoothing, one or more smoothing parameters are to be determined explicitly and those choices determine the weights assigned to the observations. Single exponential smoothing models for forecasting time series data was used.

Comment [PP14]: Which are these parameters?

In the present study, Single Exponential smoothing model was used.

Single Exponential Smoothing (SES) model

Single exponential smoothing (SES) is a procedure that repeats enumeration continuously by using the newest data. Let F_t denote the forecast of the TS at time t and Y_t be the actual value. Then, the forecast error is $(Y_t - F_t)$. The method of single exponential forecasting takes the forecast for the previous period and adjusts it using the forecast error. Thus, forecast F_{t+1} for the next period, $(t+1)$ is

$$F_{t+1} = F_t + \alpha (Y_t - F_t)$$

Where F_t is forecast for Y_t and α is the smoothing constant taking values between 0 and 1. A large value of α (say 0.9) gives very little smoothing in the forecast, whereas, a small value of α (say 0.1) gives considerable smoothing. From a grid of values for α (say $\alpha = 0.1, 0.2, \dots, 0.9$), the values that yields the smallest Root Mean Square Error (RMSE) was/were chosen.

Results and Discussion

Forecasting of the number of blazes by using Exponential smoothing

Forecasting with the help of various linear and non-linear models is on the assumption that the series is stationary. Often time series are found to be non-stationary which means they are integrated and can be made stationary by differencing the time series. To check the stationarity of the number of blazes Augmented Dickey-Fuller test was used.

Comment [PP15]:

Comment [PP16]: Introduce the Table in this section and say what it is all about. Thus, the explanation should come first before the Table/ Figure/graph to prepare the reader for it instead of just dropping it with an explanation after it.

This should apply throughout the document

Table 1: ADF test statistic value along with p values for the number of blazes

	ADF test statistic value	p-value
Level (original Time Series)	-2.53	0.368

First differencing	-2.25	0.474
Second differencing	-1.81	0.642
Third differencing	-2.76	0.281

Table 1 indicated that data was not approaching stationarity even after taking the third difference, for applying ARIMA models the prerequisite condition is that data should be stationary.

When the time series data does not contain trend and seasonal components, a single exponential smoothing model was used.

Table 2: Parameters and smoothing constant value of the number of blazes by using a Single exponential smoothing model

Single Exponential smoothing model	Estimate	Standard Error	t statistic	Significance
α (Smoothing constant)	0.799	0.116	6.887	< 0.001

Table 2 indicated that the value of (smoothing constant) α was found to be 0.799 and the value of standard error was found to be 0.116. The value of the t statistic was found to be significant by applying a single exponential smoothing model.

Comment [PP17]: If possible, I feel this Table is not relevant as it could just be explained in a sentence

Table 3: R^2 , RMSE, MAPE, MAE and Normalized BIC value of the number of blazes by using a Single exponential smoothing model.

R^2	0.915
RMSE	81467.136
MAPE	3.756
MAE	59989.34
Normalized BIC	22.776

Comment [PP18]: Consider including headings for the Tables as is the case with others

Table 3 suggested that the value of R^2 was found to be 0.915 ~~provides~~ providing confirmatory evidence that a single exponential smoothing model was the best fit in the case of the number of blazes. The value of RMSE was found to be 81467.136 and the value of

MAPE was found to be 3.756. MAE and Normalized BIC value was found to be 59989.34 and 22.776.

Comment [PP19]: Give an explanation of what this means to a layman

Table 4: Forecasted values of the number of blazes by using a single exponential smoothing model

Year	Forecasting value of <u>the</u> number of blazes
2023	1365779.94
2024	1320559.15
2025	1275338.36

Table 4 showed the forecasted values of the number of blazes for the years 2023, 2024 and 2025.

Forecasting of resin yield by using Exponential smoothing

Forecasting with the help of various linear and non-linear models is on the assumption that the series is stationary. Often time, series are is found to be non-stationary which means they are integrated and can be made stationary by differencing the time series. To check the stationarity of the resin yield Augmented Dickey Fuller test was used.

Table 5: ADF test statistic value along with p values for resin yield

	ADF test statistic value	p -value
Level (original Time Series)	-1.07	0.909
First differencing	-3.05	0.170
Second differencing	-1.68	0.690
Third differencing	-3.64	0.466

Table 5 indicated that data was not approaching stationarity even after taking the third difference, for applying ARIMA models the prerequisite condition is that data should be stationary.

When the time series data does not contain trend and seasonal components, a single exponential smoothing model was used.

Table 6: Parameters and smoothing constant value of resin yield by using a Single exponential smoothing model

Comment [PP20]: Consider comment made under PP17

Single Exponential smoothing model	Estimate	Standard Error	t statistic	Significance
α (Smoothing constant)	0.845	0.131	6.435	< 0.001

Table 6 indicated that the value of the smoothing constant was found to be 0.845 and the value of standard error was found to be 0.131. The value of the t statistic was found to be significant by applying a single exponential smoothing model.

Table 7: R^2 , RMSE, MAPE, MAE and Normalized BIC value of resin yield by using a Single exponential smoothing model

Comment [PP21]: Refer to comment under PP18

R^2	0.895
RMSE	3999.501
MAPE	4.728
MAE	2856.49
Normalized BIC	16.761

Table 7 suggested that the value of R^2 was found to be 0.895 ~~provides~~ providing confirmatory evidence that a single exponential smoothing model was the best fit in the case of resin yield. The value of RMSE was found to be 3999.501 and the value of MAPE was found to be 4.728. MAE and Normalized BIC values were found to be 2856.49 and 16.761. The results were in close affinity with the findings of Eva and Oskar (2012).

Comment [PP22]: How do you tell, any guidelines or standards available and if yes, consider including them?

Comment [PP23]: Is this reference the same as that in the reference list (#2) that has the same year but different names or preferred to use the initials in full?

Table 8: Forecasted value of resin yield by using a single exponential smoothing model

Year	Forecasting value of resin yield
2023	57144.57
2024	55319.44
2025	53494.31

Table 8 showed the forecasted values of resin yield for the years 2023, 2024 and 2025.

Comment [PP24]: This looks like a Table title and, as shuch, you may want to consider relocating this

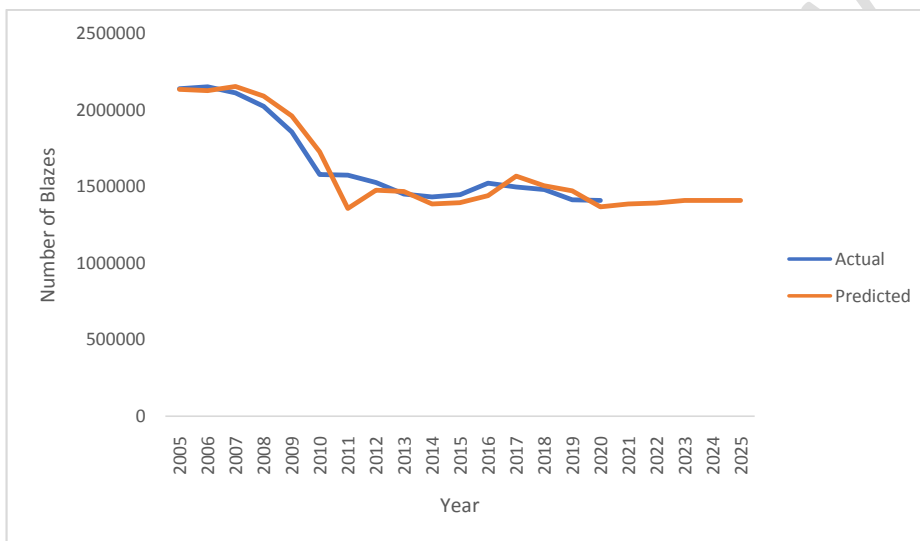


Fig 1: Actual and predicted values of the number of blazes by using a single exponential smoothing model

Comment [PP25]: Consider saying something about the two figures in the text (Introducing them) instead of just dropping them without any explanation. This may also include relocation.

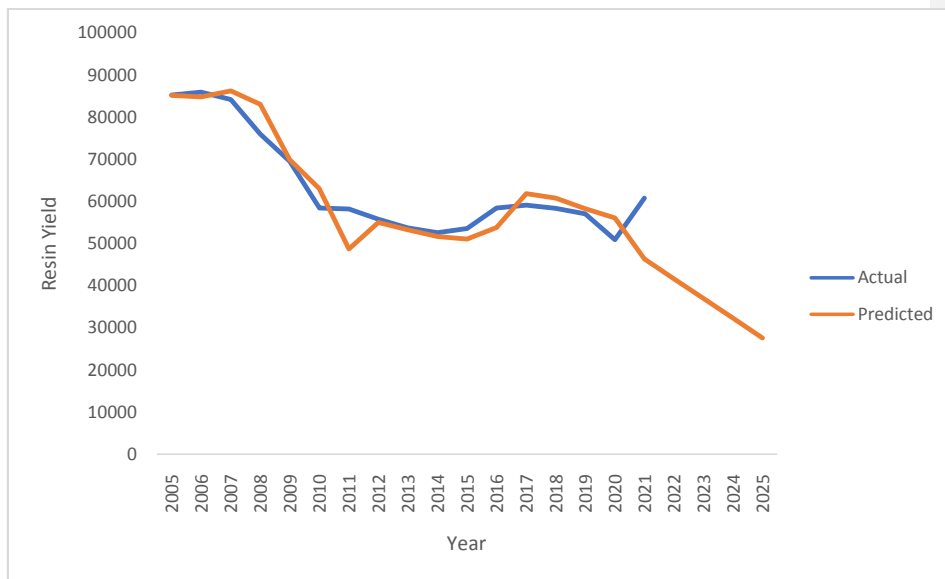


Fig 2: Actual and predicted values of resin yield by using a single exponential smoothing model.

Conclusion

The results indicated that data was not approaching stationarity even after taking the third difference. So, the prerequisite condition of the ARIMA model is that the data should be stationary and if the time series data does not contain trend and seasonal components, the Single Exponential Smoothing model could be used. The Single Exponential Smoothing model was found to be the best fit for the prediction of the number of blazes and resin yield as per the high value of R^2 , low value of MAPE and Normalized BIC.

References

- Joshi H.B. (1972). Lowering of minimum diameter for resin tapping in chir (*Pinus roxburghii* Sargent.). Indian Forester 98(1): 441-448.
- OSTERTAGOVA E and OSTERTAG O. 2012. Forecasting using simple exponential smoothing method, *Acta Electrotechnica et Informatica*. 12(3): 62-66, DOI: <https://doi.org/10.2478/v10198-012-0034-2>

Comment [PP26]: What does this mean to a layman?

Comment [PP27]: Which was what and how is it compared to the acceptable range/limit?

Comment [PP28]: What were the values here and how far are they compare to the acceptable range/limit if available?

Formatted: Font: (Default) Times New Roman, 12 pt

Formatted: List Paragraph, Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.5" + Indent at: 0.75"

Formatted: Font: (Default) Times New Roman, 12 pt

Formatted: List Paragraph, Indent: Left: 0.75", First line: 0"

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black

Formatted: List Paragraph, Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.5" + Indent at: 0.75"

Comment [PP29]: Need for clarification as it appears to be the same as that reference below Table 7 in the document. If yes, there is need for consistency.

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black

3. [Sahni K.C.\(1990\). Gymnosperms of India and adjacent countries. Bishan Singh Mahendra Pal Singh, Dehradun. Pp. 1-169.](#)

Formatted: Font: (Default) Times New Roman, 12 pt

UNDER PEER REVIEW