

# BIODIESEL PRODUCTION FROM SEED OIL OBTAINED FROM

## *PONGAMIA PINNATA L.*

### Abstract:

At the present time biodiesel are the most promising source of energy as it is renewable and can accomplished the rising energy demand. *Pongamia pinnata* L.(commonly known as Karanj)is an evergreen tree of family *Fabaceae* sub family *Papilionaceae*, has been recognized as a potential source of biodiesel prepared from the oil obtained from its seeds. In the present work, biodiesel fuel was prepared by alkaline-catalyzed esterification of high free fatty acids present in Karanj oil. The transestrification reaction was performed by varying practical parameters such as NaOH percentage (0.50%, 0.75%, 1%), methanol to oil ratio ( 3:1, 6:1, 9:1), and reaction temperature and time (40°C for 2h, 60°C for 2h, room temperature for 24h) at constant stirring at 150 rpm. Optimum alkaline-catalyzed transesterification was achieved using 1% NaOH as a solid alkaline catalyst with a methanol-to-oil ratio of 1:6, temperature at 60°C. The yield of methyl esters from Karanja oil under the optimal condition was 92%. The biodiesel and oil contents were analysed using Gas Chromatography and Mass Spectroscopy (GC-MS) analyser. Fuel properties of the biodiesel obtained by transesterification were tested and found to meet the ASTM (American Society for Testing and Material) specifications.

Key words: Biodiesel, bioenergy, *Pongamia pinnata* L., transesterification, Karanja oil.

### Introduction

Energy is a crucial component of a country's economic success. The majority of energy needs are met by fossil fuels. Increasing energy consumption and population pressure have put increasing strain on the available fossil fuels (Tripathi *et al.*, 2014). Fossil fuels are currently in short supply, and their widespread use causes significant environmental effects (Thangaraj *et al.*, 2018). When a replacement for fossil fuels is needed, renewable energy sources, which are more environmentally friendly and can take the place of current energy sources, should be considered. This has spurred an effort to discover new, sustainable, and renewable energy sources during the past few decades. In addition, the use of fossil fuels increases the greenhouse gas emissions that cause global warming. Because of this, researchers are becoming increasingly interested in using alternative energy sources, such as biofuels. On the basis of biofuel sources of biomass, their limitations as a renewable source of energy, and their technological progress, generally biofuels can be categorised in three generations (1st, 2nd and 3rd generation). European Union had already banned first generation biofuel made up of fermentation of consumable food like soybean and rapeseed oils to secure the food supply. Some studies also carried out on how these biodiesels affect engine performance and emissions (Korbitz *et al.*, 1999, Dorado *et al.*, 2006). Second generation biofuel includes cellulosic ethanol, non-food feed stock, waste vegetable oil (Venkatachalam *et al.*, 2020), forest residues, industry residue and sustainable biomass. Third generation includes Algal fuel, generally obtained from microalgae (Lee *et al.*, 2022).

Biodiesel obtained from non-food feed stock is one of the finest possibilities for today's vehicle fuel due to price increases and the non-renewable nature of fossil fuels. Transesterification reaction is key reaction for the conversion of oil into biodiesel. It is a process of reacting triglyceride (the main component of oil) with an alcohol (methanol) in presence of a catalyst (mainly use NaOH or KOH). According to technical definitions, biodiesel is a fatty acid alkyl ester produced by transesterification of animal or plant fat with

short-chain alcohols like methanol or ethanol. Biodegradability, low toxicity, low sulphur content, high flammability, and high cetane number are the distinctive characteristics of biodiesel that make it special (Chen *et al.*, 2007).

*Pongamia pinnata* L. (Family: *Leguminosae* family, subfamily *Papilionaceae* , commonly known as Karanj) is one of the sources of non-edible oils (Lakshmikanthan, 1978). It is mostly found in the Western Ghats of India and can grow on a variety of soil types, from clayey to sandy. *P. pinnata* kernel contains between 30 and 40 percent oil, it is thought to be a viable source for making biodiesel (Balat *et al.*, 2010). It is a medium-sized glabrous tree with a trunk diameter of less than 50cm and a height of about 18m. Karanj thrives in humid and subtropical conditions with annual rainfall ranging from 500 to 2500mm. It is producing flat, elliptic fruits that are nearly 7.5cm long. Each fruit has 1-2 brownish red kernels shaped like a kidney. The oil can be extracted from the kernels by oil expeller or soxhlet method. The kernel yield per tree ranges from 9 to 90kg. The colour of the freshly extracted oil ranges from yellowish orange to brown. It has an unpleasant odour and a bitter flavour and also has fungicidal properties. It is not widely exploited due to the presence of toxic furanoflavones, such as Karenin, Pongapin, Kanjone, and Pongagalabrin makes it non-edible. The Karanj oil is rich in fatty acids such as palmitic, stearic, oleic, linoleic, logoceric, eicosenoic, arachidic, and behenic. The saturated acids, palmitic (hexadecenoic acid) and stearic (octadecanoic acid), as well as the unsaturated acids oleic (octadec-9-enoic acid) and linoleic (9,12-octadecadienoic acid), are found in maximum concentration. In the present study, we focus on the optimum yield of oil via Soxhlet method with polar solvents and further transesterification reaction performed for biodiesel production.

#### **Collection and identification of plant material:**

*Pongamia pinnata* seeds were used as raw materials to produce biodiesel. These seeds were collected from different parts of Jaipur city. Specimen was submitted to Herbarium, Department of Botany, University of Rajasthan, Jaipur. Dry seeds were isolated from the kernel and sun-dried. Seeds were roasted for half and let cool. Then, it were crushed in mortar and pastel and fine powder was prepared with the help of a mixer grinder. Seed powder is weigh and collected in airtight jars and stored in a refrigerator for further extraction.

### **Methodology:**

**Extraction of oil:** The oil was obtained by the soxhlet extraction method. 50 gm seed powder was packed in a thimble and placed in the main chamber of the soxhlet extraction unit and 300 ml n-hexane was added and run at 60°C for 24 hours. Another experiment was run with petroleum ether at the same time and temperature. The oil was isolated and purified at rotary evaporator. Oil was further sent for GC-MS analysis.

### **Transesterification of oil:**

Transesterification is the process by which a triglyceride (fat/oil) reacts with an alcohol in the presence of an acidic, alkaline, or lipase as a catalyst to produce mono alkyl ester, which is the base for biodiesel and glycerol. According to reports, alkaline catalyzed transesterification is the quickest and easiest to set up. Consequently, in the current investigation, the oil of *P. pinnata* was transesterified with methyl alcohol in the presence of a potent alkaline catalyst NaOH. In order to prepare biodiesel from *P. pinnata* crude oil, firstly Sodium methoxide was prepared by mixing NaOH, with 10 ml distilled methanol at constant stirring at 150 rpm at room temperature ( Karmee and Chandra, 2004). 10 ml of Karanj crude oil was warmed at 60°C and stirred concurrently in a different vessel of the transesterification reactor. Then Sodium-methoxide was added. The reaction was repeated by

varying practical parameters such as NaOH percentage (0.50%, 0.75%, 1%), methanol to oil ratio (3:1, 6:1, 9:1), and reaction temperature and time (40°C for 2h, 60°C for 2h, room temperature for 24h) at constant stirring at 150 rpm. Optimum alkaline-catalyzed transesterification was achieved using 1% NaOH as a solid alkaline catalyst with a methanol-to-oil ratio of 1:6, temperature at 60°C. This process was continued until the separation between biodiesel and oil was observed. After completion of the reaction, the mixture was transferred to a separating funnel and allowed to settle for 24 hours. After settling, distinguished lower glycerol, water solubilized the soap, catalyst, and other impurities, and upper methyl ester (Biodiesel) layers were separated manually, settled at the bottom of the funnel, which was eventually drained out. After each wash, the pH of the water was checked. The washing was continued until the pH of the separated water reaches the range of 7-8. The final product obtained is biodiesel. *P. pinnata* biodiesel is amber yellow. Then, passed over anhydrous Sodium sulphate for removal of moisture and after filtration placed on rotary evaporator for complete clearance of biodiesel. The biodiesel and oil contents were analysed using Gas Chromatography and Mass Spectroscopy (GC-MS) analyser.

### **Quantitative and qualitative analysis of Biodiesel**

**Biodiesel Yield:** The total yield of biodiesel was obtained by following formula:-

$$\text{Yield of Biodiesel (\%)} = \frac{\text{Grams of Biodiesel Produced} \times 100}{\text{Grams of the oil used}}$$

**Qualitative analysis of biodiesel:** The physio-chemical characteristics of biodiesel obtained from *P. pinnata* oil, such as its density, kinematic viscosity, acid value, iodine value, saponification value and moisture content, were used to describe its quality. These oil characteristics were established by ASTM standards.

## Result and discussion

The *Pongamia* oil content about 42 wt %. GC-MS chromatogram of Karanj oil is shown in Figure 1 and GC-MS chromatogram of transesterified oil is shown in Figure 2. The fatty acid composition of *Pongamia* oil is given in Table 1, which indicates the higher concentration of free fatty acids like Linoleic acid (46.08%), Oleic acid(28.56%), Palmitic acid(13.78%), Steric acid (11.07%) etc.

GC-MS analysis of Karanj oil.

*Pongamia pinnata* seed oil is rich in the saturated acids, palmitic (hexadecanoic acid) and steric (Octadecanoic acid) and the unsaturated acids, oleic (octadecan-9-enoic acid) and linoleic acid(9,12-octadecadienoic acid). 2-[5-(2-Methyl-benzoxazol-7-yl)-1H-pyrazol(42.68%), 6-(2-Ethoxy-phenyl)-5-nitro-piperidin-2-one(21.08%), 3,5-Dimethoxyflavone(20.66%),1,4-Naphthalenediol(2.00%) were some major compounds identified via GC-MS.



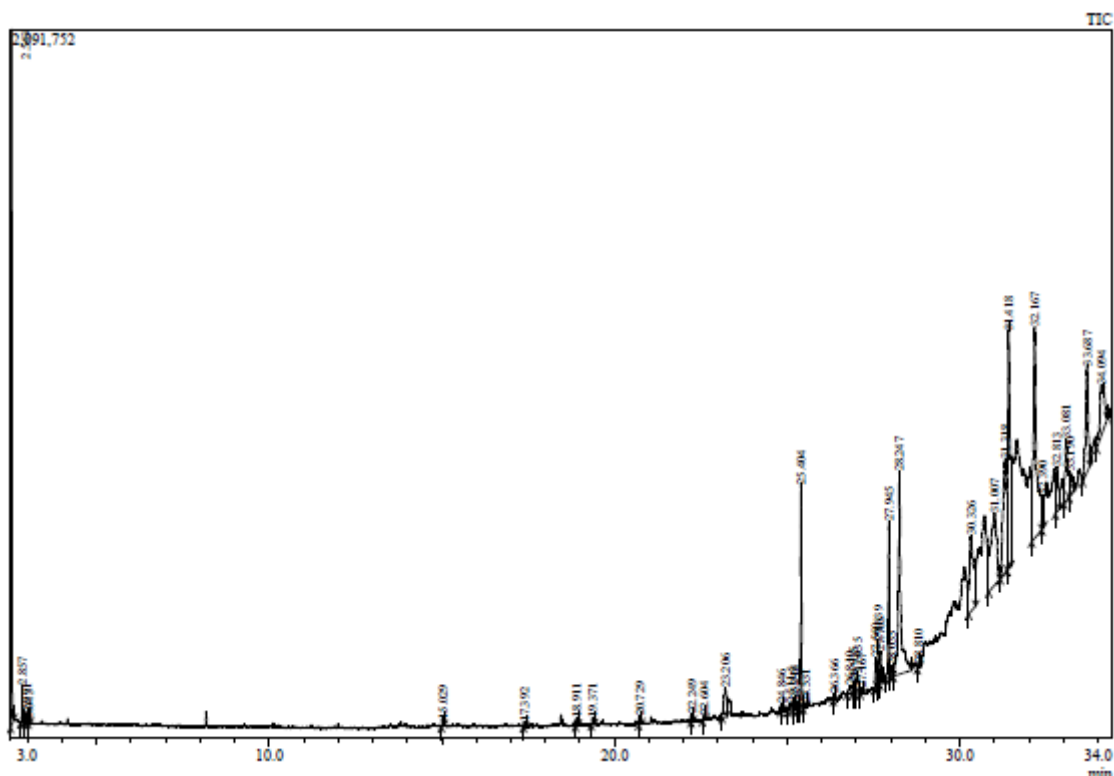


Figure 2: GC-MS Chromatogram of transesterified oil(FAME)

Table1 : FAME composition (%) of Karanj oil.

S.N.	Methyl esters of Fatty acid	Molecular formula	Percentage
1.	Heneicosanoic acid, methyl ester	$C_{16}H_{32}O_2$	36.73
2.	Stearic acid, methyl ester	$C_{18}H_{36}O_2$	23.7
3.	Linoleic acid, methyl ester	$C_{18}H_{32}O_2$	16.15
4.	Palmitic acid, methyl ester	$C_{17}H_{34}O_2$	12.33
5.	Oleic acid, methyl ester	$C_{18}H_{34}O_2$	5.84
6.	Tetracosanoic acid, methyl ester	$C_{24}H_{48}O_2$	4.06
7.	Eicosanoic acid, methyl ester	$C_{20}H_{40}O_2$	0.99
8.	Dosocasnoic acid, methyl ester	$C_{22}H_{44}O_2$	0.16

The qualitative parameters of biodiesel obtained from *Pongamia* oil are given in Table 2. Moisture content (0.04), density (867), kinematic viscosity (4.7), acid value (0.78), ester value (125) and iodine value (1.15) are reported which are in the range of established by ASTM parameters.

Table 2: Qualitative parameters of Biodiesel obtained from Karanj oil.

S.N.	Parameter	ASTM value	Biodiesel from Karanj oil
1.	Moisture content	0.05 max	0.04
2.	Density	820-860	867
3.	Kinematic Viscosity	1.9-6.0(40 <sup>0</sup> )	4.7
4.	Acid value	0.80 max	0.78
5.	Ester value	96.5 min	125
6.	Iodine value	1.0-6.0	1.15

Biodiesel obtained from *Pongamia* seed oil studied by many researchers (Suresh *et al.*, 2018) are either used directly or blended with conventional diesel and then used in the engine with minor or no modifications. Biodiesel oils obtained from non-edible oils such as *Pongamia* oil are environment-friendly and non-toxic (Fazal *et al.*, 2018) compared to conventional diesel fuel. In the proposed work, *Pongamia* oil conversion rate is 92% into biodiesel with the molar ratio (1:6) which is quite higher with the previous work of Karmee *et al.* (2004) who discovered maximal oil conversions of 80 and 83 percent at the 1:3 and 1:10 molar ratios of oil and methanol. Similar reports were carried out by Hosseinzadeh-bandbafha *et al.*(2018) on a small and a large scale. When the molar ratio was 9:1 (with the

catalyst NaOH kept fixed at 1 percent of Karanj oil), they discovered that the production of biodiesel went up to 85 percent on small scale and 86 percent on a big scale. They also tested the impact of varying catalyst concentration (NaOH) with constant wt. of oil and methanol (9:1). The greatest percent yield was determined to be 82 and 81 in small-scale and large-scale experiments, respectively, when the weight of NaOH 1 percent of Karanj oil was used as the catalyst, according to the research on the effects of changing catalyst concentration with constant weights of oil and methanol.

In our experiment, the kinematic viscosity is 4.7 CST which is quite similar with the finding of Karmee and Chadha (2004). They discovered 4.8 CST kinematic viscosity of the methyl esters of Karanj oil.

The fatty acid composition of Keranj oil reveals that Oleic acid ( $C_{18}H_{34}O_2$ ) is found maximum *i.e.* (51.59%), Linoleic acid ( $C_{18}H_{32}O_2$ ) (16.64%), Palmitic acid ( $C_{16}H_{32}O_2$ ) (11.65%), Stearic acid ( $C_{18}H_{36}O_2$ ) (7.50%) and other fatty acids in minute concentrations (Bobade and Khyade, 2012). For better transesterification, the fatty acids should be comprises  $C_{16}$  to  $C_{18}$ . Table 2 exhibits that methyl esters of Heneicosanoic acid (36.73%); Stearic acid (23.7%); Linoleic acid (16.15%); Palmitic acid (12.33%), Oleic acid (5.84%) which indicates desire composition of biodiesel. Earlier, the properties of the FAMES (Fatty Acid Methyl Esters) were also reported by Azam *et al.*, 2005. The iodine value (80.9) for *P. pinnata*, which is a measure of the total number of double bonds amongst the respective fatty acids, are quite different then our findings (1.15).

Fu *et al.* (2021) reported the *Pongamia* oil content from seeds was found to range from 19 to 32.5% with younger trees producing higher oil concentrations. However, in our findings, the oil yield was 42% as we roasted seed for a particular time which coagulate protein and enhance yield of free fatty acids.

Another study on properties on biodiesel mixtures and blends of biodiesel was done by Sriharsha and Satyanarayana 2021, which supports our research. Kinematic viscosity, acid value, ester value, iodine value etc. are compared with diesel fuel according to the ASTM standards which suggest the use of Karanja methyl ester or biodiesel from *Pongamia* oil in the engine as blend in petroleum fuel with or without modification can be a potential fuel option. Further, the use of octanol on the emission and performance characteristics of biodiesel fuel was investigated by Rangabashiam and Jayaprakash (2023) on a single-cylinder, biodiesel engine using various blends of Pongamia biodiesel and octanol (O10PBD90, and O20PBD20) and Pongamia Biodiesel (PBD).

### **Conclusion**

The major fatty acids in *Pongamia pinnata* crude oil were Heneicosanoic acid, Stearic acid, Linoleic acid, Palmitic acid, Oleic acid observed. The soxhlet extraction of roasted seeds gives maximum oil yield, which after transesterification method convert into biodiesel and glycerin. Here, glycerin can be purified and can be commercially used. The seedcake which remains after oil extraction, can be used as feedstock. Thus, we can reduce the cost of biodiesel production. Further, different bland can be prepared with the proper mixing of Petroleum diesel and can be tested for its better performance. It is required to work on reduction of *Pongamia* biodiesel friction and viscosity by using organic solvents, so that it can use directly into engine rather than bland. At the same time, plantation of this useful tree at barren lands should be supported.

### **Reference:**

Azam M.M., Waris A., Nahar N.M. 2005. Prospects and potential of fatty acid methyl esters of some non-traditional seed oils for use as biodiesel in India. *Biomass and Bioenergy* **29**: 293-302.

Balat M. and Balat H. 2010. Progress in biodiesel processing, *Applied Energy*, **80**: 1-21.

Bobade S.N. and Khyade V.B. 2012. Detail study on the Properties of *Pongamia Pinnata* (Karanja) for the Production of Biofuel. *Research Journal of Chemical Sciences*. **2(7)**: 16-20.

Chen H., Peng B., Wang D. and Wang J. 2007. Biodiesel production by the transesterification of cottonseed oil by solid acid catalysts. *Front. Chem. Eng. China*. **1**: 11-15.

Dorado M.P., F. Cruz, J.M. Palomar, F.J. Lopez. 2006. An approach to economics of two vegetable oil-based biofuels in Spain. *Renewable Energy*. **31 (8)**: 1231–123.

Fazal, M. A., Suhaila, N. R., Haseeb, A. S. M. A. and Rubaiee, S. 2018. Sustainability of additive-doped biodiesel: Analysis of its aggressiveness toward metal corrosion. *Journal of Cleaner Production*. <https://doi.org/10.1016/j.jclepro.2018.01.248>

Fu J., Summers S., Morgan T. J., Turn S. Q. and Kusch W. 2021. Fuel Properties of *Pongamia* (*Milletia pinnata*) Seeds and Pods Grown in Hawaii. *ACS omega*, **6(13)**: 9222-9233.

Hosseinzadeh-bandbafha, H., Tabatabaei, M., Aghbashlo, M. and Khanali, M. 2018. A comprehensive review on the environmental impacts of diesel / biodiesel additives. *Energy Conversion and Management*, **174**(June): 579-614.

<https://doi.org/10.1016/j.enconman.2018.08.050>

Karmee S. K. and Chadha A. 2004. Preparation of biodiesel from crude oil of *Pongamia pinnata*. *Bioresource Technology*. **96**: 1425–1429.

Korbitz W. 1999. Biodiesel production in Europe and North America, an encouraging prospect. *Renewable Energy* .16: 1078– 1083.

Lakshmikanthan V. 1978. Tree Borne Oil Seeds. Directorate of Nonedible Oils and Soap Industry, Khadi and Village Industries Commission, Mumbai, India, pp. 10.

Lee J.W.Y, Chia W. Y., Ong W. J., Cheah W. Y., Lim S.S., Chew K.W. 2022 Advances in catalytic transesterification routes for biodiesel production using microalgae. *Sustainable Energy Technologies and Assessments* .52, Part D, 102336

Mothil S., Chitra Devi V., Sathish Raam R., Asmitha P, Gokul A., Balakumar B. 2021 Biodiesel production from waste cooking oil through transesterification using novel double layered hydroxide catalyst. *AIP Conference Proceedings* 2387, 120004 (2021).

Sriharsha H. M. and Satyanarayana G. M. 2021. A study on properties of *Pongamia pinnata* and waste cooking oil mixture. *International Journal of Scientific & Engineering Research* 12( 2): 40-50.

Rangabashiam, D., and Jayaprakash V. 2023. Investigation on the performance, emission and combustion pattern of research diesel engine fueled with higher alcohol and pongamia biodiesel blends. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects* 45(2) : 4777-4788.

Srivastava A. and Prasad R. 2000. Triglycerides – Based Diesel Fuels, Renewable and Sustainable Energy Reviews, 4(2): 111-133.

Suresh, M., Jawahar, C. P. and Richard, A. 2018. A review on biodiesel production, combustion, performance, and emission characteristics of non-edible oils in variable compression ratio diesel engine using biodiesel and its blends. *Renewable and Sustainable Energy Reviews*, 92(March): 38-49. <https://doi.org/10.1016/j.rser.2018.04.048>

Thangaraj B., Solomon P. R., Bagavathi M., Srinivasan R. and Lin. 2018. Catalysis in biodiesel production—a review. *Clean Energy*. **20(2)**:1–22.

Tripathi R., Singh, J., Bharti, R. K., Thakur, I. S. Isolation, purification and characterization of lipase from Micro bacterium sp. and its application in biodiesel production. *Energy Procedia*.**54**:518-529,2014.

Venkatachalam C.D., Sengottian M, Sivasamy K.S., Rajadurai, G., Mani G. 2020. Production of biodiesel from waste cooking oil under varying parametric conditions using hydrodynamic cavitation with a single holed orifice. *AIP Conference Proceedings* 2240, 120001 (2020)

UNDER PEER REVIEW

UNDER PEER REVIEW