

Assessment and characterization of groundwater quality of Malabar coast in Kerala, India

ABSTRACT

A study was conducted to assess and characterize the groundwater quality of coastal aquifer of the Vatakara-Koyilandy stretch in the Kozhikode district of Kerala. Mann-Kendall Test was used for analysing the trend in groundwater levels. The Piper diagram was applied to determine the chemical facies of the groundwater and identify the evolution of hydrochemical parameters of groundwater sources. The source of the dissolved ions in the groundwater was described by the Gibbs diagram. The suitability of groundwater for irrigation was determined using the United States Salinity Laboratory diagram. Geostatistical tools were used to describe the spatial variability of groundwater levels and salinity and the ordinary kriging method was used to plot the spatial variability maps. It was found that Na^+ was the predominant cation with maximum concentration varying from 455.6 mg/l to 1844 mg/l during pre-monsoon and post-monsoon; respectively. Concentration of Cl^- in pre-monsoon and post-monsoon varied from 184 mg/l to 2417 mg/l and 99 mg/l to 714 mg/l; respectively. Other anions in the groundwater were SO_4^{2-} and HCO_3^- with an average concentration of 239.79 mg/l and 129.59 mg/l in pre-monsoon and 110.73 mg/l and 75 mg/l in post-monsoon; respectively. The trend in groundwater in confined and semi-confined aquifers showed negative trends whereas eight wells resulted in a significantly negative trend. However, a significant decreasing trend was observed in wells near the coasts. The most dominant cations were (Na^+ , and K^+) and the dominant anions were SO_4^- and Cl^- . The dominant cations and anions were from the mixing of seawater with the groundwater. The Na^+ ions were also found to be from the same source. In most of the area, the groundwater was highly to very high highly saline with medium sodium and not suitable for irrigation. In the unconfined aquifer, 25.2% and, in the semi-confined aquifer 24.0% area was found to be unfit for irrigation

Keywords: Aquifer characterisation, Geostatistics, Groundwater, Hydrochemical analysis, Seawater intrusion, Trend analysis

1. INTRODUCTION

Large-scale groundwater extraction to meet the increasing water demand due to rapid urbanisation and expansion of agriculture is causing land subsidence and saltwater intrusion in along the coast in several regions(Bhagat et al., 2021; Boumaiza et al., 2022; Hasan et al., 2021). Deterioration in groundwater quality due to seawater intrusion in the coastal aquifer is a widespread environmental hazard((Albuquerque et al., 2013; Alfarrak et al., 2011; Subba Rao, 2006).Groundwater becomes unfit for human consumption and irrigation due to seawater-freshwater interactions (Prusty& Farooq, 2020; SoujanyaKamble et al., 2020).Excessive pumping in coastal aquifers causes a decline of groundwater level and reversal of hydraulic gradient which results in the movement of seawater into the freshwater aquifer.

The migration of saline water into the fresh groundwater zone is known as seawater intrusion which is a serious concern in coastal regions. Seawater intrusion is the most common among the various salinisation sources, followed by inland salinity of groundwater, oil and gas-field brine, halite dissolution, and domestic, agricultural, and industrial effluents (Alfarrah et al., 2011). When coastal aquifers are pumped at a faster rate, the groundwater level drops, allowing seawater to infiltrate the freshwater due to a reverse hydraulic gradient. Large-scale seawater intrusion has occurred in coastal places worldwide due to sea-level rise, extreme weather events, changing precipitation patterns, and groundwater depletion (Mohd Isa & Aris, 2012). If seawater intrusion is not controlled along the coast, then it will spread to the inland aquifer, causing water quality to deteriorate due to saltwater up-coning as well. Even less mixing of seawater with freshwater renders it unfit for human consumption, while slightly greater amounts make it unfit for irrigation (Paniconi et al., 2001).

The deterioration in groundwater quality can be determined by analysing the concentration of the chemical components which is highly influenced by geological and human actions (Saravanan et al., 2011; Wu et al., 2017). There are several studies on hydro-geochemical analysis for determining the Hydrochemical facies of the groundwater and identifying the evolution of hydrochemical parameters of groundwater sources ((Ali & Ali, 2018; Prathap & Chakraborty, 2019; Sangadi et al., 2022; Shiyani et al., 2022). The functional sources of chemical constituents in the groundwater were studied by (Lanjwani et al., 2022; Ravish et al., 2019; Sangadi et al., 2022) by preparing the Gibbs diagram. Information on the suitability of the contaminated groundwater due to its salinity hazard was explored using the United State Salinity Laboratory (USSL) diagram in many studies (Sangadi et al., 2022; Sathiamoorthy & Ganesan, 2018). Identifying the trends in long-term groundwater level and salinity data using the non-parametric Mann-Kendall test can give insight into the sustainability of the groundwater sources for irrigation water management (Das et al., 2020; Gibrilla et al., 2018; Sahoo et al., 2021). Geostatistical methods are widely used for developing spatial prediction maps of groundwater level, contamination and its constituents (Arslan, 2012; Boudibi et al., 2021; Lanjwani et al., 2022).

Kerala has about 600 km long coastline. Decadal pre-monsoon and post-monsoon water level trend (1996-2005) suggests groundwater levels are declining at the rate of 0.1 m/yr or more in 13% and 30% of monitoring wells, respectively (CGWB, 2005; Shaji et al., 2009). The shallow aquifers that draw water from the coastal alluvium are mostly fresh, while a few isolated areas near lakes, tidal rivers, and backwater channels may be saline throughout the summer. Water in shallow wells near backwaters, lagoons, lakes, and tidal rivers is saline. During the summer, Kerala's rivers frequently experience saline water intrusion in their lower reaches. As the freshwater in these water bodies reduces, seawater intrudes upstream, in turn, the pumped wells adjacent to the river discharge saline water. The Kuttiady is one such river in the Kozhikode district of Kerala which is affected by this problem (Shaji, 2011).

In this study, the coastal region of the Malabar coast in Kozhikode district of Kerala, known as the rice bowl, was selected. Groundwater decline and salinity are the major problems in this area. Hence, there was a need to conduct a study on groundwater quality assessment and characterisation of the aquifer for irrigation and domestic applications. Geostatistical methods and hydrochemical analysis were carried out to assess and characterise the groundwater quality.

Groundwater samples were collected at regular intervals. The other data required for the study was collected from the related state and central departments. The trend analysis of the groundwater level and salinity, the hydrochemical facies, the mechanism governing groundwater chemistry and the calculation of the irrigation index were carried out to assess the water quality and characterise the aquifer. Geochemical processes and their governing mechanisms were examined using Gibbs diagrams. Hydrochemical Facies Evolution Diagram was used to determine the condition of the saltwater intrusion and its process. Mann Kendall's test and Sen's slope method were employed to investigate the trend in the groundwater level and quality. Spatial prediction maps of groundwater level and salinity were also developed using the Kriging method available in ArcGIS.

2. Materials and methods

2.1 Study area description

The Vatakara-Koyilandy coastline stretch is part of Kerala's Kozhikode coast, which is also known as the Malabar coast. The shore is 25 kilometres long and is located 20 kilometres north of Kozhikode, Kerala. It is located between 75° 03'-75° 02' East longitudes and 11° 02'-11° 06' North latitudes, with a total area of 270 km² (Fig.1). The west of the research area is bounded by the Arabian Sea. The study area has a humid subtropical climate with an average temperature of 27° C. The average annual rainfall in the area is 2700 mm. Of this 65 % is received during the North-East monsoon and 25% is received during the South-west monsoon. The rest of the rainfall occurs in other months.

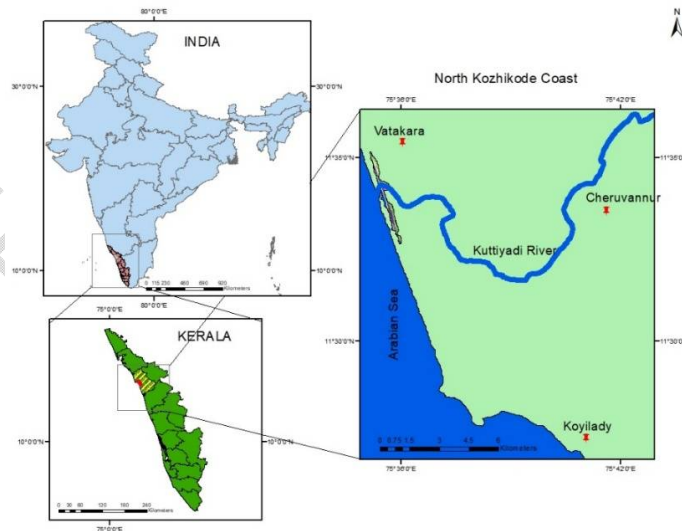


Fig. 1 Study area location map

The soil types in the region are coastal alluvial soil in coastal plain and in low-lying areas. Riverine alluvial soil are found along riverbanks. At some places red loam soil and brown hydromorphic soil are also found (KSPCB, 2019; Nair, 1987; Nazimuddin, 1993). The alluvium deposits are underlain by laterite and sedimentary rocks, mostly charnockites with mafic granulite enclaves. The coastal zone is covered by excessively drained to moderately drained sandy deposits, and the alluvium deposits are covered by

excessively drained to moderately drained sandy deposits (CGWB, 2013; KSPCB, 2019; Salaj et al., 2018b). Groundwater in weathered crystallines is present under unconfined conditions and semi-confined in deep crystalline formations. Groundwater table depth ranges from 0.73 m to 16.11 m below ground level (CGWB, 2013). The well-logs of representative wells suggest aquifer consists of three layers namely; the top unconfined layer, an aquitard and a semi-confined aquifer at the bottom (Fig. 2). The soil conditions are ideal for growing coconuts, spices, and plantation crops, and are average for other crops. Coconut, spices, paddy and plantation crops are the most important crops cultivated in the study area. (Sheeja et. Al., 2022)

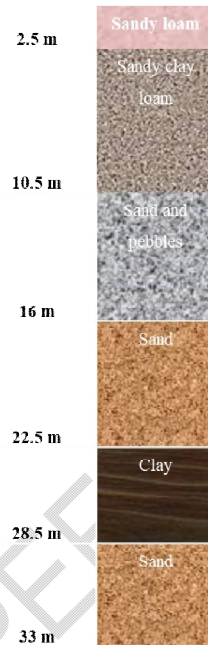


Fig. 2 Well log of the exploratory well in the study area

The Kuttiyadi River which flows through this region originates from the Banasura peak in the Naripatta hills in Wayanad and flows for 74 km until joining the Arabian Sea near Kottackal. The river drains a total area of 583 km². The river flows through evergreen forests in the upper catchment and densely populated midlands and plains with rubber, coconut, and rice fields. Kuttiyadi irrigation project (Peruvannamuzhi dam) in the upstream catchment provides the drinking water needs of Kozhikode Corporation and surrounding villages. Hence maintaining the Kuttiyadi River's water quality at suitable levels is essential. Seawater intrusion is a major problem that affects the quality of water in the Kuttiyadi river and adjoining aquifers. During low flows the tidal water cause seawater intrusion into the river up to 24km upstream (Sukumaran & Raj, 2020). With a decrease in groundwater recharge and an increase in water demand throughout the summer, the severity of seawater intrusion has increased over the years. The salinization of groundwater systems is adversely affecting the water supply for agriculture and domestic sectors.

2.2 Data Collection

Water samples from the pumped wells and river were collected from different locations at regular intervals. The sampling in the river was done starting from the river mouth to 22 km along the river. The interval between the sampling points was 1.0 km up

to 3.0 km in length and 2-5 km afterwards. Groundwater wells located 100 m and 200 m away from the river were selected for water sampling. The water quality was analysed in the water quality laboratory of CWRDM, Kozhikode. Water quality parameters analysed were, Sodium (Na^+), Calcium (Ca^{2+}), Magnesium (Mg^{2+}), Potassium (K^+), Chloride (Cl^-), Sulphate (SO_4^{2-}), Bicarbonate (HCO_3^-), total dissolved salts (TDS), electrical conductivity (EC) and pH.

Data on groundwater level and salinity were also collected from the State Groundwater Department, State Public Health Department and the Central Groundwater Board. Data from 10 observation wells in the unconfined aquifer and 9 piezometers in the semi-confined aquifer observed between 2005 and 2020 were used to study the spatial variation of groundwater salinity and water level of pre-and post-monsoon periods were used in the analysis.

2.3 Data Analysis

The statistical analysis was performed on water quality parameters for determining the minimum, maximum, mean and standard deviation. Mann-Kendall Test was used to detect the trend in annual rainfall series.

2.3.1 Mann-Kendall test

The trend in the annual rainfall series was detected by applying the non-parametric Mann-Kendall test (Kendall, 1975; Mann, 1945). The magnitude of the slope was estimated using the Sen (Sen, 1968) slope estimator. The test was conducted with the null hypothesis (H_0) that there is no trend in the series and the alternative hypothesis that there was a trend in the series.

The Mann-Kendall-statistic S is given as:

$$S = \sum_{i=1}^{n-1} \sum_{j=i+1}^n (\text{Sign}(x_j - x_i))$$

Where

$$\text{Sign}(x_j - x_i) = \begin{cases} 1 & \text{if } x_j - x_i > 0 \\ 0 & \text{if } x_j - x_i = 0 \\ -1 & \text{if } x_j - x_i < 0 \end{cases}$$

The variance of S denoted by (σ_s^2) was computed from Eq. 2

$$\sigma_s^2 = \frac{n(n-1)(2n+5) - \sum_{j=1}^q t_j(t_j-1)(2t_j+5)}{18}$$

where n is the number of data points, q is the number of tied groups in the data set and t_j is the number of data points in j^{th} tied group.

Then S and σ_s^2 were used to compute the test statistics Z_s as:

$$Z_s = \begin{cases} \frac{S-1}{6} \text{ if } S > 0 \\ 0 & \text{ if } S = 0 \\ \frac{S+1}{6} \text{ if } S < 0 \end{cases}$$

An increasing trend is indicated by a positive value of S and a decreasing trend is indicated by a negative value. The null hypothesis H_0 that there is no trend in the data is either accepted or rejected if the computed Z_s statistics is less than or more than the critical value of Z -statistics obtained from the normal distribution table at 5% significance level.

The nonparametric Sen's method was used to estimate the slope. This involves computing slopes for all the pairs of time points and then using the median of these slopes as an estimate of the overall slope. The equation to estimate slope is given by Eq. 4.

$$Q_i = \frac{x_j - x_k}{j - k}$$

Where, $j > k$. If there are n values x_j series, we get as many as $N = ((n + 1)/2)$ slope estimate Q_i . Sen's estimator of slope is simply given by the median of these N values of Q_i 's.

$$Q = Q_{[(N+1)/2]} \text{ if } N \text{ is odd}$$

$$Q = (Q_{[N/2]} + Q_{[(N+2)/2]})/2 \text{ if } N \text{ is even.}$$

Q_{med} was computed by a two-sided test at 100 (1- α) % confidence interval. An increasing trend in time series is indicated by Positive value and decreasing trend by negative value.

2.4 Hydrochemical Analysis

Data on the concentration of major ions such as HCO_3^- , Cl^- , Ca^{2+} , Mg^{2+} , Na^+ , etc K^+ were used for hydrochemical analysis using the Piper diagram. The trilinear Piper diagram proposed by (Piper, 1944), was applied to plot the concentration of major cations and anions to determine the chemical facies of the groundwater to identify the evolution of hydrochemical parameters of groundwater sources.

Trilinear Piper diagram was constructed with the help of Geochemical analyst software version 2015.1.14.

2.5 Mechanism Governing the Groundwater Chemistry

Gibb's diagrams are tool for understanding the various mechanisms and processes involved in groundwater chemistry (Gibbs, 1970). The source of the dissolved ions in the groundwater can be understood by the Gibbs diagram which is a plot of $(\text{Na}^+)/(\text{Na}^+ + \text{Ca}^{2+})$ vs TDS and $\text{Cl}^-/(\text{Cl}^- + \text{HCO}_3^-)$ vs TDS. Gibbs diagram was prepared with the help of GRAPHER software.

2.6 Irrigation Water Quality

The United States Salinity Laboratory diagram (USSL diagram) for suitability of water for agricultural uses was used to determine the suitability of groundwater for irrigation. Sodium percentage determines the ratio of sodium to the total cations viz., sodium, potassium, calcium and magnesium. The diagram was prepared using GRAPHER software.

SAR was prepared using the following formulae

$$SAR = \frac{Na^+}{\frac{\sqrt{Ca^{2+} + Mg^{2+}}}{2}}$$

Where, the ionic concentrations are expressed in meq/l.

2.7 Spatial Variation of Groundwater Level and Salinity

Geostatistical tools were used to describe the spatial variability of groundwater levels and salinity. Ordinary kriging was used to plot the spatial variability map of groundwater salinity and levels.

2.7.1 Ordinary kriging

Kriging involves both mathematical and statistical methods (Isaaks & Srivastava, 1989). In this interpolation is based on the semi-variogram which is defined as half the average squared difference between the attribute values at all points separated by a lag distance h (Eq. 5).

$$\gamma(h, \alpha) = \frac{1}{2N(h, \alpha)} \sum_{i=1}^{N(h)} [z(x_i + h) - z(x_i)]^2$$

Where,

$\gamma(h, \alpha)$: Semivariance as a function of both the magnitude of the lag distance or separation vector (h) and its direction (α)

$N(h, \alpha)$: number of observation pairs separated by h and direction α used in each summation

$Z(x_i)$: random variable at location x_i .

The kriging equation is given by Eq. 6

$$Z^*(x_0) = \sum_{i=1}^n \lambda_i \cdot Z(x_i) \text{ with } \sum_{i=1}^n \lambda_i = 1$$

Where,

$Z^*(x_0)$: random variable at the location

x_0 , $Z(x_i)$: measured value at a location x_i ,

λ_i : weighting factor assigned to $Z(x_i)$

n: number of observations

3. RESULTS AND DISCUSSION

3.1 Statistical Summary of Water Quality Pre-Monsoon and Post Monsoon Seasons

The range of the electrical conductivity in the study area varied between 4.30 dS/m to 0.76 dS/m during pre-monsoon and 1.96 dS/m to 0.66 dS/m in post-monsoon. The TDS in pre-monsoon season varied from 2.79 kg/m³ to 0.51 kg/m³ and in post-monsoon and in post-monsoon it varied from 1.28 kg/m³ and 0.36 kg/m³ (Table 1). Data showed Na⁺ was the predominant cation with a maximum concentration of 1844 mg/l and 455.6 mg/l during pre-monsoon and post-monsoon; respectively. Other cations with higher concentrations were K⁺, Mg²⁺ and Ca²⁺ with an average concentration of 440.45 mg/l, 324.68 mg/l and 226.89 mg/l in pre-monsoon and 196.89 mg/l, 139.09 mg/l and 139.09 mg/l in post-monsoon respectively.

Table 1 Statistical data for the analysed groundwater samples

	Ca ²⁺	Mg ²⁺	Na ⁺	K ⁺	HCO ₃ ⁻	SO ₄ ²⁻	Cl ⁻	TDS	EC	pH
Premonsoon										
Minimum	58.61	29	119	54.32	74	45	184	0.51	0.76	6.8
Maximum	492.6	786.3	1844	1023	196.6	1146	2417	2.79	4.30	8.6
Mean	226.89	324.68	697.50	440.45	129.59	239.79	755.76	1.41	2.11	8.1
STDV	133.26	250.08	473.54	344.66	36.961	363.44	620.56	0.71	1.10	0.6
Postmonsoon										
Minimum	41	22	74.3	39.8	53.8	30.2	99	0.36	0.66	6.9
Maximum	251	314	455.6	428	128	425	714	1.28	1.96	8.1
Mean	107.45	139.09	312.89	196.89	75.88	110.73	327.96	0.75	1.12	7.6
STDV	59.42	91.42	138.19	142.12	19.38	136.42	211.92	0.26	0.44	0.5

Ca²⁺: Calcium (mg/l), Mg²⁺: Magnesium (mg/l), Na⁺: Sodium (mg/l), K⁺: Potassium (mg/l), HCO₃⁻: Bicarbonate (mg/l), SO₄²⁻: Sulphate (mg/l), Cl⁻: Chloride (mg/l), TDS: Total Dissolved Solids (kg/m³), EC: Electrical conductivity (dS/m)

Chloride concentration in pre-monsoon varied from 184 mg/l to 2417 mg/l and in post monsoon it varied from 99 mg/l to 714 mg/l. Other anions were SO₄²⁻ and HCO₃⁻ with an average concentration of 239.79 mg/l and 129.59 mg/l in pre-monsoon and 110.73 mg/l and 75 mg/l in post-monsoon; respectively. The EC, TDS and concentration of all the anions and cations were found to be decreasing from pre-monsoon to post-monsoon.

3.2 The Trend in Groundwater Level, and Quality

The results of trend analysis for pre-monsoon groundwater levels in both confined and semi-confined aquifers using the Mann-Kendall test and Sen's slope estimates are given in the Tables 2-5. All the monitoring wells in both confined and semi-confined aquifers showed negative trends whereas eight wells resulted in a significantly negative trend (Table 2 & Table 3). A significant decreasing trend was observed in wells near the coasts. There was a significant rise in the groundwater salinity in both unconfined and semi-confined aquifers (Table 4 and Table 5). The Mann-Kendall test reveals that the study area is affected by the decline in groundwater level

and seawater intrusion during pre-monsoon. The groundwater decline is creating a reverse hydraulic gradient which results in the movement of seawater into the freshwater aquifer (Motevalli et al., 2018). Due to this, the groundwater in parts of the study is becoming unsuitable for drinking as well as irrigation purposes.

Table 2. The trend in groundwater level in the unconfined aquifer

Premonsoon				
Well ID	Z	Sens slope	p-value	Trend
KKDOW019	-2.3	-0.05	0.02	Fall
KKDOW174	-1.57	-0.008	0.11	Fall
KKDOW176	-1.89	-0.031	0.06	Fall
KPH16	-2.57	-0.036	0.01	Fall
KPH95	-2.07	-0.22	0.03	Fall
KPH96	-2.70	-0.023	0.007	Fall
KPH31	-2.41	-0.014	0.010	Fall
QKKD059	-1.93	-0.045	0.052	Fall
QKKD060	-2.21	-0.023	0.027	Fall

Since the test was conducted with a 95 % confidence level, the p-value <0.05 was considered to be significant. All the monitoring wells in both confined and semiconfined aquifers in the region showed negative trends whereas eight wells resulted in a significantly negative trend. A significant decreasing trend was observed in wells near the coasts. The salinity was also found to have an increasing trend in both the aquifers. In the unconfined aquifer, wells namely KKDOW019, KPH16, KPH95, KPH96, KPH31 and QKKD060 were found to have a significant falling trend in groundwater levels in last 15 years. The Z statistic was found to be more than 1.96. Among them, KPH96 resulted in a strongly falling trend with the highest Sen's slope, 0.22 and a p-value of 0.007. Similarly, in the semiconfined aquifer, W23765, KPH15, KPH65, and L01176 resulted in a significant falling trend in groundwater level. This clearly shows that the groundwater level is declining in both aquifers.

Table 3. The trend in groundwater level in the semi-confined aquifer

Premonsoon				
Well ID	Z	Sens slope	p-value	Trend
KPH15	-2.52	-0.046	0.01	Fall
KPH19	-1.31	-0.017	0.19	Fall
KPH65	-2.92	-0.029	0.003	Fall
L00994	-1.35	-0.02	0.17	Fall

Table 4. The trend in groundwater salinity in unconfined aquifer

Premonsoon				
Well ID	Z	Sens slope	p-value	Trend

KPH16	1.94	0.01	0.05	Rise
KPH95	0.9	0.006	0.36	Rise
KPH96	1.31	0.005	0.19	Rise
KPH31	2.03	0.011	0.04	Rise

Table 5. The trend in groundwater salinity in the semi-confined aquifer

Premonsoon				
Well	Z	Sens slope	p- value	Trend
KPH15	1.98	0.015	0.04	Rise
KPH19	1.22	0.003	0.22	Rise
KPH65	1.67	0.09	0.09	Rise
L00994	2.17	0.01	0.02	Rise

Trend analysis on groundwater salinity shows that all the wells have a rising trend with few of them having a significantly rising trend. Wells namely KPH16 and KPH96 had significantly rising trend in salinity in the unconfined aquifer. Sen's slope varies from 0.005 to 0.01. Similarly, in the semiconfined aquifer, KPH15 and L00994 were found to have significant negative trends. The Z statistics were 1.98 and 2.17 and the p-value was 0.04 and 0.02 respectively.

There is a significant rise in the groundwater salinity in both unconfined and semi-confined aquifers. The Mann-Kendall test reveals that the coastal aquifer in Vadakara, Kozhikode North is getting affected by the decline in groundwater and seawater intrusion. The groundwater decline causes the seawater to intrude into the groundwater over the years ((Motevalli et al., 2018). Which makes the groundwater unsuitable for drinking as well as irrigation.

3.3 Hydrochemical facies

The results of the Piper diagram for the pre-monsoon season in the year 2020 are presented in Fig. 3. On the cationic triangle, the samples fall within the (Na^+ , Ca^+ and K^+). In 2020, the most dominant cations were (Na^+ , and K^+) and the dominant anions were SO_4^- and Cl^- . Hydrogeochemical facies were Na-Cl followed by Ca-Mg-Cl which indicates the influence of seawater intrusion or upconing into the coastal aquifer (Alfarrah et al., 2011; Shin et al., 2020). Furthermore, the dominant cations and anions were from seawater indicating the mixing of seawater with the groundwater (Slama& Sebei, 2020).

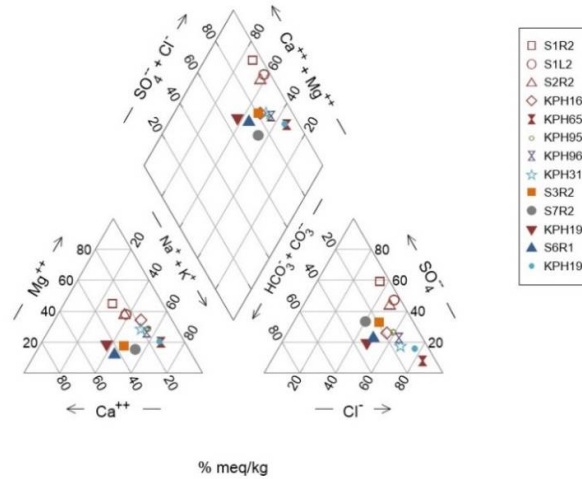


Fig. 3 Concentration of major cations and anions on Piper diagram

3.4 Groundwater Chemistry

The Gibbs plot I of the ratios of anions Vs TDS (Fig. 4) showed a higher concentration of Cl^- proportion in most of the samples, indicating that Cl^- ions might have been generated by a variety of sources. The Gibbs plot I of the ratios of anions Vs TDS revealed the higher concentration of Na^+ proportion and its distribution in larger part indicated that the Na^+ ions are produced from a similar source or through the same geochemical process. In both the plots, all the samples showed evaporation crystallization dominance and no sample showed rock and precipitation dominance. This reveals the evaporation augment the concentration of Na^+ and Cl^- ions in the aquifer with increasing TDS (Rao et al., 2017). The Na^+ and Cl^- ions present in the aquifer of the study area were generated from seawater and the salinity in the groundwater in some area may be due to the evaporation dominance of the ions (Alfarrah et al., 2011; Lanjwani et al., 2022; Sangadi et al., 2022). From the spatial distribution on diagrams, and the statistical summary of the water sampling and analysis the aquifer is characterised by saline nature due to seawater intrusion.

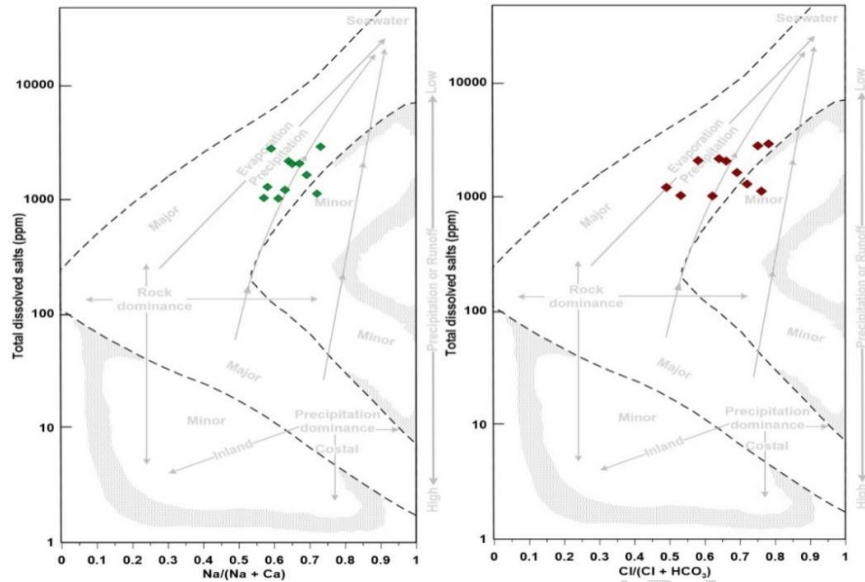


Fig. 4 Gibbs plot of ratios of anions and cations Vs TDS

3.5 Groundwater Quality for Irrigation

The USSL diagram include four classes of the salinity hazard based on the electrical conductivity of the water. The USSL diagram (Fig. 5) illustrates that most of the groundwater samples fall in the category of C3S2 (high salinity with medium sodium) followed by C4S2 (very high salinity with medium sodium). The electrical conductivity ranges from 1.87 to 4.2 dS/cm and SAR values range from 12 to 18. The values of SAR specified 55% of the samples contained low to medium sodium adsorption ratio. Gradual accumulation of Na^+ levels in soil might occur as a result of irrigating with water with high SAR values. It may have a negative impact on infiltration as well as percolation rates thus resulting in inadequate aeration and soil crusting (Slama & Sebei, 2020).

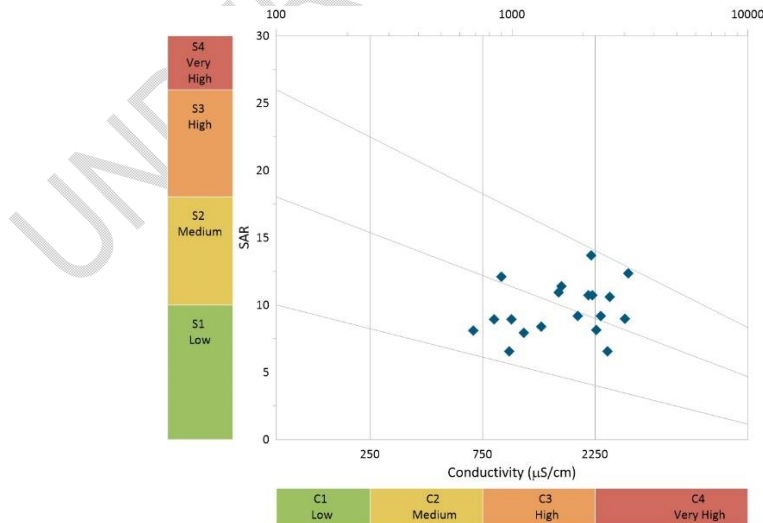


Fig. 5 USSL diagram

Groundwater with low salinity ($EC < 0.5$ dS/m) are suitable for agriculture provided there will not be any development of salinity (Lanjwani et al., 2022). In this study there is no groundwater samples in this category. Groundwater with medium salinity ($EC 0.5-1$ dS/m) and high salinity ($EC 1-2.25$ dS/m) can be used for irrigation with leaching, proper crop selection and other reclamation technique (Lanjwani et al., 2022). The result revealed that there was an occurrence of medium alkalinity and high to very high salinity hazards in the aquifer. About 35% of the samples were designated marginally suitable for agriculture and 65% of the samples were classified as unsuitable for agriculture due to the high salinity and little danger of exchangeable sodium (Lanjwani et al., 2022; Qishlaqi et al., 2017).

3.6 Spatial Variability Map of Groundwater Level

The area under groundwater elevations less than 2 m, 2-4 m, and greater than 4 m were determined from the spatial variability maps of groundwater elevation in pre-monsoon and post-monsoon for the year 2020 for both unconfined and semi-confined aquifer. The results are presented in Fig. 6 and Table 6. In unconfined aquifer the area under water table elevation of less than 2 m was 27.1 % and in post monsoon 28.4 % m. Area under 2-4 m was 21.3% in pre-monsoon and 46.3% in post-monsoon. In pre-monsoon season, 51.6% area was under the depth water table depth greater than 4 m. There are areas with water table elevation below 0 m. This will create a reverse hydraulic gradient and thereby seawater intrusion to the coastal aquifer (Salaj et al., 2018).

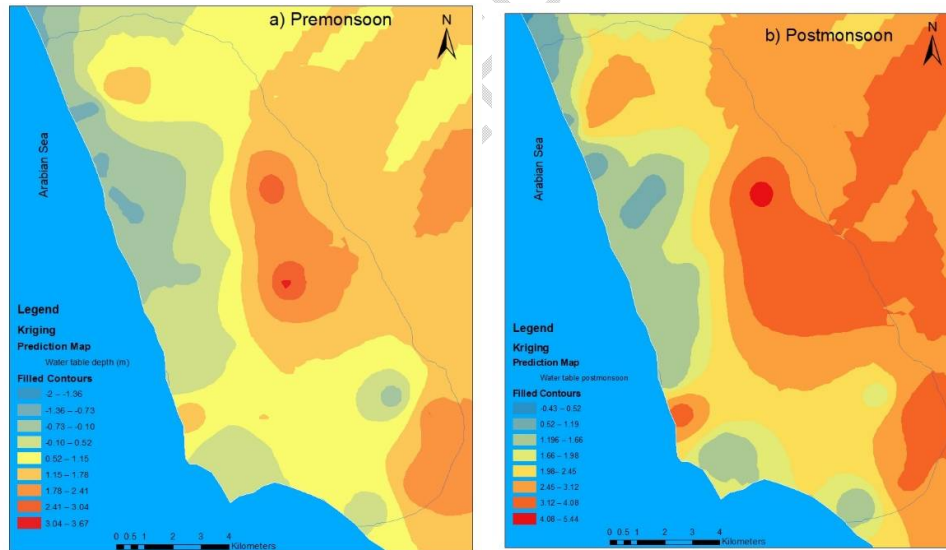


Fig. 6 Spatial variability map of groundwater level in unconfined aquifer

Table 6. Area under various water table elevation

Water table elevation m	Area (%) Unconfined aquifer		Area (%) Semi-confined aquifer	
	Pre-monsoon	Post monsoon	Pre-monsoon	Post monsoon
< 2	27.1	28.4	32.5	52.3
2.0 - 4.0	21.3	46.3	41.6	29.9
>4.0	51.6	25.3	25.9	17.8

In semi-confined aquifer (Fig. 7 and Table 6), the water table elevation under less than 2 m in pre-monsoon was in 32.5 m of the total area and post-monsoon it was in 52.3 %. Area under water table elevation of 2-4 m in pre-monsoon was 41.6 % which decreased to 29.9% in post-monsoon. Area under water table elevation of more than 4 m in pre and post monsoon were 25.9% and 17.8 %; respectively. The improvement in groundwater level in the aquifer during post-monsoon may be due to the recharge in the unconfined aquifer and vertical leakage through the semiconfined aquifer during monsoon(Mini, 2012).

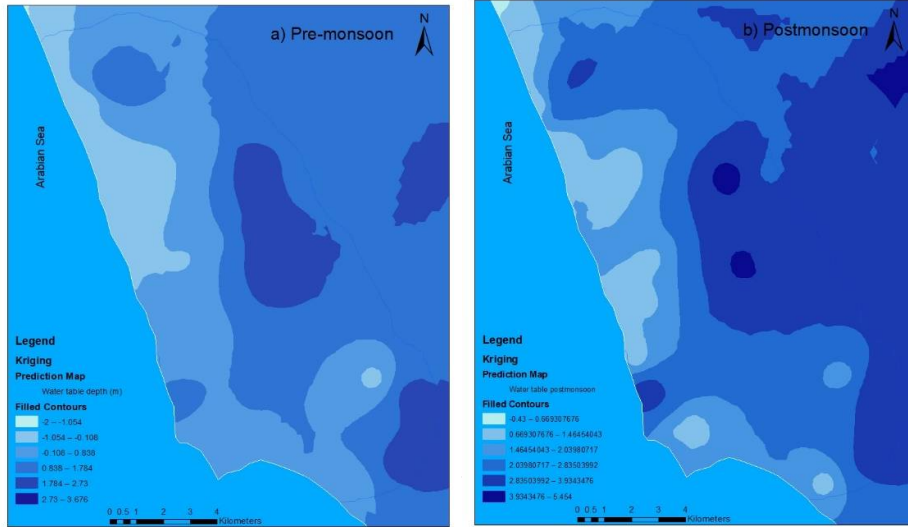


Fig. 7 Spatial variability map of groundwater level in semi-confined aquifer

3.7 Spatial variability map of groundwater salinity

Irrigation water quality classification based on Central Pollution Control Board of India (CPCB, 2018) was used for the categorisation of suitability of groundwater for irrigation. The electrical conductivity in the aquifer varied from 0.2ds/m to 4.3 dS/m. In unconfined aquifer (Fig. 8 and Table 7), most of the area lies in the EC range of 0.75-2.25 dS/m (Pre-monsoon- 31.7%, post-monsoon-44.5%).The area in pre-monsoon season under EC of more than 4 dS/m was 25.2 %, which is unfit for irrigation. As of now the most of the area lies under moderately safe to unsafe category which in future may increase due to increasing groundwater pumping (Salaj et al., 2018a).

In semi-confined aquifer (Fig. 9 and Table 7), 20.1% area was under safe and moderately safe category which is almost same in post monsoon. The area under moderately unsafe category was 33 %. The area under moderately safe category increased from 21.7% in pre-monsoon to 45.5 % in post monsoon. About 24.0% area was categorised as unfit for irrigation in pre-monsoon and there is no area present in this category during post-monsoon. During monsoon, recharge occurs in the unconfined aquifer and vertical leakage through the semiconfined aquifer diminishes the reverse hydraulic gradient in the aquifer thus reduces the salinity (Mini, 2012).

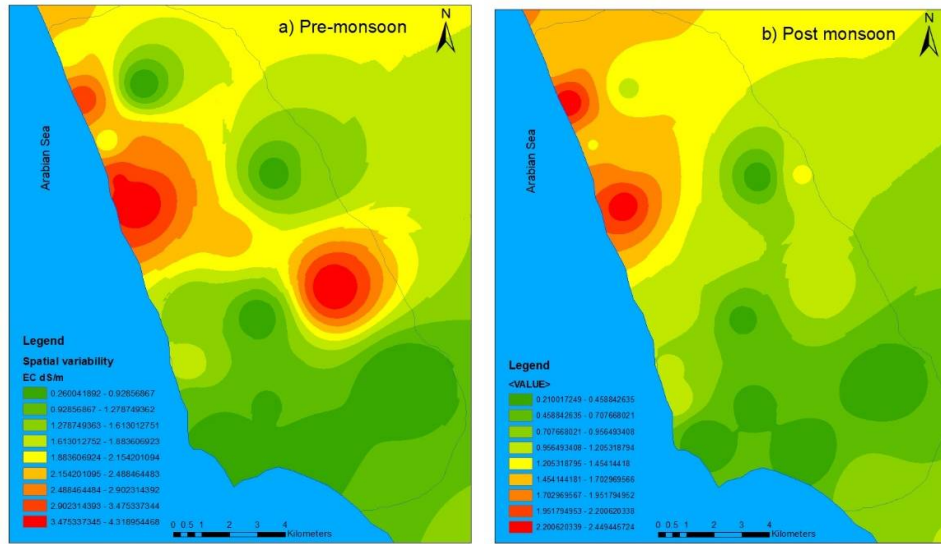


Fig. 8 Spatial variability map of salinity in unconfined aquifer

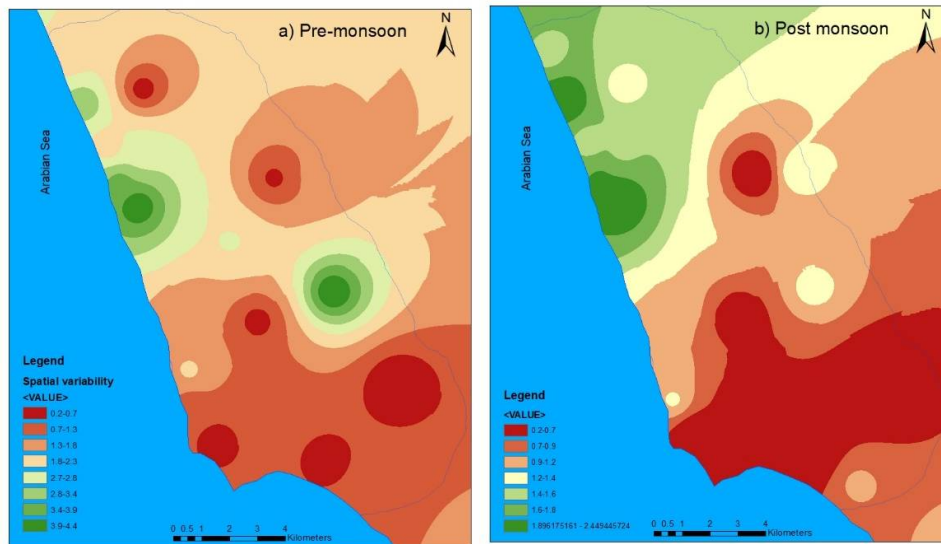


Fig. 9 Spatial variability map of salinity in semi-confined aquifer

Table 7. Percentage area under various EC classes

EC range dS/m	Area (%)		Area (%)	
	Pre- monsoon	Post- monsoon	Pre- monsoon	Post- monsoon
< 0.75	23.1	31.6	20.1	20.6
0.75-2.25	31.7	44.5	21.7	45.5
2.25-4	20	23.9	33.6	33.9
>4.0	25.2	0	24.6	0

CONCLUSION

The characterization of the coastal aquifer of Kozhikode district in Kerala was done based on physical and chemical parameters, hydrogeochemical analysis, trend analysis and spatial variations in groundwater levels and salinity. The aquifer consists of three layers; the top unconfined layer, and the bottom semi-confined layer which are separated by an aquitard. It was concluded that the dominant cations and anions were from seawater due to the mixing of seawater with the groundwater. The groundwater in the affected area has medium alkalinity and high to very high salinity, and is not suitable for irrigation. Most of the area in unconfined aquifer in pre and post monsoon lies in the EC range of 0.75-2.25 dS/m. The area in pre-monsoon season under EC of more than 4 dS/m was 25.2 %, and is unfit for irrigation. As of now the most of the area lies under moderately safe to unsafe category which in future may increase as the groundwater table is declining. In semi-confined aquifer about 20.1% area in pre and post monsoon was under safe and moderately safe category whereas the groundwater in about 24.0% area was unfit for irrigation in pre-monsoon.

4. REFERENCES

- Albuquerque, M. T. D., Sanz, G., Oliveira, S. F., Martínez-Alegría, R., & Antunes, I. M. H. R. (2013). Spatio-Temporal Groundwater Vulnerability Assessment - A Coupled Remote Sensing and GIS Approach for Historical Land Cover Reconstruction. *Water Resources Management*, 27(13), 4509–4526.
- Alfarrah, N., Walraevens, K., Farrah, N. al, & Martens, K. (2011). Hydrochemistry of the Upper Miocene-Pliocene-Quaternary aquifer complex of Jifarah Plain, NW-Libya. *Geologica Belgica*, 14(3–4), 159–174.
- Ali, S. A., & Ali, U. (2018). Hydrochemical characteristics and spatial analysis of groundwater quality in parts of Bundelkhand Massif, India. *Applied Water Science*, 8(1).
- Arslan, H. (2012). Spatial and temporal mapping of groundwater salinity using ordinary kriging and indicator kriging: The case of Bafra Plain, Turkey. *Agricultural Water Management*, 113, 57–63.
- Bhagat, C., Puri, M., Mohapatra, P. K., & Kumar, M. (2021). Imprints of seawater intrusion on groundwater quality and evolution in the coastal districts of south Gujarat, India. *Case Studies in Chemical and Environmental Engineering*, 3, 100101.
- Boudibi, S., Sakaa, B., & Benguega, Z. (2021). Spatial variability and risk assessment of groundwater pollution in El-Outaya region, Algeria. *Journal of African Earth Sciences*, 176.
- Boumaiza, L., Walter, J., Chesnaux, R., Zahi, F., Huneau, F., Garel, É., Stotler, R. L., Bordeleau, G., Johannesson, K. H., Vystavna, Y., Drias, T., Re, V., Knöller, K., & Stumpp, C. (2022). Combined effects of seawater intrusion and nitrate contamination on groundwater in coastal agricultural areas: A case from the Plain of the El-Nil River (North-Eastern Algeria). *Science of The Total Environment*, 851, 158153.
- CGWB. (2005). Annual Report 2005-06. Central Groundwater Board, Ministry of Water Resources, Faridabad. 204 p.

- CGWB. (2013). Groundwater information booklet of Kozhikode district, Kerala state, Thiruvananthapuram. Central Groundwater Board, Ministry of Water Resources, Faridabad. 29 p.
- Das, J., Rahman, A. T. M. S., Mandal, T., & Saha, P. (2020). Challenges of sustainable groundwater management for large scale irrigation under changing climate in Lower Ganga River basin in India. *Groundwater for Sustainable Development*, 11.
- Gibbs, R. J. (1970). Mechanisms Controlling World Water Chemistry. *Science*, 170(3962), 1088–1090.
- Gibrilla, A., Anornu, G., & Adomako, D. (2018). Trend analysis and ARIMA modelling of recent groundwater levels in the White Volta River basin of Ghana. *Groundwater for Sustainable Development*, 6, 150–163.
- Hasan, K., Paul, S., Tareq, -, Chy, J., & Antipova, A. (2021). Analysis of groundwater table variability and trend using ordinary kriging: the case study of Sylhet, Bangladesh. *Applied Water Science*, 11, 120.
- Isaaks, E. H., & Srivastava, R. M. (1989). *An Introduction to Applied Geostatistics*. Oxford University Press.
- Kendall, M. G. (1975). *Rank Correlation Methods* (4th edition). Charles Griffin. London.
- KSPCB. (2019). Report On Restoration of Polluted River Stretches Draft Action Plan of River Kuttiyadi (Priority V). Kozhikode District Level technical Committee. 50 p.
- Lanjwani, M. F., Khuhawar, M. Y., Lanjwani, A. H., Khuahwar, T. M. J., Samtio, M. S., Rind, I. K., Soomro, W. A., Khokhar, L. A., & Channa, F. A. (2022). Spatial variability and risk assessment of metals in groundwater of district Kamber-Shahdadkot, Sindh, Pakistan. *Groundwater for Sustainable Development*, 100784.
- Mann, H. B. (1945). Nonparametric Tests Against Trend. *Econometrica*, 13(3), 245.
- Mini, P. K. (2012). Modelling Seawater Intrusion for Management of Coastal Aquifer. PhD Thesis. IARI New Delhi. 168 p.
- Mohd Isa, N., & Aris, A. Z. (2012). Extent and severity of groundwater contamination based on hydrochemistry mechanism of sandy tropical coastal aquifer. *The Science of the Total Environment*, 438C, 414–425.
- Motevalli, A., Moradi, H. R., & Javadi, S. (2018). A Comprehensive evaluation of groundwater vulnerability to saltwater up-coning and sea water intrusion in a coastal aquifer (case study: Ghaemshahr-juybar aquifer). *Journal of Hydrology*, 557, 753–773.
- Nair, M. M. (1987). Coastal Geomorphology of Kerala. *Journal of The Geological Society of India*, 29, 450–458.
- Nazimuddin, M. (1993). COASTAL HYDROGEOLOGY OF KOZHIKODE, KERALA UNDER THE FACULTY OF MARINE SCIENCES.
- Paniconi, C., Khlaifi, I., Lecca, G., Giacomelli, A., & Tarhouni, J. (2001). A modelling study of seawater intrusion in the Korba coastal plain, Tunisia. *Physics and Chemistry of the Earth, Part B: Hydrology, Oceans and Atmosphere*, 26(4), 345–351.
- Piper, A. M. (1944). A graphic procedure in the geochemical interpretation of water-analyses. *Transactions, American Geophysical Union*, 25(6), 914.

- Prathap, A., & Chakraborty, S. (2019). Hydro chemical characterization and suitability analysis of groundwater for domestic and irrigation uses in open cast coal mining areas of Charhi and Kuju, Jharkhand, India. *Groundwater for Sustainable Development*, 9.
- Prusty, P., & Farooq, S. H. (2020). Seawater intrusion in the coastal aquifers of India - A review. *HydroResearch*, 3, 61–74.
- Qishlaqi, A., Kordian, S., & Parsaie, A. (2017). Hydrochemical evaluation of river water quality—a case study. *Applied Water Science*, 7(5), 2337–2342.
- Rao, N. S., Vidyasagar, G., Surya Rao, P., & Bhanumurthy, P. (2017). Chemistry and quality of groundwater in a coastal region of Andhra Pradesh, India. *Applied Water Science*, 7(1), 285–294.
- Ravish, S., Setia, B., & Deswal, S. (2019). Hydro-chemical analysis of pre-monsoon groundwater of north-eastern Haryana. *Groundwater for Sustainable Development*, 8, 630–643.
- Sahoo, S., Swain, S., Goswami, A., Sharma, R., & Pateriya, B. (2021). Assessment of trends and multi-decadal changes in groundwater level in parts of the Malwa region, Punjab, India. *Groundwater for Sustainable Development*, 14 p.
- Salaj, S. S., Ramesh, D., Suresh Babu, D. S., & Kaliraj, S. (2018a). Assessment of coastal change impact on seawater intrusion vulnerability in Kozhikode coastal stretch, South India using Geospatial technique. *Journal of Coastal Sciences*. 5(1), 27-41.
- Salaj, S. S., Ramesh, D., Suresh Babu, D. S., & Kaliraj, S. (2018b). Impacts of urbanization on groundwater vulnerability along the Kozhikode coastal stretch, Southwestern India using GIS based modified DRASTIC-U Model. *Journal of Coastal Sciences*. 5(1), 1-27.
- Sangadi, P., Kuppan, C., & Ravinathan, P. (2022). Effect of hydro-geochemical processes and saltwater intrusion on groundwater quality and irrigational suitability assessed by geo-statistical techniques in coastal region of eastern Andhra Pradesh, India. *Marine Pollution Bulletin*, 175 p.
- Saravanan, R., Balamurugan, R., Karthikeyan, M. S., Rajkumar, R., Anuthaman, N. G., & Navaneetha Gopalakrishnan, A. (2011). Groundwater modeling and demarcation of groundwater protection zones for Tirupur Basin - A case study. *Journal of Hydro-Environment Research*, 5(3), 197–212.
- Sathiamoorthy, M., & Ganesan, M. (2018). Hydro geochemical characterization of surface and groundwater quality and assessing its suitability of drinking and irrigational purposes in Veeranam tank area, Cuddalore district, Tamil Nadu, India. 23.
- Shaji E. (2011). Groundwater quality of Kerala-Are we on the brink? *Disaster, Risk and Vulnerability Conference*, 188–191.
- Shaji E, Nayagam S P, Kunhambu V and, & Thambi D S. (2009). Change_in_groundwater_scenario_in_Kerala. *Journal of Geological Society of India*, 67–85.
- Shin, K., Koh, D. C., Jung, H., & Lee, J. (2020). The hydrogeochemical characteristics of groundwater subjected to seawater intrusion in the Archipelago, Korea. *Water (Switzerland)*, 12(6).

- Shiyan, L. N., Machekhina, K. I., & Frantczuskaia, E. O. (2022). Groundwater sources in the West Siberian region: Chemical composition, analysis, and water treatment technologies. *Cleaner Engineering and Technology*, 7.
- Slama, T., & Sebei, A. (2020). Spatial and temporal analysis of shallow groundwater quality using GIS, Grombalia aquifer, Northern Tunisia. *Journal of African Earth Sciences*, 170.
- SoujanyaKamble, B., Saxena, P. R., Kurakalva, R. M., & Shankar, K. (2020). Evaluation of seasonal and temporal variations of groundwater quality around Jawaharnagar municipal solid waste dumpsite of Hyderabad city, India. *SN Applied Sciences*, 2(3), 498.
- Subba Rao, N. (2006). Seasonal variation of groundwater quality in a part of Guntur District, Andhra Pradesh, India. *Environmental Geology*, 49(3), 413–429.
- Sukumaran, D., & Raj, J. (2020). Saline Water Intrusion in Urban Coastal Area: A Case Study of Kuttiyadi River. *American Journal of Water Resources*, 8(3), 128–133.
- Wu, J., Wang, L., Wang, S., Tian, R., Xue, C., Feng, W., & Li, Y. (2017). Spatiotemporal variation of groundwater quality in an arid area experiencing long-term paper wastewater irrigation, northwest China. *Environmental Earth Sciences*, 76(13), 460 p.
- Sheeja PS, Singh DK, Sarangi A, Sehgal V, Iquebal MA. Change Detection of Groundwater Level and Quality in Coastal Aquifers of Malabar Region in Kerala, India. *International Journal of Environment and Climate Change*. 2022 Dec 19;12(12):755-68.