

**Original Research Article**  
**Impact of climate change on surface runoff for Myponga  
River catchment in South Australia, Australia**

---

**ABSTRACT**

**Aims:** This paper is aimed to assess the future impact of climate change on some selected climatic variables and on surface runoff from Myponga catchment, South Australia.

**Methodology:** The six global climate models recommended for the South Australia were further compared among each other based on their performance to simulate observed climates in the study area. The monthly average statistically downscaled evapotranspiration and rainfall data for the period 2000-2005 were compared with respective observed climate data, graphically and statistically. On the other hand, four hydrological models in Australian rainfall-runoff library (RRL) were evaluated and compared among each other based on their performance in simulating surface runoff in the study area. Then, two GCMS, CanESM2 and MIROC5, and one hydrological model, AWBM, were selected for their better performance and used for climate projections and for runoff simulation for both base period (1990-2005) and future period (2026-2035) under two emission scenarios (RCP 4.5 and RCP 8.5), respectively. Finally, the impacts of climate change were estimated by comparing the long year's average values of the climate projections and simulated runoff in the base period and the future period for different percentile values (10, 50, and 99 %) under two emission scenarios.

**Results:** The result showed that compared to base period (1990-2005), by 2030 (2026-2035), the annual average evapotranspiration would generally increase, and rainfall would decrease for both climate models for both emission scenarios and all the percentiles. The average annual runoff showed different pattern across the climate model and emission scenarios. But, on average, percentage changes across climate models show rise in average annual runoff in range from 3.72 to 5.47 % across percentiles for intermediate scenario and decline in range from 17.13 to 20.15 % across percentiles for high emission scenario.

**Conclusion:** It is expected that by 2030 there would be no significant problems with respect to water availability, drought, and flooding at annual time scale under intermediate emission scenario but there would be drier conditions in the catchment relative to the base period under high emissions.

**Recommendation:** Therefore, adaptation and mitigation measures should be identified and applied at national and state levels to minimize possible negative impacts.

*Keywords: Climate change, Impacts, GCM, Statistically downscaled, Australian rainfall-runoff library (RRL), Myponga*

## 1. INTRODUCTION

Global warming due to rise in greenhouse gases has caused the climate to change and which in turn subsequently alters hydrological processes. The changes observed in the last several decades have constantly altered components of hydrological process such as precipitation amount and pattern, surface runoff, soil water content, ice and snow coverage,

and evaporation from land and water surfaces. Such alterations in hydrological processes are owing to the fact that hydrological systems are highly linked to atmospheric warming. While, further climate change is inevitable in future at least owing to already committed warming or past emissions [1]. Clearly, the changes would continue and inevitably would have impact on the hydrological process.

South Australia is already the driest state in the driest continent. Additionally, climate change is becoming one of the most important challenges in the effort to ensure sustainable water supply to the state. Several climate impact studies over several catchments show different levels of changes in climate variables and runoff in South Australia due to climate change. For instance, research on three sub catchments of Onkaparinga shows that reduction in mean annual runoff of 14 % may be experienced between 2016- 2045. The study further notes that South Australia would more likely face considerably drier flow regime in future [2]. CSIRO [3] also reported that southern Australia region would more likely experience decline in rainfall and runoff due to climate change in future. Recently Goyder Institute for Water Research [4] warned that significant reduction in inflow to reservoirs in South Australia may be experienced. In fact, climate change is expected to be the main source of pressure on water resources in South Australia [5]. To improve understanding of climate impact on water availability, studies of climate impact are crucial. However, climate impact studies on runoff have not been conducted in Myponga catchment in recent times. Thus, this study was conducted on Myponga reservoir catchment to provide information for proper planning of adaptation measures so as to cope with climate change impacts and ensure sustainable water supply. The study can ultimately contribute to better understanding of climate impact on water resources of the state.

The impacts of climate change on water resources can be investigated in various ways and at different levels. However, the most widely used approach involves two major processes. The first important process is projecting values of climate variables. This can be done by different ways. Use of different climate scenarios obtained from model outputs are most commonly used. This involves the use of climate models, such as general circulation models (GCMs) and their derivatives, to project climate variables in a study area for a base period, or for future period [6]. GCMs are the most effective and widely used in global and regional impact assessment studies. There are different GCMs available around the world. The performance of each model varies with geographic location. For instance, 12 major types are incorporated in online climate projection system by South Australia government and six of these models are identified as suitable for different regions in the state [7]. Second important process in impact studies is assessing hydrological impact of projected climate variables. The assessments can be done either by employing the concept of elasticity of runoff to historical climate or through hydrological modelling [6]. The choice of impact assessment method varies with data availability, depth of analysis required, and catchment size [1]. Hydrological modeling is widely used to study the impact of climate change on runoff owing to capability of hydrological models to simulate daily or monthly runoff and other hydrological parameters directly from projected climate scenarios or in combinations with other drivers [6].

In this research, impact of global warming on climate variables and runoff in Myponga reservoir catchment were assessed based on data from statistically downscaled climate projections. The climate projections from the system with six GCMs recommended for South Australia were evaluated against observed past climate data, and two models were selected to representing a range of uncertainties. For runoff simulation, four hydrological models -SIMHYD, Sacramento, SMAR, and AWBM in rainfall-runoff library (RRL) package were evaluated and the best one was selected based on efficiency and

used for simulation of runoff for impact assessment. This study was aimed at investigating impact of global warming on some climate variables and runoff by the year 2030 (between 2026-2035) relative to the base period (1986 to 2005).

## 2. METHODOLOGY

### 2.1 Description of the study area

Myponga reservoir catchment is located in Adelaide and Mount lofty ranges and cover an area of 121.23 km<sup>2</sup>. The area upstream of Myponga Reservoir is 77.7 km<sup>2</sup> (Figure 1). The major channel of the Myponga River is located near the intersection of Pages Flat Road and the Adelaide to Victor Harbor Road. This channel has a low grade (approximately 0.6%) while the altitude within the River catchment ranges from 0 to 400 above sea level, the peak at Myponga Hill [8]. The river discharges into the Myponga Reservoir and out flowing downstream of the reservoir in a westerly direction to enter Gulf St Vincent [8].

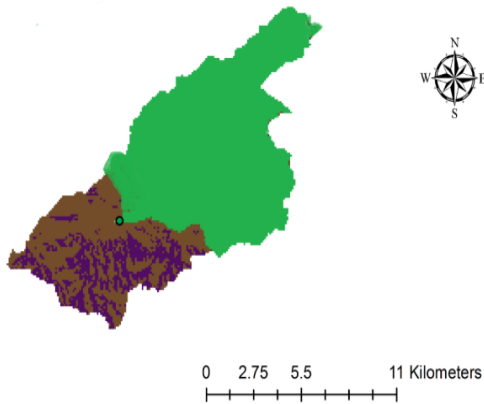


Figure 1. Myponga catchment and its part upstream of the gauge station (Green)

### 2.2 Description of the climate data sources

The data from global climate models (GCMs) available by government of South Australia (<https://data.environment.sa.gov.au>) were used in this study. Even though there are 12 GCM –CMIP 5 version available, six of these models (shown in Table 1) are identified as suitable models for climate projection in South Australia [7].

Table 1: Six GCMs identified suitable for South Australia [7]

Model	Institutions
-------	--------------

Formatted: Superscript

Formatted: Superscript

Formatted Table

CanESM2	Canadian Centre for Climate Modelling and Analysis, Canada (CCCMA)
CNRM-CM5	Centre National de Recherches Meteorologiques, France (CNRM CERFACS)
GFDL-ESM2M	NOAA Geophysical Fluid Dynamics Laboratory, USA
IPSL-CM5B-LR	Institute of Pierre-Simon Laplace, France (IPSL)
MIROC5	Atmosphere and Ocean Research Institute (The University of Tokyo), National Institute for Environmental Studies, and Japan Agency for Marine Earth Science and Technology, Japan (MIROC)
MRI-CGCM3	Meteorological Research Institute, Japan (MRI)

In the online system, CMIP5 versions of GCMs can be run for three scenarios referred as Representative Concentration Pathways (RCPs). RCPs is a term equivalent to the term "emissions scenarios" of IPCC. The three RCPs are: RCP4.5, an intermediate concentration pathway similar to the B1 emissions scenario from IPCC Assessment Report 4 (AR4), and RCP8.5, a high-concentration pathway similar to the A1FI emissions scenario in IPCC AR4, and historic (base line emission). The online system employs inbuilt statistical downscaling approaches- Nonhomogeneous Hidden Markov Modeling (NHMM) for rainfall downscaling and **weather generator** for downscaling non-rainfall variables. These downscaling tools have already been successfully used in several hydrological impact studies[9]–[11]. The NHMM simulates rainfall at daily basis for one or multiple stations in a catchment. Thus, downscaled daily rainfall projections can be obtained for a station or multiple stations. While the **weather generator** provides downscaled daily projections for non-rainfall climate variables for single or multiple stations [7]. Downscaled daily projections from global climate model (GCM) can be downloaded for 6 climate variables: namely, rainfall, maximum and minimum temperature, areal potential evapotranspiration, solar radiation, and vapor pressure deficit. The system provides 100 possible realizations for each combination of climate model (GCM) and emission scenarios (RCPs) at selected stations. The realizations are domain of possible daily weather projections in base or future periods [7].

### 2.3 Description of hydrological model

For hydrological modelling, four rainfall-runoff models available in software package called Rainfall-Runoff Library (RRL) were used. The software package is developed by public institutions called eWater in Australia. The eWater is established to develop software tools for hydrological modelling and implement national hydrological modelling strategy (NHMS). The RRL version 1.0.5 comprises of five models, AWBM, Sacramento, SIMHYD, SMAR, and Tank model. However, four of most widely used in catchment modelling are AWBM, Sacramento, SIMHYD, and SMAR. For these models, inputs data need to be on daily basis. For calibration and validation, Catchment size, rainfall, evaporation, and stream flow data are

required. While, for simulation, catchment size, rainfall, and potential evapotranspiration data together with calibration model parameters are required [12].

## 2.4 Data collected

GIS shape files, DEM data file, and coordinates of the flow station were obtained from different sources to delineate catchment (<https://data.sa.gov.au>, GIS on line, and <http://www.bom.gov.au/sa/>).

Daily rainfall observation data for 10 years (2000 to 2010) for 6 rainfall stations across the Myponga catchment were downloaded from <http://www.bom.gov.au/sa/>. These rainfall stations were selected because [their](#) rainfall data [sets from these stations are](#) expected to influence areal rainfall for the catchment based on constructed Thiessen polygons.

Daily Pan- Evaporation data [sets](#) for 11 years (2000 to 2010) were obtained from Australian Bureau of Metrology (BOM). Downscaled daily projections from global climate model (GCM) were downloaded from <https://data.environment.sa.gov.au> for two climate variables: namely, daily rainfall and potential evapotranspiration corresponding to the weather station. The daily mean flow data (ML/day) for 11 years (2000 to 2010) corresponding to the gauge station -A5020502 were downloaded from <http://www.bom.gov.au/sa/>. This flow data represents runoff from Myponga catchment upstream of the gauge station.

## 2.5 Procedure for model selection and impact analysis

In this study, two major tasks were carried out. First, climate and hydrological models were evaluated and selected. The climate and hydrological models were evaluated for [their](#)s performance in the study area to simulate the observed climate and runoff, respectively. Secondly, impact assessment [was](#)ere carried out. Two best performing GCMs among the six GCMs recommended for South Australia and one best performing hydrological models in the four hydrological models with in the Rainfall Runoff Library (RRL) were used for climate projection and runoff simulation, respectively. Then, the percentage change in projected climate and runoff for selected future periods relative to base period (2000 to 2005) were estimated. The details of each [of the](#) methods used are described below.

### 2.5.1 Evaluation of Climate model

As already explained, the Goyder Institute for [w](#)Water Research [7] has selected six climate model for South Australia. However, in this study further evaluation of the six climate models [was](#)ere conducted made to select two best performing model. Two climate models were considered sufficient to provide reasonable range of projections for understanding the impact of climate change on climate variable and runoff in the study area. To select two climate models that represent range of uncertainties, the six climate models (GCMs) recommended for South Australia were evaluated and compared. For this purpose, base period climate projections were downloaded for each of the six GCM- CMIP5 models for period [from](#) (2000 to 2005) and for **selected single** weather station. A set realisation data corresponding to median annual rainfall for each GCM [was](#)ere identified. Therefore, for six models and single weather station, data from 600 realisation files were analysed. On the other hand, observed climate data for the same period [was](#)ere collected and analysed to obtain monthly average daily rainfall and evapotranspiration. To obtain observed monthly average daily

evapotranspiration, monthly average daily pan- evaporation was multiplied by pan-coefficients determined. The pan coefficient was determined based on estimated reference evapotranspiration from Penman–Monteith equation (CROPWAT 8 software) and pan evaporation data from [the](#) weather station. Then, the observed and projected rainfall and evapotranspiration were compared based on how well they simulate the observed climate data. This approach of comparisons based on ‘Historic accuracy’ is widely used in a number of studies [13], [14]. It is based on the assumption that a model that performs better in simulating the observed climate in [the](#) past would perform better in future as well. In this study, projected and observed climate were compared graphically and statistically. Graphical comparison was done to visualize how well the models simulate the observed data. This approach was adopted from similar studies [13]. Statistically, calculated sum of square of errors for projected evapotranspiration and rainfall against observed values for each GCM were compared. Similarly, Suppiah *et al.* [14] also used [a](#) statistical approach, root-mean-square deviation (RMSD), for climate model comparisons. In this study, the accuracies of the models were compared based on the values of sum of square of errors (SSE) and finally two climate models were selected for climate projection.

Formatted: Font: Italic

### 2.5.2 Evaluation of hydrological models

In order to select best model for simulation of runoff for base period and future climate projection, firstly, the four hydrological models with-in the Rainfall Runoff Library (RRL) (SIMHYD, Sacramento, SMAR, and AWBM) were calibrated and validated simultaneously. To this end, daily rainfall and evapotranspiration data from six weather stations were used. To adjust the pan –evaporation data, monthly pan- coefficients were estimated and used for data scaling in the RRL software during calibration and validation processes. The calibration and validation were performed repeatedly using different combinations of calibration, warm up, and verification periods until the best possible performance are achieved. The performance of the four models were compared based on model efficiency. The efficiency of models in RRL Packages are expressed by Nash-Sutcliffe efficiency (NSE), Coefficient of Efficiency for Calibration (Ec), and Coefficient of Efficiency for validation (Ev) which are automatically calculated for each calibration and validation run.

The NSE is a standardized measure of the relative proportion of observed data variance to total residual variance. Thus, it measures how well the modeled flow is related to observed daily runoff [15]. Similarly, coefficients of efficiency of calibration and validations indicate how closely the respective calibration and validation observation data sets are related to calculated runoff. Secondly, the most suitable model was selected based [on](#) correlation coefficient of calibration and validation. Weighted average rainfall for the watershed was calculated based on constructed Thiessen [polygons polygon](#) for [the](#) selected six rainfall stations.

Formatted: Highlight

### 2.5.3 Assessment of climate impact

After the climate and hydrological models were evaluated and selected, the impact assessment was performed. In the process, firstly, the selected climate models were used to download climate projections at three emission scenarios (Historic, RCP 4.5, and RCP 8.5) for 5 weather stations. The projection files were analyzed and GCM realizations at 10th, 50-th, and 99-th percentiles of rainfall were identified, for 16 years base period (1990 to 2005), and 10 years (2026-2035) for RCP 4.5, and RCP 8.5. The 10th, 50th, and 99<sup>th</sup> percentiles of rainfall represents low, median, and highest annual flows, respectively. Secondly, runoff [was](#) simulated using best performing hydrological model. To simulate runoff over the watershed, projected daily time series of rainfall and evapotranspiration data for 6 grid points from two selected GCMS

were used as input in to the calibrated and validated hydrological model. The simulations were run for three percentiles of flow (10th, 50 th, and 99 th) and three emission scenarios (Historic, RCP 4.5, and RCP 8.5). Finally, the changes in climate variables and runoff due to climate change were estimated. The percentage change from annual simulated runoff for base period (1990 to 2005) and future climate projection (2026 to 2035) were computed for each climate model, emission scenario, and flow percentile.

### 3. RESULTS AND DISCUSSION

#### 3.1 Performance of global climate models

Even though the six climate models are already identified as suitable for South Australia, these models were evaluated based on how well they simulate observed rainfall and evapotranspiration for Myponga catchment. For this purpose, five years average (2000 to 2005) monthly observed and projected rainfall and evapotranspiration of Myponga reservoir station were compared graphically as shown in Figure 2 and 3 and statistically as shown in Table 2.

As it can be seen in Figures 2 and 3, the curves are superimposing and it is difficult to identify visually how each model performs. Yet, it is clear that the curves generally show similar trend over months for both rainfall and evapotranspiration.

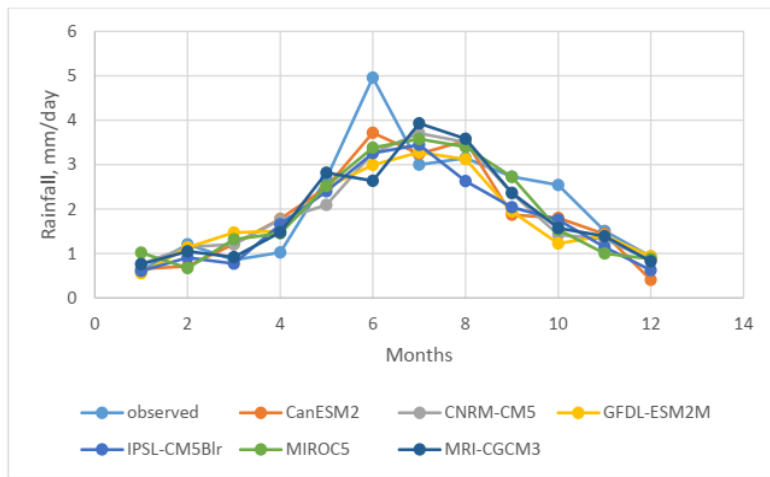


Fig 2. Comparison of projected and observed rainfall (2000-2005)

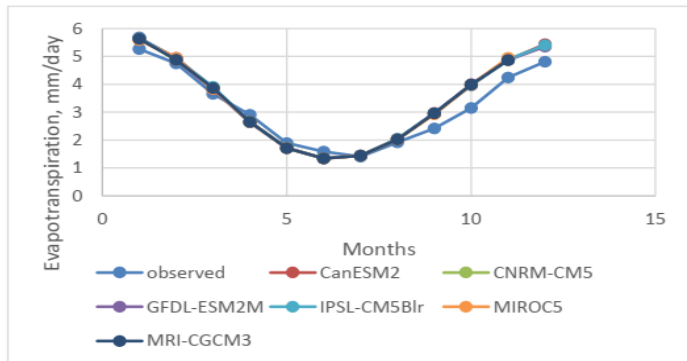


Fig 3. Comparison of projected and observed evapotranspiration (2000-2005)

To identify precisely how each model performs, the statistical comparisons employing the concept of sum of square error were used to compare the monthly average observed and projected rainfall and evapotranspiration for each climate model. The sum of square errors for respective climate model is summarized in Table 2. The result indicates that sum of square error (SSE) for rainfall is lowest for CanESM2 and highest for MRI-CGCM3 whereas sum of square error (SSE) for evapotranspiration is the highest for CanESM2 while CNNRM-CM5, MRI-CGCM3, and MIROC5 have shown nearly the same SSE. These indicate that rainfall projected by CanESM2 and evapotranspiration projected by CNNRM-CM5, CNNRM-CM5, MRI-CGCM3, and MIROC5 are relatively accurate to simulate the observed median climate values for the period 2000-2005. It can be noticed that the differences in SSE across the models for evapotranspiration are not large. Similarly, the differences in SSE across the models for rainfall are not significant except for CanESM2 and MRI-CGCM3. Additionally, the SSE values in Table 2 also show that rainfall is generally less reliably projected by the models than evapotranspiration indicated by higher SSE for rainfall projections. Suppiah *et al.* [14] also found large variations in rainfall projections by different climate models.

Formatted: Font: Italic

Table 2: Statistical comparison by sum of square error (SSE)

Models	SSE- mm/day	
	Rainfall	Evapotranspiration
CanESM2	4.30	2.18
CNNRM-CM5	5.96	2.04
GFDL-ESM2M	6.95	2.10
IPSL-CM5Bkr	5.26	2.15
MIROC5	5.03	2.09
MRI-CGCM3	7.82	2.06

### 3.2 Performance of hydrological Models

After several attempts of calibration and validation, the best possible combination of NashSutcliffe efficiency (NSE), Coefficient of Efficiency for Calibration (Ec), and Coefficient of Efficiency Validation (Ev) for respective model were identified as shown in Table 3.

Table 3: Performance of Models

Models	Calibration		Validation	
	NSE	EC	NSE	EV
AWBM	0.75	0.87	0.64	0.84
Sacramento	0.83	0.92	0.44	0.75
SIMHYD	-0.04	0.59	0.009	0.46
SMAR	-0.04	0.59	0.009	0.46

As it can be seen in the Table 3, SIMHYD and SMAR performed poorly while AWBM and Sacramento showed comparable performance. The correlation efficiency and NSE value of Sacramento for calibration are higher than that of AWBM, but for both, correlation efficiency lies between  $0.8 \leq E \leq 0.93$ . However, the performance of Sacramento for validation is significantly lower than that of AWBM. For validation, the Correlation efficiency for AWBM lies between  $0.8 \leq E \leq 0.93$  while for Sacramento the correlation efficiency lies between  $0.6 \leq E \leq 0.8$ . This means, AWBM has better consistency for different set of data than Sacramento.

Table 4: Model performance classes (Ladson, 2008)

Classification	Coefficient of Efficiency (Ec) for Calibration	Coefficient of Efficiency(Ev) for Validation
Excellent	$E_c \geq 0.93$	$E_v \geq 0.93$
Good	$0.8 \leq E_c \leq 0.93$	$0.8 \leq E_v \leq 0.93$
Satisfactory	$0.7 \leq E_c \leq 0.8$	$0.6 \leq E_v \leq 0.8$
Passable	$0.6 \leq E_c \leq 0.7$	$0.3 \leq E_v \leq 0.6$
Poor	$E_c \leq 0.6$	$E_v \leq 0.3$

Based on criteria by Ladson (2008) shown in Table 4, the performance by AWBM is good while performance by Sacramento is satisfactory. Therefore, AWBM and its calibration parameters (Table 5) were used for simulations in assessment of climate impact. These parameters can be used for other studies for a reasonable period beyond which catchment characteristics and its response would change due to change in land cover.

Table 5: AWBM calibration parameters

Parameter	Description	
<b>A1</b>	Partial area of smallest store	0.134
<b>A2</b>	Partial area of middle store	0.433
<b>BFI</b>	Base flow index	0.420
<b>C1</b>	Surface storage capacity of smallest store	7.1
<b>C2</b>	Surface storage capacity of middle store	131.8
<b>C3</b>	Surface storage capacity of largest store	474.5
<b>Kb</b>	Base flow recession constant	1
<b>Ks</b>	Surface runoff recession constant	0.51

### 3.3 Impact of warming on climate variables and runoff

The impacts of warming for evapotranspiration, rainfall, and runoff have been estimated. Due to differences in the climate and hydrological models, time frame, watershed characteristics, and scale of projects in different studies, the estimated percentage changes might vary across studies. This makes direct comparisons of the results of this study with other studies difficult. However, the results are compared with previous studies in general sense.

#### 3.3.1 Impacts on potential evapotranspiration

Based on the projected annual evapotranspiration from the two climate models (CanESM2 and MRI-CGCM3) for base and future periods, the estimated percentage changes in potential annual evapotranspiration by 2030 (2026-2035) relative to base period (1990 - 2005) are given in Table 6. As shown in the table, for intermediate emission scenario (RCP 4.5), the average annual evapotranspiration is expected to change in range of 1.58 to 2.28 %, 1.56 to 2.52%, and 1.47 to 2.25 % across the climate models for corresponding 10<sup>th</sup>, 50<sup>th</sup>, and 99<sup>th</sup> percentile of annual values. Whereas for high emissions scenario (RCP8.5), the changes for the same period are expected to be in range of 2.63 to 4.27 %, 1.98 to 4.35 %, and 1.91 to 4.52 % across climate models for corresponding 10<sup>th</sup>, 50<sup>th</sup>, and 99<sup>th</sup> percentile of annual rainfall. Projections by both climate models, CanESM2 and MRI-CGCM3, in this study show increase in average annual potential evapotranspiration for all percentiles and emission scenarios. According to CSIRO and BOM [16], by 2030 annual evapotranspiration would change by 0, 3, and 6.5 % for intermediate emission scenario and by 0, 3, and 3% for high emission scenarios, for corresponding 10<sup>th</sup>, 50<sup>th</sup>, and 90<sup>th</sup> percentile) in Adelaide and Mount lofty range natural resource management region. The projections in this study are in agreement with results by CSIRO and BOM [16].

Formatted: Highlight

Table 6: Percentage changes of average annual potential evapotranspiration

GCM model	Intermediate emission scenario (RCP4.5)			High emission scenario (RCP4.5)		
	10 <sup>th</sup> percentile	50 <sup>th</sup> percentile	99 <sup>th</sup> percentile	10 <sup>th</sup> percentile	50 <sup>th</sup> percentile	99 <sup>th</sup> percentile
CanESM2	2.28	2.52	2.25	4.27	4.35	4.52
MRI-CGCM3	1.58	1.56	1.47	2.63	1.98	1.91
Average	1.9	2.0	1.9	3.5	3.2	3.2

To summarize, by 2030 average annual potential evapotranspiration is expected to rise relative to the base period (1990-2005) under both climate models and emissions scenarios. It can be seen that the rates of changes are generally higher for high emission scenario than for intermediate emission scenario. Additionally, it can be noticed that the percentage changes for CanESM2 are consistently higher than that of MRI-CGCM3. Averaged percentage changes across climate models show rise in a range of 1.9 to 2.0 % and 3.2 to 3.5 % across percentiles for intermediate and high emission scenario, respectively.

Comment [EN1]: quantify

Comment [EN2]: quantify

### 3.3.2 Impacts on rainfall

Based on the projected annual rainfall from two climate models (CanESM2 and MRI-CGCM3) for base and future period, the estimated percentage changes in annual rainfall by 2030 (2026-2035) relative to base period (1986 - 2005) are given in Table 7. As shown in the Table 7, for intermediate emission scenario (RCP 4.5), the average annual rainfall is expected to change in range of -1.16 to -6.34 %, -1.1 to -8.95 %, and -6.81 to 1.57 % across the climate models for corresponding 10<sup>th</sup>, 50<sup>th</sup> and 99<sup>th</sup> percentile of annual rainfall. Whereas for high emissions scenario (RCP8.5), the changes for the same period are expected to be in range of -9.43 to -7.87 %, -6.82 to -13.44%, and -13.44 to -11.58% for corresponding 10<sup>th</sup>, 50<sup>th</sup>, and 99<sup>th</sup> percentile of annual rainfall.

Table 7. Percentage change in average annual rainfall

GCM model	Intermediate emission scenario (RCP4.5)			High emission scenario (RCP4.5)		
	10 <sup>th</sup> percentile	50 <sup>th</sup> percentile	99 <sup>th</sup> percentile	10 <sup>th</sup> percentile	50 <sup>th</sup> percentile	99 <sup>th</sup> percentile
CanESM2	-6.34	-8.95	-6.81	-9.43	-13.44	-11.58
MRI-CGCM3	-1.16	-1.10	1.57	-7.87	-6.82	-4.75
Average	-3.75	-5.03	-2.62	-8.65	-10.13	-8.17

Projections by CSIRO and BOM [16] for the Adelaide and Mount range natural resource management region indicate that by 2030, the annual rainfall is expected to change by -15, -4.5, and 0 % for intermediate emission scenario and by -15,-4.5, and 0 % for high emission scenarios, for corresponding 10<sup>th</sup> , 50<sup>th</sup>, and 90<sup>th</sup> percentile of annual rainfall. Whereas Charles and Fu [9] projected decline in annual rainfall by 4.9 % and 5.4% for intermediate emission scenario and high emission scenario, respectively. On the other hand, CSIRO provides decline ranging 1 to 10% for the region corresponding to increase in atmospheric carbon dioxide to 420 – 480 ppm (RCP2.6) [17]. It can be noticed that most of the projections in this study are in agreement with the previous projections in publications mentioned above.

Formatted: Highlight

To summarize, average annual rainfall is expected to decline by 2030 for all cases emission scenarios and percentiles except for projection by MRI-CGCM3 at 99<sup>th</sup> percentile under intermediate emission scenario. It can be seen that, similar to evapotranspiration, the rates of changes are generally higher for high emission scenario than for intermediate emission scenario. Additionally, it can be noticed that the percentage changes for CanESM2 are consistently higher than that of MRI-CGCM3 model. The averaged percentage change across climate models, the decline in average annual rainfall may range 2.62 to 5.03 % and 8.17 to 10.13 % across percentiles under intermediate and high emission scenario, respectively.

### 3.3.3 Impact on streamflow

Based on the simulated runoff for projected daily rainfall and evapotranspiration from respective climate models for base and future periods, the estimated percentage changes in annual runoff by 2030 (2026-2035) relative to base period (1986 - 2005) are given in Table 8. As shown in the table, for intermediate emission scenario (RCP 4.5), the average annual runoff from the catchment is expected to change in range of -9.98 to 20.9 %, -2.26 to 9.7 %, and 1.36 to 8.81 % for corresponding 10<sup>th</sup>, 50<sup>th</sup>, and 99<sup>th</sup> percentile of annual rainfall.

Table 8. Percentage change in average annual runoff

GCM model	Intermediate emission scenario (RCP4.5)			High emission scenario (RCP4.5)		
	10th percentile	50th percentile	99th percentile	10th percentile	50th percentile	99th percentile
CanESM2	20.92	9.70	8.81	-10.62	-16.63	-13.05
MRI-CGCM3	-9.98	-2.26	1.36	-23.98	-23.66	-21.21
Average	5.47	3.72	5.08	-17.3	-20.15	-17.13

It can be noted that despite decline in annual rainfall and increase in annual evapotranspiration at higher rate for CanESM2, the annual runoff or response of the catchment showed rise especially at intermediate emission scenario. A number of studies in South Australia have projected decline in mean annual runoff for several catchments under both intermediate and high emission scenarios [2], [4]. Another study projected that runoff in the Eastern mount Lofty Ranges would decline by 3 to 52% with various climate models by 2030 [18]. Thus, the simulated flow for climate projection by MRI-CGCM3 is in agreement with the previous findings explained above where-as result for CanESM2 shows contradictions for intermediate emission scenario.

To summarize, percentage change in average annual runoff for 2030 (2026-2035) relative to base period (1990- 2005) would possibly increase or decrease for intermediate emission scenario while it is expected to decrease consistently for high emission scenario. There is wider variability among simulated annual flow across the climate models for intermediate emission scenario. Averaged percentage changes across climate models show rise in average annual runoff in range from 3.72 to 5.47 % for intermediate scenario and decline in range from 17.13 to 20.15 % across percentiles for high emission scenario.

The interpretation of the simulated runoff for different percentiles are based on the practical impacts associated with each of the percentiles. According to Westra *et al.* [2], mean or median annual flow (50<sup>th</sup> percentile), low annual flow (10<sup>th</sup> percentile flow), and maximum annual flow (99<sup>th</sup> percentile) can be used to explain impact of climate change? on water resources availability, drought, and flooding conditions, respectively. Accordingly, the annual low flow (worst case) show possibilities of drought for projection by MRI-CGCM3 under intermediate

Formatted: Font: Italic

Formatted: Superscript

emission scenario and for both climate models under high emission scenario. Whereas for others cases, the low flow would increase. With respect to median flow, it is expected to decline for all cases except for projections by CanESM2 under intermediate emission scenario. These would have severe implications for water resource availability for competing water users. As to maximum annual flow, it would increase ranging from slight to moderate rate under intermediate emission scenario while it is expected to decline at higher rate under high emission scenarios. Thus, there would be possibility of slight to moderate flooding conditions under intermediate emission scenarios, and less possibilities of flooding events under high emission scenario.

Comment [EN3]: May need to be explained.

#### 4. CONCLUSION AND RECOMMENDATIONS

The following conclusions and recommendations are forwarded

- The climate model, CanESM2, has shown best performance in simulating monthly average observed daily rainfall (2000-2005) while CNRM-CM5, MRI-CGCM3, and MIROC5 have shown similar higher performance in simulating monthly average observed daily evapotranspiration (2000-2005). None of the models showed consistently highest performance for both rainfall and evapotranspiration.
- Among the four hydrological models in RRL, calibration and validation resulted in 'Good' performance for AWBM model and 'satisfactory' performance for **Sacramento**. The other models, SIMHYD and SMAR, perform very poorly for the catchment and its hydrological conditions in the period 2000-2010. Therefore, it is recommended to use AWBM and its calibration parameters for simulation of runoff for reasonable period of time until significant changes in hydrological and watershed characteristics happen. Yet, the calibration parameters may need to be further refined with larger amount of data to increase reliability.
- By 2030s, the average annual potential evapotranspiration is expected to rise relative to base period (1990-2005) for both climate models (CanESM2 and MRI-CGCM3) under both emission scenarios. Averaged percentage changes across climate models show rise in average annual evapotranspiration in range from 1.9 to 2.0 % and from 3.2 to 3.5% across percentiles for intermediate and high emission scenario, respectively. Whereas, The average annual rainfall is expected to decline for all emission scenarios and percentiles except for projection by MRI-CGCM3 at 99<sup>th</sup> percentile for intermediate emission scenario. Averaged percentage changes across climate models show decline in average annual rainfall in range from 2.62 to 5.03 % and from 8.17 to 10.13 % across percentiles for intermediate and high emission scenario, respectively.
- Average annual runoff for 2030s (2026-2035) would possibly increase (CanESM2) or decrease (MRI-CGCM3) relative to base period (1990-2005) for intermediate emission scenario while it is expected to decrease consistently for high emission scenario for both climate models. Averaged percentage changes across climate models show rise in average annual runoff in range from 3.72 to 5.47 % for intermediate scenario and decline in range from 17.13 to 20.15 % across percentiles for high emission scenario.

Thus, on average, annual runoff would slightly rise for intermediate emission scenario for all percentiles indicating no challenges in water availability, drought, and flooding conditions at annual time scale. Whereas at high emission scenario,

there would be significant decline in annual runoff, indicating remarkable challenges in water availability, and risk of drought at annual time scale. Analysis at seasonal time scale might be needed to understand the pattern of the changes in runoff but for reservoir catchment such as Myponga, the analysis at annual time scale is sufficient. Thus, adaptation and mitigation measures should be identified and applied at national, state, and local administrative level to minimize possible negative impacts and utilize the possible opportunities.

## REFERENCES

- [1] M. Babel, A. Agarwal, and V. Shinde, "Climate Change Impacts on Water Resources and Selected Water Use Sectors," in *Climate Change and Water Resources*, S. Shrestha, M. Babel, and V. Pandey, Eds., Boca Raton, Florida, USA: CRC press : Taylor and Francis group, 2014.
- [2] S. P. Westra, M. Thyer, M. Leonard, and M. Lambert, "Impacts of climate change on surface water in the Onkaparinga catchment - Final report volume 3: impact of climate change on runoff in the Onkaparinga catchment," Goyder Institute for Water Research, Report, 2014. Accessed: May 28, 2023. [Online]. Available: <https://digital.library.adelaide.edu.au/dspace/handle/2440/89348>
- [3] CSIRO, *Climate change in Australia: Impacts, adaptation and vulnerability. Climate Adaptation*. The Commonwealth Scientific and Industrial Research Organisation(CSIRO). Accessed: Oct. 04, 2015. [Online]. Available: [www.climatechange in Australia.gov.au](http://www.climatechange.in Australia.gov.au).
- [4] Goyder Institute for Water Research, "Impact of climate change on the surface water resources of the kangaroo island natural resources management region, Government of South Australia," Goyder Institute for Water Research, Adelaide, South Australia., 2015. Accessed: May 28, 2023. [Online]. Available: <https://goyderinstitute.org>
- [5] Environmental protection Authority, South Australia (EPA SA), *State of the Environment: South Australia, Environmental Protection Authority, South Australia*. Environmental protection Authority, South Australia (EPA SA), 2013. Accessed: Oct. 22, 2015. [Online]. Available: <http://www.epa.sa.gov.au/xstdfiles/~/Water/Report/myponga>
- [6] F. H. S. Chiew *et al.*, "Estimating climate change impact on runoff across southeast Australia: Method, results, and implications of the modeling method," *Water Resour. Res.*, vol. 45, no. 10, 2009, doi: 10.1029/2008WR007338.
- [7] Goyder Institute for Water Research, *Climate change projections data for South Australia -A User Guide*, vol. Occasional Paper No. 15/1. Adelaide, South Australia: Goyder Institute for Water Research, 2015.
- [8] Environmental protection agency, South Australia (EPA SA), *Myponga watercourse restoration project final report 2000-07*. Environmental protection agency, South Australia (EPA SA), 2008. Accessed: Oct. 14, 2015. [Online]. Available: <http://www.epa.sa.gov.au/xstdfiles>
- [9] S. Charles and G. Fu, "Statistically Downscaled Projections for South Australia – Task3, CSIRO Final Report," Goyder Institute for Water Research, Adelaide, South Australia., Report, 2014. Accessed: May 28, 2023. [Online]. Available: <https://digital.library.adelaide.edu.au/dspace/handle/2440/89348>
- [10] A. Frost, SP. Charles, B. Timbal, and F. H. S. Chiew, "A comparison of multi-site daily rainfall downscaling techniques under Australian conditions," *J. Hydrol.*, vol. 408, no. 1–2, pp. 1–18, Sep. 2011, doi: 10.1016/j.jhydrol.2011.06.021.
- [11] G. Fu *et al.*, "Modelling runoff with statistically downscaled daily site, gridded and catchment rainfall series," *J. Hydrol.*, vol. 492, pp. 254–265, Jun. 2013, doi: 10.1016/j.jhydrol.2013.03.041.
- [12] G. Podger, "Rainfall Runoff Library User Guide v1.0.5 (GP)." CRC for Catchment Hydrology, Australia, 2004. Accessed: May 29, 2023. [Online]. Available: <https://www.scribd.com/document/335929065/Rainfall-Runoff-Library-User-Guide-v1-0-5-GP>
- [13] S. Bony, R. Colman, and T. Fichefet, "Climate models and their evaluation," in *Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*, S. Solomon, D. Qin, M. Manning, Z. Chen, M. Marquis, K. B. Averyt, M. Tignor, and H. L. Miller, Eds., Cambridge University Press, 2007, pp. 623--624.
- [14] R. Suppiah, CSIRO, and South Australia, Eds., *Climate change under enhanced greenhouse conditions in South Australia: an updated report on assessment of climate change, impacts and risk management strategies relevant to South Australia*. Adelaide, S. Aust: CSIRO Marine and Atmospheric Research : Dept. of Environment and Heritage, South Australia, 2006.
- [15] J. Nash and J. Sutcliffe, "River flow forecasting through conceptual models part I — A discussion of principles," *J. Hydrol.*, vol. 10, no. 3, pp. 282–290, Apr. 1970, doi: 10.1016/0022-1694(70)90255-6.
- [16] CSIRO and the Bureau of Meteorology (BOM), Ed., *Climate change in Australia: technical report 2007*. [Aspendale, Vic: CSIRO Marine and Atmospheric Research], 2007.

- [17] D. K. Bardsley and C. Liddicoat, "Community perceptions of climate change impacts on natural resources management in the Adelaide and Mount Lofty Ranges," Government of South Australia, the Department of Water, Land and Biodiversity Conservation, Adelaide, DWLBC Report 2008/14, 2007.
- [18] Australian Government: Department of Agriculture, Fisheries, and Forestry, Department of Metrology, and Bureau of rural sciences, "Water resources in a changing climate: southern South Australia. Initiative of the national Agriculture and climate change Action plan, Communicating Climate change," 2008. [Online]. Available: <https://www.mla.com.au/globalassets/mla-corporate/blocks/research-and-development/sa-water-resources-.pdf>

UNDER PEER REVIEW