

Original Research Article

Enhanced hydrocarbon recovery using the application of seismic attributes in fault detection and direct hydrocarbon indicator in Tomboy Field, ~~western-Offshore~~western-offshore Niger Delta Basin

ABSTRACT

Seismic stratigraphic and structural interpretation is often hampered by seismic resolution and, sometimes, ~~human's~~human inability to identify a subtle feature on the seismic. These factors have frequently led ~~to the~~to poor seismic interpretation of geologic features. Thus, an integral approach to ~~studying the~~studying structural patterns and hydrocarbon bearing zones using seismic attributes ~~were~~was carried out on the Tomboy field using 3D seismic data covering approximately 56 km² of the western belt of the Niger Delta. The seismic volume underwent post-stack processing, which enhanced seismic discontinuities. A deep steering volume was first ~~created,~~created and several dip filters were applied to enhance faults in the study area. After that, curvature and similarity attributes were calculated on the dip-steered and fault-enhanced volume. These calculations show detailed geometry of the faults and zones of subtle lineaments. Six faults (F1, F2, F3, F4, ~~F5,~~F5 and F6) were identified and mapped. These faults range from antithetic to ~~crestal~~crest growth faults. Two major growth faults (F5 and F6) were revealed to dip in the NE-SW directions. A near-extensive ~~crestal~~crest fault (F4) appeared beneath the major faults. Although several minor fractures were displayed in the southern and central ~~portion~~portions of ~~the~~the crest fault of the dipping seismic data, the ~~SW-dipping crestal fault~~SW (F4) and growth fault F6 are responsible for holding the hydrocarbon found within the identified closures. Using attributes on the seismic data increased confidence ~~in the~~in mapping and interpreting structural features. Furthermore, ~~Energy~~energy attributes were used as Direct Hydrocarbon Indicator (DHI) to ~~visualize~~visualise viable areas within the ~~study and permit~~study, which allows a more robust interpretation. Time slices were taken ~~at~~in regions of flat and bright spots. ~~Spectral~~The spectral decomposition attribute was run on these slices to display areas of high amplitude ~~reflection~~reflexion typical of hydrocarbon-bearing regions, which are trapped mainly by regional to ~~sub-regional~~subregional growth faults. The surface attribute calculated on the generated surface shows that the field is ~~dominantly~~predominantly controlled by faults serving as traps for hydrocarbon.

Keywords: Seismic attributes, Hydrocarbon, Faults, Bright hydrocarbon, faults, bright spots, Dip filter

1. INTRODUCTION

The seismic attributes used in studies are suggested to be all the information obtained from seismic data, either by direct measurements or logical or experience-based reasoning (Taner, 2001; Thapar, 2004). Chopra and Marfurt (2005) defined seismic attributes as any information derived from seismic data, such as interval velocity, inversion for acoustic

impedance (Aniwetalu et al., 2018), prediction of pore pressure prediction pressure (Joshua et al., 2022), and reflector terminations. Seismic attribute analysis has also been a vital aid in seismic interpretation since 1930 when geophysicists discovered the first seismic section. Ever since Since more than 50 attributes of seismic data have been obtained, more types of attributes attribute have been found with the advance in computer technology. For reservoir characterisation (Lunina et al., 2014; Shang et al., 2022; Nwaezeapu et al., 2018; Oguadinma et al., 2023) and seismic interpretations (; Oguadinma et al., 2017; Oguadinma et al., 2018), seismic attributes analysis has been used by many authors (Vetrici and Stewart, 1996; Strecker et al., 2004; Ajisafe and Ako, 2013; Oguadinma et al., 2016; Oguadinma et al., 2021). It also proved its importance in the classification of the depositional environment (Ahmad and Rowel, 2013; Matos and Marfurt, 2013; ;Oguadinma et al., 2014) and in the detection and enhancementimprovement of fractures and faults (Ayolabi and Adigun, 2013; Castillo, 2010; Francelino and Antunes, 2013; Santosh et al., 2013) to give details of structural history and to provide direct hydrocarbon indicator (Adepoju et al., 2013). The seismic attribute technique is often used

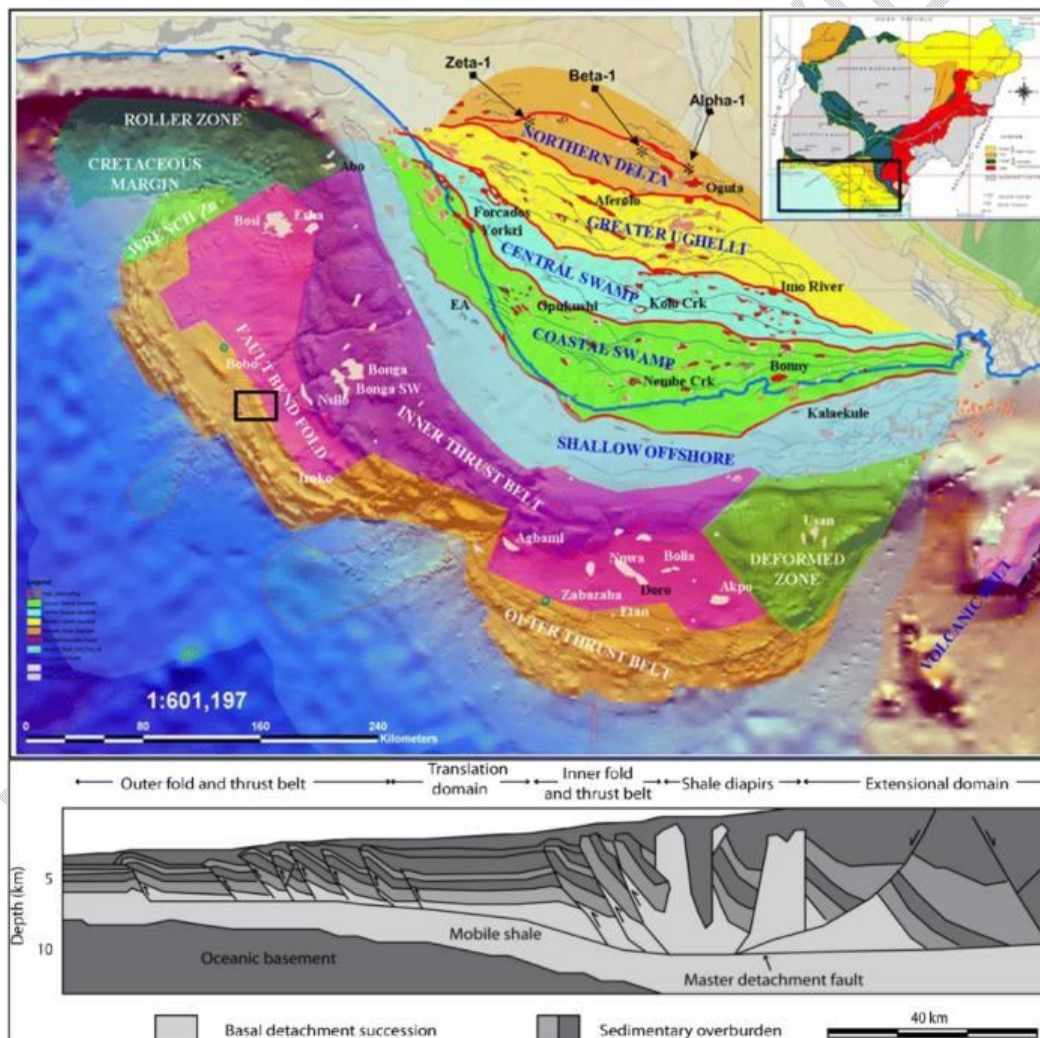


Fig. 1. (a) The Niger Delta complex showing different depocenters and the location of the studied area in a black box (modified from Ejedawe et al., 2002). (b) Cross-section through the Niger Delta showing the gross architecture and structural style typical of large deltas situated on passive margins (Corredor et al., 2005).

used in seismic data processing because it can ~~enhance~~improve geological information not observed using the conventional processing method (Ayolabi and Adigun, 2013). Chopra (2002) used similarity as a coherence attribute in detecting trace discontinuities of the seismic data to detect faults and stratigraphic features. The curvature attribute is used in 3D horizon interpretation to ~~characterize~~characterise faults and fracture systems (Robert, 2001). In 3D seismic data volume, fault dipping can be detected using a semblance-based coherency algorithm (Marfurt et al., 1998, 1999). The study of Jones and Roden (2012) used ~~the geometry~~the seismic attribute technique of ~~dip~~dips of maximum similarity and curvature types ~~in investigating~~to investigate the fault system of the South Texas oil field. Their study showed that the geometry seismic attribute technique ~~helped~~helped to enhance and detect faults and fractures. At the same time, the curvature attributes were also applied to highlight other features not revealed by the geometry attributes application. This ~~paper sets out~~article ~~aims~~ to enhance fault visualization and highlight viable hydrocarbon placement using seismic attributes in the study area in the Niger Delta Basin.

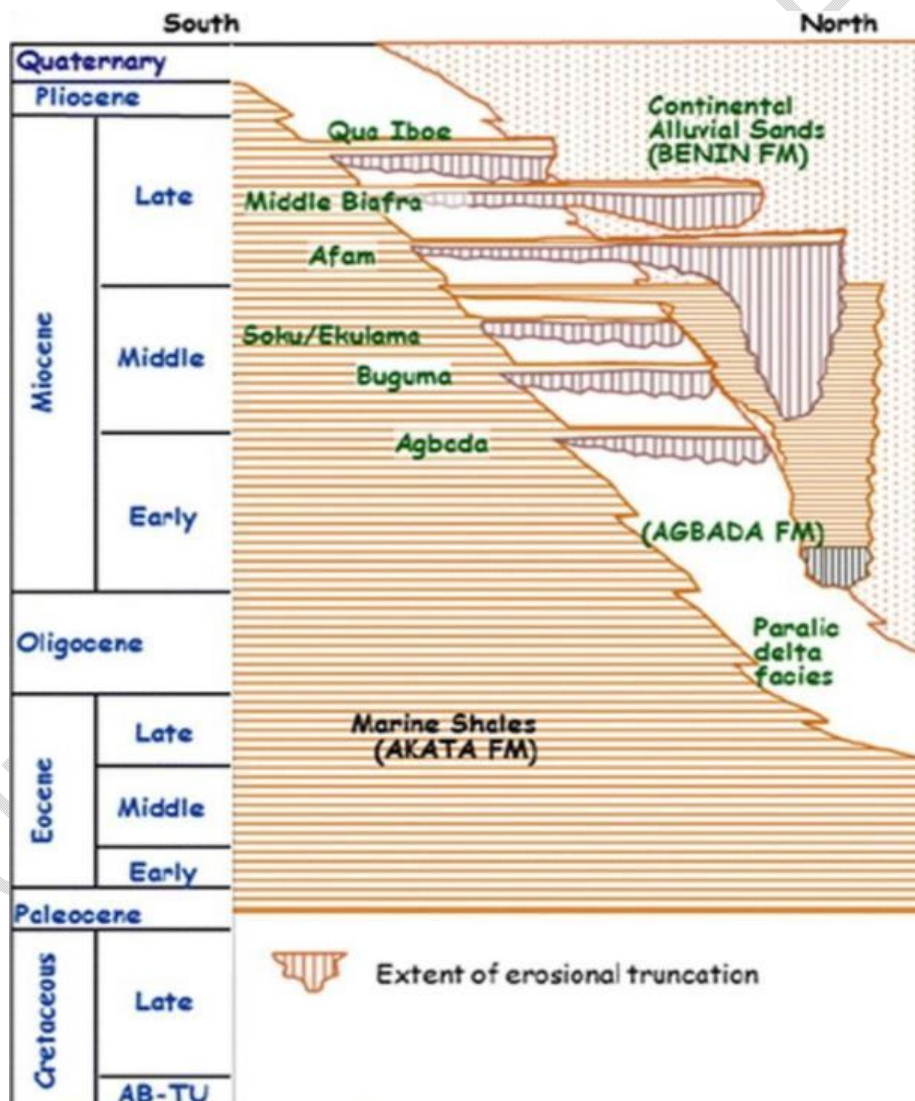


Fig. 2. Regional stratigraphy of the Niger Delta showing different geologic formations (Akata Formation, which is the oldest; Agbada Formation that ~~overlies the~~overlies Akata and the youngest Benin Formation containing mainly alluvial deposits) (Ozumba, 2013)

2. GEOLOGICAL BACKGROUND

The Tomboy field is located in the offshore western Niger Delta Basin (Fig. 1). This basin is situated in the Gulf of Guinea, Central Africa. It lies between latitudes $4^{\circ}4'$ and $6^{\circ}6'N$ and longitudes $3^{\circ}3'$ and $9^{\circ}9'E$. A regressive sequence where the rate of the sediment supply is higher than the subsidence rate (Reijers, 2011) causes the accumulation of clastic wedges approximately 12 km thick in the basin. The tectonic framework of the Niger Delta margin along the western coast is controlled by Cretaceous fracture zones that appear as ridges and sometimes trenches in the deep part of the Atlantic Ocean (Lehner and Ruiter, 1977).

In the delta, shale tectonic activities are on the rise (Oguadinma et al., 2021). For instance, shale mobility induced internal deformation in response to some processes. One of the processes is shale diapirism formed from loading poorly compacted and overpressure prodelta and delta slope clay (Agbada Formation; Tuttle et al., 1999) by high-density delta front sands of the Agbada Formation. Another process is slope instability due to a lack of lateral basin-ward support for the under compacted delta-slope clay (Akata Formation). The Benin Formation is Oligocene and younger. It comprises continental floodplain sands and alluvial deposits with deposits estimated to be 2 km thick (Tuttle et al., 2015). The stratigraphic column of the lithostratigraphic units of the Niger Delta is shown in Fig. 2.

3. METHODOLOGY

This study used 3D seismic data loaded into the OpendTect and Petrel interpretative software. The data were quality checked for errors, and corrections were made. Before interpretation in Petrel, seismic data was loaded. The data was scanned and realised to improve the signal-to-noise ratio and to decrease the data size so that data processing and interpretation would be improved. Fault mapping was carried out manually on the seismic inline and crossline sections manually. The seismic data was steered for a more detailed interpretation, and the objective was to improve the signal-to-noise ratio for better seismic data to run interpretations on.

Seismic attributes such as curvature, semblance, energy, and spectral decomposition were used for fault detection and DHI. The similarity attribute has been defined as the Euclidean distance between the normalised vectors over the vector lengths. Similarities of one and zero indicate that the trace segments are identical and non-identical, respectively (Tingdahl and De Groot, 2003). Using the OpendTect software window environment, it is observed that the calculation of similarity is often favoured by determining the direction of the best match at every position, which is a result by itself: the dip. Applying the similarity attribute is relatively easy and gives clarity at every stage. When integrated with other attributes, this attribute would certainly give impressive results in the shortest time possible.

The Spectral decomposition and the semblance attributes maps are based on "horizons" (+/- a few meters around the interpreted horizons). The spectral decomposition RGB frequencies of the blending used were from frequency evaluation of the interval of interest of the seismic data using the work of Peyton et al. (1998). The semblance attribute stresses seismic trace-by-trace and utilizes observations and interpretations of structural and stratigraphic features.

Different steering cubes were calculated from a different algorithm. From Fig. 3, subtle features in the full stack steering cube were visible after the background steering cube was calculated (Fig. 3c). This region is circled in red. To explain further, dip Steering is

used when seismic reflectors are followed by [auto-tracking](#) the pre-calculated dip field from any starting position. Working with more than a steering cube is essential hence the three steering cubes in this study: the Full steering [cube](#), the Detailed steering cube and the Background steering cube.

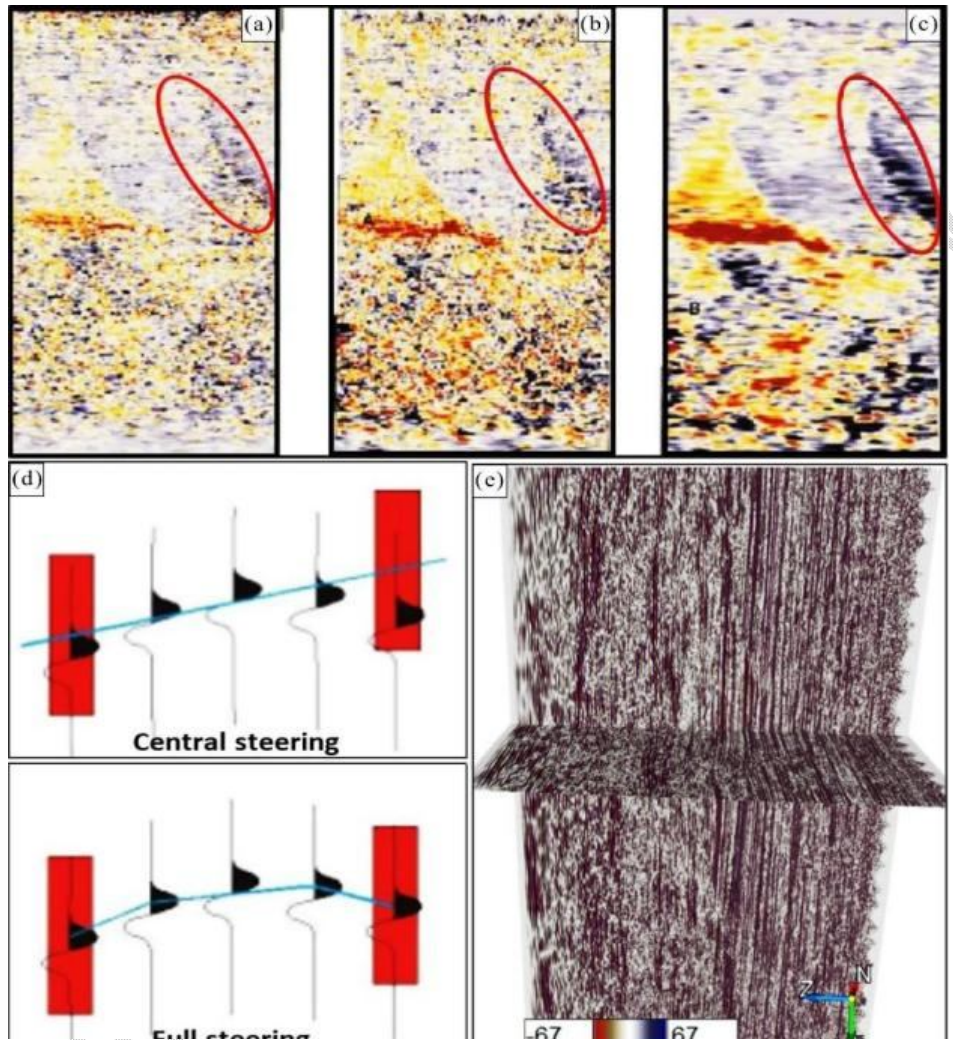


Fig. 3. (a) Full-stack steering cube, (b) Detailed steering cube and (c) background steering cube. Notice how the fault on the full stack steering cube was enhanced at the background steered cube. (d) Comparison between central and full steering cubes. It appears that the relationship in the full steering cube is better than the centre, while the detailed and background steering are better than the full steering cube. (e) Seismic survey base map of the study area displaying the seismic inline and cross line. The red box represents the location of the study area.

In OpendTect, data-driven steering is of two types: Central and Full steering (Fig. 3d). Where the central steering dip/azimuth at the point of evaluation point is followed by a trace segment to compute filters and seismic trace at an event, the Full steering, at every tract position, is updated. The Detailed steering cube is made of dips calculated from the dip computation algorithm and is used to preserve details in the data (Fig. 3 and Table 1). For example, in a fracture detection study. On the other hand, the Background steering cube is usually median-filtered and a smoothed version

of the Detailed steering cube. If ~~well-filtered,well-filtered,~~ it contains less noise; notably, the dips follow larger structural trends.

Table 1 ~~Settings~~**Setting** of seismic attributes with values of dip-steered attribute, step-out, statistical ~~operator~~**operator**, and time gate.

Attribute	Dip-steering	Step-out	Statistical operator	Time gate (ms)
Similarity	Not steered	N/A	Minimum	(-24, 24)
Curvature	Steered	(1, 1, 1)	Maximum	(-24, 24)
Raw steering	N/A	(1, 1, 1)	N/A	N/A
Detailed steering	N/A	(1, 1, 3)	N/A	N/A
Background steering	N/A	(5, 5, 0)	N/A	N/A

4. RESULTS AND DISCUSSION

4.1 ~~Fault interpretation~~**Interpretation of faults**

The structural framework was carried out by picking assigned fault segments on inline 5860, 5884 and 5980 sections of the seismic volume (Figs. 4 and 5).

These identified and interpreted faults ~~on~~ the seismic sections were due to discontinuous reflection along the disorientation of reflectors or as distortion caused by an anomaly of the amplitude around the fault zones (Ning et al., 2022). A total of six faults noted as F1, F2, F3, F4, ~~F5,F5~~ and F6 were identified on the inline sections (Figs. 4 and 5; Table 2). Some of these faults extend through the extent of the field, known as major regional growth faults and ~~a few~~**some** antithetic faults (Table 2). The four growth faults, F1, F3, ~~F5F5~~, and F6, are dipping southward, while others dip ~~toward~~**stoward** the north except for the minor fault (F2) dipping southwest.

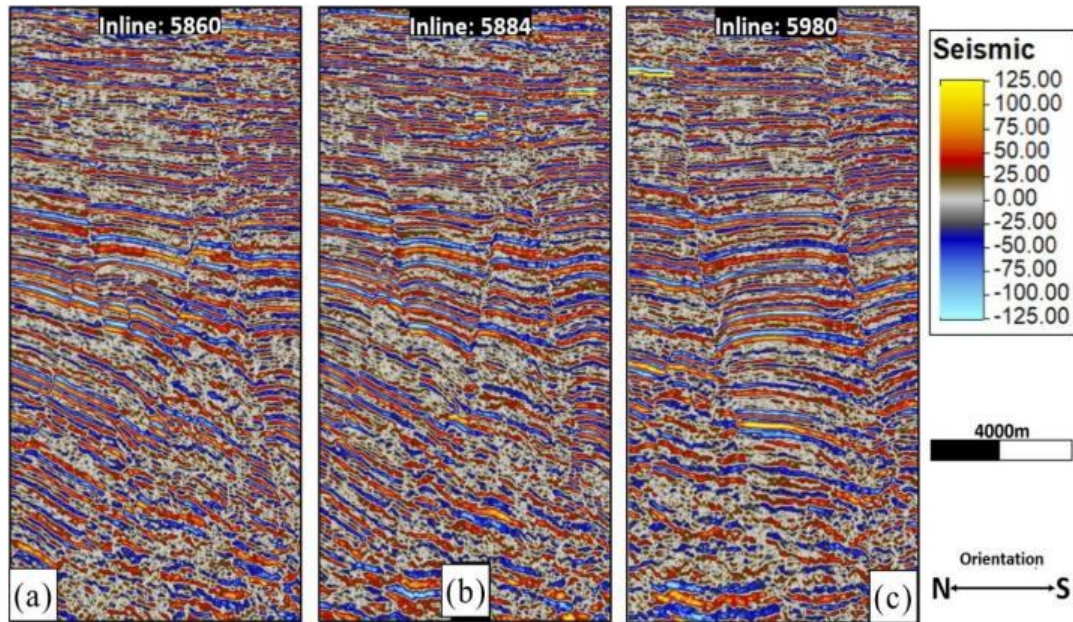


Fig. 4. Uninterpreted seismic sections of in-lines 5860, 5884, and 5980. Notice the map's legend, scale, and orientation on the right-hand side of the figure.

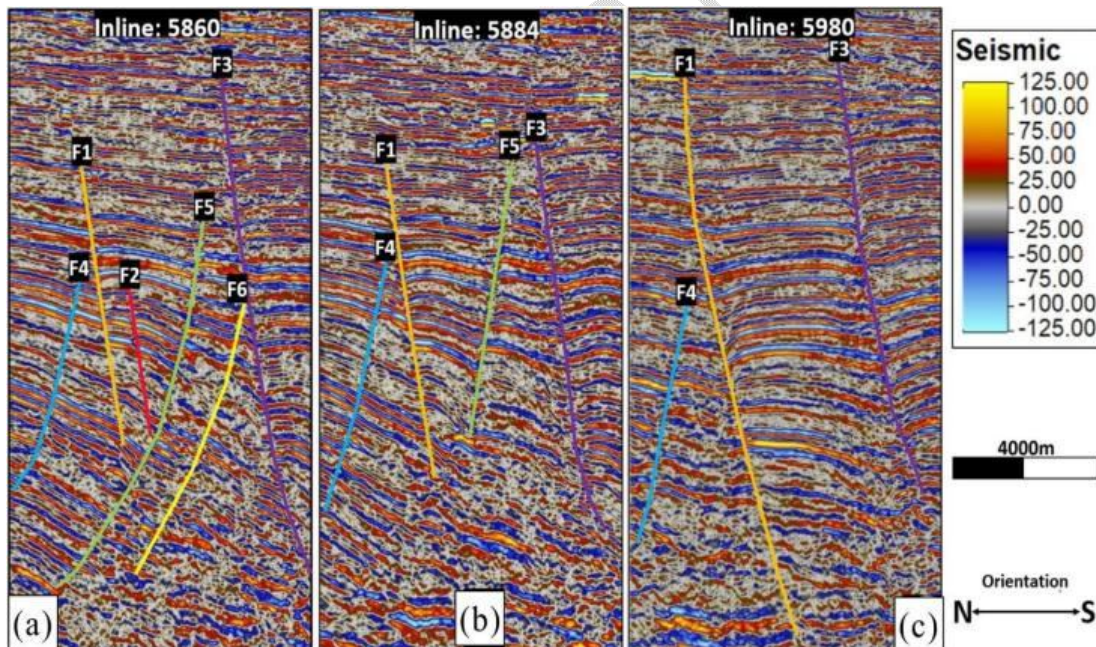


Fig. 5. Interpreted seismic sections of in-lines 5860, 5884, and 5980. Six faults were observed and interpreted in seismic sections A, B and C.

These identified and interpreted faults in the seismic sections were due to discontinuous reflection along the disorientation of reflectors or as distortion caused by an anomaly of the amplitude around the fault zones (Ning et al., 2022). A total of six faults noted as F1, F2, F3, F4, F5, F5 and F6 were identified on the inline sections (Figs. 4 and 5; Table 2). Some of these faults extend through the extent of the field, known as major regional growth faults and a few some antithetic faults (Table 2). The four growth faults, F1, F3, F5, and F6, are

dipping southward, while others dip ~~toward~~toward the north except for the minor fault (F2) dipping southwest.

Table 2 Interpreted faults along the inline sections of the entire 3-D seismic volume noting fault type, dip ~~direction~~direction, and fault symbols

Fault Type	Dip Direction	Fault Symbol
F1	Southwest	Minor Growth Fault
F2	Southwest	Minor Fault
F3	Southwest	Major Regional Growth Fault
F4	North	Antithetic Fault
F5	Southeast	Major Growth Fault
F6	Northeast	Major Growth Fault

4.4. Attribute ~~analysis~~Analysis and its significance

Different attributes ~~(i.e.,)~~(ie. similarity, spectral decomposition, energy, and diffusion filter; Table 1) were run on the seismic cube. Z-slices were taken on the original seismic and displayed as flattened maps. Structures respond to acoustic waves differently; thus, the attributes extracted are best used to study different subtle and ~~sub-seismic~~subseismic faults missed by conventional seismic interpretation. Figs. 6 and 7 show the results of similarity attributes applied to the data used for this study and the clarity of structural features it provides. Observe the uninterpreted and interpreted maps from seismic ~~inlines~~lines 5884 and 5980. It made subtle features visible and interpretation easy while increasing the results' confidence (Fig. 7).

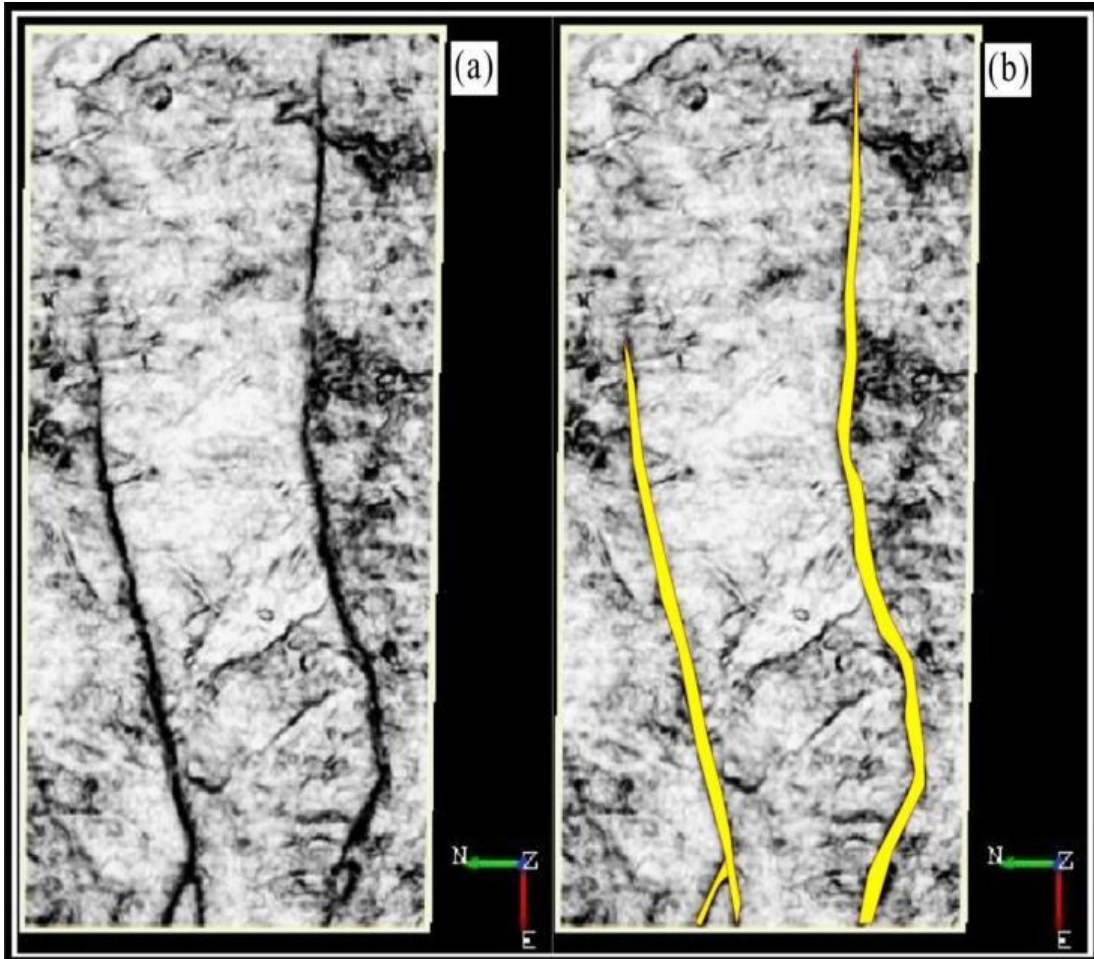


Fig. 6. Extracted similarity attribute maps from inline 5860. (a) shows the uninterpreted map with regions of possible discontinuous reflectionsreflexions. (b) shows the same map withas the interpreted faults.

UNDER

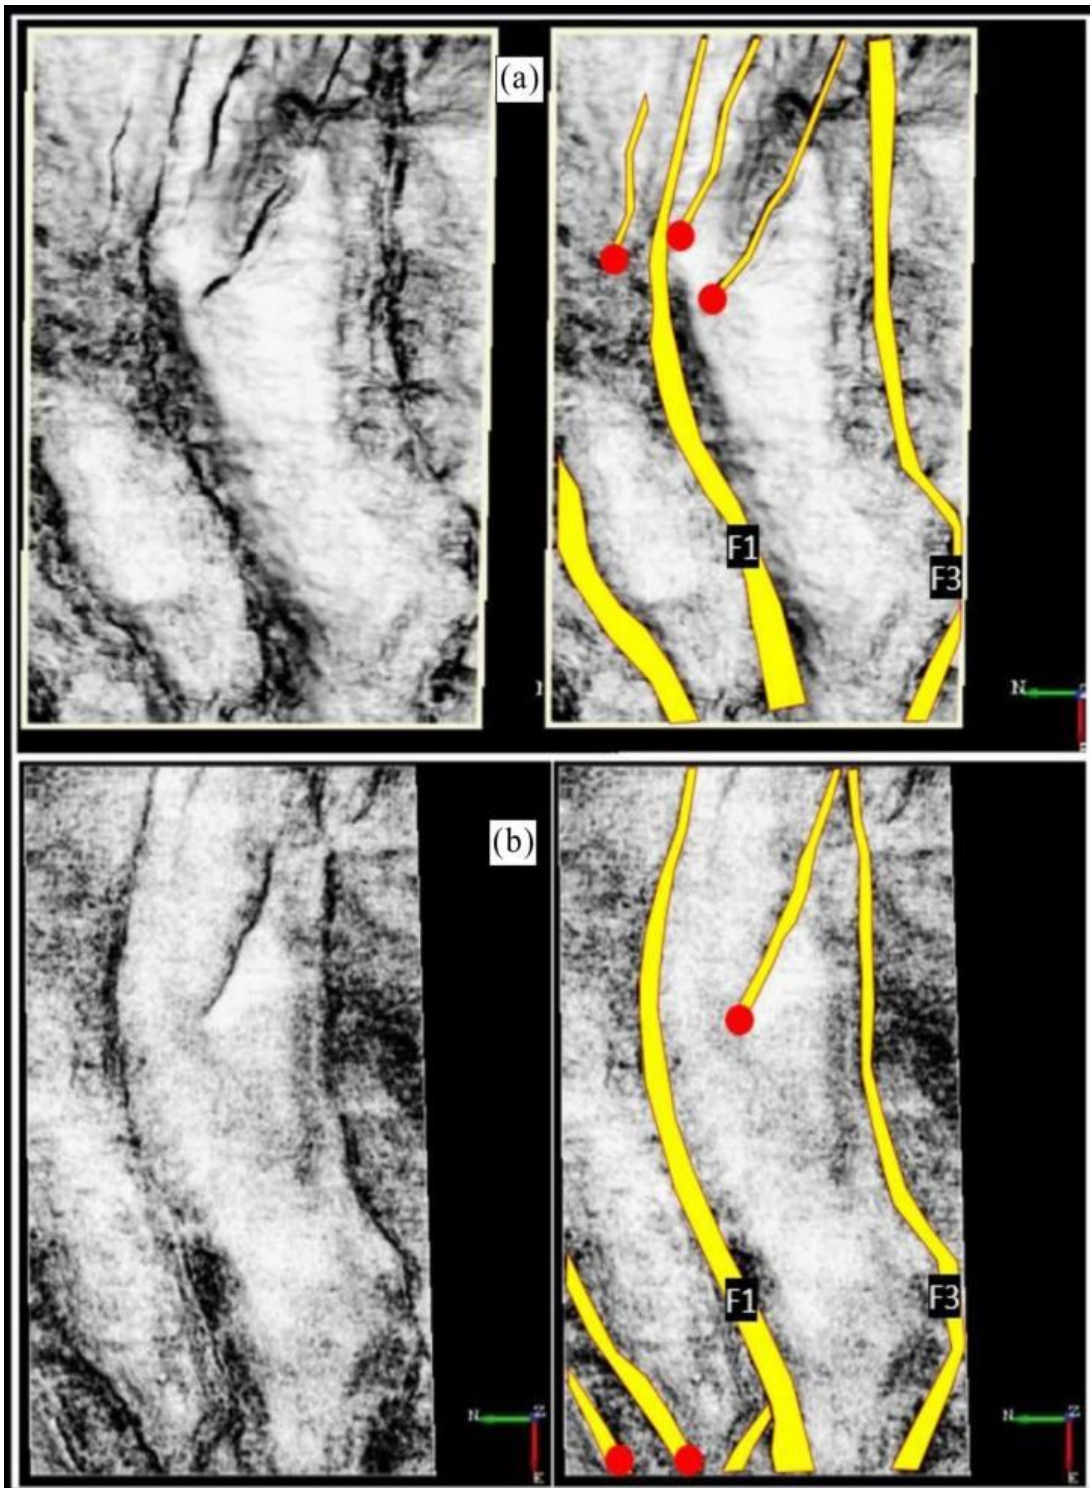


Fig. 7. Extracted similarity attribute maps from inlines 5884 and 5980. On the left of both (a) and (b) are the uninterpreted maps showing regions of possible discontinuous reflections. On the right are the same maps with the interpreted faults. F1 and F3 represent fault one and fault three, respectively. The red circles are placed on faults that were not identified on the seismic sections.

The energy attribute is the sum of the amplitudes squared in a time gate. It highlights packages with different reflection strengths in seismic reflections (Fig. 10). In siliciclastic, energy attributes can decipher lithology and sediment porosity types and enhance bright spot regions. In this study, the application of energy attribute has made it possible to identify bright spots on the time slices obtained from the seismic volume (see Figs. 8 and 10b), serving as a pre-plan methodology for highlighting possible hydrocarbon regions for good interpretation decisions even without the presence of well logs like such as gamma-ray and resistivity to help identify and classify reservoir bearing formations (Oguadinma et al., 2021). Hence, its usefulness cannot be overemphasized. The application of energy attributes is not universally known, and most researchers and industry experts are oblivious to its use. This is because applying the root mean square attribute and spectral decomposition serves similar purposes. However, from the quality of the results generated in this study, the energy attribute has proven to be an even better direct hydrocarbon indicator (DHI) tool for effectively identifying leads and prospective hydrocarbon regions.

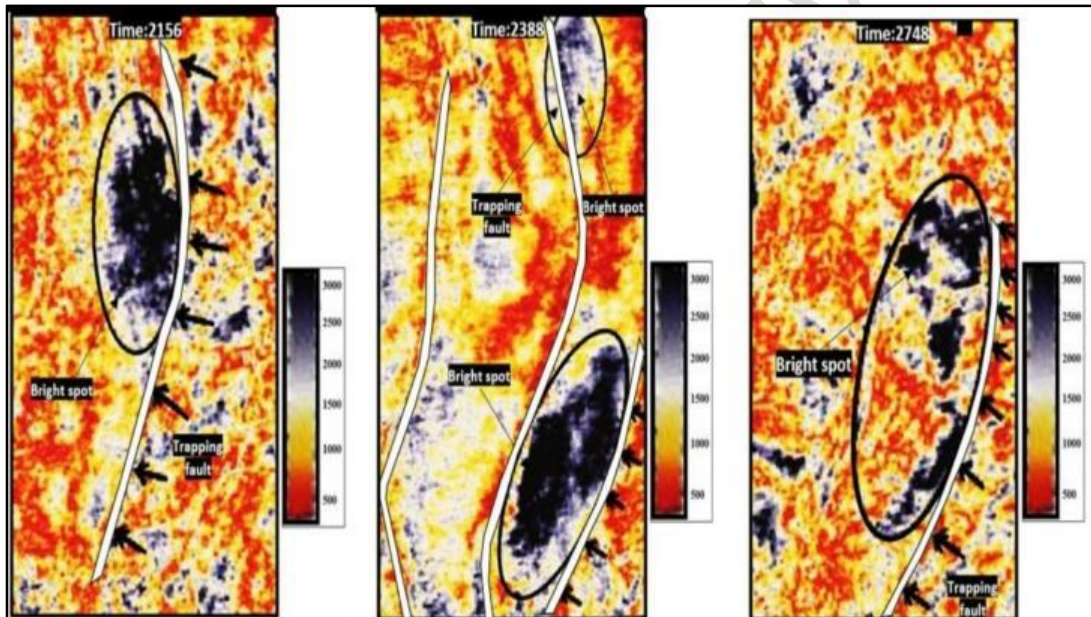


Fig. 8. Time slices showing areas of high-amplitude anomalies observed at times 2156, 2388 and 2748, respectively. Using energy attributes, these areas are interpreted as bright spots (potential hydrocarbon areas), and hydrocarbon accumulation was observed to close up close on faults.

By using the spectral decomposition attribute, the effect of frequency assessment was carried out on the seismic data obtained from the Tomboy field. Observations were made to confirm the viability of the energy attribute application and to ground truth the finding about the field having places of bright spots (Fig. 9b). Firstly, First, a horizon was interpreted in both the inline and the crossline sections across the entire 3D seismic volume. The interpreted horizon is further converted into a time surface map before applying the spectral decomposition attribute (Welsh et al., 2008). The spectral RGB (Red, Green, and Blue) frequencies were fine-tuned to agree with the layer of the horizon that it is to be applied. This action helped manage the frequency difference until the desired output map was clear enough for interpretation to be obtained. Fig. 9a shows a time surface map from

time 2388, and Fig. 9b shows the result of the spectral decomposition attribute extracted from the horizon. Notice the abnormally high-frequency reading in the red circle bounded by two faults.

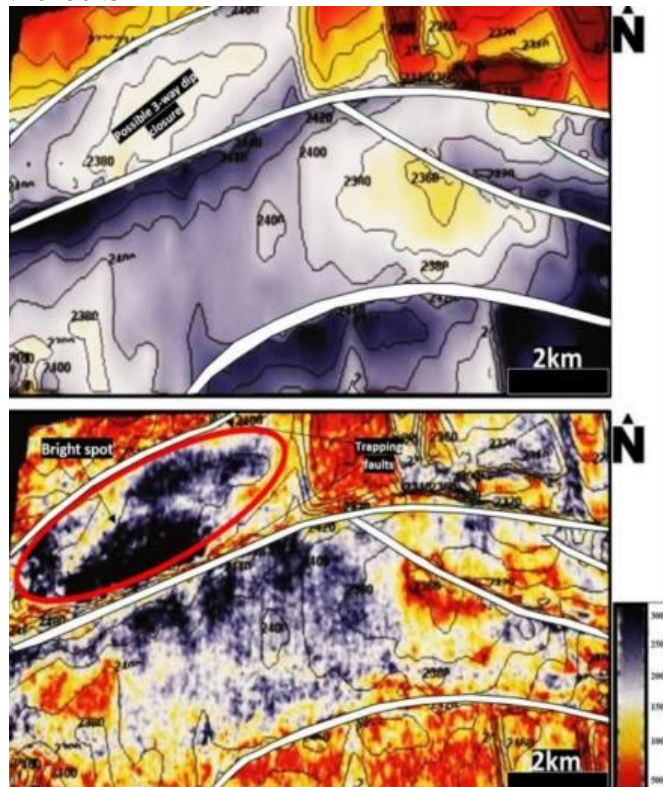


Fig. 9. (a) Time surface map of a horizon mapped at time 2388 with a series of faults dipping in the SW-NE direction. (b) The spectral decomposition map extracted from the OpendTect software. It shows a bright spot region enclosed in a red circle, closing against faults.

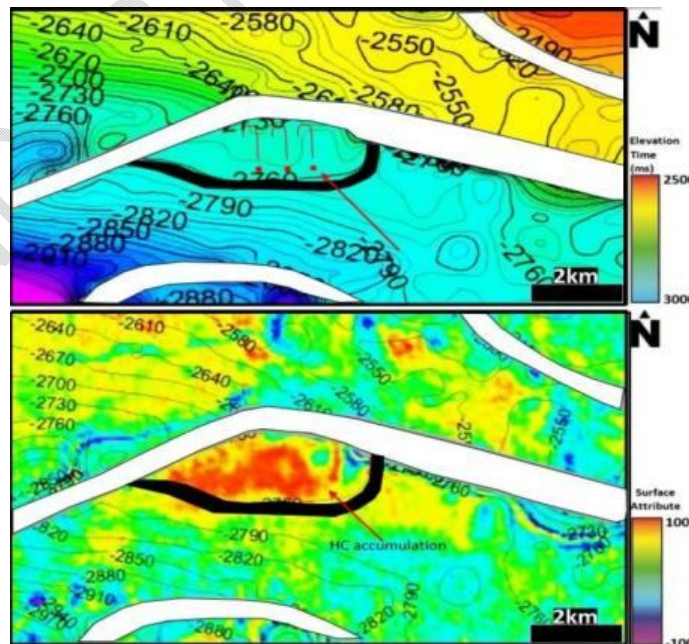


Fig. 10. (a) Interpreted time surface map of a horizon mapped at 2748 showing faults. (b) Contour 2760 is closing on a major fault. The ~~hydrocarbon-bearing~~hydrocarbon-containing region was evident on this attribute map in contour 2760 of the surface map in (a). HC stands for hydrocarbon accumulation

4. CONCLUSION

~~Similarity~~The similarity attribute is a great tool ~~for~~for improving structural ~~interpretation~~enhancement,interpretation, and it plays a crucial role in subtle feature detections that would not usually be detected by human eyes or subtle features beyond seismic resolution. These seismic attributes are better applied on horizon and time slices. However, it is advised that data quality checking and signal-to-noise ratio be applied before running the attribute method on the data. This will guarantee a better output ~~of~~of the expected results ~~from~~of the data. Interpretation of the 3D seismic data for locating both seismic scales and sub-seismic scale structural elements and areas of possible hydrocarbon accumulation has been demonstrated to be more efficient by using seismic attribute mapping and analysis. From this study, several observations have been ~~made~~made.

- ★ Seismic attributes can be run on an entire 3D seismic volume before interpretation ~~commences~~begins.
- ★ Seismic attributes extracted from time slices are essential and can be used as reconnaissance for better visualisation of areas to focus on during a detailed interpretation.
- ★ Spectral decomposition and ~~Energy~~energy attributes have proven very useful as direct hydrocarbon indicators by identifying bright spot areas that are interpreted to contain a significant amount of hydrocarbon.
- ★ It was also observed that fault block displacement leads to seismic ~~reflection~~reflexion discontinuity. By identifying and interpreting faults ~~in~~in the data, displaced seismic ~~reflections~~reflexions can be better correlated from one fault block to the other. This will ~~enhance~~improve interpretation confidence and produce a better result.

Integrated discontinuous attributes and other seismic attributes would yield better hydrocarbon exploration outcomes. Therefore, seismic attribute analysis should be integrated into the standard ~~practice~~practise of hydrocarbon exploration and production; and oil companies can quickly reduce the risk of drilling dry holes resulting from missed faults due to conventional seismic interpretation methods.

REFERENCES

- Adepoju, O., Joseph, O., Chukwuemeka, N., 2013. DHI analysis using seismic frequency attribute on field-AN Niger Delta, Nigeria, IOSR Journal of Applied Geology and Geophysics, 1(1), 5–10
- Ahmad, M. N., and P. Rowell, 2013. Detection of fluvial sand systems using seismic attributes and continuous wavelet transform spectral decomposition: a case study from the Gulf of Thailand, Mar Geophys Res, Springer.
- Ajisafe, Y.C., and B. D. Ako, 2013. 3-D Seismic Attributes for Reservoir Characterization of "Y" Field Niger Delta, Nigeria, IOSR Journal of Applied Geology and Geophysics, 1(2), 23-31.

- Aniwetalu, et al, (2018). Spectral analysis of Rayleigh waves in Southeastern part of Niger delta, Nigeria. *International Journal and Advance Geosciences*, vol. 6, p. 51- 56. <http://dx.doi.org/10.14419/ijag.v6i1.8776>
- Ayolabi, E. A., and A. O. Adigun, 2013. The Use of Seismic Attributes to Enhance Structural Interpretation of Z-Field, Onshore Niger Delta, *Earth Science Research*, 2(2), Canadian Center of Science and Education.
- Castillo, F., 2010. Seismic attributes for 3-D fracture interpretation, Halliburton, Geo Canada.
- Chopra, S., 2002. Coherence cube and beyond, *EAGE First break*, 20, 27-33.
- Chopra, S., and K. J. Marfurt, 2005. Seismic attributes- A historical perspective, *Geophysics*, 70 (5).
- Corredor et al., 2005. Structural styles in the deep-water fold and thrust belts of the Niger Delta. *American Association of Petroleum Geologists Bulletin*. 89, 753–780.
- Ejedawe J, Fatumbi A, Ladipo K, Stone K., 2002. Pan—Nigeria exploration well look—back (Post-Drill Well Analysis). Shell Petroleum Development Company of Nigeria Exploration Report 2002.
- Evamy, B.D., Haremboure, J., Karmarling, P., 1978. Hydrocarbon Habitat of Tertiary Niger Delta. *American Association of Petroleum Geologists Bulletin*, 62, 1-39.
- Francelino, A. V. M., and Antunes, A. F., 2013. Applying filters and seismic attributes for enhancing faults in the 3D seismic survey of Alto De Siririzinho (Sergipe-Alagoas Basin, northeast Brazil), *Revista Brasileira de geodesic*, 31(1), 109-123.
- Jones, G. and Roden, R., 2012. Fracture detection interpretation beyond conventional seismic approaches: Presented at AAPG conference.
- Lehner, P. and De Ruiter, P. A. C., 1977. Structural history of the Atlantic margin of Africa *Am. Assoc. Petrol. Geol. Bull.* 61, 961-981
- Lunina, O. V., Caputo, R., and Gladkov, A. S., 2014. Southern East Siberia Pliocene-Quaternary faults Database, analysis and inference. *Geoscience Frontiers* 5 (2014) 605-619
- Kelechi N Ibekwe, ChinazaekpereArukwe, ChibuzorAhaneku, et al. Enhanced hydrocarbon recovery using the application of seismic attributes in fault detection and direct hydrocarbon indicator in Tomboy Field, western-Offshore Niger Delta Basin. Authorea. January 24, 2023. DOI: [10.22541/essoar.167458067.76297684/v1](https://doi.org/10.22541/essoar.167458067.76297684/v1)
- Marfurt, J., Kirilin, R., Farmer, L., Bahorich, S., 1998. 3-D seismic attributes using a semblance-based coherency algorithm, *Geophysics*, 63, 1150–1165.
- Marfurt, J., Sudhaker, V., Gersztenkorn, A., Crawford, D., Nissen, E., 1999. Coherency calculations in the presence of structural dip, *Geophysics*, 64, 104–111.
- Matos, M. C. D., and K. J. Marfurt, 2013. Subsurface geometry interpretation by integrating continuous wavelet transform seismic attributes," *Sismo research and consulting*, The University of Oklahoma, 13th international congress of the Brazilian geophysical society.
- Ning, F., Yun, J., Zhang, Z., Li, P., 2022. Deformation patterns and hydrocarbon potential related to intracratonic strike-slip fault systems in the east of the Central Uplift Belt in the Tarim Basin. *Energy Geoscience* 3 (2022) 63-72
- Nwaezeapu et al., (2018). Hydrocarbon Reservoir Evaluation: a case study of Tymot field at southwestern offshore Niger Delta Oil Province, Nigeria. *Nanoscience and Nanotechnology*, Vol 2, Issue 2, DOI: <http://dx.doi.org/10.18063/nn.v0i0.618>.
- Oguadinma, V., Okoro, A., Reynaud, J., Evangeline, O., Ahaneku, C., Emmanuel, A., Eliseus, A., 2021. The art of integration: A basic tool in effective hydrocarbon field appraisal. *Mediterranean Geosciences Union Annual Meeting*
- Oguadinma et al. (2014). Lithofacies and Textural Attributes of the Nanka Sandstone (Eocene): Proxies for evaluating the Depositional Environment and Reservoir Quality. *Journal of Earth Sciences and Geotechnical Engineering*, vol. 4, no. 4, 2014, 1-16 ISSN: 1792-9040 (print), 1792-9660. [10.13140/RG.2.2.33124.07042](https://doi.org/10.13140/RG.2.2.33124.07042)

- Oguadinma et al. (2016). An integrated approach to hydrocarbon prospect evaluation of the Vin field, Nova Scotia Basin. S.E.G. Technical Program Expanded Abstracts. International Exposition and Annual Meeting, Dallas, Texas, 99–110. 2016. [10.1190/segam2016-13843545.1](https://doi.org/10.1190/segam2016-13843545.1)
- Oguadinma et al. (2017). Advanced Study of Seismic and Well Logs in the Hydrocarbon Prospectivity of Siram Field, Niger Delta Basin. Geological Society of America *Abstracts with Programs*. Vol. 49, No. doi: [10.1130/abs/2017AM-296312](https://doi.org/10.1130/abs/2017AM-296312)
- Oguadinma et al. (2021). Study of the Pleistocene submarine canyons of the south-eastern Niger delta basin: Tectonostratigraphic evolution and infilling Conference/Reunion des sciences de la terre, Lyon, France.
- Oguadinma et al. (2021). The art of integration: A basic tool in effective hydrocarbon field appraisal, Med-GU Conference, Istanbul. Turkey.
- Oguadinma O Vivian, Ibekwe N Kelechi, LanisaAdemola, et al. Reservoir and sequence stratigraphic analysis using subsurface data. ESS Open Archive February 09, 2023.
- Oguadinma O Vivian, Ibekwe N Kelechi, LanisaAdemola, et al. Submarine canyon: A brief review. ESS Open Archive, February 09, 2023.
- Ozumba, B., 2013. Geology of the Niger Delta: An Overview for Geophysics Processors. An SPDC presentation for geologists in Nigeria.
- Peyton, L., 1998. Interpretation of incised valleys using new 3D seismic techniques: A case history using spectral decomposition and Coherency: *The Leading Edge*, v. 17, p. 1294-1298.
- Reijers, T.J.A., 2011. Stratigraphy and Sedimentology of the Niger Delta. *Geologos*, 17, 133-162. <https://doi.org/10.2478/v10118-011-0008-3>
- Roberts, A., 2001. Curvature attributes and their application to 3D interpreted horizons, *First Break*, 18, 85-99.
- Santosh, D., Aditi, B., Poonam, K., Priyanka S., Rao P.H, Hasan, S. Z., Harinarayana, T., 2013. An Integrated Approach for faults and fractures delineation with dip and curvature attributes, 10th Biennial International Conference & Exposition, Kochi.
- Shang, X., Hou, J., Dong, Y., 2022. The genesis of reservoir heterogeneity and its impacts on petroleum exploitation in beach-bar sandstone reservoirs: A case study from the Bohai Bay Basin, China. *Energy Geoscience* 3 (2022) 35-48
- Taner, M. T., 2001. Seismic attribute, *CSEG Recorder*, 48-56.
- Thapar, M. R., 2004. Seismic attributes; Principal & application, *Petro Skills*, 73–123.
- Tingdahl K.M. and de Groot P.F.M., 2003. Post-stack dip- and azimuth processing. *Journal of Seismic Exploration* 12, 113–126.
- Tuttle, M. L. W., Charpentier, R. R., Brownfield, M. E., 2015. The Niger Delta Petroleum System: Niger Delta Province, Nigeria, Cameroon, and Equatorial Guinea, Africa. United States Geologic Survey.
- Vetrici, D. G., and Stewart, R. R., 1996. 3-D seismic attributes, *CREWS research report*, 8(45), 1–30
- Welsh, A., Brouwer, F. G. C., Wever, A., 2008. The Spectral decomposition of seismic reflection data to detect Gas related frequency anomalies. 70th EAGE Conference & Exhibition, June 2008, Rome.