

Original Research Article

SITE INVESTIGATION AND SHEAR STRENGTH PROPERTIES OF SOIL


Abstract: This study examined the soil's shear strength qualities at various depths with natural soil moisture content. At various depths below the surface of the ground, ranging from 400mm to 24.75m for point 1 and 400mm to 11.25m for point 2, the soil sample was taken using the drilling method. Wet sieve analysis was used to determine the distribution of the grains, and each soil sample's natural moisture content was calculated. Other fundamental tests included the Atterberg limit test, specific gravity, and sieve analysis. The data revealed that silt and clay make up the soils at points 1 and 2, with the soil at point 2 being more plastic than the soil at point 1. In Addition, it was discovered from the results that soil shears more quickly at increasing in the depth of from ground surface and that the cohesiveness index and angle of internal friction are negatively associated.

Keywords: Soil, Moisture content, Shear strength, Liquid limit, Plastic limit, Plasticity index


1.0 INTRODUCTION

“In nature, soils are more frequently found as mixtures with different ratios of various constituents rather than as individual particles of gravel, sand, silt, clay, or organic matter. Grouping soils based on a set of clear criteria would enable the engineer to assess the performance of a particular soil”. (Onyelowe, 2013). “Soils are categorized into groups and subgroups based on shared engineering qualities. The following classification schemes are the most often employed in soil classifications: the American Association of State and Transportation Officials (AASHTO) and the Unified Soil Classification System (USCS)” [1].

“Shearing deformation is one of the most detrimental processes for land and environment degradation, and shear strength is essential for slope stability and soil erosion assessment”. [2]. The direct shear test works by applying a normal load to the sample and driving it to fail along a predetermined plane. This allows for the direct measurement of the shear force capacity under particular circumstances as well as the calculation of the internal friction and cohesion angle. The shear resistance created within the sliding plane along a known section area of the sample is what is referred to as the shear stress in the shear box test. [3]. The general trends of direct shear tests on sand and clays are shown in graph 1 and 2.

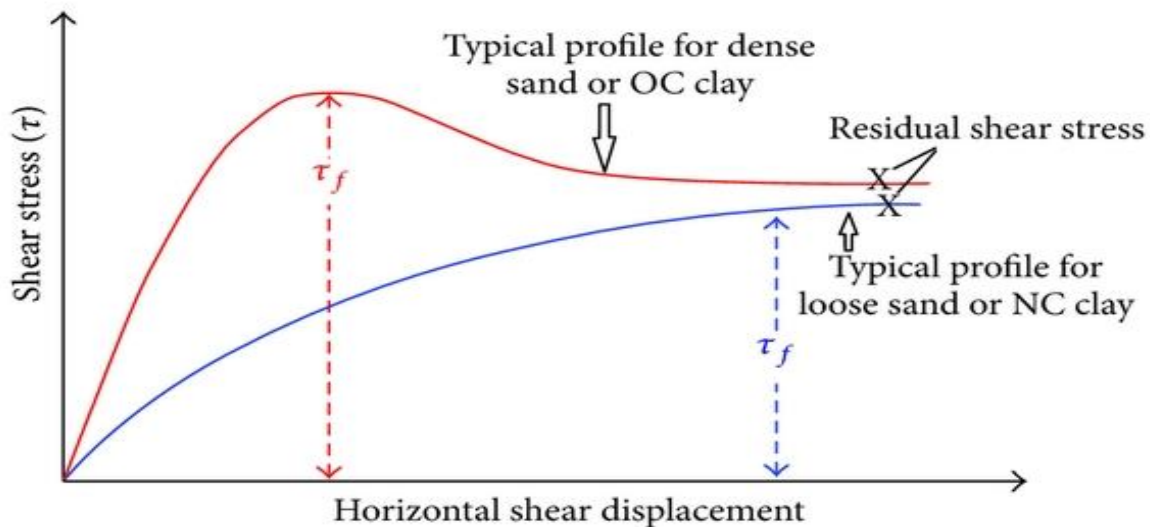

Graph 1: Typical shear stress versus horizontal shear displacement of soils (OC stands for overconsolidated and NC stands for normally consolidated) [16].

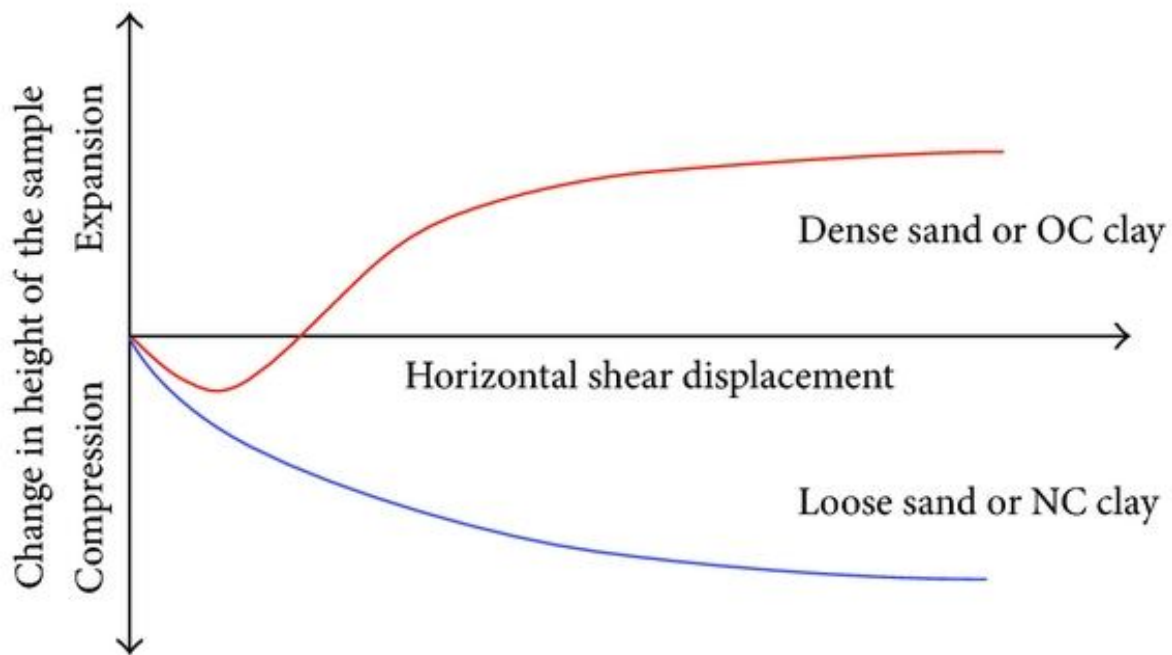

Graph 2: Typical vertical displacement versus horizontal shear displacement of soils (OC stands for over consolidated and NC stands for normally consolidated) [16].

Particle size distribution is one of the numerous intrinsic features of soil that affect shear strength, which is dictated by the bonding forces of the soil matrix.[4], bulk density [5], degree of aggregation [6], and organic matter [7]. The most significant causes of bonding force variation, which affects shear strength, are changes in hydrologic conditions, rather than these intrinsic features of soil materials.[8]. “One of the hottest subjects in soil mechanics and environmental engineering, the impact of water content on shear strength, has been thoroughly investigated. However, a variety of locations, soils, and experiment types have found varying trends regarding the correlation between shear strength qualities and water content”. [9, 10, 11] e.g.. To fill the gap in the literature and close the discrepancy in the results from earlier research, this study is focused on classifying the soils collected from the study region and assessing the influence of variable moisture content on soil shear strength.

2.0 MATERIALS AND METHODS

Soil samples were collected from the site being investigated, using a rotary drilling machine to bore a hole and a soil sampler to retrieve the soil sample at varying depths, after the sample was collected, they were taken to the laboratory to examine their properties and the deduction was then made from the test results obtained.

2.1 Tests conducted on samples

After the sample was obtained the following tests were carried out on the samples obtained for the site; Sieve analysis, Atterberg limits, specific gravity test, and direct shear test.

2.1.1 Soil sample

The soil sample used in this study was obtained at 20, Louis Solomon Close, off Ahmadu Bello way, Victoria Island, Lagos.” situated at latitude $6^{\circ}25'43.5''$ N, longitude $3^{\circ}24'28.8''$ E for point 1 and latitude $6^{\circ}25'43.4''$ N longitude $03^{\circ}24'28.6$ E” for point 2.

2.2 Methods

2.2.1 Method of Obtaining Sample

As indicated in Table 1, soil samples were taken using the rotary drilling method at various depths below the surface, ranging from 400 mm to 24.75 m for point 1 and 400 mm to 11.25 m for point 2.

Table 1: Soil Moisture Content at Varying Depth

| Soil samples at various depth | Average moisture content | |
|-------------------------------|--------------------------|---------|
| | Point 1 | Point 2 |
| 400mm | 7.55 | 7.53 |
| 2.25m | 9.5 | 10.6 |
| 4.5m | - | 12.8 |
| 6.75m | 20.4 | 20.3 |
| 9.0m | - | 23.11 |
| 11.25m | - | 25.93 |
| 24.75m | 73.5 | - |

Wet sieve analysis was used to determine the distribution of the soil grains, and each soil sample's natural moisture content was then calculated [12].

2.2.2 Particle Size Distribution

“The soil particle size distribution was done in accordance with [13] standard specifications and the soils were classified using the AASHTO Classification System”.

2.2.3 Plastic Limit, Plastic Index, and Plasticity Index

“The soil plasticity index was calculated by subtracting the numerical difference between the soil's liquid limit (LL) and plastic limit (PL), as shown in equation 1.0, from the soil's liquid limit and plastic limit, which were established following” [14].

$$PI = LL - PL \quad (1.0)$$

2.2.4 Soil Shear Strength

The direct shear test method was used to determine the soil shear strength by [15].

3.0 RESULTS

The results of the tests involved in this investigation are listed below.

3.1 Particle Size Distribution

Table 2: Soil Classification and Rating at Various Depths for Point 1

| Soil depth (m) | % Passing sieve #200 | C _c | C _u | AASHTO classification | Type of material | Subgrade rate |
|----------------|----------------------|----------------|----------------|-----------------------|------------------|---------------|
| 0.4 | 62.10 | 0.87 | 1.00 | A-6(7.2) | Clay soil | poor |
| 2.25 | 57.85 | 8.40 | 15.60 | A-4(3.5) | Silty soil | Fair |
| 6.75 | 54.6 | 1.15 | 115.38 | A-4(3.2) | Silty soil | Fair |
| 24.75 | 40.65 | 1.13 | 200.00 | A-7-6(3.28) | Clay soil | poor |

Table 3: Soil Classification and Rating at Various Depths for Point 2

| Soil depth (m) | % Passing sieve #200 | C _c | C _u | AASHTO classification | Type of material | Subgrade rate |
|----------------|----------------------|----------------|----------------|-----------------------|------------------|---------------|
| 0.4 | 61.5 | 1.01 | 1.88 | A-6(8.48) | Clay soil | Poor |
| 2.25 | 57.95 | 6.40 | 8.42 | A-4(2.4) | Silty soil | Fair |
| 4.5 | 41.55 | 0.68 | 32 | A-4(0.9) | Silty soil | Fair |
| 6.75 | 54.70 | 0.32 | 28 | A-7-6(7.9) | Clayey soil | Poor |
| 9.0 | 43.4 | 0.67 | 45 | A-6(1.8) | Clayey soil | Poor |

| | | | | | | |
|-------|------|------|------|-------------|-------------|------|
| 11.25 | 37.1 | 0.84 | 16.5 | A-7-6(3.02) | Clayey soil | Poor |
|-------|------|------|------|-------------|-------------|------|

3.2 Specific Gravity

Table 4: Specific gravity of soil at point 1

| | | | | |
|------------------------------|-------|-------|-------|--------|
| Soil sample at various depth | 400mm | 2.25m | 6.75m | 24.75m |
| Specific gravity | 2.57 | 2.47 | 2.60 | 2.63 |

| | | | | | | |
|------------------------------|-------|-------|------|-------|------|--------|
| Soil sample at various depth | 400mm | 2.25m | 4.5m | 6.75m | 9.0m | 11.25m |
| Specific gravity | 2.6 | 2.9 | 2.5 | 2.6 | 2.5 | 2.6 |

Table 5: Specific gravity of soil at point 2

3.3 Plasticity Index

The results of calculating the soil plasticity index using the liquid limit and plastic limit are shown below.

Table 6: Atterberg limit test result for point 1

| | | | | |
|--|-------|-------|-------|-------|
| Soil sample at various depth for point 1 | 400mm | 2.25m | 6.75m | 24.75 |
| Liquid limit | 32.00 | 39.80 | 37.50 | 40.00 |
| Plastic limit | 20.5 | 32.25 | 28.7 | 21.6 |

| | | | | |
|------------------|-------|------|------|-------|
| Plasticity index | 11.50 | 7.55 | 8.80 | 18.40 |
|------------------|-------|------|------|-------|

Table 7: Atterberg limit test result for point 2

| | | | | | | |
|--|-------|-------|------|-------|------|--------|
| Soil sample at various depth for point 2 | 400mm | 2.25m | 4.5m | 6.75m | 9.0m | 11.25m |
| Liquid limit | 38.0 | 29.9 | 32.5 | 42 | 32.0 | 46.0 |
| Plastic limit | 20.9 | 22.3 | 22.9 | 22.5 | 23.6 | 24.5 |
| Plasticity index | 17.1 | 7.6 | 9.6 | 19.5 | 8.4 | 21.5 |

3.4 Shear Strength

Table 8. Angle of internal friction and cohesion index results for point 1

| Sample taken at point 1 | Angle of internal friction(degrees) | | | Cohesion index C (KN/m ²) | | |
|-------------------------|-------------------------------------|--------------|--------------|---------------------------------------|--------------|--------------|
| | Natural moisture content | 2% increment | 4% increment | Natural moisture content | 2% increment | 4% increment |
| | | | | | | |

| | | | | | | |
|---------------|-------------|-------------|-------------|------------|-----------|-----------|
| 400mm | 30.0 | 33.5 | 30.0 | 8 | 0 | 7 |
| 2.25m | 29.0 | 30.0 | 31.0 | 0 | 2 | 3 |
| 6.75m | 24.0 | 26.0 | 29.0 | 2 | 9 | 5 |
| 24.75m | 10.0 | 11.0 | 12.5 | 102 | 92 | 79 |

| Sample taken at point 2 | Angle of internal friction(degrees) | | | Cohesion index C (KN/m²) | | |
|--------------------------------|--|--------------|--------------|--|--------------|--------------|
| | Natural moisture content | 2% increment | 4% increment | Natural moisture content | 2% increment | 4% increment |
| 400mm | 31.0 | 28.5 | 25.0 | 19 | 28 | 32 |

| | | | | | | |
|-------|------|------|------|----|----|------|
| 2.25m | 38.5 | 29.5 | 22.0 | 5 | 18 | 22 |
| 4.5m | 28.5 | 26.5 | 16.0 | 13 | 17 | 34 |
| 6.75m | 23.5 | 20.0 | 14.0 | 24 | 30 | 36 |
| 9.0 | 16.0 | 16.0 | 20.0 | 27 | 22 | 12.5 |
| 11.25 | 19.0 | 23.5 | 27.5 | 31 | 20 | 16 |

Table 9. Angle of internal friction and cohesion index results for point 1

4.0 RESULT AND DISCUSSION

4.1 SOIL CLASSIFICATION

The particle size distribution of the soil samples is presented in Figure 1 and was classified accordingly.

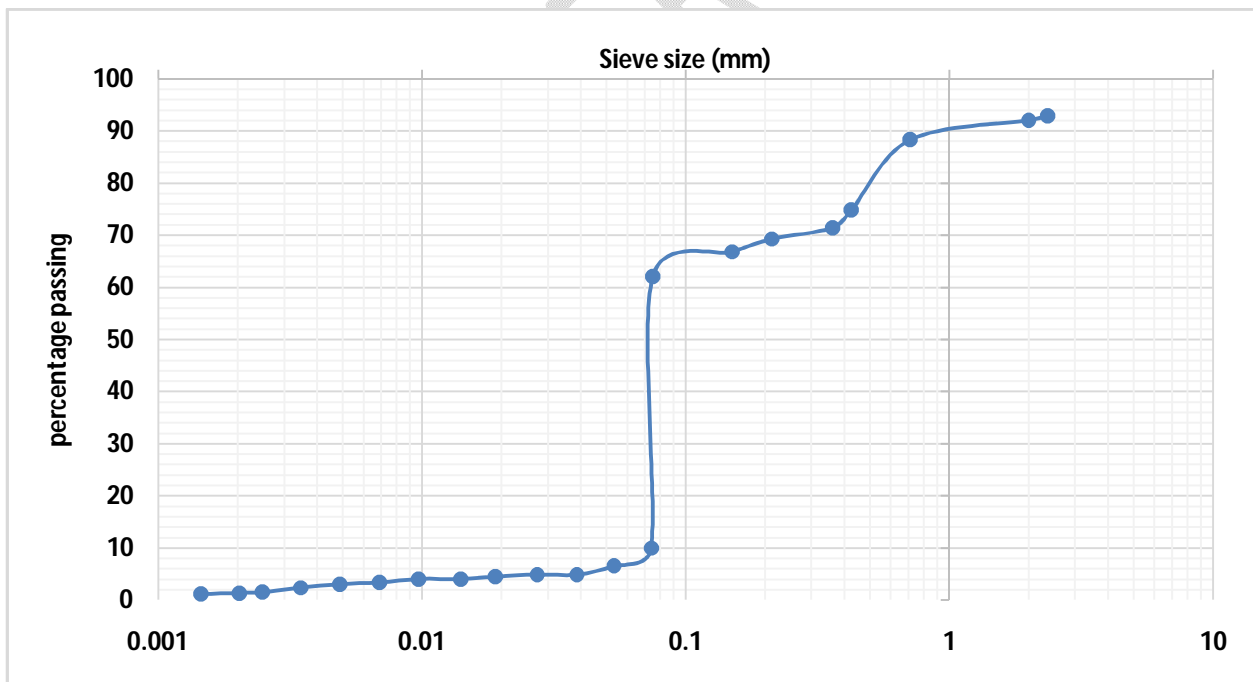


Figure 1: Percentage Passing Against Sieve Size

From the curves in Figure 1, the coefficient of uniformity (C_u) and coefficient of curvature (C_c) of the soil sample is given as;

$$C_c \text{ (coefficient of curvature)} = D_{30}^2 / (D_{60} * D_{10})$$

$$C_u \text{ (coefficient of uniformity)} = D_{60} / D_{10}$$

The soil sample's computed C_u and C_c were determined at different depths, and the results are shown in Tables 2 and 3 along with categorization and rating.

4.11 Soil Classification and Rating at Various Depths for Point 1

The result from Table 2 shows that the C_c and C_u of the soil range from 0.87 – 8.40 and 1.00 – 200 respectively for point 1. Also, at 0.4m depth and 24.75m depth, the soil type was clay in a poor state, while at 2.25m depth to 57.85m depth, the soil type was silty in a fair state.

4.12 Soil Classification and Rating at Various Depths for Point 2

Table 3's outcome also reveals that the soil's C_c and C_u range for point 1 from 1.01 to 6.40 and 1.88 to 16.5 respectively. Additionally, the soil type was clayey in poor condition at depths of 0.4 m, 6.75 m, 9.0 m, and 11.25 m, and silty in fair condition at depths of 2.25 m to 4.5 m.

4.2 Specific Gravity

Figures 2 and 3 show that neither position's soil-specific gravity result showed a trend, instead falling within a range of 2.47 to 2.90.

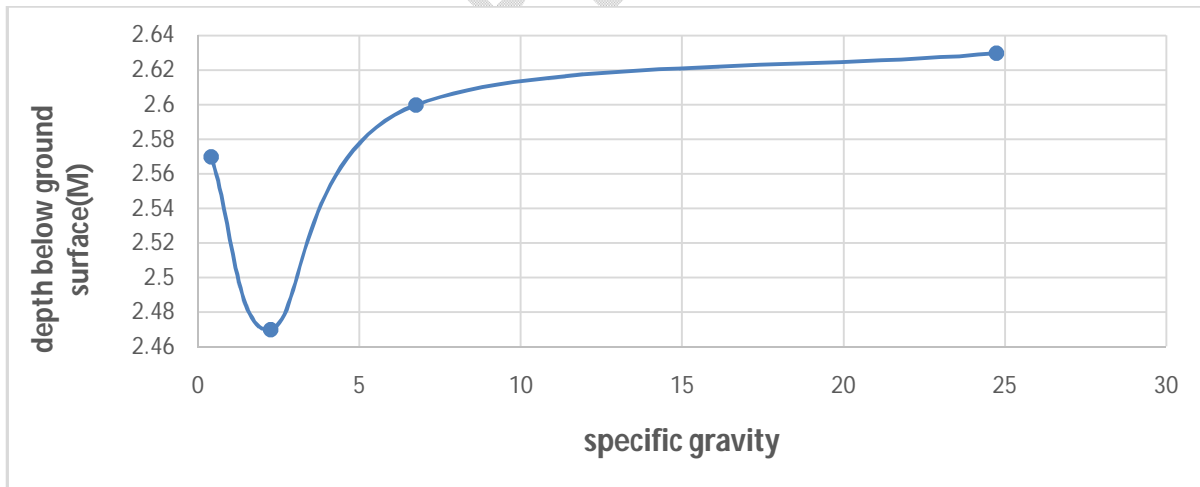


Figure 2. variation of specific gravity with depth for Point 1

According to Figure 2, the specific gravity decreased between 0.4 and 2.25 meters while increasing steadily between 2.25 and 24.75 meters. This suggests that particular gravity may rise along with increasing depth.

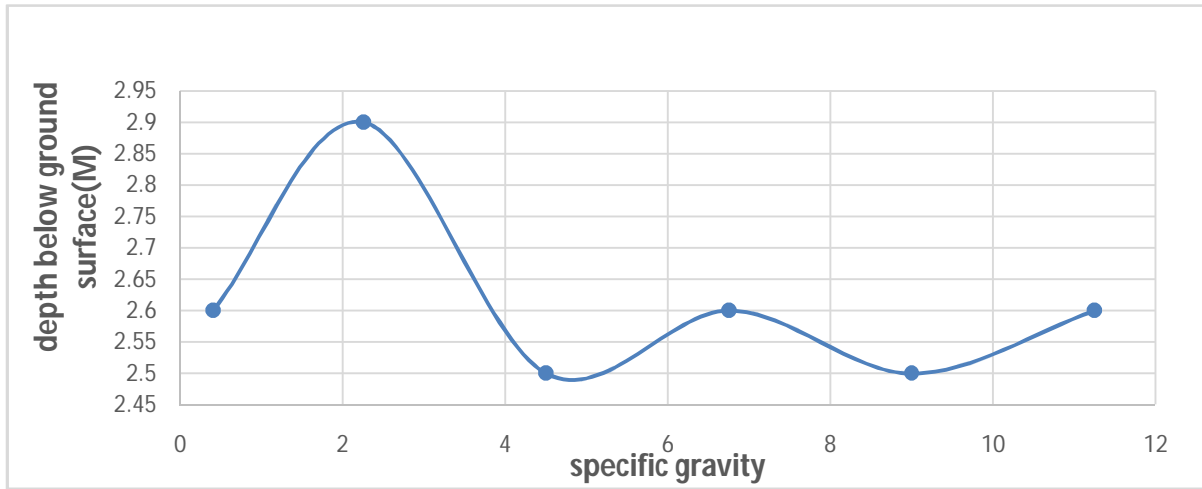


Figure 3. Variation of specific gravity with depth for Point 2

Figure 3 shows the specific gravity grew from 0.4 to 2.25 meters, decreased to 2.25 to 4.5 meters, increased to 6.75 meters, decreased again to 9.0 meters, and finally increased to 11.25 meters. In contrast to point 1, point 2's specific gravity trend is erratic.

4.3 Plasticity Index

The results of calculating the soil plasticity index using the liquid limit and plastic limit are shown below.

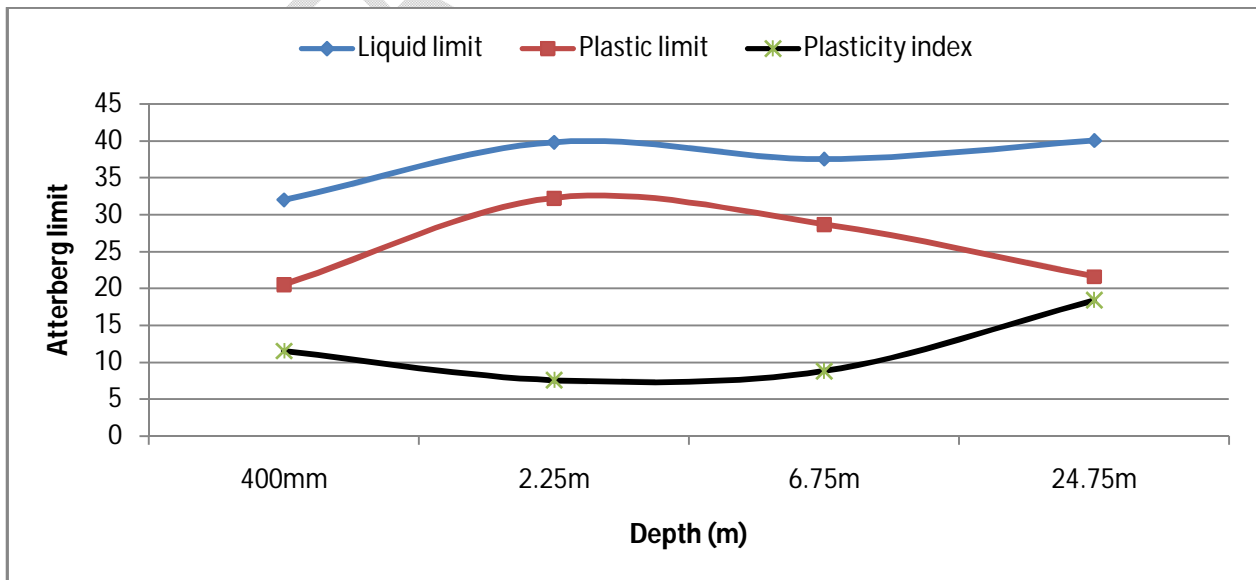


Figure 4. Atterberg limit of soil at Point 1

The outcome of figure 4. displays the soil's liquid limit, plastic limit, and plasticity index at various depths. The outcome, however, revealed that the PI is the antithesis of the LL and PL, ranging from 11.5 to 18.4, with a trend that decreased from 0.4 to 2.25 and then increased from 2.25 to 24.75. The results of this study revealed that the soil's PI displays medium plasticity (i.e., between 10 and 20), which is a sign that it is partly clayey and silty, as shown in Table 2 Hence, the soil is composed of silt and clay in nature. The results of this study revealed that the soil's PI displays medium plasticity (i.e., between 10 and 20), which is a sign that it is partly clayey and silty, as shown in Table 2. As a result, silt and clay make up the soil's natural composition.

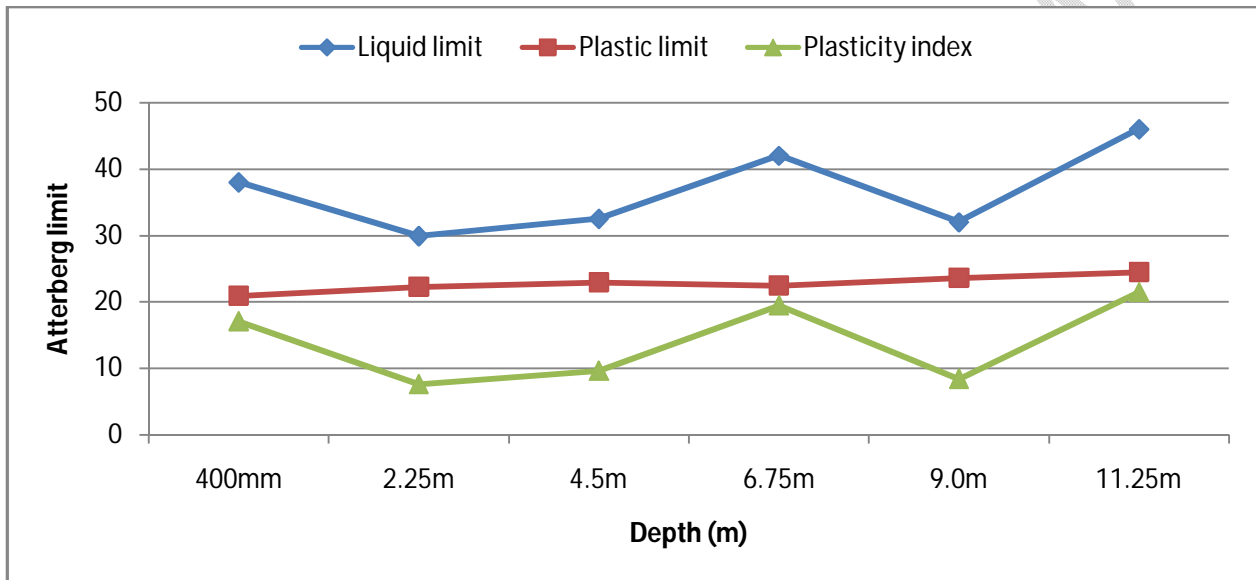


Figure 5: Atterberg limit of soil at Point2

The results from Table 5 demonstrate that the soil Atterberg limit at point 2 exhibits an irregular pattern and ranges from 17.1 to 21.5. This suggests that the PI of the soil at point 2 exhibits medium-high plasticity (i.e., between 10 and 20; 20 and 40), which is an indication that the soil in point 2 is highly plastic and can hold a significant amount of water in it in comparison to soil sample at point 1. Additionally, the results of the investigation demonstrated that the soil at point 2 is partially made up of silt and clay, which is supported by the result in Table 7.

4.4 Shear Strength

Results for the cohesiveness index and angle of internal friction for points 1 and 2 at various depths are shown in the figures below. Additionally, the result displays the coefficient of internal friction and cohesion index values of the at its natural moisture content.

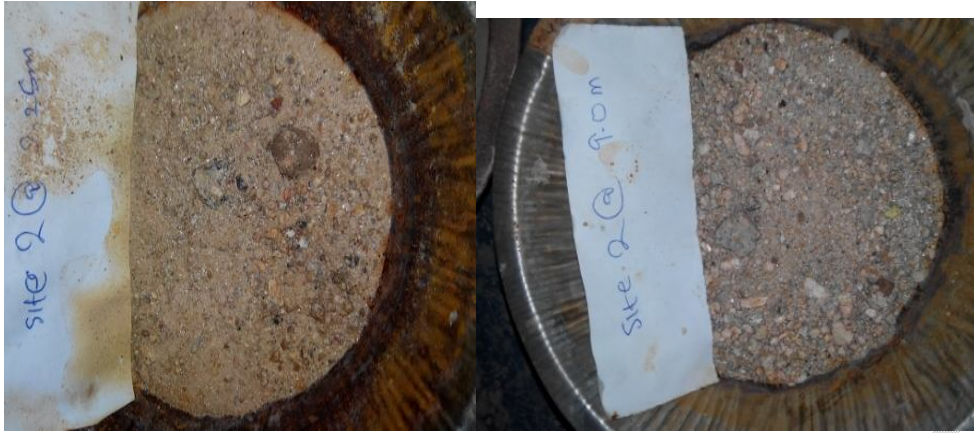


Figure 6: soil samples



Figure 7: Shear box set-up



Figure 8: Shear box apparatus

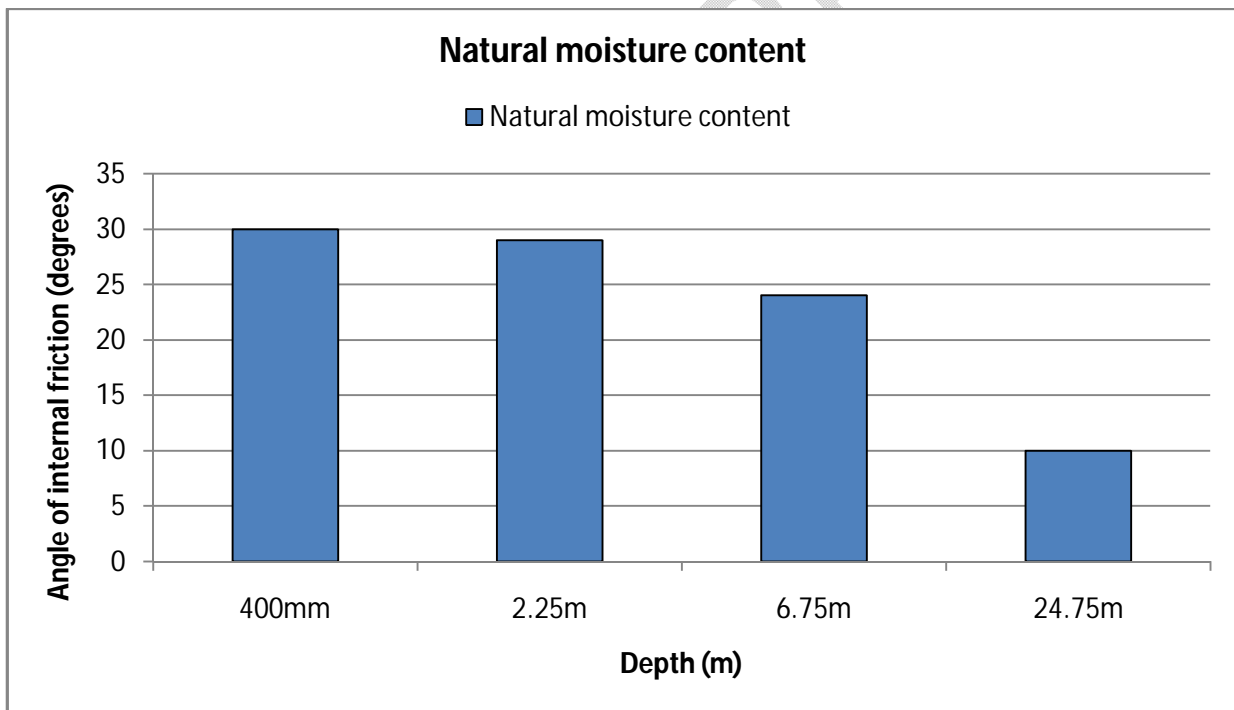


Figure 9: Soil angle of internal friction for point 1

At the natural moisture content at different depths below the ground surface, i.e. 0.4, 2.25, 6.75, and 24.75 meters, the angle of internal friction at point 1 increases at 2.25 m, 6.75 m, and 24.75 m depths. These conclusions imply that as soil depth grows, the angle of internal friction decreases and that the soil angle of internal friction increases when moisture content decreases [16].

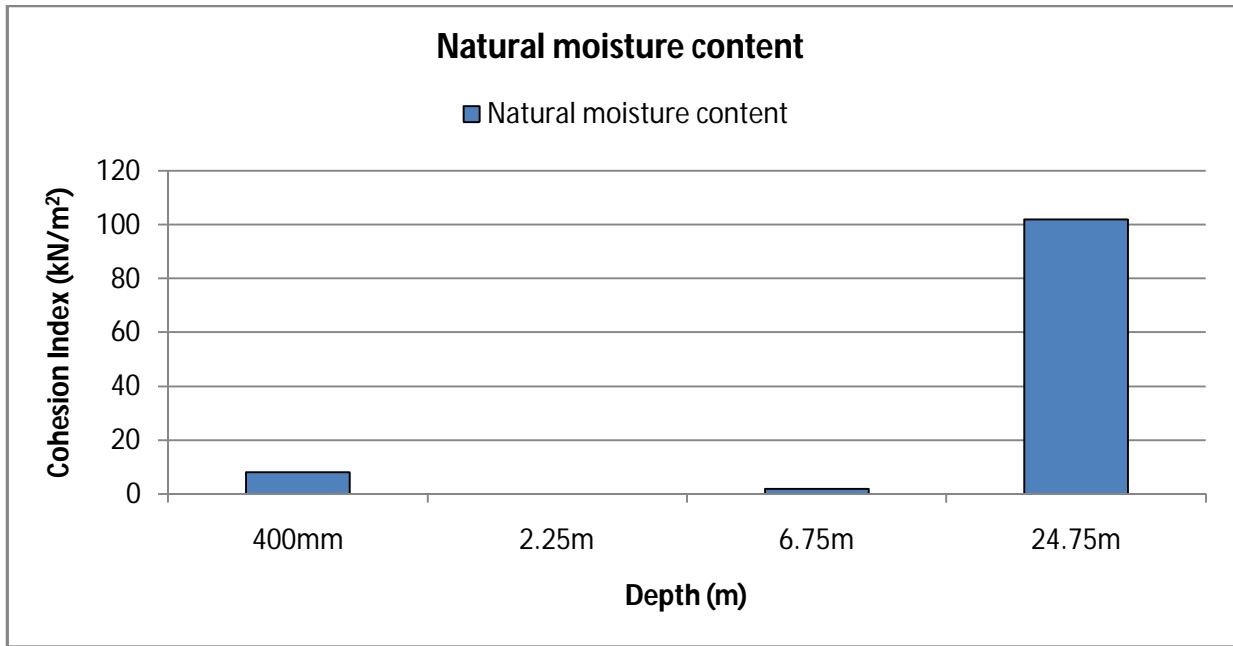


Figure 10: Soil Cohesion index for point 1

The soil cohesion index showed an erratic pattern in the result shown in Figure 7. The soil's natural moisture content had the highest cohesiveness index at 0.4 meters and 24.75 meters of depth, The soil cohesiveness index was also below 10kN/m² between 0.4 and 6.75 meters in depth. The soil cohesiveness index, however, was between 80 and 100 kN/m² at 24.75 n depth and showed a declining trend as moisture content rose.

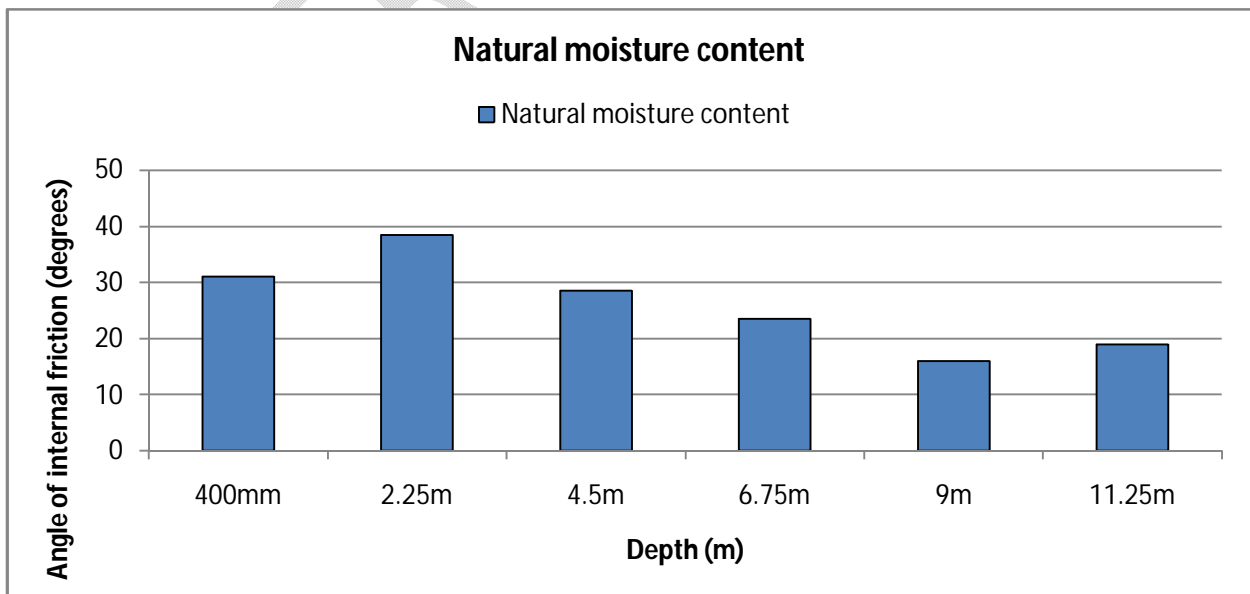


Figure 11: Soil angle of internal friction for point 2

Figure 11's conclusion demonstrates that, except for 9 meters of soil depth, the soil angle of internal friction decreases as moisture content rises, it happened at 0.4, 2.25, 4.5, and 6.75 meters of depth with the soil's natural wetness.

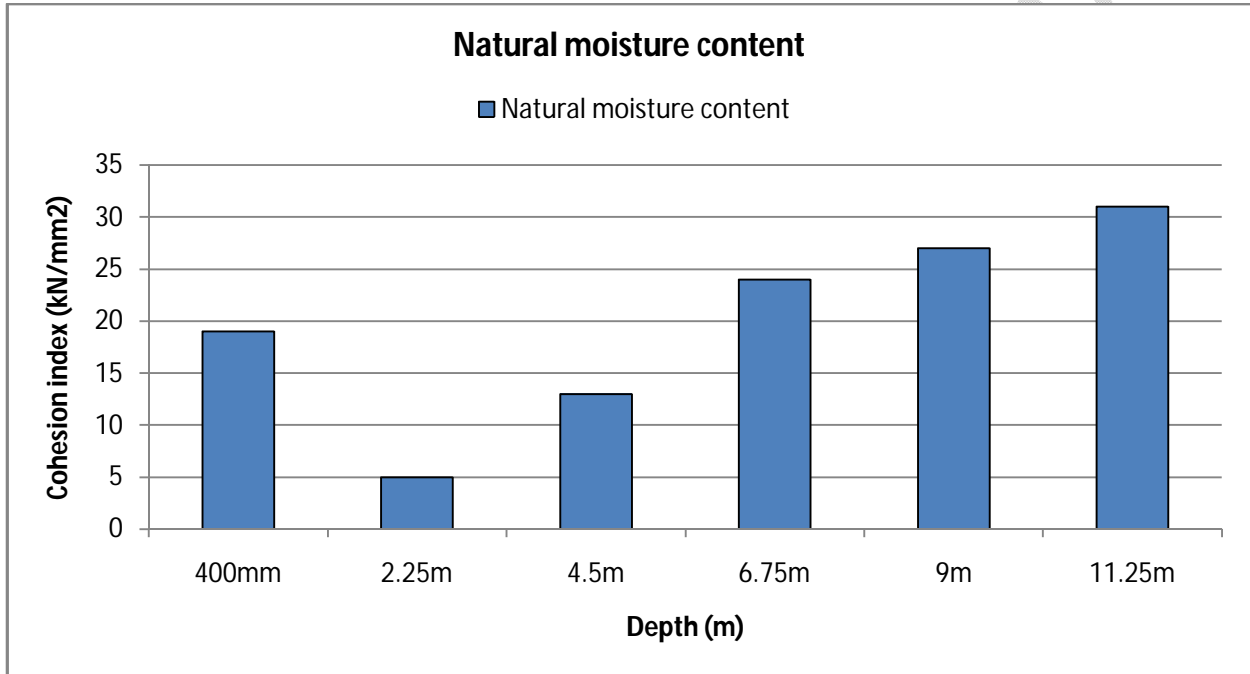


Figure 12: Soil Cohesion index for point 2

According to Figure 12, the soil cohesiveness index rises as moisture content rises at depths of 0.4, 2.25, 4.5, and 6.5 meters, whereas it falls at depths of 9 and 11.25 meters as moisture content rises. According to Figure 7., the maximum cohesiveness index is reached at depths of 0.4 m, 2.25 m, 4.5 m, and 6.5 m with a 4 percent moisture increase, and at depths of 9 m and 11.25 m at the soil's natural moisture content. The conclusion of this study suggests that the optimal cohesion index for this particular soil occurs around 6.75 meters and decreases below that level.

4.0 CONCLUSION

The investigation aimed to ascertain how different moisture contents affected the soil's shear strength characteristics. The soil's specific gravity ranges from 2.47 to 2.90, and the soil plasticity index at point 2 is higher than that at point 1, indicating that it can hold more water without losing its plasticity. According to the soil classification and rating system, the soil is composed of clayey and silty soil, with poor and good subgrade ratings, respectively. The results also show that the angle of internal friction decreases with soil depth and increases with moisture content at point 1, whereas the soil cohesion index showed an uneven pattern at point 1. At point 2, the soil angle of internal friction decreases as moisture content increases at depths of 0.4 m to 6.75 m, with the soil's natural moisture content reaching the maximum value, but increases as moisture content increases at depths of 9 m to 11.25 m, with 4 m of moisture content reaching the maximum value. In contrast, the soil cohesion index increases as moisture content increase from 0.4 m to 6.75 m, with 4 m of moisture content reaching the maximum value, and decreases.

LIMITATION

The interpretation of this research should be guided by the following limitations:

- Two coring points were considered.
- The maximum depth core for this research was 24.75m

REFERENCE

- [1] Onyelowe, K. C. Effect of water content on the shear strength of amaoba lateritic soil. *Int J Res Civil Eng Architect Design*, 1, 1-10. 2013.
- [2] Wei, Y., Wu, X., Xia, J., Miller, G. A., Cai, C., Guo, Z., & Hassanikhah, A. The effect of water content on the shear strength characteristics of granitic soils in South China. *Soil and Tillage Research*, 187, 50-59. 2019.
- [3] Dafalla, M. A. Effects of clay and moisture content on direct shear tests for clay-sand mixtures. *Advances in Materials Science and Engineering*, 2013.
- [4] Knapen, A., Poesen, J., Govers, G., Gyssels, G., & Nachtergaele, J. Resistance of soils to concentrated flow erosion: A review. *Earth-Science Reviews*, 80(1-2), 75-109. 2007.

- [5] Zhang, C., Wang, X., Zou, X., Tian, J., Liu, B., Li, J., Kang, L., Chen, H., & Wu, Y. Estimation of surface shear strength of undisturbed soils in the eastern part of northern China's wind erosion area. *Soil and Tillage Research*, 178, 1-10. 2018.
- [6] Wuddivira, M. N., Stone, R. J., & Ekwue, E. I. Influence of cohesive and disruptive forces on strength and erodibility of tropical soils. *Soil and Tillage Research*, 133, 40-48. 2013.
- [7] Rachman, A., Anderson, S., Gantzer, C., & Thompson, A. Influence of long-term cropping systems on soil physical properties related to soil erodibility. *Soil Science Society of America Journal*, 67(2), 637-644. 2003.
- [8] Horn, R., & Albrechts, C. Stress-strain effects in structured unsaturated soils on coupled mechanical and hydraulic processes. 2002 ASAE Annual Meeting, 2002.
- [9] Rahardjo, H., Satyanaga, A., Leong, E.-C., Ng, Y. S., & Pang, H. T. C. Variability of residual soil properties. *Engineering geology*, 141, 124-140. 2012.
- [10] Al-Shayea, N. A. The combined effect of clay and moisture content on the behavior of remolded unsaturated soils. *Engineering geology*, 62(4), 319-342. 2001.
- [11] Hoyos, L. R., Velosa, C. L., & Puppala, A. J. Residual shear strength of unsaturated soils via suction-controlled ring shear testing. *Engineering geology*, 172, 1-11. 2014.
- [12] ASTM-D2216. Standard Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass. *ASTM International*, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA, 19428-2959 USA. 2019.
- [13] ASTM, D. Standard test method for particle-size analysis of soils. 2007.
- [14] ASTM-D4318. Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils *ASTM International*, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA, 19428-2959 USA. 2017.
- [15] ASTM-D3080. Standard Test Method for Direct Shear Test of Soils Under Consolidated Drained Conditions. *ASTM International [ASTM]*. 2004.

[16] Abdullahi I, Umoh U U, Apata A.C, Effect of Varying Moisture Content on Share Strength Properties of Soil. Saudi Journal of Civil Engineering. 2022

UNDER PEER REVIEW