

# Comparison between DS, DSS and Triaxial resistance tests in compacted tropical soils in the State of Rio de Janeiro, Brazil.

## ABSTRACT

Direct shear (DS), Direct simple shear (DSS) and Triaxial tests with controlled shear rates were performed in two soils from the Baixada Fluminense region, in the city of São João do Meriti – Rio de Janeiro, Brazil. The soils in question are deposited on non-compacted soft soil with the addition of Municipal Solid Waste (MSW). Both samples of compacted soil were excavated at a depth of 10.0 m, and undisturbed samples were collected. In both tests, the shear rate of 0.043 mm/min was adopted. The soil at Point 1 was characterized as a clay soil collected in a slope region and the soil at Point 2 is a sand and collected in a central region. The tests presented coherent results with probabilistic accuracy greater than 95% reliability in all three resistance tests.

*Keywords:* direct simple shear, triaxial, sand, clay, tension, friction angle, cohesion, soil.

## 1. INTRODUCTION

During the last years, tests that determine soil resistance have been extensively studied in order to indicate the best test to be performed on each type of soil. Associated with this, structures foundations projects have been requiring more information about the soils studied. (ANDERSEN, 2015). Tropical coastal regions, such as in Rio de Janeiro State, with a large mountainous cluster and steep slopes, are most often exposed to static loads (DEARMAN et al, 1978 e MATULA et al. 1976) motivating the study of more critical resistance parameters. In this sense, the experiments that provide more information and, therefore, used in the Geotechnical area are direct shear (DS), direct simple shear (DSS) and triaxial tests.

In general, DS test has been more widely used, and the parameters obtained in the test have been more frequently used in engineering projects (ZHAO et al, 2014). On the other hand, DSS test are performed only in special situations: when more information related to excess pore pressure are required (KAVAZANJIAN et al., 1999). The triaxial is the second test more used in geotechnical engineering to obtain resistance parameters. The analysis is carried out in different rupture plans and, therefore, provide more precise resistance parameters results (CASAGRANDE AND HIRSCHFELD, 1960).

The main advantage of the direct simple shear (DSS) test in relation to the direct shear test (DS) is that reproduces more faithfully field conditions and simplicity in relation to triaxial tests . This test has become more common in the most diverse areas of study, especially for the determination of resistance parameters for slope stability studies.

In the studied region (Logística Sendas), the soil is very **clayey and sandy**, both lateritic, as showed by RAMOS (2018). According to MARSAL et al. (1976) clay percentages greater or equal to 30% already influence in a determinant way in the properties of the materials. Since the soil has sufficient percentage of clay to govern ~~the~~ its behavior as a whole it is called a clay soil. In the same way, sand percentages greater or equal to 30% have the same behavior. Therefore, both types of experiments are needed to obtain more critical resistance parameters.

Moreover, in this region the soil was already compacted with 20 ton using a Vibrating Single Drum Roller. Further, Mori (1983) states that saprolite soils, when excavated and compacted in the field, still maintain much of their structure intact, whereas in laboratory tests, the initial matrix destruction is quite intense. That is, compacted saprolite soils have even

30 more complex structures than those presented in homogeneous compacted soils. According to genealogical origin of  
31 tropical soils of the region, the soils studied are a homogeneous lateritic soil Vargas (1985) and Vaz (1969).

32 This study has as main focus that comprehends determination of tropical compacted soil resistance parameters, from the  
33 Rio de Janeiro state, through geotechnical tests, especially, direct shear (DS) test, direct simple shear (DSS) and the  
34 triaxial. These techniques will bring a better understanding of the rupture and movement mechanism of the slope, as well  
35 as the evaluation of the criteria adopted. AI tests were done at Geotechnics Laboratory – UFRJ.

## 36 37 2. MATERIAL AND METHODS

### 38 39 2.1 Sample Collection

40 The experimental ground of study was established in 2010 to study the construction of landfills on layers of non-  
41 compacted soft soils with the addition of Municipal Solid Waste (MSW), a common environmental problem throughout the  
42 country (Mahler, 2018). Moreover, the region where the samples were collected is in São João do Meriti, located in the  
43 Metropolitan Region of Rio de Janeiro (22°47'40.5"S 43°21'05.9"W).

44 Two undisturbed samples were collected in the field. Point 1 in the slope Region and Point 2 in the Central Region of the  
45 development. The samples were 25x25x25 centimeters in size. They were rapidly paraffined and protected, in order to not  
46 lose humidity. Therefore, they would not undergo changes during transport to the laboratory, where they were placed in a  
47 moisture chamber. For safety factors, Point 1 was chosen for appearing to be more clayey and Point 2 for having higher  
48 settlements, as previous mentioned by Deere e Patton (1971).

### 50 51 52 53 54 2.2 Direct Shear

55 The DS test was performed in accordance with standard ASTM 2974 soil procedures, to determine the shear stress (Zhao  
56 et al, 2014).. Six tests were carried out at two different points in saturated state, with initial tensions of 75 kPa, 150 kPa  
57 and 300 kPa for both points. The sample cell has 36 cm<sup>2</sup> in area (6 cm x 6 cm), is horizontally split and secured by two  
58 screws. The adopted shear velocity was 0.043 mm.min<sup>-1</sup>. The DS tests were carried out with flooding for at least one  
59 night.

### 60 61 2.3 Direct Simple Shear

62 The equipment used was Geocomp's Shear Trac-II-DSS.. A detailed description of the DSS test was given in the classic  
63 work by Bjerrum and Landva (1966). Six tests were carried out at two different points in saturated state, with initial  
64 tensions of 75 kPa, 150 kPa and 300 kPa for both Points. The sample cell has 31.73 cm<sup>2</sup> in area (diameter 6.36 cm). The  
65 specimen was sheared in drained condition at constant volume and the applied deformation velocity pre-defined as (0.043  
66 mm/min), given the suitability of the velocity for the direct Shear Test (DS). The DSS tests were carried out with flooding  
67 for at least one night.

### 68 69 2.4 Triaxial

70 A detailed description of the triaxial equipment used in this work was given by Head (1985). The triaxial tests were  
71 performed in accordance with standard BS 1377:8, 1990.

72 Eighteen tests were carried out at two different points in isotropical drained (CID) and undrained (CIU) consolidated  
73 samples. The initial strengths were 25, 50, 100 and 440 kPa for CIU non-percolated tests from Point 2 and 25 and 100  
74 kPa for percolated in the same Point. For the CID analysis the initial strength was 30, 45, 60 and 80 kPa. In the Point 1,  
75 the initial strengths were 50, 100, 200 and 300 kPa for CIU and CID. Tensions have been adapted to facilitate comparison  
76 with other techniques. The sample cell was molded in the laboratory. The base diameter ranged from 4.78 to 5.10 cm and  
77 height from 10.20 to 11.08 cm, with a total sample area ranging from 17.95 to 20.43 cm<sup>2</sup>. The specimen was sheared at a

78 predefined applied strain velocity (0.043 mm/min). Several drainage cycles were performed during the sample saturation  
 79 period and the sample was considered saturated when it assumed Skempton B values above 95%.


### 81 3. RESULTS AND DISCUSSION

82  
 83 As a general principle, it should be taken into account that the shear strength of purely granular soils is basically a  
 84 phenomenon of friction, and therefore, it predominantly depends on the normal pressure to the shear plane. In the case of  
 85 cohesive soils, in addition to friction, cohesion plays an important role in resistance.

86 In resistance tests, the normal pressure  $\sigma$  is varied, measuring the respective shear stress failure (BS 1377-7:1990).  
 87 Thus, it is possible to establish the Mohr envelope for a given soil, from points  $(\sigma, t)$  obtained in tests.

#### 89 3.1 Direct Shear

90 Figure 1-a shows the soil behavior at different stresses for horizontal displacement. As can be seen, the behavior had  
 91 stabilization of the deformations prior to the conclusion of the test with constant growth values. Moreover, Figure 1-a and  
 92 1-b show a standard behavior of clay soil for Point 1 (dotted lines) and sand soil for point 2 (solid lines). The curve  
 93 stabilization at 75 kPa in Point 2 had a quickly ruptured, unlike all other analyzed samples. Further, Figure 1-c, shows an  
 94 elongation behavior in all tests. The friction and cohesion values found from 0 to 10 m deep obtained by the linearization  
 95 on the Figure 1-d are showed in Table1. Consequently, Point 1 is clearly more clayey and Point 2 more sandy Vargas  
 96 (1953, 1974) and De Mello (1972) and et. al.

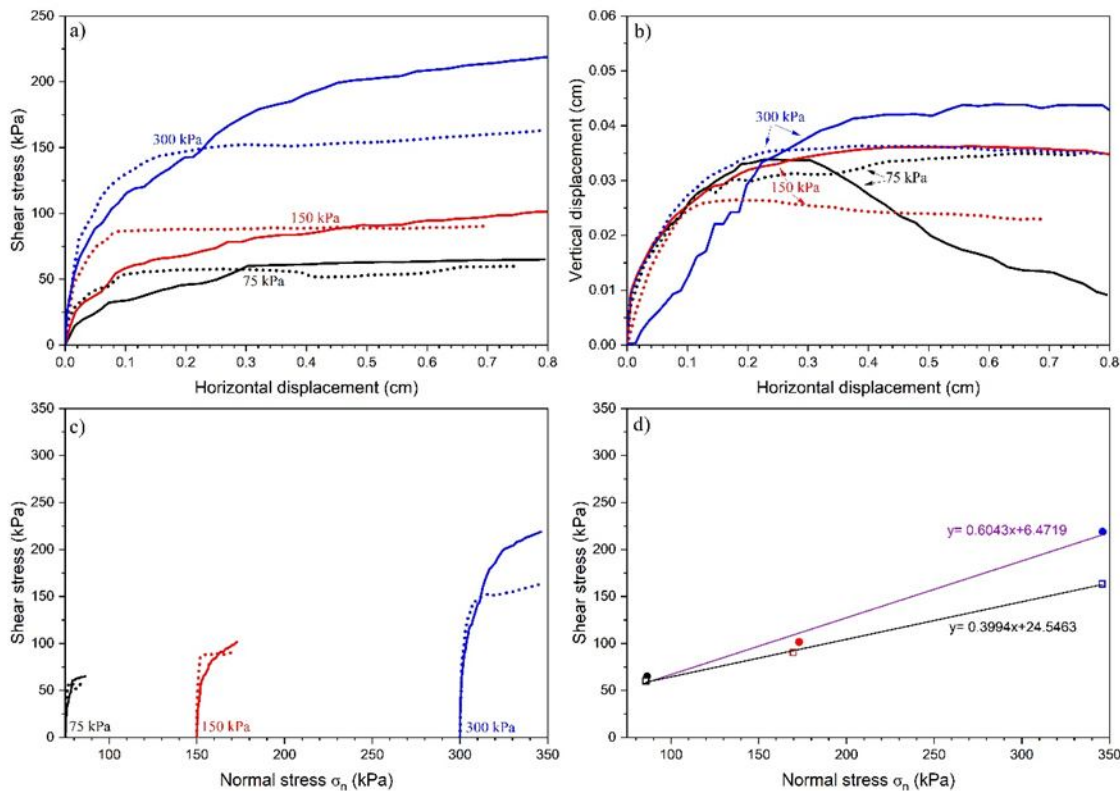

97  
 98 Figure 1: (a) Shear Stress (kPa) x Horizontal Displacement (cm), (b) Vertical Displacement (cm) x Horizontal  
 99 Displacement (cm), (c) Shear Stress (kPa) x Normal Stress (kPa) and (d) Mohr's wrap in the point 1 (dotted line) and 2  
 100 (solid line). The applied stresses of 75, 150 and 300 kPa are represented by black, red and blue, respectively.

101 Table 1: Friction and cohesion values found from 0 to 10 m deep in the DS experiments.

	Friction (°)	Cohesion (kPa)
<b>Point 1</b>	21.77	24.55
<b>Point 2</b>	31.14	6.47

### 3.2 Direct Simple Shear

Figure 2-a shows the soil behavior at different stresses for shear strain. As can be seen, the behavior had stabilization of the deformations prior to the conclusion of the test with constant growth values. The test with 75 kPa in Point 1 shows a small decline after 15% with rapid stabilization afterwards. This didn't affect the measurement since the coefficient of determination ( $R^2$ ) was 0.9997, as showed in Figure 2-d. Figures 2-a and 2-b show a standard behavior. Notwithstanding, only at Point 1 with 75 kPa showing a certain discrepancy, as reported before.

In all trial, Figure 2-c shows a shortening behavior. As found in the Figure 2, the straight lines, their friction angle and cohesion coefficients in Figure 3 showed that Point 1 is clearly more clayey and Point 2 more sandy. Despite this, there is excessive discrepancy between DS and DSS values, as can be observed in Tables 1 and 2, respectively. In this regard, DS test have a defined failure plane, unlike the DSS test. It is possible that this distinction has made all the difference in the results. Moreover, DSS test presented extremely careful safety results, since the failure plane was not horizontal.

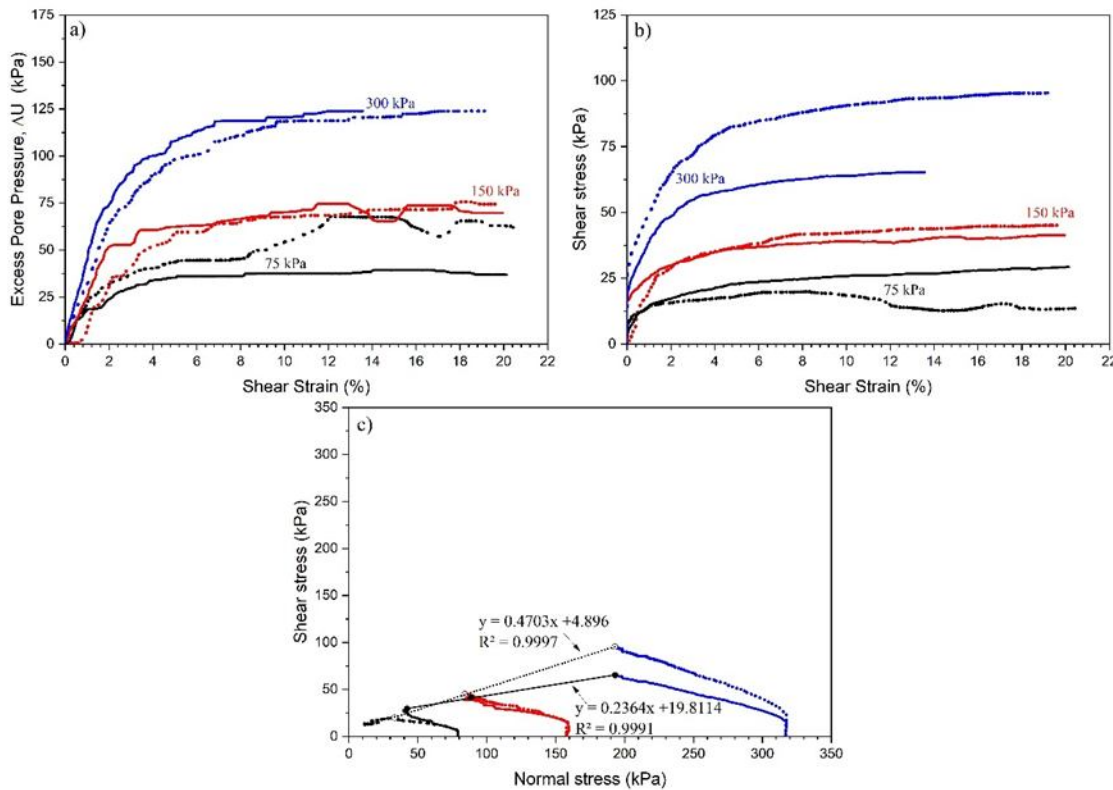


Figure 2: (a) Excess Pore Pressure (kPa) x Shear strain (%), (b) Shear Stress (kPa) x Shear Strain (%), (c) Shear Stress (kPa) x Normal Stress (kPa) and Mohr's wrap in the point 1 (dotted line) and 2 (solid line). The applied stresses of 75, 150 and 300 kPa are represented by black, red and blue, respectively.

Table 2 – Friction and cohesion values found from 0 to 10 m deep in the DSS experiments.

	Friction (°)	Cohesion (kPa)
<b>Point 1</b>	13.84	19.82
<b>Point 2</b>	25.19	4.90

122  
123

### 3.3 Triaxial

124  
125

The triaxial tests use more stress points than DS and DSS due the technical standard, which requires a minimum of 12 tests (BS 1377:8, 1990).

126  
127  
128  
129  
130  
131  
132  
133  
134


Figures 3-a and 4-a show the soil behavior at different stresses for axial strain. As can be seen, the stabilization behavior of the deformations prior to the conclusion are in constant growth values. Figures 3-a, 3-b, 4-a and 4-b show a standard behavior with excess pore pressure [Hilf (1956) and Simms and Yanful (2002)]. Figures 3-c and 4-c show the soil behavior Parameter A for axial strain. As can be seen, all samples reached peak deviator stress ( $q_{max}$ ) between 2 and 8% for Point 1 and between 4 and 8% for Point 2. The test with 100 kPa in Point 2 shows a small ascent after 8%, with rapid stabilization afterwards. Probably, there was a harder material like stone or quartz during the test that interfered with the result. Nevertheless, this didn't affect the measurement since the coefficient of determination ( $R^2$ ) was 0.9974, as showed in Figure 4-e. Figures 3-d and 4-d reiterate the situation at Point 2 with 100 kPa, however, with a few discrepancies in the other tests.

135  
136  
137  
138

In all trial, Figures 3-e e 4-e shows a shortening behavior. In the same way as founded in Figures 1 and 2, the straight lines, their friction angle and cohesion coefficients in Figures 3 and 4-e corroborate that Point 1 is more clayey and Point 2 more sandy. The friction and cohesion values found from 0 to 10 m deep obtained by the linearization on the Figures 3-e and 4-e are shown ed in Table 3.

139  
140  
141  
142  
143  
144  
145

Figure 3: CIU Point 1 (a) Stress,  $t$  (kPa) x Axial Strain (%), (b) Excess Pore Pressure (kPa) x Axial strain (%), (c) Parameter A x Axial Strain (%), (d) Analyse  $\sigma_1 / \sigma_3$  (kPa) x Axial Strain (%) and (e) Mohr's wrap in the point 1. The applied stresses of 50, 100, 200 and 300 kPa are represented by black, red, blue and green, respectively.

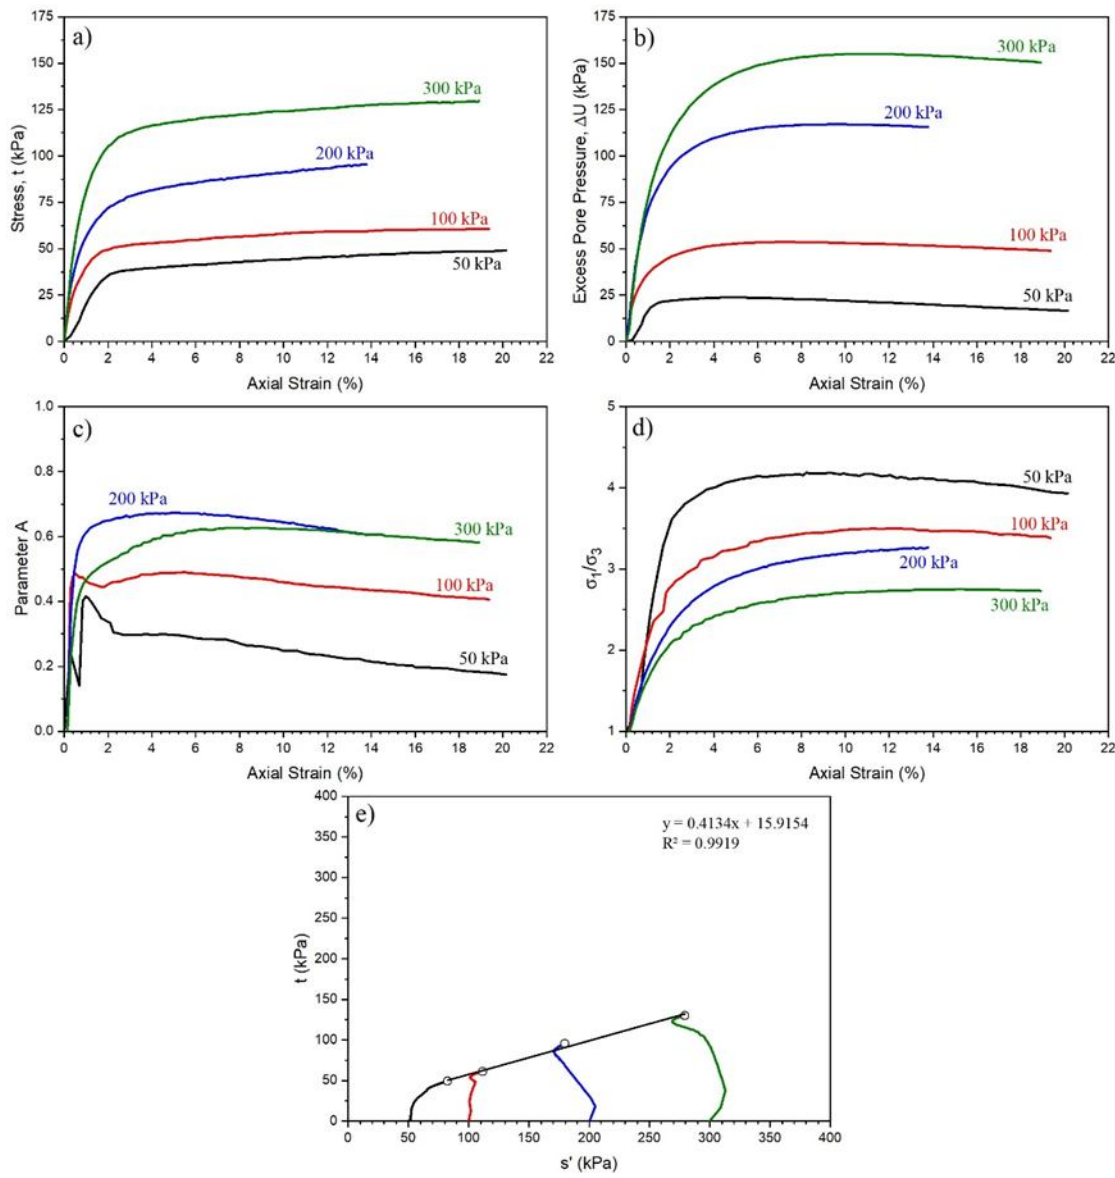

146 Figure 3: CIU Point 1 (a) Stress,  $t$  (kPa) x Axial Strain (%), (b) Excess Pore Pressure (kPa) x Axial strain (%), (c)  
 147 Parameter A x Axial Strain (%), (d) Analise  $\sigma_1/\sigma_3$  (kPa) x Axial Strain (%) and (e) Mohr's wrap in the point 1. The  
 148 applied stresses of 50, 100, 200 and 300 kPa are represented by black, red, blue and green, respectively.  
 149  
 150

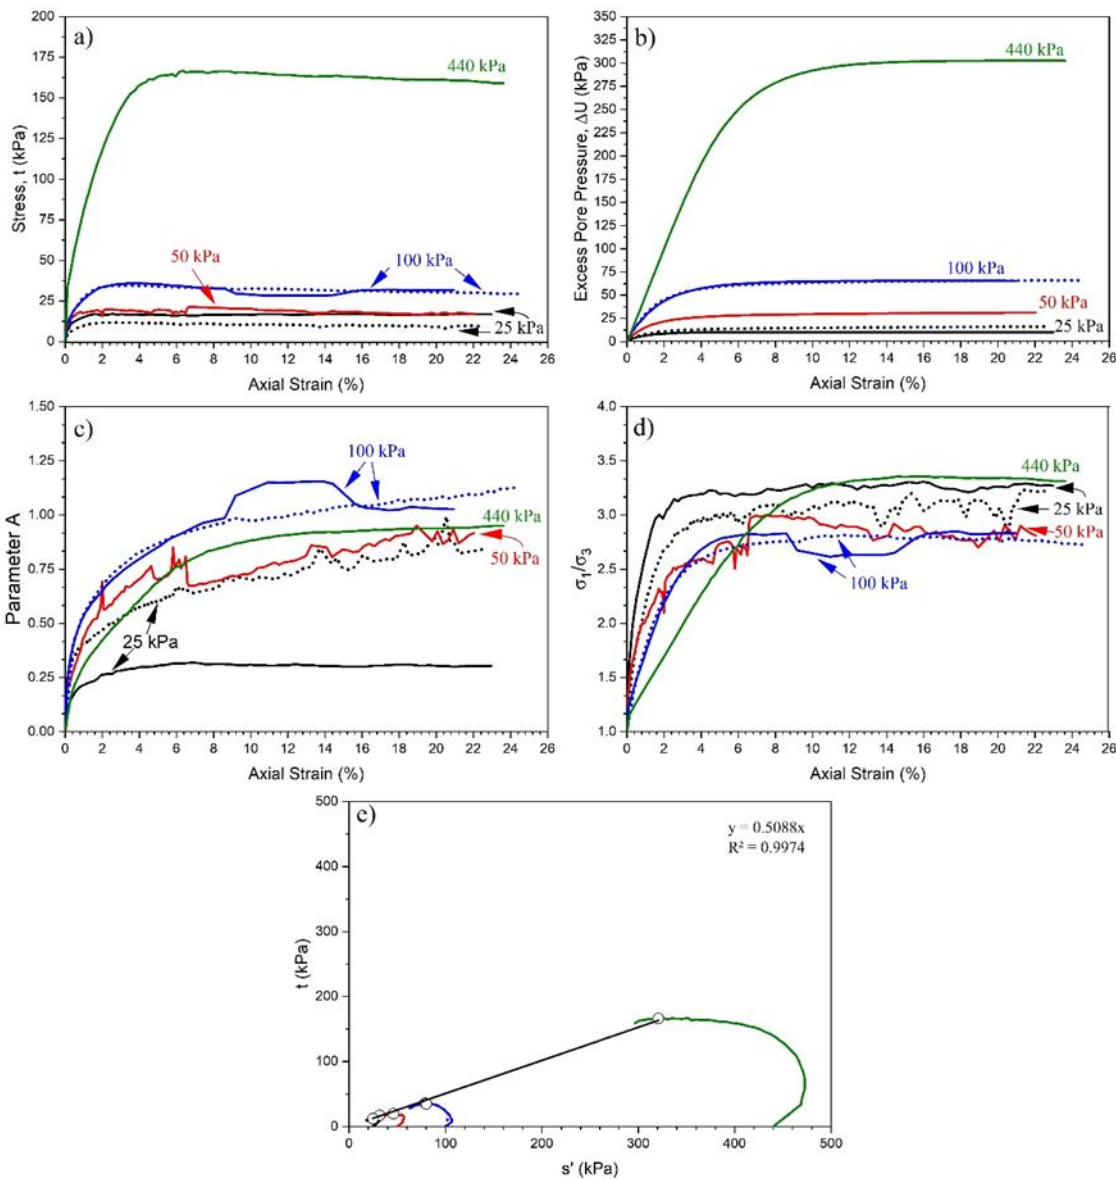


Figure 4: CIU Point 2 (a) Stress,  $t$  (kPa) x Axial Strain (%), (b) Excess Pore Pressure (kPa) x Axial strain (%), (c) Parameter A x Axial Strain (%), (d) Analyse  $\sigma_1/\sigma_3$  (kPa) x Axial Strain (%) and (e) Mohr's wrap in the point 2. The applied stresses of 25, 50, 100 and 440 kPa are represented by black, red, blue and green, respectively. The solid line represents non-percolated samples and the dotted line percolated samples.


Table 3 –and cohesion values found from 0 to 10 m deep in the Triaxial-CIU experiments.

	Friction Triaxial CID (°)	Friction Triaxial CIU (°)	Cohesion Triaxial CID (kPa)	Cohesion Triaxial CIU (kPa)
<b>Point 1</b>	27,02	22,46	9,11	15.92
<b>Point 2</b>	32.75	26.97	0.15	0

Figures 5-a and 6-a shows the soil behavior at different stresses for axial strain. As can be seen, the stabilization behavior of the deformations prior to the conclusion of the test was constant with growth values. Figures 5-a, 5-b, 6-a and 6-b show a standard behavior with volumetric strain. In all trial, Figures 6-c e 7-c show a shortening behavior. As found in the


163  
164  
165

Figures 1, 2, 3 and 4 the straight lines, their friction angle and cohesion coefficients in Figure 5-c and 6-c showed that Point 1 is more clayey and soil 2 more sandy.

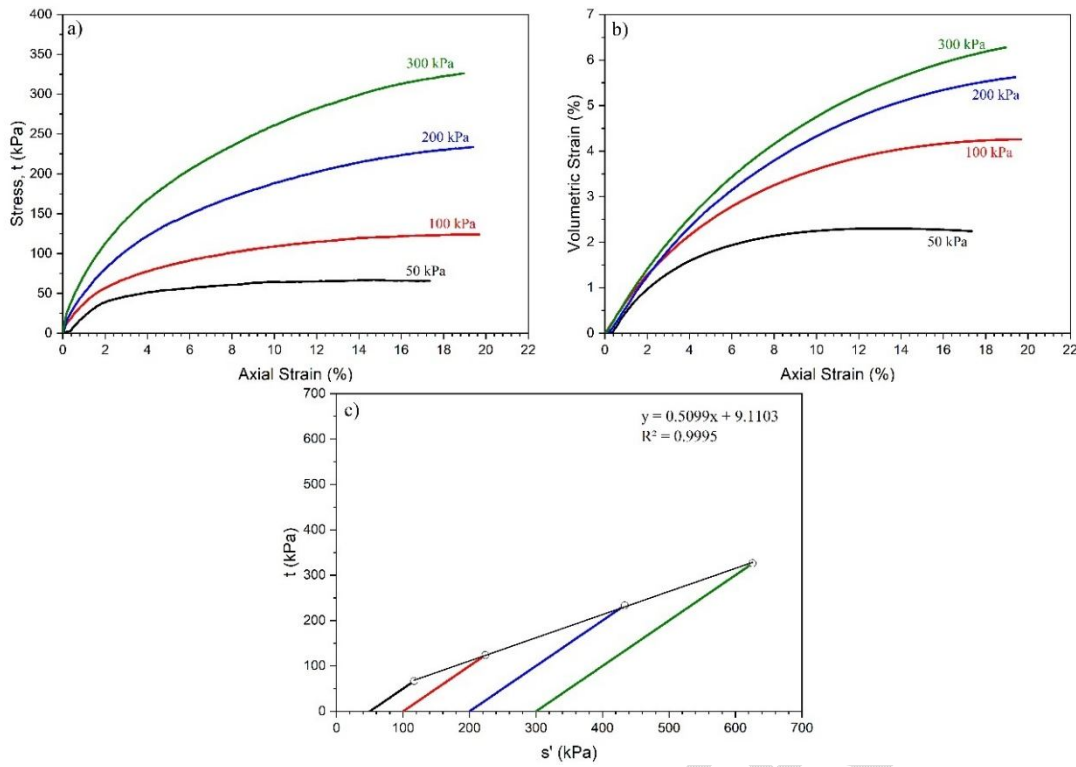

166  
167  
168  
169  
170  
171

Figure 5: CID Point 1 (a) Stress,  $t$  (kPa) x Axial Strain (%), (b) Volumetric Strain (%) x Axial strain (%), (c)  $t$  (kPa) x  $s'$  (kPa), The applied stresses of 50, 100, 200 and 300 are represented by black, red, blue and green, respectively.

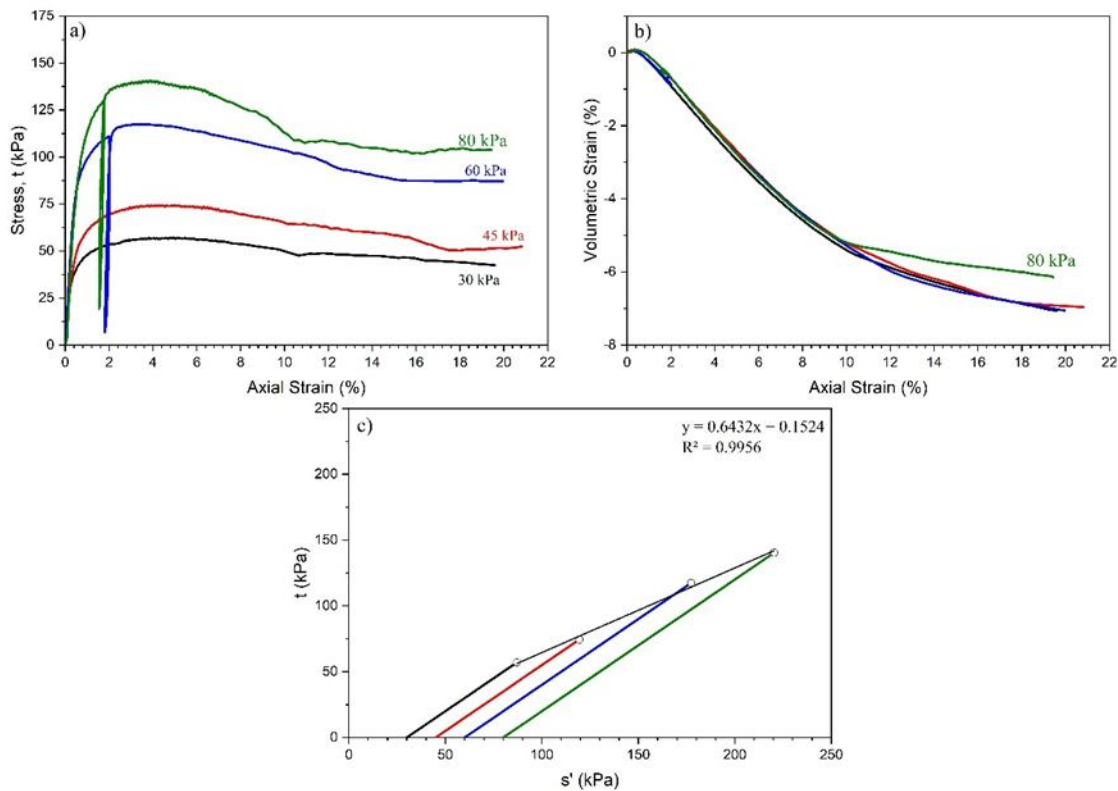

172

173 Figure 6: CID Point 2 (a) Stress,  $t$  (kPa) x Axial Strain (%), (b) Volumetric Strain (%) x Axial strain (%), (c)  $t$  (kPa) x  $s'$   
 174 (kPa), The applied stresses of 30, 45, 60 and 80 kPa are represented by black, red, blue and green, respectively.  
 175

### 176 3.4 Comparison of Results

177 The samples used in the different cutting tests show reduced variability in terms in physical state and identification  
 178 characteristics. Therefore, it is possible to joint analysis of the results obtained.

179 Table 4 presents the results obtained in this work, together with results found in the literature to facilitate the comparison  
 180 between the data. According to Seed et al. (1959) and Casagrande and Hirschfeld (1960), another way of obtaining  
 181 dispersion is to print large shear stresses on the soil mass. According to the authors, the boundary region of two types of  
 182 structure above is for clayey soils around the optimal moisture, for energy levels compatible with the Normal Proctor.  
 183 Therefore, information related to compaction, equipment used, soil type and adopted shear speed in the resistance test  
 184 are summarized in this table.

185 It can be observed based on resistance parameters obtained in this work (Table 4) that the DS test is reasonably equal to  
 186 the values presented in the Triaxial CID and greater than the Triaxial CIU. The values in DSS are the smaller one  
 187 because of the predefined orientation plane as previously discussed. Table 4 also includes other tests carried out in the  
 188 academic literature. It was expected that the geotechnical parameters of friction angle and cohesion intercept were much  
 189 lower in direct shear tests (DSS) than those obtained in direct shear (DS) due to the predefined orientation plane of the  
 190 Direct Shear test. According to HANZAWA et al. (2007), the results obtained through the direct simple shear (DSS) tests  
 191 represent more faithfully the conditions in the field than the direct shear (DS) results.

192 The tests obtained in this work had results very consistent with the literature. The Triaxial-CIU results obtained by  
 193 Coutinho e Bello (1986), the soil was especially similar in the characteristics with the soil of Point 2.

194 For the Triaxial-CID, the results were closer to Fortes (2011) in the Point 1. The soil worked by Fortes (2011) is the  
 195 closest geologically with Point 1, since they are both tropical soils. Probably, the difference between the tests by Mello  
 196 (1946) and Schroder (2011) is due to the geological formation of the studied soil, since the last two are temperate soils.

197 Table 4 - Comparison between results found in DSS, Triaxial and DS experiments of this work as well as those found in  
 198 the literature.

	Friction Angle (°)	Cohesion Intercept (kPa)	Soil type	Compaction and equipment used	Adopted shear speed (mm/min)
Authors 1 (CID) – Triaxial	27.0°	9.1	Lateritic inorganic compact, high plasticity sandy clay	20 ton Vibrating Single Drum Roller (normal proctor)	0.043
Authors 1 (CIU) – Triaxial	22.5	15.9	Lateritic inorganic compact, high plasticity sandy clay	20 ton Vibrating Single Drum Roller (normal proctor)	0.043
Authors 2 (CID) – Triaxial	32.8°	0.15	Lateritic inorganic compact, sandy clay of medium plasticity	20 ton Vibrating Single Drum Roller (normal proctor)	0.043
Authors 2 (CIU) – Triaxial	26.97	0	Lateritic inorganic compact, sandy clay of medium plasticity	20 ton Vibrating Single Drum Roller (normal proctor)	0.043
Schroder (2017) (CID) - DS	37.7°	145	Lateritic inorganic compact, high plasticity sandy clay	H Hydraulic jack 12 ton (normal proctor)	0.2
Schroder (2017) (CID) - Triaxial	31°	180	Lateritic inorganic compact, high plasticity sandy clay	H Hydraulic jack 12 ton (normal proctor)	0.2
LG' (Normal Proctor) – Strong (2011) (CID) - DS	24.4°	95.6	Lateritic organic compact, high plasticity clay	Bulldozer 14 ton (normal proctor)	0.025
LG' (Normal Proctor) – Strong (2011)	37°	65	Lateritic organic compact, high plasticity clay	Bulldozer 14 ton (normal proctor)	

(CID) - Triaxial			plasticity clay	0.025
Mello (1946) – CID - DS	29.8°	254	Compressed organic lateritic blue clay high plasticity	Bulldozer 14 ton (normal proctor) 0.025
Authors 1 – DS	21.8°	24.6	Lateritic inorganic compact, high plasticity sandy clay	20 ton Vibrating Single Drum Roller (normal proctor) 0.043
Authors 2 (2018)– DS	31.1°	6.5	Lateritic inorganic compact, sandy clay of medium plasticity	20 ton Vibrating Single Drum Roller (normal proctor) 0.043
Authors 1 (2018) (CIU) – DSS	13.8°	19.8	Lateritic inorganic compact, high plasticity sandy clay	20 ton Vibrating Single Drum Roller (normal proctor) 0.043
Authors 2 (CIU) - DSS	25.2°	4,9	Lateritic inorganic compact, sandy clay of medium plasticity	20 ton Vibrating Single Drum Roller (normal proctor) 0.043
Schroder (2017) – (CIU) – DS	27.7°	20	Lateritic inorganic compact, high plasticity sandy clay	H Hydraulic jack 12 ton (normal proctor) 0.2
Quental (1986) – (CIU) – Triaxial – Normally Dense	33.1°	6.1	Lateritic organic compact, high plasticity clay	Bulldozer 14 ton (normal proctor) 0.025
Mello (1946) – CIU - DS	28.4°	130	Compressed organic lateritic blue clay high plasticity	Bulldozer 14 ton (normal proctor) 0.025
Dib (1985b) – CIU - Triaxial	26°	25	Organic compacted clayey silt	Bulldozer 14 ton (normal proctor) 0.025

#### 4. CONCLUSION

The study carried out throughout this article allows us to conclude that the soil presents resistance, in terms of effective stresses, ranging from 21 to 33°. This result is much higher than what would be expected given its plasticity characteristics. However, it is perfectly justified by the predominantly silty granulometric composition with sand in the Central Part of the Landfill and more clay in the part of the slope of the Landfill up to 10m deep.

It is visible that for the specific situation of this landfill, the DS and Triaxial tests fit better, with the DSS being very cautious.

It is understood that the adoption of soaked Direct Shear tests, at different points of the landfill, is the best solution, as they present satisfactory parameters regarding the error requirement and qualify the enterprise data.

#### REFERENCES

- Andersen, K.H. Cyclic soil parameters for offshore foundation design. Third ISSMGE McClelland Lecture. Frontiers in Offshore Geotechnics III – Volume 1, Oslo, 2015.
- Bjerrum, L. Geotechnical properties of Norwegian marine clays. *Géotechnique*, 4:49-69. 1954.
- Bjerrum, L., Landva, A. Direct Simple-Shear Tests on a Norwegian Quick Clay. *Géotechnique*, v. 16(1), p. 1-20, 1966.
- BS 1377-8 (1990). "Methods of test for soils for civil engineering purposes – part 8: shear strength tests (effective stress)". British Standards Institution, London.
- Bishop, A. W., and D. J. Henkel (1962). *The triaxial test*. London, Arnold

- 222 Casagrande, A.; Hirschfeld, R. C. (1960). Stress- deformation and strength characteristics of a clay compacted to a  
223 constant dry unit weight. In: Research Conference on Shear Strength of cohesive soil, p.359-417. Boulder, Colorado,  
224 USA.
- 225 Coelho, P.A.L.F. (2000). "Caracterização geotécnica de solos moles. Estudo do local experimental da Quinta do Foja  
226 (Baixo Mondego)". Dissertação de Mestrado, Dep. Eng.<sup>a</sup> Civil da FCTUC, Coimbra
- 227 Coutinho, R. Q.; Bello, M. I. M. C. V. (2011). Analysis and Control of the Stability of Embankments on Soft Soils:  
228 Juturnaíba and Others Experiences in Brazil. *Soils & Rocks*, v. 4, p.331- 351.
- 229 Dearman, W. R.; Baynes, F. J.; Irfan, T. Y. Engineering Grading of Weathered Granite. *Engineering and Geology*, 1978,  
230 v.12, n.4, p.345-374.
- 231 Dearman, W. R.; Matula, M. Environmental Aspects of Engineering Geological Mapping. *Bulletin of the International  
232 Association of Engineering Geology*, Krefeld, 1976, N<sup>o</sup> 14. p141-146.
- 233 Deere, D.U. and Patton, F.D. (1971). Slope stability in residual soils. *PACSMFE*  
234 4, v. 1, 87-170, Puerto Rico.
- 235 De Mello, V. F. B. (1972). Thoughts on soil engineering applicable to residual  
236 soils. *ACSE 13, SASSE*, 5-33. Hong Kong
- 237 Dyvik, R., Berre, T., Lacasse, S., e Raadim, B. Comparison of truly undrained and constant volume direct simple shear  
238 tests. *Géotechnique*, v. 37, n. 1, pp. 3-10. 1987.
- 239 Gibson, R. E., and Henkel, D. J. (1954). "Influence of duration of tests at constant rate of strain on measured drained  
240 strength," *Geotechnique*, 4(1):6-15.
- 241 Head, K.H. (1985). "Manual of soil laboratory testing". Vols. 1, 2 e 3, Pentech Press, London.
- 242 Hilf, J. W. (1956). An investigation of pore water pressure in compacted cohesive soils. Technical Memorandum No 654,  
243 United States Department of the Interior, Bureau of Reclamation, Design and Construction Division, Denver, CO.
- 244 Leao L. A.; Fortes, R. M. Estudo da variabilidade da resistência ao cisalhamento de alguns solos classificados segundo a  
245 mct (miniatura, compactado, tropical) para dois níveis de energia: Normal e intermediária. VII Jornada de Iniciação  
246 Científica. Universidade Presbiteriana Mackenzie, 2011.
- 247 Kavazanjian, E., Jr. Seismic design of solid waste containment facilities. In *Proceedings of the 8th Canadian Conference  
248 on Earthquake Engineering* p. 51-89. Vancouver, BC, June 1999. Google Scholar. 1999.
- 249 Kjellman, W. Testing the shear strenght of clay in Sweden. *Geotecnique 2*, No.3, p. 225 232. 1951.
- 250 Marsal, R. J; Fuentes de la Rosa, A. (1976). Mechanical properties of rockfill soil mixtures, *Proc. XII, I cold*, Ciudad del  
251 Mexico, Mexico.
- 252 Mello, V.F.B. "Shearing Strength of clay". Dissertação de M.Sc, MIT, Boston, 1946.
- 253 Merighi; J. V.; Alvarez Neto, L.; Fortes, R. M. (1987). Control of soil compaction through the mini- MCV / HILF test. In:  
254 XXII Anual Paving Meeting,
- 255 Mitchell, J. K.; Sitar, N. (1982). Engineeringproperties of tropical residual soils. *Geotechnical Specialty Conference on  
256 Engineering and Construction in tropical and residual soils*, ASCE. Honolulu,Hawaii, USA.
- 257 Mori, W. (1983). Sapolites compacted in the construction of earth dams and rockfill: the case of the Sossego dam. In:  
258 XXV Nacional Conference of Dams, p. 1-18. Salvador, Bahia, Brazil.

- 259 Schoder, K. R. "Determinação de Parâmetros Geotécnicos ( $c'$  e  $\Phi$ ) de Misturas de Solo Estabilizado por Meio de  
260 Cisalhamento Direto e Compressão Triaxial". Dissertação de M.Sc, COPPE/UFRJ, Rio de Janeiro, 2017.
- 261 Seed, H.B. e Chan, C. K. (1959). Structure and strength characteristics of compacted clays. Journal of the ASCE – SM5.
- 262 Simms, P. H. and Yanful, E. K. (2002). Predicting soil-water characteristic curves of compacted plastic soils from  
263 measured pore-size distributions. *Géotechnique*, 52, 4, 269 - 278.
- 264 Stein, K.; Budny, J.; Hartmann, D.; Tapahuasco, F. C. (2018). Determination of Geotechnical Parameters ( $c$  and  $F$ ) of a  
265 lateritic soil with different lime and rice husk ash contents. In: XVI Nacional Conference of Geotechnical / 6asPortuguese-  
266 Spanish Geotechnical Day. Ponta Delgada, Portugal.
- 267 Vargas, M. (1953). Some engineering properties of residual clay soils occurring in Southern Brazil. *ICSMFE*, 3, v. 1, Zurich.
- 268 Vargas, M. (1974). Engineering properties of residual soils from South Central region of Brazil. *ICIACEG*, 2, IAEG, v. IV,  
269 5.1-5.26, São Paulo.
- 270 Vargas, M. (1985). The concept of tropical soils. Intl. Conf. on Geomech. In *Tropical Lateritic and Saprolitic Soils*, 1.  
271 *ISSMFE*, v. 3, 101-134, Brasília.
- 272 Vaz, L. F. (1996). Classificação genética dos solos e dos horizontes de alteração de rocha em regioes tropicais. *Soil and*  
273 *Rocks*, 19 (2), 117-136
- 274 Zhao YR, Xie Q, Wang GL et al. (2014). A study of shear strength properties of municipal solid waste in Chongqing  
275 landfill, China. *Environmental Science and Pollution Research*, 21(22):12605–12615.
- 276