

Study of Soil and Crop Parameters of Coconut Orchard for Designing of Tractor Operated Coconut Basin Lister cum Fertilizer Applicator

ABSTRACT

Aims: To study the soil and crop parameters of coconut orchards for the design of tractor operated coconut basin lister cum fertilizer applicator.

Place and Duration of Study: The study was conducted in Instructional Farm, KCAET in the Year 2021.

Methodology: Soil parameters such as moisture content, bulk density, cone index, and shear strength; Crop parameters such as trunk diameter and root zone depth of coconut palm were studied using standard procedures to design tractor operated coconut basin lister cum fertilizer applicator.

Results: The soil moisture contents varied from 13.2 to 15.6% with mean of (Av=14.66%). The soil bulk density ranged from 1615 to 1865 kg m⁻³ with mean of (Av=1696.6 kg m⁻³). The soil cone index varied from 0.428 to 1.506 N mm⁻² with mean of (Av=1.041 N mm⁻²). The soil shear strength varied from 1.47×10⁻³ to 3.13×10⁻³ N mm⁻² (Av=with mean of 2.31×10⁻³ N mm⁻²). The trunk diameter of the coconut palm varied from 32.3 to 38.1 cm (Av=with mean of 34.74 cm). The root zone depth of the coconut palm varied from 13.4 to 15.2 cm (Av=with mean of 14.3 cm).

Conclusion: Soil moisture contents, bulk density, cone index, and shear strength helped in the design of power requirements and different parts of the machine. The trunk diameter of the coconut palm aided in deciding the working width of the machine while the root zone depth assisted in finalizing the operational depth of the machine.

Keywords: Basin lister, Coconut, Cone index, Shear strength, Soil bulk density, Shear strength, Basin lister, Coconut

1. INTRODUCTION

Agriculture plays an integral role in the economy of India and the total workforce involved in agriculture and allied sector in the country is 54.6%. In India, the total geographical area and the net sown area is 328.7 million hectares and 139.4 million hectares respectively in 2016-17. India is favourable for growing horticultural crops such as vegetables, fruits, tuber crops, mushrooms, ornamental crops, medicinal and aromatic plants, spices, and plantation crops like coconut, cocoa, tea, coffee, etc. The horticultural crops production in the country was 319.56 million tonnes in an area of 26.21 million hectares and horticultural crops production in Kerala was 9.16 million tonnes in an area of 1.55 million hectares for the year 2019-20 (Anonymous, 2021). Coconut palm comes under plantation crops in the category of horticulture crops. The plantation crops production in the country was 16.03 million tonnes in an area of 4.07 million hectares for the year 2019-20 and the plantation crops production in Kerala was 5.5 million tonnes in an area of 0.97 million hectares for the year 2019-20 (Anonymous, 2021).

The share of coconut production of India's share in coconut production in the global arena is 34.73%. Around 12 million people of the country depend on coconut cultivation, processing, and related activities. The area and production area of coconut in the country were 2.17 million hectares and 20,308.70 million nuts respectively for the year 2019-20 (Anonymous, 2021). The south Indian states have a share of 89.66% in the area and 88.97% in the coconut production of coconut in the country. Kerala leads in coconut production with a 34.37% share of production in the country and it

Formatted: Font: 10 pt, English (United States), Not Superscript/ Subscript

produced 6980.30 million nuts in an area of 0.76 million hectares for the year 2019-20 (Anonymous, 2021). The basin listing operation is performed in about a 1.8 m radius around the coconut palm for irrigation requirements aiding in the growth of plants. The fertilizer application is performed by digging a ditch to a depth of 10 cm at a radius of 1.8 m from the base of the coconut palm. For the good management of coconut palm; 0.50 kg of N, 0.32 kg of P_2O_5 and 1.20 kg of K_2O fertilizer rates need to be applied (Anonymous, 2016). Drudgery prone, expensive, time consuming, less ease of operation, plant damage, ~~accident~~-prone, lower operational depth, lower precision, and fertilizer losses occur with manual operation of basin listing and fertilizer application. ~~Availability~~-The ~~availability~~ of machines and research works were not reported for basin listing and fertilizer application operations of the coconut palm. Therefore, a research work was attempted to design and develop a ~~tractor-tractor~~-operated coconut basin lister cum fertilizer applicator. In this regard, soil and crop parameters were studied to assist in the design of various parts of tractor operated coconut basin lister cum fertilizer applicator.

Adeniran and Babatunde (2010) investigated soil properties affecting optimum soil cultivation and the study revealed that the cone index increased with depth and decreased with an increase in moisture contents as high moisture content reduced the soil cohesion. Kumar *et al.* (2012) conducted a study to assess soil cone index for no-tillage and conventional tillage and the results indicated that higher bulk density and greater soil depth resulted in higher cone index while higher moisture contents reduced cone index. Thorat *et al.* (2014) studied soil properties such as soil moisture content, soil bulk density, and cone index for the design of ridge profile weeder and they found that draft increased with cone index but showed a reverse trend with soil moisture content and soil bulk density exhibited linear relationship between with soil moisture content. Srinivas and Meena (2020) studied the cone index in sandy loam soils with a cone penetrometer and it varied from 11.7 to 15 N/cm^2 up to a depth of 5 cm. Further, it was concluded that the cone index increased with depth and affected the operational speed and power requirement of the machine.

2. METHODOLOGY

The procedure for measuring soil and crop parameters influencing the design and development of a ~~tractor-tractor~~-operated coconut basin lister cum fertilizer applicator ~~are elucidated below. These parameters were~~ taken just before the operations of basin listing and fertilizer application for the coconut palm.

2.1 Soil parameters

~~The following~~ Soil parameters ~~of such as~~ moisture content, bulk density, cone index, and shear strength were determined as they would be helpful in the design of tractor operated coconut basin lister cum fertilizer applicator.

2.1.1 Moisture content

Moisture content is the ratio of the weight of water to the weight of the solids. It is expressed in percentage and is found out by oven dry method as shown in Fig. 1. Soil samples of different locations were collected from the fields at depths upto 12.5 cm. The soil samples of 50 g each were collected in different containers and placed in a hot electric oven under a controlled temperature of $105^\circ C$ for a time period of 24 hours (Angelis, 2007). The weight before and after drying was found out

using an electronic weighing balance having a sensitivity of 0.01 g. The moisture content of soil affects the draft of the implement and slip. Soil moisture content helps in the optimum design of the machine for lowering energy input.

$$MC = \frac{W_1 - W_2}{W_1} \times 100$$

Where,

- MC = Soil moisture content, %
- W_1 = ~~Initial~~The initial weight of the soil sample, g
- W_2 = ~~Final~~The final weight of the dry soil sample, g

Formatted: Indent: First line: 0"



Fig. 1. Soil moisture content measurement by oven drying method

2.1.2 Bulk density

The compactness of the soil is determined by the bulk density and is measured by the core cutter as shown in Fig. 2. Initially, the ~~volume of a~~ cylinder volume was determined by measuring the internal diameter (10 cm) and height of the core cutter (12.5 cm). Then empty core cutter was weighed and noted. A small area of the soil to be tested in the experimental field was exposed and the surface was levelled. A cylindrical core cutter was pressed into the soil mass using the rammer with a delley-Dolley placed over the top of the core cutter. Pressing was stopped when the delley Dolley protrudes about 15 mm above the surface. ~~Surrounding~~The surrounding soil of the core cutter was removed and it was taken out. ~~Core~~The core cutter filled with soil was removed and weighed. The bulk density was found ~~out~~ by using the equation mentioned (Ahmed *et al.*, 2018).

$$\rho = \frac{M}{V}$$

Where,

- ρ = Bulk density of soil, kg m⁻³
- M = Mass of the ~~even~~-~~oven~~-dried soil, kg
- V = ~~Volume~~The volume of the core sampler, m³

2.1.3 Cone index

~~Cone~~A cone penetrometer was used to measure the penetration resistance of the soil. The cone penetrometer was positioned near the coconut palm as shown in Fig. 3. Cone index indicates

soil resistance and it is expressed as force per square ~~centimetre-centimeter~~ required for a cone of the standard base area to penetrate the into-soil to different depths. ~~Cone-The cone~~ index for the same soil varies with the cone apex angle, area of cone base, and depth of penetration (Hummel *et al.*, 2004). A uniform force was placed on the handle and the deflection of the dial gauge was noted for different depths. The cone index was measured from 2.5 to 12.5 cm in depth and recorded manually.



Fig. 2. Soil bulk density measurement by core cutter method



Fig. 3. Soil cone index measurement by cone penetrometer

2.1.4 Shear strength

Shear-The shear strength of a-soil is the maximum resistance offered by the soil to shear stress (Punmia *et al.*, 2017). The in-situ measurement of the shear strength of soil was carried out using a Triaxial shear test apparatus. BA borehole at depth of 12.5 cm was dug out. Casing-The casing was extended up to these depths and hence the entire unit was fixed at the location during the test. Vane was connected to the rod having the same female thread and it was pushed downward with a moderate steady force up to a depth of 50 mm below the bottom of the borehole and allowed to move further. The initial dial gauge reading was set to zero and the gear handle was turned so that the vane was rotated at the rate of 0.1 deg. per second, this in turn helps to get a uniform rate of 12 turns per minute. The torque indicator dial gauge reading was noted and the rotation of the vane was continued until the reading drops appreciably from the maximum.

$$S = \frac{T}{\pi \left(\frac{D^2 H}{2} + \frac{D^3}{6} \right)}$$

Where,

S = Shear strength, kgf cm⁻²

T = Torque, kgf cm

D = Overall-The overall diameter of the vane, cm

H = Height of the vane, cm

2.2 Crop parameters

The major crop parameters such as the trunk diameter of coconut palm and root zone depth were considered. These parameters were studied at the time of basin listing and fertilizer application for the coconut palm. These parameters influence the design of a tractor-operated coconut basin lister cum fertilizer applicator.

2.2.1 Trunk diameter of coconut palm

About 25 coconut palms were selected randomly in the experimental plot to measure the trunk diameter of the coconut palm. The trunk diameter of the coconut palm was recorded by using the measuring tape and the average of these readings was noted. It helps in deciding the working width of the machine and in turn the field capacity of the machine.

2.2.2 Root zone depth

To measure the root zone depth, 25 coconut palms were chosen at random in the coconut plantation area. An area of a 1.5 m radius around the coconut palm was marked and the soil was dug randomly until the roots appear. Then measuring tape was used to measure the root zone depth of the coconut palm against the flat top layer of soil and the average of these readings was considered. Root zone depth helps in deciding the depth of operation of the machine and in turn other design elements which determine the machine power requirement.

3. Results and Discussion

3.1 Soil parameters

The soil parameters such as moisture content, bulk density, cone index and shear strength were found out at the time of basin listing and fertilizer application. The data obtained from experiments was statistically analysed and the results are rationalized below.

3.1.1 Moisture content

The soil moisture content was measured at different places of the experimental plot at the time of basin listing and fertilizer application operations. The moisture content of the soil was determined and statistically analysed. The moisture content varied from 13.2 to 15.6% with a mean of (Av=14.66%); with a coefficient of variance of 6.77% and a standard deviation of 0.993 as mentioned in Table 1. The machine needs to be designed considering the obtained moisture content of the soil as it affects the energy demand for basin listing operation.

Formatted: Highlight

Table 1. Soil and crop parameters

S. No.	Soil parameters			Crop parameters		
	Moisture content (%)	Bulk density (kg m ⁻³)	Cone index (N mm ⁻²)	Shear strength (10 ⁻³ × N mm ⁻²)	Trunk diameter (cm)	Root zone depth (cm)
1	14.8	1865	0.428	1.47	32.3	14.5
2	15.5	1705	0.837	1.86	38.1	13.4
3	13.2	1672	1.113	2.45	35.8	15.2
4	14.2	1615	1.325	2.64	34.2	14.8
5	15.6	1626	1.506	3.13	33.3	13.8
Range	2.4	250	1.078	1.66	5.8	1.8
Mean	14.66	1696.6	1.041	2.31	34.74	14.34
S.D	0.993	100.842	0.424	0.653	2.276	0.733
C.V(%)	6.77	5.94	40.73	28.26	6.55	5.11

3.1.2 Bulk density

The soil bulk density was measured randomly in the experimental plot of the coconut plantation. Soil samples were collected within the radius of 1.8 m of a coconut palm as the basins and fertilizer application is done in this zone. The bulk density of soil was determined and statistically analysed. The bulk density of the soil ranged from 1615 to 1865 kg m⁻³ with a mean of (1696.6 kg m⁻³), with a coefficient of variation of 5.94% and a standard deviation of 100.842 as shown in (Table 1). Generally, the bulk density of soil varies with soil moisture. It was observed that the bulk density of soil increased with the increase in soil moisture contents and had a linear relationship. Soil bulk density is a crucial parameter in the ease of movement of the machine in basin listing and fertilizer application operations.

3.1.3 Cone index

The cone index of soil was determined and statistically analysed. The cone index varied from 0.428 to 1.506 Nmm⁻² with a mean of ($\bar{A}_v = 1.041$ N mm⁻²) with a coefficient of variation of 40.73% and a standard deviation of 0.424 as given in (Table 1). The cone penetration resistance values increased with depth as the bulk density increased. As the depth increased from the surface, the soil resistance was also increased. The cone index is an important consideration in the design of the power requirement of the machine. The coefficient of determination (R^2) value was estimated as 97.17% indicating the high accountancy of cone index with depth and it is depicted in Fig. 4. The model was highly significant ($p \leq 0.05$) which means that there is a linear relationship between cone index and depth and it is reported in Table 2.

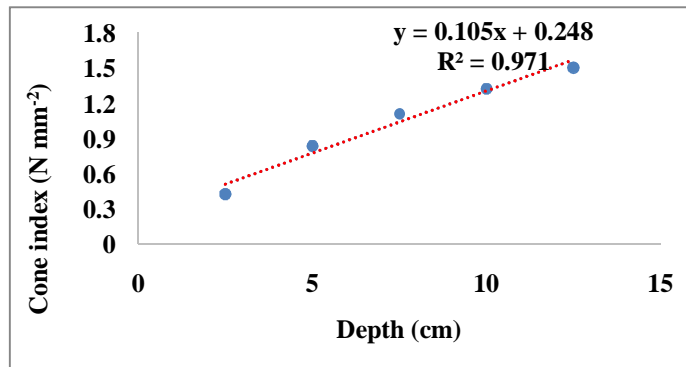


Fig.4. Relation between cone index and depth

Table 2. ANOVA for cone index

	df	SS	MS	F	Significance F
Regression	1	0.699074	0.699074	102.9402	0.002039906
Residual	3	0.020373	0.006791	-	-
Total	4	0.719447	-	-	-

3.1.4 Shear strength

~~The shear strength of soil was determined and analysed statistically.~~ The shear strength of soil varied from 1.47×10^{-3} to 3.13×10^{-3} N mm⁻² with mean of ($A_v = 2.31 \times 10^{-3}$ N mm⁻²). The coefficient of variation was found out to be 28.26% while the standard deviation was 0.653. Shear strength is a vital parameter in the soil-tool interaction design of basin lister for the coconut palm. The coefficient of determination (R^2) for the regression model was 98.36% as shown in Fig.5 revealing the linear relationship between shear strength and depth. The model was significant as $p \leq 0.05$ and it is shown in (Table 3).

3.2 Crop parameters

~~The crop parameters such as trunk diameter and root zone depth of coconut palms were found out at the time of basin listing and fertilizer application.~~ The data obtained from experiments was ~~wer~~ statistically analysed and the results are explained below that aid in the design of the machine.

3.2.1 Trunk diameter of coconut palm

~~The trunk diameter of coconut palm was measured and statistically analysed.~~ The trunk diameter of the coconut palm varied from 32.3 to 38.1 cm with a mean of ($A_v = 34.74$ cm). The coefficient of variation and standard deviation were 6.55% and 2.276 respectively as given in (Table 1). The trunk diameter varies with the variety and age of coconut palms. The trunk diameter of the coconut palm is an important consideration in deciding the working width of the machine and in turn has an effect on affects the power requirement of the machine.

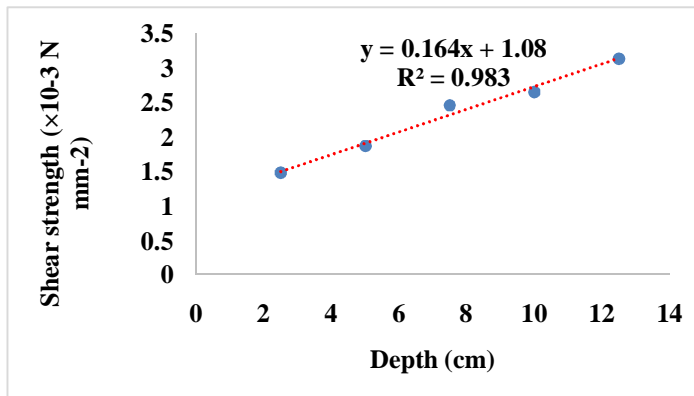


Fig.5.Relation between shear strength and depth

Table3. ANOVA for Shear strength

	df	SS	MS	F	Significance F
Regression	1	0.000176	0.000176	189	0.000833
Residual	3	2.8E-06	9.33E-07	-	-
Total	4	0.000179	-	-	-

3.2.2 Root zone depth

The root zone depth of the coconut palm varied from 13.4 to 15.2 cm at a radius of 1.5 m from the trunk of the palm. The mean and standard deviation were 14.34 and 0.733 respectively while the coefficient of variance was 5.11% as shown in(Table 1). This parameter needs to be considered as the basin lister operation must not cause damage to the roots of the coconut palm. It also helps in deciding the depth of operation of the machine and the power requirement of the machine.

4. CONCLUSION

~~The soil parameters such as moisture content, bulk density, cone index and shear strength and crop parameters such as trunk diameter and root zone depth of coconut plantation were studied and results were obtained.~~ Soil moisture contents, bulk density, cone index and shear strength helped in the design of power requirements and different parts of the machine. The trunk diameter of the coconut palm aided in deciding the working width of the machine while the root zone depth assisted in finalizing the operational depth of the machine. The soil and crop parameters were taken into consideration to design the ~~tractor-tractor~~-operated coconut basin lister cum fertilizer applicator for optimum field performance.

REFERENCES

- Angelis, D.M. 2007. Measurement of soil moisture content by gravimetric method. *American Society of Agronomy*.1-2.
- Adeniran, K.A. and Babatunde, O.O. 2010. Investigation of Wetland Soil Properties affecting Optimum Soil Cultivation. *Journal of Engineering Science and Technology Review*. 3(1): 23-26.

- Anonymous, 2016. Package of practices, Crops 2016, Kerala Agricultural University, Kerala, India, 392p.
- Ahmed, A.G., Abbas Z.K., Akif, K., Sui, Y.K., Michael, N. and Will, G. 2018. Soil bulk density estimation methods: A Review. *Pedosphere*.28(4): 581–596.
- Anonymous, 2021. *Agriculture Statistics at a Glance 2021*. Directorate of Economics & Statistics, Ministry of Agriculture & Farmers Welfare, Department of Agriculture, Cooperation & Farmers Welfare, New Delhi. 319p.
- Hummel, J.W., Ahmad, I.S., Newman, S.C., Sudduth, K.A. and Drummond, S.T. 2004. Simultaneous soil moisture and cone index measurement. *Transactions of the ASAE*.47(3): 607-618.
- Kumar, Chen, Y., Sadek, A. and Rahman, S. 2012. Soil cone index in relation to soil texture, moisture content, and bulk density for no-tillage and conventional tillage. *Agricultural Engineering International: CIGR Journal*.14(1): 26-37.
- Punmia, B.C., Ashok, K.J and Arun, K.J. 2017. *Soil mechanics and foundations*, 17th Edition, Laxmi Publications (P) Ltd, New Delhi, India, 460-465.
- Srinivas, J. and Meena, S.S. 2020. Design and Development of Walking Type Multi-Crop Power Weeder. *Indian Journal of Ecology*.47(1): 266-271.
- Thorat, D.S. 2013. *Design and development of ridge profile power weeder*. M.Tech. Dissertation, Division of Agricultural Engineering, IARI, New Delhi. 57-63.