

## Original Research Article

# Latex sludge waste biocompost for management of soil fertility and productivity

### ABSTRACT

**Aim:** Production and characterization of latex sludge waste compost using different bulking agents like sawdust, zeolite and cattle manure in various ratios and checking its feasibility in agriculture use

**Study Design:** The experiment was conducted by completely randomized design with ten treatments and three replications

**Place and Duration of Study:** The experiment was conducted at the Department of Soil Science and Agricultural Chemistry, College of Agriculture, Vellayani, Kerala Agriculture University between November 2022- February 2022

**Comment [F2]:** It is preferable the sub-sections are removed to make one paragraph without indent.

**Comment [F3]:** Reframe the aim. This is what is to be done.

**Methods:** The latex sludge waste collected from HLL, Trivandrum was used for the study. The latex sludge waste is mixed with different bulking agent like sawdust, zeolite and cattle manure in different ratios. Composting inoculum is used equally in all the treatments to fasten the composting process. The resultant composts were analysed for physical, chemical and biological properties.

**Results:** The compost prepared from latex sludge, zeolite, sawdust and cattle manure resulted higher values of major macro and micro nutrients and good physical properties compared to other treatments. A gradual decrease in C:N ratio and carbon dioxide emission was observed for a period of 120 days of composting in all the experiment. The results showed that the co-composting of latex sludge with sawdust, zeolite and cattle manure produces quality compost. All the ratios of the mixture of composts were found to be a better growth medium for crops compared to application of latex sludge alone

**Conclusion:** Composting of latex sludge is found to be one of the economic and environmentally viable option for the management of large quantity of latex sludge waste. The compost showed optimum physical, chemical and biological properties and can be utilize for crop production.

*Key words: Latex sludge compost; sawdust; zeolite; Cattle manure.*

UNDER PEER REVIEW

## 1. INTRODUCTION

Soil is one of the integral components of agriculture, which serve as the primary source of nutrients for the growth of plants. The transfer of nutrients from soil to plants greatly augments the nutritional value of food, thereby rendering it healthier. Healthy soils play a fundamental role in ensuring food security and laying the foundation for a sustainable future. Soil is a dynamic living natural body that supports life on earth.

Rapid industrialization has led to the production of considerable amounts of waste both solid and liquid form from various industrial sectors such as sugar, pulp and paper, fruit and food processing, distilleries, dairies, tanneries, slaughterhouses, poultrys, rubber industries etc. Huge amount of these waste is used for unscientific landfilling, this will again lead to the contamination of soil as well as water bodies. Considering rubber industries that manufacture products from rubber latex are gloves, health care products like Blood collection bags, Surgical sutures, Hydrocephalus shunts, tissue expanders, clothing etc. About 10% of the natural rubber harvested from rubber tree (*Hevea brasiliensis*) is used to make latex products including gloves [1]. Natural Rubber is used to make 50,000 consumer products including 400 medical devices [2]. Due to the great demand for latex products in the global market, the associated production processes have generated a massive industry and the processing of latex generates large volume of waste with high pollution potential known as latex sludge.

Over an extended period, numerous chemical and biological techniques have been implemented for the management of sludge, including landfilling, incineration, anaerobic digestion, and aerobic composting. Among these methods, composting emerges as the most viable alternative for sludge management, as it permits the repurposing of waste as soil conditioners or organic fertilizers on agricultural lands for food and feed crops. Composting has aroused as a dependable and reliable technique for disposing of latex sludge while minimizing the deleterious effects on the environment and soil, and the cost of the method of composting is relatively low compared to other techniques.

The characteristics of the latex sludge will vary depending on the type of treatment carried out in the industry [3]. Due to the excess amount of moisture in the latex sludge waste, it is mixed with bulking agents such as sawdust, zeolite and cattle manure etc to bring the final product with appropriate moisture and sponginess [4]. The approach that is being employed to recycle the nutrients in the latex sludge wastes is highly beneficial for the agriculture chain and ensures soil health.

## 2. MATERIALS AND METHODS

### 2.1 Production and characterisation of latex sludge compost

The latex sludge waste for conducting the experiment was procured from HLL, Trivandrum. In Kerala, HLL Lifecare Limited is one of the largest consumers of rubber in the form of latex for the manufacture of health care products like blood collection bags, surgical sutures, hydrocephalus shunts, tissue expanders etc. The latex sludge at this industry is a semi-solid byproduct that is produced following effluent treatment in the effluent treatment plant and presently treated as a waste material. The latex

**Comment [F4]:** Let a reader know the objective(s) and uniqueness of this research.

sludge compost was prepared by aerobic heap method mixed with bulking agents such as sawdust, cattle manure and zeolite in different proportions as per the ten different treatments. Moisture content of 50 to 60 per cent was maintained in the mixture by spraying water as it is one of the pre-requisites for uniform decomposition of organic wastes. To this mixture 5 per cent of microbial consortia (Composting inoculum) added uniformly in all treatments. The Composting inoculum for the experiment was collected from Department of Agricultural Microbiology, College of Agriculture, Vellayani. The composting heap is periodically turned once in ten days interval. In the study ten treatments with bulking agents in different ratios were followed.

T<sub>1</sub>: Latex Sludge Waste (LSW) + Sawdust (SD) (1:1)

T<sub>2</sub>: Latex Sludge Waste (LSW) + Saw dust (SD) +CattleManure (CM) (1:1:1)

T<sub>3</sub>: Latex Sludge Waste (LSW)+ Zeolite (1:1)

T<sub>4</sub>: Latex Sludge Waste (LSW)+ Zeolite + Cattle Manure (CM) (1:1:1)

T<sub>5</sub>: Latex Sludge Waste (LSW)+ Saw Dust (SD) (2:1)

T<sub>6</sub>: Latex Sludge Waste (LSW) + Saw Dust (SD)+ Cattle Manure (CM) (2:1:1)

T<sub>7</sub>: Latex Sludge Waste (LSW )+Zeolite (2:1)

T<sub>8</sub>: Latex Sludge Waste (LSW)+Zeolite + Cattle manure (2:1:1)

T<sub>9</sub>: Latex Sludge (LSW) + Zeolite + Saw dust (SD) + Cattle manure (CM) (2:1:1:1)

T<sub>10</sub>: Latex Sludge Waste (LSW) alone

The period of composting was 120 days. The compost samples were collected from each heap is analysed for physical, chemical and biological properties.

## 2.2 Statistical Analysis

The production and characterization of latex sludge compost was done in completely randomized design (CRD). "The F values for treatments were compared with the table values. If the effects were significant, critical difference at a 5% significance level were calculated for effecting comparison among the means. R-package grapesagri1 was used for data analysis" [5].

## 3. RESULTS AND DISCUSSION

### 3.1 Physical properties of the resultant latex sludge compost

**Comment [F5]:** Mention only the treatments applied to Latex Sludge Waste.

**Comment [F6]:** The calculated F value is compared to the tabulated value. The use of p-value is recommended.

The physical properties such as moisture content, water holding capacity and bulk density of latex sludge compost were analysed. The moisture content of resultant latex sludge compost varied between 21.12 to 36.62 per cent. The higher moisture content is present in T<sub>9</sub> prepared from Latex Sludge waste, Zeolite, Sawdust (SD) and Cattle manure (CM) in 2:1:1:1 ratio which might be due to the adsorption capacity of the materials used in the composting [6]. The water holding capacity of T<sub>9</sub> was found to be higher and which was on par with T<sub>2</sub>(Latex Sludge Waste (LSW)+ Saw dust (SD) +CattleManure (CM) 1:1:1). The lowest bulk density of latex sludge compost was recorded for T<sub>9</sub> might be due to the presence of higher organic matter content in the compost. Bulk density is an important factor as it maintains influences the microbial development, activity and organic matter degradation [7]

**Table 1. physical properties of resultant latex sludge compost**

Treatments	Water holding capacity (%)	Bulk density (Mg m <sup>-3</sup> )	Moisture content (%)
T <sub>1</sub>	73.85	0.63	29.61
T <sub>2</sub>	84.70	0.41	35.50
T <sub>3</sub>	72.15	0.71	24.71
T <sub>4</sub>	79.65	0.45	33.43
T <sub>5</sub>	70.29	0.71	27.81
T <sub>6</sub>	82.23	0.44	34.62
T <sub>7</sub>	70.53	0.73	22.58
T <sub>8</sub>	77.26	0.48	32.63
T <sub>9</sub>	85.70	0.36	36.62
T <sub>10</sub>	67.44	0.82	21.12
SEm (±)	0.405	0.023	1.414
CD	1.195	0.067	4.172

### **3.2 Chemical properties of the resultant latex sludge compost**

The pH values of the latex sludge compost varied between 6.35 to 7.24. Initially the pH of the compost decreased due to the release of organic acids from the composting mixture later on maturation of compost it tends to increase and attains a neutral value [8]. The highest value of EC was found in T<sub>10</sub> (Latex Sludge Waste (LSW) alone) is 2.97 ds m<sup>-1</sup>. EC value of compost is an important parameter as it reflects the degree of salinity present in compost and also the phytotoxic effect of compost on plant growth [9]. EC of the latex sludge compost ranged from 2.97 dS m<sup>-1</sup> to 1.27 dS m<sup>-1</sup> which was below the recommended value as soil amendment.

The major macro and micro nutrients (N, P, K, Ca, Mg, S, Fe, Mn, Zn, Cu) of the resultant latex sludge compost is given in table 2. During initial stages of composting the pile did not contain nitrates but later on composting continues the nitrate content increases as a result of nitrification of ammonium by nitrifying bacteria [10]. some amount of nitrogen may loss during composting through volatilization, denitrification, leaching and immobilization process [11]. The addition of organic matter such as sawdust for composting would also help to control the decomposition rate and promoting nitrogen retention within the compost [12]. The final compost contains higher concentration of nutrients and limited trace elements and heavy metal content conforms the compost quality produced from latex sludge mixed with bulking agents saw dust, zeolite and cattle manure as a growth medium [13].

### **3.3 Biological properties of the resultant latex sludge compost**

One of the important aspects of compost quality is compost stability and it is related to the extent to which the organic matter present in the mixture get stabilized throughout the process of composting. [14]. The quality and maturity of compost is analysed by various physical, chemical and biological parameters. The maturity of compost is monitored by C:N ratio, CO<sub>2</sub> evolution during composting, humic substances produced at the end of composting etc. [15]

A gradual decrease in C:N ratio was observed during 120 days of composting period in the study. At the end of composting a constant value has reached indicating the stabilization of compost. As the process of decomposition continued, the carbon content of the compostable material decreased over time primarily due to the losses of carbon in the form of carbon dioxide. Consequently, the N content per unit of material increased, leading to a decrease in the C:N ratio. The living microorganisms present in the compost mixture decomposes the organic matter and achieved maturity of compost [16]. Lower values of C:N ratios were observed in T<sub>9</sub> (12.39) and T<sub>4</sub> (12.72) indicates the maturity of compost. The C:N ratio of compost is given in table 2.

**Table 2. Characterization of resultant latex sludge compost**

Treatments	pH	EC (dSm <sup>-1</sup> )	Total organic carbon (%)	Total N (%)	Total P (%)	Total K (%)	Ca (%)	Mg (%)	S (%)	Fe (mg kg <sup>-1</sup> )	Mn (mg kg <sup>-1</sup> )	Zn (mg kg <sup>-1</sup> )	Cu (mg kg <sup>-1</sup> )	Pb (mg kg <sup>-1</sup> )	Cd (µg kg <sup>-1</sup> )	C:N ratio
T <sub>1</sub>	6.79	1.80	21.38	1.18	0.52	0.16	2.91	1.43	0.39	1484.40	167.52	182.12	22.67	0.56	1.13	16.76
T <sub>2</sub>	7.06	1.50	19.42	1.49	0.65	0.27	3.23	1.66	0.48	1773.90	178.69	256.06	30.54	0.12	0.27	13.03
T <sub>3</sub>	7.23	1.60	21.33	1.25	0.59	0.18	2.08	1.64	0.44	1189.63	156.12	175.84	23.48	ND	0.57	17.05
T <sub>4</sub>	7.24	2.10	18.43	1.45	0.78	0.36	3.23	1.97	0.57	1662.40	185.35	279.9	33.43	ND	ND	12.72
T <sub>5</sub>	6.83	1.83	21.39	1.28	0.56	0.14	2.61	1.46	0.43	1480.50	166.91	201.34	22.39	0.18	1.27	18.28
T <sub>6</sub>	7.12	1.90	21.02	1.56	0.71	0.31	3.59	1.66	0.51	1869.80	183.35	282.16	29.70	ND	0.03	13.47
T <sub>7</sub>	7.17	1.70	20.71	1.16	0.55	0.14	2.35	1.46	0.41	1077.87	157.36	179.81	21.56	0.16	0.52	17.87
T <sub>8</sub>	7.15	1.27	19.97	1.39	0.61	0.26	3.05	1.56	0.45	1532.60	179.44	253.34	33.09	0.05	0.78	14.37
T <sub>9</sub>	7.13	1.90	20.57	1.66	0.96	0.42	3.91	1.95	0.61	1876.80	189.4	290.14	35.36	ND	ND	12.39
T <sub>10</sub>	6.35	2.97	21.72	1.08	0.56	0.12	2.75	1.33	0.38	1062.63	141.76	156.84	21.38	1.5	1.39	20.05
SEm (±)	0.011	0.151	0.246	0.021	0.012	0.011	0.019	0.019	0.006	22.457	1.965	1.626	0.744	0.001	0.004	0.020
CD	0.032	0.446	0.725	0.062	0.032	0.031	0.056	0.056	0.019	66.249	5.797	4.796	2.195	0.003	0.011	0.059

**Comment [F7]:** This table does not include calculated F value. The MANOVA table is required since there multiple responses (physical, chemical and biological properties) from the ten treatments.

Carbon dioxide evolution can be utilized as a direct method to check the compost maturity as it reflects the microbial respiration and biological activity of the compost. The rate of CO<sub>2</sub> evolution decreases during composting indicates the stabilization of compost as a result of reduced metabolic activity in the compost [17]. The higher value of CO<sub>2</sub> evolution was observed in T<sub>9</sub> (5.13 mg CO<sub>2</sub> g<sup>-1</sup>) and lower value in T<sub>10</sub> (2.3 mg CO<sub>2</sub> g<sup>-1</sup>). During composting a gradual decrease of carbon dioxide was observed due to the stabilization of compost, which is shown in the fig (1) [18]. As the compounds undergo degradation, the medium experiences an increase in the concentration of more resilient compounds that are less easily utilized by microorganisms. Consequently, the microbial activity and the corresponding respiration exhibit a decline [19].

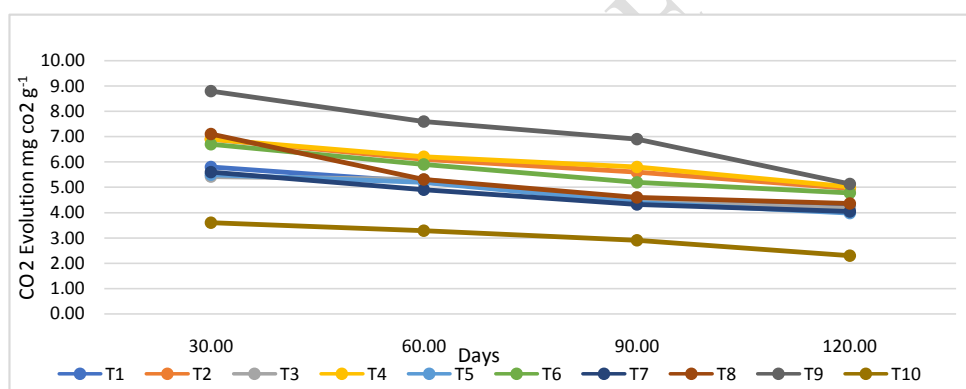


Fig.1 Changes in CO<sub>2</sub> Evolution during composting over time

#### 4. CONCLUSION

The co-composting of latex sludge with sawdust, zeolite and cattle manure provides high quality compost. The major macro and micro nutrients were found to be higher in T<sub>9</sub> (latex sludge compost prepared from latex sludge waste, zeolite, sawdust and cattle manure in 2:1:1:1 ratio) followed by T<sub>6</sub>, T<sub>2</sub> and T<sub>4</sub>. Composting of latex sludge waste is an economic and environment friendly method as it recycles the nutrients in latex sludge waste back into the agriculture system.

**Comment [F8]:** This section is insufficient because the right analysis was not used as stated in statistical analysis. It is from the MANOVA table that it can be decided if the treatment has significant effect. If there is significant effects, the pairs of significant effect will be determined by post hoc (comparison of means).

## REFERENCES

1. Henneberry B. All about natural rubber-properties, applications and uses. Thomas. <https://www.thomasnet.com/articles/plastics-rubber/all-about-natural313-rubber-properties-applications-and-uses/> [Accessed May 2021].
2. Salehi M, Cornish K, Bahmankar M, Naghavi MR. Natural rubber-producing sources, systems, and perspectives for breeding and biotechnology studies of *Taraxacum kok-saghyz*. *Industrial Crops and Products*. 2021;170: 113667.
3. Taweeprada W. Rubber recovery from centrifuged natural rubber latex residue using sulfuric acid. *Songklanakarin J. Sci. Technol.* 2013;35: 213-216.
4. Tremier A, de Guardia A, Massiani C, Paul E, Martel JL. A respirometric method for characterising the organic composition and biodegradation kinetics and the temperature influence on the biodegradation kinetics, for a mixture of sludge and bulking agent to be cocomposted. *Bioresour. Technol.* 2005; 96: 169.
5. Gopinath PP, Prasad R, Joseph B, Adarsh VS. grapesAgri1: Collection of Shiny Apps for Data Analysis in Agriculture. *Journal of Open Sources Software*. 2021;6 (63): 3437.
6. Jayaseeli DM, Raj SP. Chemical characterisation of coirpith as a function of its particle size to be used as soilless medium. *Ecoscan*. 2010; 4: 163-169
7. Khater ESG. Some physical and chemical properties of compost. *Int. J. Waste Resour.* 2015;5: 72-79.
8. Li L.M, Ding XL, Qian K, Ding, Yin ZJ. Effect of microbial consortia on the composting of pig manure. *J. Animal and Veterinary Advances*. 2011;10: 1738- 1742
9. Garg P, Gupta A, Satya S. Vermicomposting of different types of waste using *Eisenia foetida*: a comparative study. *Bioresour. Technol.* 2006;97: 391-39
10. Huang GF, Wu QT, Wong JWC, Nagar BB. Effect of C/N on composting of pig manure with sawdust. *Waste Manage.* 2004;24: 805– 813
11. Moreno JI. Urban sewage sludges: characterization and agricultural use. Ph.D Thesis University of Murcia. 1985
12. Bernal MP, Albuquerque JA, Moral R. Composting of animal manures and chemical criteria for compost maturity assessment. *A Rev. Biores. Tech.* 2009; 100: 5444– 5453
13. Sundaram L, Vincent SGT. Biocomposting of latex ETP sludge and effect of latex compost on cowpea. *J. Glob. Biosci.* 2017;6(8): 5177-5188.
14. Weppen P. Determining compost maturity: evaluation of analytical properties. *Compost. Sci. Util.* 2002;10: 6–15
15. Goyal S, Dhull SK, Kapoor KK. Chemical and biological changes during composting of different organic wastes and assessment of compost maturity. *Bioresource technology*. 2005;96: 1584-1591.
16. Kalamdhad AS, Kazmi AA. Effects of C/N ratio on mixed organic waste composting in a rotary drum composter. *Int. J. Environ. Eng.* 2009;1: 187-207
17. Fernandez FJ, Sanchez-Arias V, Rodriguez L, Villasenor J. Feasibility of composting combinations of sewage sludge, olive mill waste and winery waste in a rotary drum reactor. *Waste Management*. 2010;30: 1948-1956.
18. bei Li Y, ting Liu T, li Song J, hua Lv J, shao Jiang J. Effects of chemical additives on emissions of ammonia and greenhouse gas during sewage sludge composting. *Process Safety and Environmental Protection*. 2020; 143: 129-137.

19. Banegas, V, Moreno, JL, Moreno, JI, Garcia, C, Leon, G, Hernandez, T. 2007. Composting anaerobic and aerobic sewage sludges using two proportions of sawdust. Waste Management. 2007; 27(10): 1317-1327.

UNDER PEER REVIEW