

## **Effect of Total Electrolyte Concentration and Sodium Adsorption Ratio on Swelling Percentage of Salt Affected Soils in Purna Valley of Maharashtra**

### **Abstract**

The present investigation was carried out in the Purna valley of Vidarbha region of Maharashtra to study the effect of total electrolyte concentration and sodium adsorption ratio on swelling percentage of salt affected soils in Purna valley of Maharashtra. The sampling was done in the month of October, 2013. The soil samples were taken from two sites; at the depth of 0-20 cm (surface soil) and 20- 40 cm (sub-surface soil) respectively. For equilibration of soil samples, the synthetic waters were prepared with 4 levels of total electrolyte concentrations (TEC) i.e. 10, 20, 40, 80  $\text{meL}^{-1}$  with three levels of SAR viz., 5, 10 and 15  $\text{mmol}^{1/2}\text{L}^{-1/2}$ . The increase in swelling percentage was due to the increase in SAR, ESP, levels and also decreases with increasing total electrolyte concentration.

(**Keywords:** Swelling percentage, Total electrolyte concentration, Sodium adsorption ratio )

### **INTRODUCTION**

Black soils (Vertisols and their Vertic intergrades) occur widely in many parts of the world, and in India particular. It occupies an area of 72.9 M.ha in India, 35.5 per cent of which is in the state of Maharashtra (Sharma *et al.* 2004).

The poor structural stability of Vertisols particularly during monsoon season renders the agricultural activities very difficult. The soil of Purna valley is mainly derived from basaltic alluvium and has clay texture with synthetic clay mineralogy. They have swell shrink potential, slow permeability with very low hydraulic conductivity and imperfect drainage. The soils are classified as sodic Haplusterts and Sodic Calcicusterts (Padole *et al.* 1998).

The swelling of Vertisols is influenced by the initial water content, associated soil moisture suction, CEC, nature and amount of clay and composition of soil solution, ESP, lime and organic matter content.

The swell shrink potential of Vertisols in relation to clay content and ESP and soils are found to be dominantly smectitic with minor amounts of kaolinite and illite. At same levels of clay and ESP, the increase in electrolyte concentration would decrease the swelling (Nayak *et al.* (2006)

### **MATERIALS AND METHODS**

The present laboratory investigation entitled "Effect of Total Electrolyte Concentration and Sodium Adsorption Ratio on Swelling Percentage of Salt Affected Soils in Purna Valley of Maharashtra" was carried out during 2013-14 in Purna valley of Vidarbha region of Maharashtra state. The materials and methods are discussed in this chapter.

#### **Site Description and Collection of Soil**

The study area comprises parts of Purna valley of Vidarbha region of Maharashtra state. Soil samples were collected from Ramagar village under Daryapur taluk of Amravati district (latitude: 20° 55' 19.452 " N, longitude: 77° 19' 36.40 " E). The sampling was done in

the month of October, 2013. The soil samples were taken from two sites, the samples were collected up to the depth of 0-20 cm (surface soil) and 20- 40 cm (sub-surface soil) respectively.

### Preparation of different qualities of synthetic water

For equilibration of soil samples the synthetic waters were prepared with 4 levels of total electrolyte concentrations (TEC) i.e.10, 20, 40, 80 meL<sup>-1</sup> with three levels of SAR viz., 5, 10 and 15 mmol<sup>1/2</sup> L<sup>-1/2</sup>. The Ca: Mg ratio were kept at 1 : 1.5 in these solutions. Pure AR grade chloride salts of calcium magnesium and sodium were used to prepare different quality waters.

Each quality of waters is prepared as below. As per definition

$$SAR = \frac{Na^+}{\sqrt{\frac{Ca^{2+} + Mg^{2+}}{2}}}$$

### Physicochemical Properties

The physicochemical properties of experimental soil samples were determined by using the standard methods. The Soil pH was determined by a glass electrode pH meter in 1:2 soil : water suspension as given by Jackson, 1973. The Electrical conductivity (1:2) measured by measured by ELICO conductivity bridge meter (Jackson, 1973). The organic carbon was determined by Walkely and Black (1934) rapid titration procedure. Soil samples were oxidized by Potassium dichromate (1N) and the concentrated H<sub>2</sub>SO<sub>4</sub> was used to generate the heat of dilution. The amount of unutilized dichromate was determined by back titration with Standard ferrous ammonium sulphate solution (0.5N). The free calcium carbonate was determined by rapid titration method (Pipper, 1966). The soil was treated with a known volume of 0.5 N HCl to neutralize all the carbonates. The unutilized HCl was back titrated with Standard NaOH of 0.25N using phenolphthalein as an indicator. The exchangeable Ca<sup>2+</sup> and Mg<sup>2+</sup> were determined by leaching the soils in 1N KCl TEA, buffer solution (pH 8.2) and titrating the leachate with standard EDTA solution using mureoxide and EBT as an indicator (Jackson.1973). Exchangeable sodium and potassium were determined by leaching the soil with 1N ammonium acetate (pH7) solution, Na<sup>+</sup> and K<sup>+</sup> from the leachate were estimated by using Flame photometer given by Page *et al.* (1982). For the determination of cation exchange capacity (CEC) soil was saturated with 1N NaOAC (sodium acetate pH 8.2), after removal of excess, sodium acetate by washing with alcohol, the adsorbed sodium was extracted by washing with 1N NH<sub>4</sub>OAC (ammonium acetate pH7) and the leachate was made up to known volume. Na<sup>+</sup> present in the leachate was determined with flame emission spectrophotometer (Jackson, 1973) and Percent Base saturation, Exchangeable sodium percentage (ESP) was derived by using following equations:

$$PBS = \frac{\text{Exchangeable base}}{\text{CEC}} \times 100$$

$$ESP = \frac{\text{Exchangeable sodium}}{\text{CEC}} \times 100$$

## CEC

Where, Exchangeable cations and CEC of soils were expressed in  $\text{cmol (p+) kg}^{-1}$

### Exchangeable sodium ratio (ESR)

The exchangeable sodium ratio determined by

From extract  $\text{ESR} = (-0.0126 + 0.01475 \text{ SAR})$  developed by U.S. Salinity Laboratory Staff (1954).

Ex Na

From soil  $\text{ESR} = \frac{\text{Ex Na}}{\text{CEC} - \text{Ex Na}} \times 100$ , developed by Jurinak *et al.* (1984).

CEC – Ex Na

### Exchangeable Sodium Percentage (ESP)

The exchangeable sodium percentage from the paste extract was determined by

$100(-0.0126 + 0.01475 \text{ SAR})$

$\text{ESP} = \frac{\text{ESP}}{1 + (0.0126 + 0.01475 \text{ SAR})}$

$1 + (0.0126 + 0.01475 \text{ SAR})$

The above equation was developed by U.S. Salinity Laboratory Staff (1954).

### Saturation extracts analysis

The saturated paste was prepared and the extract was obtained. The method described by Richards (1954) was followed for the saturation extract preparation. The saturation extracts of the soil samples were analyzed for pHs, electrical conductivity (ECe) and cations and anions as per the methods outlined by Richards (1954). Saturation percentage was determined from a volume of water required to prepare the paste of known weight of the soil.

### List 1 :Chemical composition of different quality of synthetic solutions

SAK mmol/2 L- 1/2	TEC 10 meL <sup>-1</sup>					TEC 20 meL <sup>-1</sup>					TEC 40 meL <sup>-1</sup>					TEC 80 meL <sup>-1</sup>				
	N a <sup>+</sup>	C a <sup>2+</sup>	M g <sup>2+</sup>	C l <sup>-</sup>	T o t a l	N a <sup>+</sup>	C a <sup>2+</sup>	M g <sup>2+</sup>	C l <sup>-</sup>	T o t a l	N a <sup>+</sup>	C a <sup>2+</sup>	M g <sup>2+</sup>	C l <sup>-</sup>	T o t a l	N a <sup>+</sup>	C a <sup>2+</sup>	M g <sup>2+</sup>	C l <sup>-</sup>	T o t a l
5	6.4	1.8	1.8	1.0	10	11	3.5	5.7	20	20	17	8.9	14	40	40	27	2.2	3.1	8.0	80
10	8.7	0.5	0.9	1.0	10	15	1.8	2.7	20	20	26	6.1	8.4	40	40	43	1.5	2.2	8.0	80
15	9.5	0.5	0.5	1.0	10	18	1.1	1.1	20	20	31	3.4	5	40	40	54	1.0	1.6	8.0	80

### Equilibration of soil samples:

Soil samples passed through 2 mm sieve were kept on the Buchner funnels and allowed to leach with the equilibrating solution. About 300 g soils were taken in the Buchner funnel. After addition of the solution the leaching were facilitated by the application of suction to Buchner funnel using a vacuum pump. The leaching process was continued till effluent attains nearly the constant composition. For certain estimations such as organic carbon, samples were further ground and passed through a 0.2 mm (80 mesh) sieves, as suggested by Jackson, (1973). The soil samples thus prepared were air dried and after appropriate grinding, sieved the samples were used for the determination of different

properties viz. swelling, degree of dispersion, hydraulic conductivity and aggregate stability and as well as coefficient of linear extensibility.

**Swelling Percentage:**

The metallic cylinders (constant head device) prepared for measuring HC are allowed be saturated overnight with the same solution from downward to upward movement by which it was equilibrated. Since these swelling type of soils take much time to attain equilibrium, the samples were allowed to saturated for 16 hrs. and the same sample were used for swelling and saturated Hydraulic Conductivity. After 16 hrs duration, the increase in volume in each cylinder was measured from top at 4 sites and average increase was recorded as percent swelling.

$$\text{Percent Swelling} = \frac{\text{Increase in volume}}{\text{Original volume}} \times 100$$

**Statistical analysis:**

Statistical analysis was carried out by analysis of variance technique for two way classification as suggested by Panse and Sukhatme (1985) and multiple linear regression as suggested by Darlington *et al.* (1973).

$$Y = a + b_1X_1 + b_2X_2.$$

Where,

X<sub>1</sub>= TEC

X<sub>2</sub>= SAR

Y= Hydraulic conductivity

**RESULTS AND DISCUSSION**

The results presented in Table 1 revealed that the swelling percentage was 10.80 per cent (surface soil) and 12.41 per cent (sub-surface soil) in first site and in second site 11.80 per cent (surface soil) and 18.40 per cent (sub-surface soil). McNeel and Coleman, (1966) had found similarly results. They showed that with increase in the ESP of the soil, a very sharp increase in macroscopic swelling was observed.

**Table 1: Initial physical properties of soil**

Depth	Swelling (%)
-------	--------------

SiteI(0-20 cm)	10.8
SiteI(20-40 cm)	12.4
Site II(0-20cm)	11.8
SiteII(20-40cm)	18.4

The data presented in Table 2 revealed that the pH (1:2) was recorded 8.53 (surface soil) to 8.6 (sub-surface soil) for first site and for second site it was 8.31(surface soil) and 8.37(sub-surface soil) which was increased with depth. This may be due to the alkaline hydrolysis of bicarbonates which is predominant in these soils. The electrical conductivity ranged from 0.17 dSm<sup>-1</sup> (surface soil) and 0.23 dSm<sup>-1</sup>(sub-surface soil) for the first site, and for second site it was 0.16 dSm<sup>-1</sup> (surface soil) and 0.25 dSm<sup>-1</sup>(sub-surface soil). The electrical conductivity in subsoil was observed more. The calcium carbonate was 9.4 % (surface soil) and 11.6 % (sub-surface soil) for the first site, and for second site it was 8.37 % (surface soil) and 10.2 per cent (sub-surface soil). Calcium carbonate concentration is increased in sub soil layers. The organic carbon was recorded 4.0 g kg<sup>-1</sup>(surface soil) and 2.7 g kg<sup>-1</sup>(sub-surface soil) in first site, and for second site it was 4.3 g kg<sup>-1</sup>(surface soil) and 2.5 g kg<sup>-1</sup>(sub-surface soil). In general the organic carbon observed low in the sub soil which is due to dispersion of organic matter caused by exchangeable Na<sup>+</sup>.

**Table 2: Initial chemical properties of soil**

Depth	pH (1:2)	EC (1:2) dSm-1	CaCO <sub>3</sub> (%)	Organic Carbon (g kg-1)
Site I (0-20 cm)	8.53	0.17	9.4	4
Site I (20-40 cm)	8.6	0.23	11.6	2.7
Site II (0-20 cm)	8.31	0.16	8.37	4.3
Site II (20-40 cm)	8.37	0.25	10.2	2.5

### Ion exchange analysis

The exchange complex of studied soil was observed in Table 3 to be dominated by calcium, magnesium and sodium. The calcium ion (Ca<sup>2+</sup>) and magnesium ion (Mg<sup>2+</sup>) in general showed decreasing trend with depth in soil where sodium (Na<sup>+</sup>) showed increasing trend. The base saturation percentage was 96.77 per cent (surface soil) and 87.44 per cent (sub-surface soil) in the first site and 94.61 per cent (surface soil) and 85.16 per cent (sub-surface soil) in the second site, which was highly base saturated.

**Table 3: Ion exchange analysis data of initial soil**

Site/ Depth	Extractable bases c mol (P+) Kg-1	Total Cations	CEC Cmol (p+) kg-	Base saturati on (%)	ESP (%)	ES R
-------------	--------------------------------------	------------------	-------------------------	----------------------------	------------	---------

	Ca <sup>2+</sup>	Mg <sup>2+</sup>	Na <sup>+</sup>	K <sup>+</sup>		1			
Site I(0-20 cm)	33.4	12.6	4.2	1.3	51.58	53.3	96.77	7.87	0.08
Site I(20-40 cm)	30.4	11.8	5.1	0.97	48.27	55.2	87.44	9.23	0.1
Site II(0-20 cm)	33	12.4	4.6	1.28	51.28	54.2	94.61	8.48	0.09
Site II(20-40 cm)	31.4	10.8	5.7	0.9	48.8	57.3	85.16	9.94	0.11

### Swelling Percentage of the equilibrated soil

The results with respect to the swelling of the equilibrated samples treated with different TEC and SAR are presented in Table 4 for site I and site II soils.

### Effect of total electrolyte concentration on swelling percentage

The results presented in Table 4 revealed that the swelling percentage of equilibrated soil of site I for the surface soil was 12.43, 10.50, 10.27 and 9.73 at 10, 20, 40 and 80 meL<sup>-1</sup> total electrolyte concentration of equilibrating solution respectively, irrespective of SAR levels. The swelling percentage was found to decrease by 27.74% with increase in the TEC levels from 10 to 80 meL<sup>-1</sup>.

As in case of site I for the sub-surface soil, the swelling percentage was 14.50, 13.67, 11.53 and 10.87 at 10, 20, 40 and 80 meL<sup>-1</sup> total electrolyte concentration of equilibrating solution respectively, irrespective of SAR levels. The swelling percentage was found to decrease by 33.39% with increase in the total electrolyte concentration levels from 10 to 80 meL<sup>-1</sup> of the equilibrating solution.

The increase in total electrolyte concentration from 10, 20, 40 and 80 meL<sup>-1</sup> in the first depth of second site (surface soil) swelling percentage was 14.77, 12.63, 10.90 and 9.80 which was decrease up to 50.71 % with increase in total electrolyte concentration level from 10 to 80 meL<sup>-1</sup> of the equilibrating solution (Fig. 1).

In the second depth of the site II (sub-surface soil) swelling percentage was 15.53, 14.87, 12.60 and 11.70 at 10, 20, 40 and 80 meL<sup>-1</sup> total electrolyte concentration of the equilibrating solution respectively, irrespective of SAR level. Here, we can observe that significant relationship between total electrolyte concentration and swelling percentage of the soil. The swelling percentage was found to decrease by 32.73 % with the increase total electrolyte concentration levels from 10 to 80 meL<sup>-1</sup> of the equilibrating solution.

**Table 4: Effect of total electrolyte concentration and SAR on swelling percentage**

Depth (cm)	SAR (mmol <sup>1/2</sup> L <sup>-1/2</sup> )	Swelling (%)	Mean
		Total electrolyte concentration (meL <sup>-1</sup> )	

		10	20	40	80		
Site I (0-20)	5	12.00	10.00	9.80	9.30	10.28	
	10	12.30	10.50	10.20	9.90	10.73	
	15	13.00	11.00	10.80	10.00	11.20	
	Mean	12.43	10.50	10.27	9.73		
	TEC : SE (m)= 0.07		SAR: SE (m)= 0.06		CD at 5 % = 0.26		CD at 5 % = 0.23
Site I (20-40)	5	14.00	13.00	11.00	10.60	12.15	
	10	14.50	13.80	11.60	10.80	12.68	
	15	15.00	14.20	12.00	11.20	13.10	
	Mean	14.50	13.67	11.53	10.87		
	TEC : SE (m)= 0.08		SAR: SE (m)= 0.07		CD at 5 % = 0.29		CD at 5 % = 0.25
Site II (0-20)	5	14.50	12.30	10.00	9.50	11.58	
	10	14.80	12.50	11.20	9.90	12.10	
	15	15.00	13.10	11.50	10.00	12.40	
	Mean	14.77	12.63	10.90	9.80		
	TEC : SE (m)= 0.16		SAR: SE (m)= 0.14		CD at 5 % = 0.56		CD at 5 % = 0.48
Site II (20-40)	5	15.30	14.50	12.00	11.30	13.28	
	10	15.50	15.00	12.50	11.80	13.70	
	15	15.80	15.10	13.30	12.00	14.05	
	Mean	15.53	14.87	12.60	11.70		
	TEC : SE (m)= 0.11		SAR: SE (m) = 0.10		CD at 5 % = 0.40		CD at 5 % = 0.35

### Effect of SAR on swelling percentage


The results (Table 4) presented that the swelling percentage of equilibrated soil of site I in the surface soil was 10.28, 10.73 and 11.20 at 5, 10, 15 SAR of equilibrating solution respectively, irrespective of different electrolyte level.

Similarly in site I in the sub-surface soil, the swelling percentage was 12.15, 12.68 and 13.10 at 5, 10, 15 SAR of equilibrating solution respectively, irrespective of different total electrolyte concentration level.

In both soils, at the same total electrolyte concentration levels the swelling percentage was found to increase about 8.94 and 7.81 per cent respectively with increase in SAR levels from 5 to 15 of the equilibrating solution.

The swelling percentage of site II of surface soil the equilibrated samples were 11.58, 12.10, 12.40 respectively. Whereas in site II of sub-surface soil, the swelling percentage was 13.28, 13.70 and 14.05.

In both soils, at the same total electrolyte concentration level the swelling percentage was found to increase about 7.08% and 5.79 % respectively in SAR level from 5 to 15 of the equilibrating solution (Fig. 1).

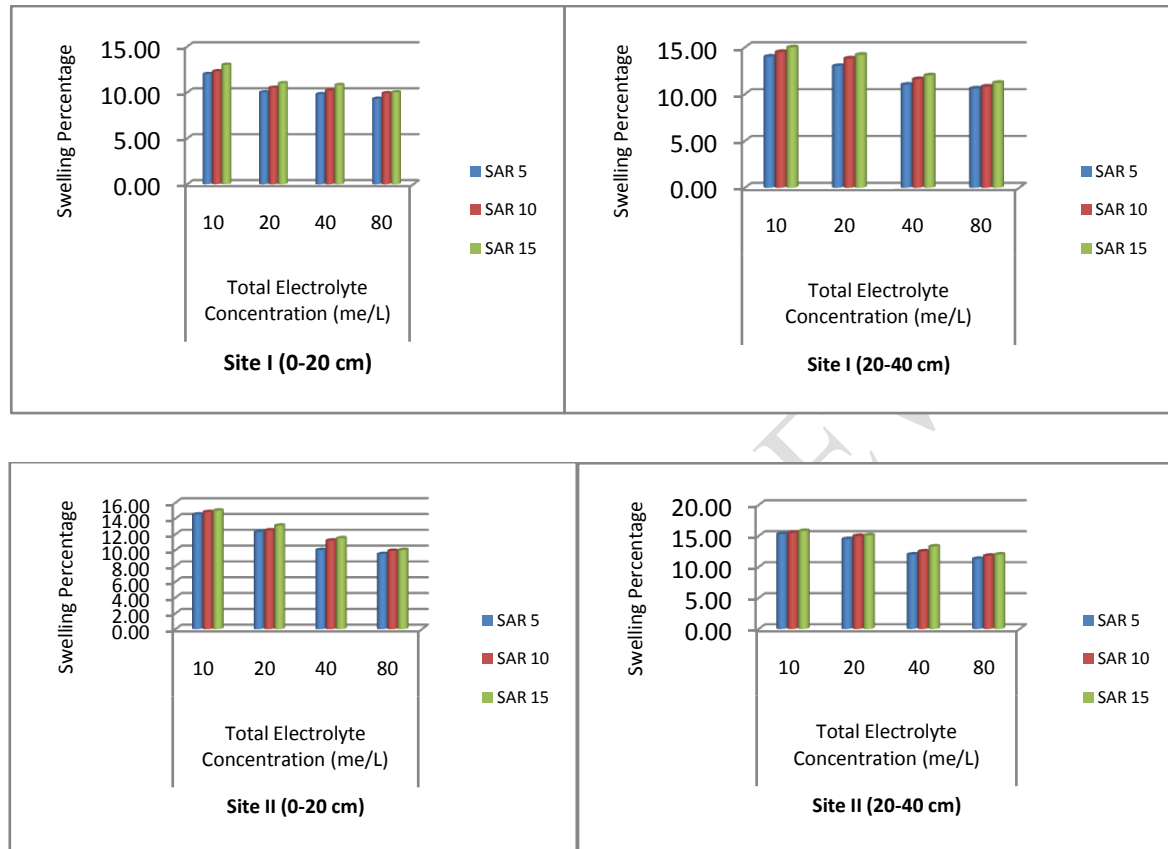

**Fig. 1: Relationship between total electrolyte concentration and SAR with swelling percentage in different site**

### Relationship between total electrolyte concentration and SAR with swelling percentage in different site

We can observe that there is a significant relationship between TEC and swelling, with increase in total electrolyte concentration levels from 10 to 80 meL<sup>-1</sup> at 5% level of significance.

The results showed that the increase in SAR swelling percentage of the equilibrated soil was also increased. So, there is significant relation between SAR and swelling percentage of the equilibrated soil at 5% level of significance.

The results with respect to electrolyte concentration and sodium adsorption ratio with swelling percentage of equilibrated samples for multiple regressions are presented in Table 5.

**Table 5: Multiple linear regression of TEC and SAR with swelling percentage in different sites**

Independent variable	Site I (0-20 cm)	Site I (20-40 cm)	Site II (0-20 cm)	Site II (20-40 cm)
a (Constant)	10.93	13.61	13.59	14.96
b <sub>1</sub> (TEC)	- 0.03**	-0.05**	- 0.06**	- 0.05**
b <sub>2</sub> (SAR)	0.09	0.09*	0.08	0.07
R <sup>2</sup>	0.66**	0.85**	0.82**	0.87**

\*\*Significant at 0.01 % level of significance

\*Significant at 0.05 % level of significance

As per the results revealed in the Table 5 it was found that in the site I, surface soil the electrolytes concentration was negatively significant at 0.01 % level of significance. Whereas the coefficient of determination was (0.66) significant at 0.01 % level of significance. Similarly in the site I, sub-surface soil the electrolytes concentration was negatively significant at 0.01 % level of significance and sodium adsorption ratio was significant at 0.05 % level of significance. It showed that the coefficient of determination was (0.85) significant at 0.01 % level of significance.

In the site II, surface soil the electrolytes concentration was negatively significant at 0.01 % level of significance. It showed that the coefficient of determination was (0.82) significant at 0.01 % level of significance. Similarly in the site II, sub-surface soil the electrolytes concentration was negatively significant at 0.05 % level of significance. It showed that the coefficient of determination was (0.87) significant at 0.01 % level of significance.

The higher swelling percentage may be due to the more clay content. In general increase in ESP increases swelling percentage, similar results are found by Klages (1966) who observed that under sodic conditions the clay swells when wet and swelling pressure causes it to reorient in the direction of least resistance.

The increase in the swelling percentage was due to the increase in SAR, ESP levels and also decreases with increasing electrolyte concentration due to compression of double layer thickness of clay minerals. McNeal and Coleman (1966) had found similar results. They showed that with increase in the ESP of the soil, a very sharp increase in macroscopic swelling was observed.

## CONCLUSION

The higher swelling percentage increased due to more clay content. Increase in ESP increases swelling percentage. The increase in the swelling percentage was due to the increase in SAR, ESP levels and also decreases with increasing electrolyte concentration. Increase in the ESP of the soil, a very sharp increase in macroscopic swelling was observed.

## REFERENCES

- Darlington, R. B., S. Weinberg, and H. Walberg, 1973. Canonical variate analysis and related techniques. *Review of Educational Research*, 453-454.
- Jackson, M. L., 1973. *Soil Chemical Analysis*, Prentice Hall of India Pvt. Ltd., New Delhi.
- Jurinak, J. J., C. Amrhein, and R. J. Wagenet, 1984. Sodic hazard: The effect of SAR and salinity in soils in overburden materials. *Soil Sci.* 137: 152-159.
- McNeal, B. L., and N. T. Coleman, 1966. Effect of solution composition on the swelling of extracted soil clays. *Soil Sci. Soc. Am. Proc.* 30:313-317.
- Nayak, A. K., A. R. Chinchmalatpure, G. G. Rao and A. K. Varma, 2006. Swell shrink potential of Vertisols in relation to clay content and exchangeable sodium under different ionic environment. *J. Indian Soc. Soil Sic* 54(1):1-5.
- Padole, V. R., D. W. Deshmukh and R. K. Chakolkar, 1998. Water retention and hydraulic conductivity of salt affected Vertisols as influenced by physico-chemical properties, *PKV Research J.* 22(2): 211-213
- Page, A. L., R. H. Miller and D. R. Keeny, 1982. *Methods of Soil Analysis*, second edition, Part 2. Chemical and microbiological properties ASA, Madison, Wisconsin, USA.
- Panse, V. G. and P. V. Sukhatme, 1985. *Statistical methods for Agricultural Workers*, ICAR, New Delhi.
- Richards, L. A., 1954. *Diagnosis and improvement of saline and alkali soils USA Handbook No. 60*, Oxford and IBH Publishing Co. Calcutta pp.:160.
- Sharma, R. C., A. K. Mandal, R. K. Saxena and K. S. Verma, 2004. Characteristics, formation and reclaimability of sodic soils under different geomorphic plains of Ganga basin. *Extended summaries: International conference on sustainable management of sodic lands* 1: 168-170.
- U. S. Salinity laboratory staff 1954. *Diagnosis and important of saline and alkaline soil*. U. S. Dept. Agric. Handbook No. 60. Washington. D.C.
- Walkely, A. and A. I. Black, 1934. An examination of degtijare FF method for determining soil organic matter and a propose modification of chromic acid titration method. *Soil Science* 37, 29-38.