

Hydrological impacts and field scale of rain and artificial recharge structures of pre and post monsoon in effective groundwater zones

Abstract

To study the groundwater recharge through rainfall and artificial recharge structures in selected dry well in different locations of UP was experimented. The results of the study concluded that the autoregressive time series model can be used effectively to predict the pre and post monsoon ground water level the better predictions will help the Farmers and policy makers to optimally utilize the groundwater resources. It is providing the solutions to execute the artificial recharge structure at the appropriate locations with best geological condition to enhance the recharge rate at least cost for control of declining groundwater level. It reveals that the stochastic auto regressive lime series model is an effective tool for management of ground water resource. It was also suggested that those locations should be selected where the variation of pre and post monsoon ground water level is maximum as the physical soil characteristics including hydraulic conductivity may enhance the recharge rate at least cost.

Key words: Hydrological impact, Groundwater recharge, Rainfall recharge, dry well recharge etc.

Introduction

We know that the world as a blue planet, 70% of the earth's surface is covered with water. The reality, however, is that 97% of the total water on earth of about 1400 Billion Cubic Meter (BCM) is saline and only 3 % is available as fresh water. About 77% of this fresh water is locked up in glaciers and permanent snow and 11% is considered to occur at depths exceeding 800 m below the ground, which cannot be extracted economically with the technology available today. About 11% of the resources are available as extractable ground water within 800 m depth and about 1% is available as surface water in lakes and rivers. Out of the 113,000 BCM of rain and snow received on the earth, evaporation losses account for about 72,000 BCM, leaving a balance of about 41,000 BCM, out of which about 9000-

14000 BCM is considered utilizable.

Water is a state matter under India's constitution but the central government provides much of the financing for groundwater development in consequence, there is substantial component for control over funding and the interpretation of groundwater data. Historically, most of CGWB-maintained wells were open dug wells. However, a substantial number of isolated piezometers have been installed over the past five years and the number is increasing. Groundwater levels in state networks are generally monitored twice a year, before and after the monsoon. Water scarcity may be severe during droughts or on a seasonal basis even where long-term trends are absent and water-balance estimation indicate substantial resources are available for development.

Review of Literature:

Agriculture sector is the major consumer of irrigation water in India. Therefore, it becomes very important to develop a water use plan to ensure more crops per drop, thereby increasing water productivity and achieving sustainability in agriculture. In addition, due to erratic and limited rainfall in semi-arid regions, irrigation is essential for increasing crop production and productivity. The reviews relating to surface runoff assessment and groundwater recharge assessment are presented by following below mentioned headings.

1. Ground water exploitation and recharge required
2. Artificial Recharge of groundwater
3. Effectiveness of recharge structures for groundwater development
4. Hydrogeology
5. Rainfall analysis

Globally, groundwater depletion has increased from 126 km³ in 1960 to 283 km³ in 2000 Ravichandran *et al.* (2011). In semi-arid and arid areas, the extraction of groundwater for irrigation was the major cause of groundwater depletion Russo *et al.* (2014). Bouwer (2002) also observed that groundwater pumping must be managed so that it will not exceed the safe yield or the natural recharge rate of the aquifers and found that it should range from less than 1% of average precipitation in arid to semi-arid climates, to 20% of average precipitation in Mediterranean-type climates and 50% in cool and humid climates as in north-western Europe. Agarwal *et al.* (2009) analyzed the problem of declining water table and factors

responsible for it in Punjab. They study and found that due to change in cropping pattern irrigation requirement increases, which resulted in over exploitation of groundwater. They suggested suitable strategies for arresting declining water table. Strategies include rain water harvesting, change of cropping pattern, delay in paddy transplantation, and precision irrigation for artificial groundwater recharge. Saha and Marwaha (2016) observed a steep decline in groundwater level in western Ganga plains, India. The average decline rate was about 0.15 m/year. Magnus and Swami and Kulkarni (2016) also observed that pumping rate was higher than natural recharge in southeastern Nigeria. Due to this hydrological imbalance had occurred, which was affecting quality and quantity of groundwater.

Groundwater recharge is the downward movement of surface water to join the groundwater. Groundwater recharge may be natural or artificial. Natural recharge takes place naturally without any intervention and human effort. Artificial recharge systems are the engineered systems where surface water is put on or in the ground for infiltration and subsequent movement to aquifers to augment groundwater resources. The work on artificial groundwater recharge started in early fifties. Tripathi *et., al.* (2016) summarized the knowledge on groundwater recharge and reported advances in groundwater recharge estimation technique.

Artificial groundwater recharge began early in last century in the Europe. First infiltration basin for recharging the groundwater was constructed at Goteborg, Sweden in 1897 and subsequently several basins were developed. Infiltration rates' ranging from 7 to 52 feet/day was reported for these basins Jansa, (1952). In the Santa Clara river valley in California, floodwaters were stored in the dams and released slowly to get absorbed in stream beds and off channel ponds. Also water was spread over receptive Orchard lands. Thus water that would otherwise be largely wasted in the semi-arid region was conserved by storage in the ground and made available to meet water requirements Todd (1959). The most significant artificial recharge operations in the Eastern United States were carried out at numerous locations on Long Islands, New York, particularly in Nassau County. Due to rapidly increasing population and industrial growth, Long Islands recognized the need to protect and conserve its resources of fresh water supplies at an early date. Definite steps were taken to prevent pollution and contamination of streams (Welsch, 1957). Niranjan and Srinivasu (2012) assessed the impact of small water harvesting and artificial recharge interventions in Singoda river basin, coastal Saurashtra, India.

They compared the pre-monsoon water levels of the wells located nearer to check dam and far away from the check dam.

Islam *et., al.* (2014) estimation and forecast of groundwater recharge and capacity of aquifer are essential issues in effective groundwater resource management in Bangladesh. Peera and Kumar (2015) assessment of groundwater resources by whatever method is normally subject to large uncertainties and errors. The methodology recommended by Groundwater Estimation Committee (GEC) is being adopted to compute the groundwater resources in India. The proposed methodology follows the recommendations of Groundwater Estimation Committee, and it uses the water level changes in two specific seasons i.e. one monsoon period and other one is non-monsoon period. Hao *et., al.* (2014) groundwater transient flow model was developed to evaluate the applicability and effectiveness of artificial recharge scenarios in the middle-upper part of the Yongding River alluvial fan in Beijing. These scenarios were designed by taking into account different types of recharge facilities and their infiltration rate with the Middle Route Project for South-to-North Water Transfer (MRP) as the recharge water source.

Mansouri and Mezouary (2015) climate change is already a reality affecting, in particular, several countries of the Mediterranean Sea. The impact of this change on water resources is very important; indeed, climate observations highlight periods of droughts and floods, which we call extreme events. To reduce the effect of these two phenomena on the quantitative degradation or lack of water resources due to changes in rainfall, artificial recharge techniques are a solution to adapting to this situation. The excess water generated by floods on watersheds could be retained in basins to be injected into the aquifer reservoir after the identification of suitable sites for groundwater recharge.

Material and Methods:

The study was conducted in the Ambedkar Nagar district UP watershed having area 6628.00 ha. The total area of watershed is 4955 ha and treatable area is 4708 ha. Present study revealed the Artificial ground water recharge by reactivating dry well and catchment-scale of the watershed, to evaluate the effectiveness of individual structures and to delineate the suitable sites for constructing recharge structures in the study area by following key points.

1. Study area

2. Dry well analysis
3. Estimation of ground water recharge
 - a. Natural recharge through dry well
 - b. Artificial recharge from structures
 - c. From field irrigation
 - d. Water table fluctuation method
4. Effectiveness of individual recharge structure
5. Hydrological impact of recharge structures
6. Delineation of the potential groundwater recharge zones in the study area
7. Model validation with curve number map by using ERDAS software
8. Suggest the site specific suitable recharge structures using RS and GIS

Groundwater recharge estimation using empirical formulae

Natural groundwater recharge from rainfall was estimated using following empirical formulae based on water level fluctuation and rainfall amount in Ganga -Yamuna doab Chaturvedi in 1936 derived an empirical relationship to arrive at the recharge as a function of annual precipitation (Kumar, 1996).

$$R_g = 2 (P - 15)^{0.4}$$

Where,

R_g is net recharge, in inches, P is annual rainfall, in inches.

This formula is useful for preliminary estimates of recharge due to rainfall. This formula later modified by U.P. irrigation research institute.

$$R_g = 1.35 (P - 14)^{0.5}$$

Where R_g is net recharge, in inches, P is annual rainfall, in inches.

Results and Discussion:

The present investigation was artificial ground water recharge by reactivating dry wells. For studying the impact, it is necessary to assess the available water resources such as rainfall, groundwater and details of existing RWH structures. For the assessment of groundwater potential, the groundwater level data (1998-2017) of the observation wells situated in the Ambedkarnagar watershed were collected from Ground water department, Ayodhya U.P. The data about the rainfall were collected from Indian Meterological department, Pune.

The main objective of the study is to develop an autoregressive time series model for annual rainfall. The stochastic process of annual precipitation is characterized by an autoregressive model. This chapter discusses about model identification and parameter estimation and evaluation of performance and adequacy of the model by statistical parameters and several other measures such as mean forecast error, mean absolute error, mean relative error, mean square error, root mean square error and integral square error.

The yearly stream flow series Y_t the precipitation was modeled by means of an autoregressive model. The various steps involved are identification, estimation of parameters and validation of model type, sequence and parameters. The general shape of the autocorrelogram and partial autocorrelogram are used as a basis for identification.

1. By using rain water inside the dry well, our water is not going to waste, it is being recharged underground.
2. The quality of underground water is getting better.
3. There is an observation well near our dry well through which we have checked that the ground is getting recharged and the rate of decreasing depth is decreasing.
4. We had installed an observation well near the dry well, then the observation well is telling that the decreasing rate of the ground water level has decreased and has become stable. We have collected rain water, tube well water or canal water inside the dry well similarly. If we keep collecting rain water inside the dry well for 1-5 years in the future then we can improve the water level of our land by doing this the quality of the ground water level will be good.
5. We had installed an observation well there and there we used to test the sample of water in which we saw that there was a difference in the quality of the ground water level the quality is getting better and the recharge rate of the depth in quality is not decreasing much and it is decreasing rate has come down.
6. We analyzed and saw whether we have to save our underground water level or improve the underground water level or do not water or save water from being wasted or save water.

The observed and predicted groundwater level by developed models in each location with R^2 between observed and predicted values and the different statistical parameters and error of predicted values to evaluate the performance of the developed model are given table-1.

Autocorrelation and partial auto correlation coefficient for 95 per cent upper and lower limit up to lag 10. The correlation between observed and predicted rainfall is shown in Fig. 1. Tabular values and the graphical representation of the correlation between observed and predicted groundwater levels exhibits strong correlation between observed and predicted which clearly indicates that the auto regressive time series model of order 1 can be used for prediction of groundwater level fluctuations more accurately in Akbarpur Block to adopt the best management strategies within the acceptable limits of errors.



Picture1 : Drywell recharge work in selected sites of District Ambedkarnagar

Present study concluded that the autoregressive time series model can be used effectively to predict the pre and post monsoon ground water level at different locations of Ambedkarnagar District the better predictions will help the Farmers and policy makers to optimally utilize the groundwater resources. It is providing the solutions to execute the artificial recharge structure at the appropriate locations with best geological condition to enhance the recharge rate at least cost for control of declining groundwater level. It reveals that the stochastic auto regressive lime series model is the effective tool for management of ground water resource in selected experimental sites.

Table -1 Observation and prediction of pre and post monsoon ground water level at different locations of Ambedkarnagar District

| Year | Bevana | | | | Kotwa | | | | Kurki bazar | | | | Rampur sakarwari | | | | Suklahiya | | | |
|---|--------|------|------|------|-------|------|-------|------|-------------|------|-------|------|------------------|------|-------|------|-----------|------|-------|------|
| | Pre | | Post | | Pre | | Post | | Pre | | Post | | Pre | | Post | | Pre | | Post | |
| | Obs | Pred | Obs | Pred | Obs | Pred | Obs | Pred | Obs | Pred | Obs | Pred | Obs | Pred | Obs | Pred | Obs | Pred | Obs | Pred |
| 1998 | 7.66 | 6.58 | 6.55 | 6.56 | 3.14 | 2.04 | 6.55 | 6.61 | 4.03 | 3.41 | 6.55 | 6.72 | 4.34 | 3.57 | 6.55 | 5.70 | 3.42 | 2.68 | 6.55 | 6.23 |
| 1999 | 7.37 | 6.22 | 6.27 | 5.85 | 2.99 | 1.82 | 1.90 | 1.92 | 3.71 | 2.97 | 4.21 | 4.32 | 4.71 | 3.99 | 6.22 | 5.30 | 3.18 | 2.31 | 1.70 | 1.61 |
| 2000 | 7.07 | 6.13 | 4.38 | 4.01 | 2.78 | 2.19 | 2.32 | 2.36 | 3.26 | 3.22 | 4.23 | 4.32 | 4.95 | 3.89 | 5.90 | 5.20 | 2.78 | 2.06 | 2.00 | 2.05 |
| 2001 | 7.47 | 6.28 | 4.40 | 4.56 | 4.20 | 3.19 | 2.44 | 2.45 | 5.45 | 4.75 | 2.37 | 2.43 | 4.17 | 3.23 | 6.48 | 5.64 | 3.05 | 2.17 | 2.61 | 2.37 |
| 2002 | 7.02 | 5.21 | 6.71 | 6.08 | 3.56 | 3.17 | 2.06 | 2.04 | 3.77 | 3.64 | 3.77 | 3.86 | 4.22 | 3.72 | 6.23 | 5.64 | 2.70 | 2.53 | 1.55 | 1.31 |
| 2003 | 5.28 | 3.60 | 3.48 | 3.04 | 4.95 | 4.28 | 1.90 | 1.89 | 5.28 | 4.93 | 3.48 | 3.57 | 5.35 | 4.30 | 6.90 | 6.05 | 4.50 | 4.02 | 1.42 | 1.15 |
| 2004 | 4.90 | 3.97 | 4.02 | 4.38 | 4.66 | 4.20 | 1.96 | 1.98 | 4.90 | 4.75 | 4.02 | 4.15 | 4.32 | 4.32 | 6.31 | 5.21 | 4.18 | 3.17 | 1.30 | 1.05 |
| 2005 | 6.60 | 5.43 | 7.58 | 7.87 | 5.10 | 4.02 | 2.31 | 2.40 | 5.45 | 4.90 | 6.43 | 6.62 | 6.62 | 5.07 | 5.41 | 4.33 | 2.70 | 1.78 | 1.33 | 1.47 |
| 2006 | 6.70 | 6.07 | 7.56 | 8.06 | 3.65 | 3.46 | 2.85 | 2.88 | 4.28 | 3.35 | 5.95 | 6.12 | 3.45 | 2.15 | 5.21 | 4.26 | 2.50 | 2.43 | 2.85 | 2.79 |
| 2007 | 8.10 | 6.92 | 8.49 | 7.82 | 5.50 | 4.99 | 2.20 | 2.25 | 2.75 | 2.73 | 5.85 | 5.99 | 3.12 | 2.01 | 5.54 | 5.54 | 4.70 | 4.66 | 2.26 | 2.22 |
| 2008 | 7.29 | 5.62 | 3.45 | 2.78 | 5.25 | 4.81 | 2.50 | 2.46 | 5.41 | 5.15 | 3.45 | 3.53 | 3.47 | 2.35 | 8.45 | 7.62 | 5.40 | 4.88 | 2.30 | 2.14 |
| 2009 | 5.75 | 4.47 | 3.02 | 2.80 | 5.35 | 5.00 | 1.60 | 1.55 | 5.21 | 5.06 | 3.12 | 3.19 | 3.57 | 3.26 | 6.82 | 6.40 | 4.35 | 4.08 | 1.80 | 1.59 |
| 2010 | 6.08 | 5.06 | 4.96 | 4.74 | 5.60 | 5.06 | 1.70 | 1.69 | 5.54 | 5.30 | 3.47 | 3.55 | 5.62 | 5.37 | 7.57 | 7.23 | 4.70 | 4.37 | 1.55 | 1.34 |
| 2011 | 6.86 | 5.74 | 5.12 | 5.29 | 5.20 | 4.87 | 2.00 | 1.97 | 5.31 | 5.18 | 3.40 | 3.49 | 6.41 | 5.85 | 8.01 | 7.39 | 4.65 | 4.56 | 1.55 | 1.33 |
| 2012 | 6.93 | 6.39 | 6.85 | 6.40 | 5.60 | 5.42 | 1.82 | 1.69 | 5.61 | 5.59 | 4.00 | 4.07 | 5.87 | 5.93 | 7.30 | 7.08 | 5.25 | 5.16 | 1.50 | 1.60 |
| 2013 | 8.42 | 6.78 | 4.28 | 3.90 | 6.12 | 5.51 | 0.86 | 0.80 | 6.05 | 5.80 | 1.46 | 1.48 | 7.25 | 6.92 | 8.30 | 7.77 | 5.43 | 4.87 | 2.75 | 2.42 |
| 2014 | 6.27 | 5.23 | 4.35 | 4.67 | 5.17 | 4.68 | 1.70 | 1.84 | 5.38 | 4.91 | 2.20 | 2.25 | 6.69 | 6.37 | 7.65 | 6.40 | 4.25 | 3.84 | 1.20 | 0.97 |
| 2015 | 6.90 | 6.28 | 7.40 | 7.46 | 5.20 | 5.30 | 3.40 | 3.37 | 4.50 | 4.42 | 3.10 | 3.15 | 6.56 | 6.93 | 5.33 | 5.47 | 4.30 | 4.45 | 1.40 | 1.47 |
| 2016 | 8.20 | 7.04 | 6.55 | 6.89 | 6.70 | 6.44 | 1.60 | 1.79 | 5.60 | 5.57 | 1.20 | 1.28 | 8.25 | 7.98 | 8.80 | 8.42 | 5.80 | 5.71 | 2.60 | 2.73 |
| 2017 | 7.40 | 3.41 | 7.70 | 6.25 | 6.25 | 3.61 | 3.90 | 3.71 | 6.00 | 4.12 | 8.90 | 9.09 | 7.15 | 4.16 | 8.25 | 5.15 | 5.60 | 3.42 | 3.00 | 2.35 |
| R² (Bet Obs and Pred) | 0.558 | | 0.92 | | 0.788 | | 0.994 | | 0.79 | | 0.999 | | 0.813 | | 0.696 | | 0.807 | | 0.973 | |

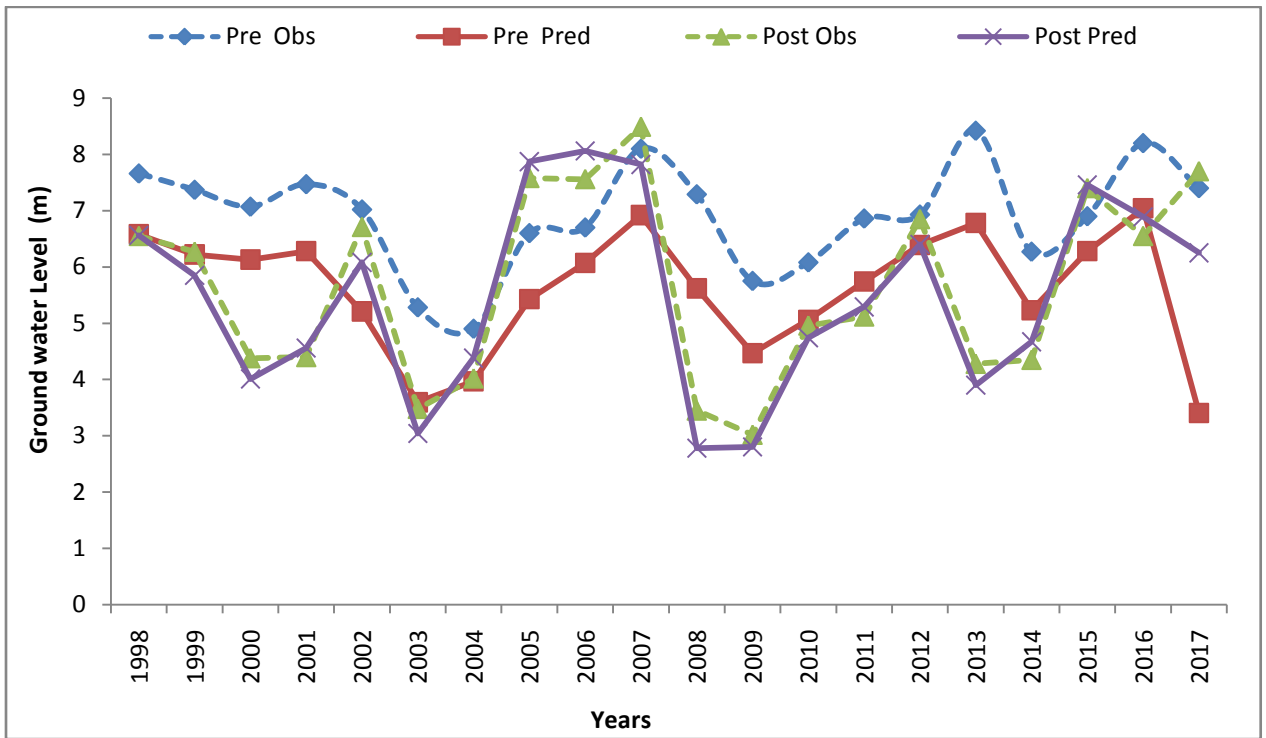


Fig. 1 Observation and prediction of pre and post monsoon ground water level at different locations

References

1. Agarwal, C.K., Bhargava, A.N., Singh, P.R. and Chhabra, S.S. (2009). Estimation of recharge to groundwater due to return flow of irrigation in Eastern Yamuna Canal Command Area using nuclear technique – A case study. In: Proceedings of All India Seminar on Groundwater Investigation, Management and Geophysical Techniques, Lucknow, December 11-12, 1990. pp. T-IV/44-48.
2. Bouwer Herman (2002). Artificial recharge of groundwater: hydrogeology and engineering. *Hydrogeology Journal* vol. (10), 121–142.
3. Hao Q., Shao J., Cui Y. and Xie Z., 2014. Applicability of Artificial Recharge of Groundwater in the Yongding River Alluvial Fan in Beijing through Numerical Simulation. *Journal of Earth Science*, Vol. 25(3): 575–586.
4. Jansa, O.v., 1952. Artificial replenishment of underground water, Proe. International Water Supply Association, 2nd Congress, Paris, 105 p.
5. Mansouri B.E. and Mezouary L.E., 2015. Enhancement of groundwater potential by aquifer artificial recharge techniques: an adaptation to climate change. *Hydrological Sciences and Water Security: Past, Present and Future (Proceedings of the 11th Kovacs Colloquium, Paris, France)*. IAHS Publ. 366.
6. Ravichandran S., Kumar S.S. and Singh L., 2011. Selective Techniques in Artificial Groundwater Recharge through Dug well and Injection well methods. *International Journal of ChemTech Research*, 3(3):1050-1053.
7. Russo, T. A., Fisher, A. T., & Lockwood, B. S. (2014). Assessment of Managed Aquifer Recharge Site Suitability Using a GIS and Modeling. *Groundwater*.
8. Swami, V. A. and Kulkarni, S. S. (2016). Simulation of Runoff and Sediment Yield for a Kaneri Watershed Using SWAT Model. *Journal of Geoscience and Environment Protection*, 4(01), 1.
9. Todd, D.K., 1959. Automated bibliography on artificial recharge of groundwater through 1954, Water Supply Paper, U.S. Geological Survey, 1477, 115 p.
10. Tripathi A, Mishra A K and Verma G (2016) Impact of preservation of subsoil water act on groundwater depletion the case of Punjab, India. *Env Manage* 58: 48-59.
11. Welsch, W.F., 1957. Water supply problems in Nassau County, Long Island, at Annual Convocation of New York Distt. Personnel of Water resources Division, U.S. Geological Survey presented at Albany, New York.
12. Niranjana, V. and V.K. Srinivasu. 2012. Small water harvesting and artificial recharge interventions in Singoda river basin, coastal Saurashtra: Hydrological and Socioeconomic impacts, Report - Institute for Resource Analysis and Policy, Hyderabad.
13. Islam M.N., Chowdhury A., Islam K.M. and Rahaman M.Z., 2014. Development of rainfall recharge model for natural groundwater recharge estimation in Godagari Upazila of Rajshahi district, Bangladesh. *American Journal of Civil Engineering*, 2(2): 48-52.
14. Peera D.G. and Kumar M.K., 2015. Assessment of groundwater resources: a case study. *International Journal of Advances in Engineering & Technology*, Dec., 2015. ISSN: 22311963.
