

# Wastewater phytopurification monitoring with Congolese planted filters (Republic of Congo)

**Abstract:** The present study aims to evaluate the purifying power of two Congolese plant filters or emerging macrophytes EP-F (*Echinochloa Pyramidalis (Lam)Hutch*) and CA-F (*Cyperus Alternifolius L.*) on wastewater from the Total market, the largest national market of Brazzaville in Congo. To do this, we set up an experimental device composed of gravel, fine sand and two plants. These plants were cultivated in an experimental pilot consisting of 8 tanks of 42,000 cm<sup>3</sup> of wastewater at treat each one, in addition to 2 tanks used as controls. The purifying performance study of the system after 90 days of treatment showed a significant reduction in physical, organic and mineral pollution. Using the planted filter EP-F (*Echinochloa Pyramidalis (Lam)Hutch*), we obtain reduction rates of almost 100% for turbidity and for suspended matter (SM), 75.42% for COD, 76.5% for NH<sub>4</sub><sup>+</sup> ions, 99.5% for NO<sub>3</sub><sup>-</sup> ions and 99.73% for PO<sub>4</sub><sup>3-</sup> ions. In the case of the CA-F (*Cyperus Alternifolius L.*) planted filter, we obtain reduction rates of almost 100% for turbidity and SM, 80.94% for COD, 93% for ions. NH<sub>4</sub><sup>+</sup>, 89.11% for NO<sub>3</sub><sup>-</sup> ions and 98.93% for PO<sub>4</sub><sup>3-</sup> ions. Furthermore, we also noted an increase in organic and mineral pollutants concentrations in the two plants compared to the plants before wastewater passage. This study shows that *Echinochloa Pyramidalis (Lam)Hutch* and *Cyperus Alternifolius L.* are effective macrophyte filters to eliminate physical, organic and mineral pollution.

**Keywords:** Phytoremediation, phytoepuration, urban discharges, wastewater.

## 1. Introduction

Water pollution coming from untreated effluents have become a growing concern for developing countries. The increase of wastewater discharges that has not undergone appropriate treatment resulting from economic and industrial development, the intensification and expansion of agriculture and wastewater volumes increase in urbanizing areas, further promote the degradation of surface water and groundwater quality worldwide [1]. However, attention to managing water after it has been used is often a neglected part of the water cycle [2]. In fact, most of the world's wastewater is neither collected nor treated. 71% of wastewater generated is treated in Western countries while 32 out of 48 countries in sub-Saharan Africa have no data on wastewater treatment [3]. One of the main challenges related to wastewater in Africa is the general lack of infrastructure for collection and treatment, which generates physical, chemical and biological

pollution on water surface into which it is discharged. The toxicity, mobility and load of pollutants have a significant impact on water resources, human health and environment [4]. According to the Congolese coastline environmental audit report on the coasts of Pointe-Noire city, economic capital of the Republic of Congo, wastewater from industrial, hotel and hospital establishments is discharged without prior treatment into the natural environment, notably into sewers and the Tchinouka and Songolo rivers [5]. For two decades, we have witnessed the evolution of technical depollution methods with the gradual transition from so-called traditional biodegradation technics whose costs are much lower. Professionals present on the treatment market are increasingly moving towards less cumbersome and less expensive techniques such as phytoremediation [6]. Phytoremediation is a plant biotechnical method based on plants ability to extract or block pollutants, whether in porous, liquid or gaseous media.

This technical method with promising advantages is based on biodegradation principle by the combined action of plant roots and microorganisms. It is used for the treatment of organic and inorganic pollution. It is therefore an interesting alternative to other physicochemical depollution processes due to their reduced environmental impact and their low cost [7]. Also, tropical plants continue to provide support in wastewater treatment processes. These tropical plants are used successfully for the wastewater depollution and can be combined with conventional purification techniques [8]. Research has shown that certain Cameroonian tropical plants such as *E. indica*, *C. dactylon* and *A. sessilis* can survive and develop in environments polluted with domestic fuel while possessing good phytoremediation capacities [9]. In Algeria, phytoremediation processes currently represent 56% of wastewater treatment processes, with 60 lagooning stations, with approximately 941 phytoremediation biodiversity species, used in pollutants bioaccumulation and biodegradation, dominated by microscopic algae, duckweed, reeds, oleander, hibiscus, canna, papyrus, pomegranate and rush [10]. This study aims to compare the purifying effectiveness of artificial marsh system composed of the Congolese plants *Echinochloa Pyramidalis (Lam) Hutch* and *Cyperus Alternifolius L.* in elimination of pollutants present in the wastewater of the largest market in Brazzaville, namely the Total market.

## 2. Material and Methods

### 2.1 Study Site

This study was carried out at Brazzaville in the Republic of Congo. Brazzaville, political capital of the Republic of Congo, is located between 15°20' and 15°25' East longitudes, and between 4°10 and 4°25' South latitudes. Its geographical position places it in the heart of Africa, therefore in intertropical zone characterized by high temperatures and abundant precipitation. This study was carried out near the Total Market in Bacongo in district number 2 of Brazzaville city.

### 2.2 Experimental device

The Congolese plants used in this study are *Echinochloa Pyramidalis (Lam) Hutch* (Figure 1) and *Cyperus Alternifolius L.* (Figure 2). The experimental device is presented in Figure 3. The plastic tanks of experimental device, in which a horizontal distribution pipe is placed at the bottom, have a volume of 50 liters (Figure 3-a). The tanks have an upper diameter of 40 cm maximum, a lower diameter of 35 cm and a height of 30 cm. Three superimposed layers are then placed in the bins as follows:

- the first layer, 4cm high, is a layer of coarse gravel (Figure 3-b) whose stones have a diameter between 6 and 10 mm. it is placed at the level of the distribution pipe in order to facilitate effluent passage,
- the second layer, 15cm high, is a layer of fine sand poor in organic matter, installed at the same time as an aeration pipe (Figure 3-c). The layer of fine sand is trapped between two layers of gravel,
- the third layer, 4cm high, is a layer of fine gravel (Figure 3-d) with a diameter between 2 and 3 mm placed at surface level. Fine gravel was used to avoid soil compensation at tank bottom which can cause root asphyxiation conditions due to excess water. Figure 3-d constitutes the control filter (T-F).



Figure 1: *Echinochloa pyramidalis (Lam) Hutch*

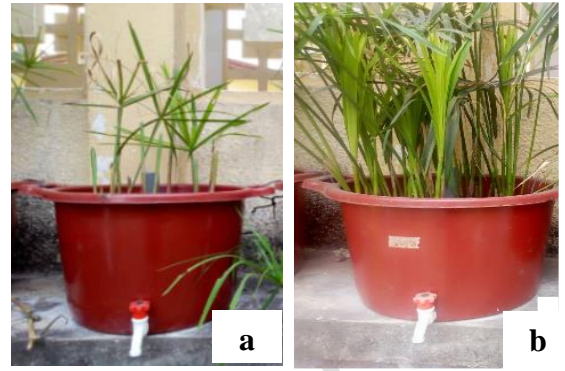


Figure 2: *Cyperus Alternifolius L.*

The experimental device consists of two (2) tanks placed in the open air and filled with a substrate composed of sand and gravel (Figure 4). A first tank is planted with *Echinochloa pyramidalis (Lam) Hutch* (Figure 4-1) and constitutes the planted filter EP-F. The second tank is planted with *Cyperus Alternifolius L.* (Figure 4-2) and constitutes the planted filter CA-F.



**Figure 3 :** Experimental device assembly  
**(a):** PVC tank and distribution pipe; **(b) :** filling of coarse gravel;  
**(c) :** filling of sand and aeration pipe; **(d)** filling of fine gravel  
 also called control filter (T-F)



**Figure 4:** Planted filters experimental device  
**(a) :** *Echinochloa pyramidalis (Lam) Hutch* or EP-F;  
**(b) :** *Cyperus Alternifolius L.* or CA-F

### 2.3. Wastewater sampling

The wastewater samples to be analyzed were taken from the gutters (Figure 5) of the Total market in district 2 Bacongo in Brazzaville (Figure 6).



**Figure 5:** Total market gutter



**Figure 6:** Wastewater sampling

These wastewater samples were then packaged in 5-liter plastic bottles (Figure 7), previously rinsed with tap water.



**Figure 7:** Conditioning of wastewater from the Total market gutter

### 2.4. Measurements of wastewater physicochemical parameters before and after treatment

For each sampling, the physicochemical parameters relating to turbidity, suspended matter, dissolved oxygen, chemical oxygen demand, ammonium ions, nitrate ions and phosphate ions were measured.

#### 2.4.1 Measurements of dissolved oxygen (O<sub>2d</sub>) content

The dissolved oxygen (O<sub>2d</sub>) content was analyzed using a DO-66A type oximeter, which uses the electrochemical reduction of molecular oxygen [11]. The oximeter electrode is immersed vertically in a beaker containing 50 ml of the sample. The reading is taken after stabilization of the displayed value.

#### 2.4.2 Suspended matter (SM) measurement

Suspended matter (SM) were determined by the wastewater filtration method. To do this, the filter paper is first dried in an oven at 105°C. Then the mass of filter paper (Mempty) is weighed. 50ml of the sample is filtered through filter paper before being placed in an oven at 105°C during 24 hours to be dehydrated. Finally, the filter paper is reweighed after dehydration ( $M_{105^{\circ}\text{C}}$ ). The suspended matter content is calculated using the dry matter mass obtained after separation of SM from wastewater, then dehydration at 105°C in an oven. According to the formula:

$$SM = \frac{M_{105^{\circ}\text{C}} - M(\text{empty})}{V_{\text{sample}}}$$

With:

$M_{105^{\circ}\text{C}}$  = sample mass (mg) after deshydration in oven at 105°C;

M (empty) = membrane mass (mg) when empty;

$V_{\text{sample}}$  = volume of the water sample studied (l).

#### 2.4.3 Turbidity measurement

Turbidity was determined by the light scattering method (NFT 90-033) using the Turbiquant Orion AQ3010 turbidimeter. The measurement using the turbidimeter is done by introducing at least 50 ml of the sample into a tank and the reading is taken after stabilization of the displayed value.

#### 2.4.4 Chemical oxygen demand (COD) measurement

Chemical oxygen demand (COD) was measured by using AFNOR standard (NF, T90-101) which consists of introducing 2 ml of sample into an acidic medium containing the appropriate reagent (commercial solution composed of  $\text{HgSO}_4$ ,  $\text{H}_2\text{SO}_4$ ,  $\text{Ag}_2\text{SO}_4$ ). The whole is heated in a COD oven at 150°C for two hours. After cooling, the calculation of the COD is carried out using the Pottier Method (1993) by applying the following formula:

$$\text{COD} = 336 \times \text{Abs} - 48.8 \times R$$

With:

R (Correlation coefficient) = 0.95

Abs: Absorbance measured with wavelength ( $\lambda=330$  nm)

#### 2.4.5 Ammoniums ions ( $\text{NH}_4^+$ ) measurement

Ammonium ions ( $\text{NH}_4^+$ ) concentrations were determined by the Nessler method which consists of taking 1ml of the sample which is adjusted to 25ml with distilled water. Three (03) drops of mineral stabilizer and 3 drops of polyvinyl alcohol are successively added to the mixture. After stirring, the mixture is supplemented with 1ml Nessler's reagent. Then, the cell is introduced into the Aqualytic AL800 type spectrophotometer. The reading

#### 2.4.6 Nitrates ions ( $\text{NO}_3^-$ ) measurement

Nitrates ( $\text{NO}_3^-$ ) concentrations were determined by colorimetry method according to standard NF T90-012. According to this method, 1mL of sulfuric acid is added to each capsule. We wait 10 min before adding approximately 10 mL of water and 10 mL of ammonia to each capsule. The contents of each capsule are transferred into a series of 25mL volumetric flasks. Then, we adjust to 25mL with the capsule rinsing water. The photometric measurements are carried out at the maximum of the absorption curve (wavelength close to 415 nm) after having adjusted the device to zero absorbance relative to water.

#### 2.4.7 Orthophosphate ions ( $\text{PO}_4^{3-}$ ) measurement

Orthophosphates ions ( $\text{PO}_4^{3-}$ ) concentrations were determined by the calorimetric method. 20 ml of water are introduced into a 25 ml volumetric flask, 1 ml of ascorbic acid solution is then added and the procedure is continued as for establishing the calibration curve. Reading is done with the AQUALYTIC-AL800 spectrophotometer at a wavelength  $\lambda=700$  nm or 880 nm.

### 2.5. Dosage of pollutants in plants

The harvested plants were washed with tap water then rinsed with distilled water to avoid atmospheric contamination. They were then spread out and dried at ordinary temperature. Then, they were crushed and reduced to powder using a porcelain mortar. A mass of 15 g of plant powder was weighed then transferred to an Erlenmeyer flask, adding approximately 125 ml of distilled water. The mixture was then mixed well with a magnetic stirrer. The mixture was then left to settle for 30 minutes. We then filtered the mixture to recover the liquid phase. Nitrate, ammonium and orthophosphate ions as well as COD were quantified in the filtrate using the same techniques used for wastewater and treated water.


## 3. Results and Discussion

### 3.1 Evolution of the dissolved oxygen ( $\text{O}_{2d}$ ) content in wastewater filtered using plants

Figure 8 presents the dissolved oxygen ( $\text{O}_{2d}$ ) content evolution as a function of time in the raw wastewater (RW) from the Total market gutter and in the three distinct filters: T-F (control filter without plant), EP-F (*Echinochloa pyramidalis* (Lam) Hutch planted filter) and CA-F (*Cyperus Alternifolius* L. planted filter). We note that dissolved oxygen evolution shows higher concentrations in the filters (T-F, EP-F, CA-F) than those of raw wastewater (RW). We note that:

- the dissolved oxygen ( $\text{O}_{2d}$ ) content in raw wastewater (RW) remains less than 0.85 mg/l throughout the study duration,

- the  $O_{2d}$  levels increase slightly over time after the wastewater passes through the T-F control filter,
- the  $O_{2d}$  levels increase enormously over time after the wastewater passes through the 2 planted filters EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*), with better oxygenation for the planted filter EP-F (*Echinochloa pyramidalis (Lam) Hutch*),
- the dissolved oxygen content of T-F, EP-F and CA-F planted filters are respectively 0.85 mg/l; 4.00 mg/l and 2.85 mg/l on the 90th day of treatment.

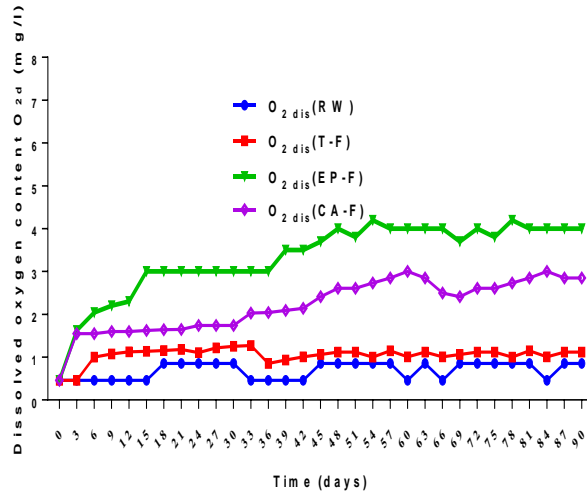


**Figure 8:** Dissolved oxygen  $O_{2d}$  content evolution as a function of time in raw wastewater (RW) and in T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters

The low levels of dissolved oxygen content observed in the supply water are due to organic load of urban discharges emanating from Brazzaville districts without any prior treatment. Dissolved oxygen ( $O_{2d}$ ) content is reduced by the activity of bacteria by decomposing the organic matter present [12]. The high levels of dissolved oxygen content in the EP-F and CA-F filtrates, compared to the T-F control filtrate, can be explained essentially due to the high wind speeds provided by the plants (*Echinochloa p* and *Cyperus A*) used which generate continuous mixing of the water mass and consequently enrich the dissolved phase with dissolved oxygen or the reduction in water temperature created by the shade of the plants used; because cold water contains a greater quantity of dissolved oxygen than hot water [13]. Overall, these results show that the filtrate waters are more oxygenated than the wastewaters.

### 3.2 Suspended matter (SM) content evolution in wastewater filtered using plants

Figure 9 shows the evolution of the suspended matter (SM) content as a function of time in the raw wastewater (RW) from the Total market gutter and in the three distinct filters: T-F (control filter without plant), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter) and CA-F (*Cyperus Alternifolius L.* planted filter). We notice that:

- The SM content in raw wastewater (RW) is initially around 350 mg/l,
- The SM content drops enormously in filtered wastewater. On the 36th day, we note that SM content went from 350 mg/l to 188 mg/l, 30 mg/l and 61 mg/l respectively in the 3 filters T-F (control filter without plant), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter) and CA-F (*Cyperus Alternifolius L.* planted filter). The reduction rate is therefore at 36 days of the order of 45.72% for the control filter T-F, 91.33% for the EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter and 82.39% for the CA-F (*Cyperus Alternifolius L.*) planted filter,
- The SM content at 90 days is almost zero for the two planted filters EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter) and CA-F (*Cyperus Alternifolius L.*). The SM content of the T-F control filter remains around 123 mg/l at 90 days. The SM reduction rate at 90 days is almost 100% for the two planted filters EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) while that of the control filter is around 64.85%.

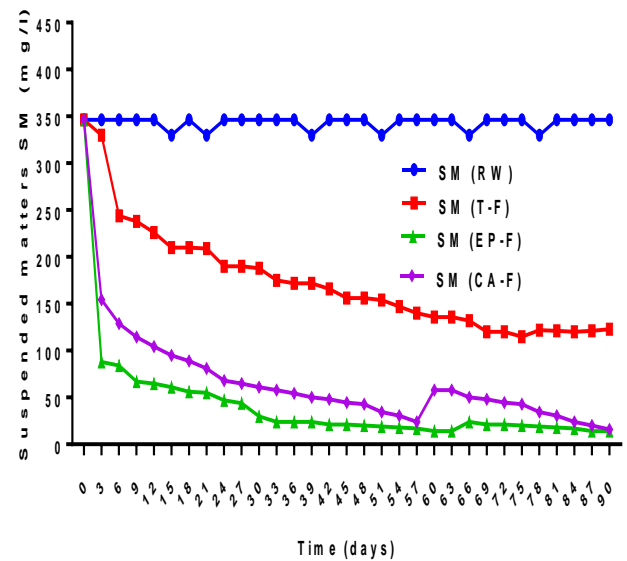


**Figure 9:** Suspended matters (SM) content evolution as a function of time in raw wastewater (RW) and in T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters

We can note a continuous decrease in the SM content up to the 60<sup>th</sup> day in the two planted filters (EP-F and CA-F). A slight increase in the SM content is observed around the 60<sup>th</sup> day for the CA-F planted filter and around the 66<sup>th</sup> day for the EP-F planted filter before decreasing again. This is due to the development of plants root and rhizomatous system which creates tunnels in the filter bed through which fine materials can pass and end up in the filtrates [14].

### 3.3 Turbidity evolution in wastewater filtered using plants

Figure 10 presents the turbidity evolution as a function of time in the raw wastewater (RW) from the Total market gutter and in the three distinct filters: T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters. We notice that:

- Turbidity in raw wastewater (RW) is initially around 432 NTU,
- Turbidity drops enormously in filtered wastewater. At 30 days, we note that the turbidity decreases from 432 to 168, 28.2 and 44.7 NTU respectively in the 3 filters T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters. The turbidity reduction rate is therefore at 30 days in order of 61.11% for the control filter T-F, 93.47% for the EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter and 89.65% for the CA-F (*Cyperus Alternifolius L.*) planted filter. The turbidity at 90 days is almost zero for the two planted filters EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*). The turbidity of the T-F control filter remains around 150 NTU at 90 days. The turbidity reduction rate at 90 days is almost 100% for the two planted filters EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) while that of the control filter is around 65%.

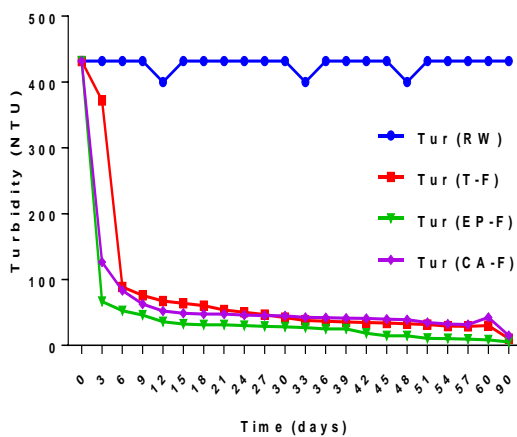

**Figure 10** : Turbidity evolution as a function of time in raw wastewater (RW) and in T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters


These results are explained by the fact that the implanted bed allows good elimination of suspended matter degraded by bacterial activity at the roots because turbidity is directly linked to the SM in wastewater. The presence of macrophytes prevents clogging and significantly improves the settling capacity, moreover its density presents a physical obstacle for the particles and

allows the clarification of the water which was initially cloudy [15]. These curves are also similar to those obtained for suspended matter.

### 3.4 Chemical oxygen demand (COD) evolution in wastewater filtered using plants

Figure 11 presents the COD evolution as a function of time in the raw wastewater (RW) from the Total market gutter and in the three distinct filters: T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters. The evolution of curve relating to chemical oxygen demand (COD) shows a decreasing trend. Indeed:

- The COD in raw wastewater (RW) is initially around 524.84 mg O<sub>2</sub>/l,
- COD drops enormously in filtered wastewater. On the 30th day, the COD decreases from 524.84 mg O<sub>2</sub>/l in raw wastewater (RW) to 273.18 mg O<sub>2</sub>/l, 85.7 mg O<sub>2</sub>/l and 142.1 mg O<sub>2</sub>/l respectively in the 3 filters T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters. The COD reduction rates are therefore at 30 days in the order of 47.94% for the control filter T-F, 84.05% for the EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter and 72.92% for the CA-F (*Cyperus Alternifolius L.*) planted filter,
- The COD at 90 days is 129 mg O<sub>2</sub>/l for the EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter and 100 mg O<sub>2</sub>/l for the CA-F (*Cyperus Alternifolius L.*) planted filter. The COD of the T-F control filter remains around 161 mg O<sub>2</sub>/l at 90 days. The reduction rate of COD at 90 days is around 75.42% for the EP-F (*Echinochloa pyramidalis (Lam) Hutch*) planted filter and 80.94% for the CA-F (*Cyperus Alternifolius L.*) planted filter while that of the control filter is around 69.32%.

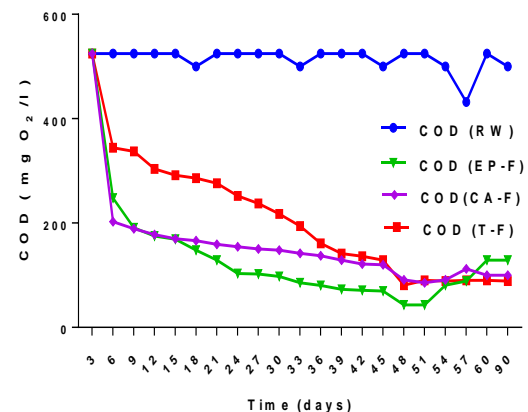


**Figure 11** : COD evolution as a function of time in raw wastewater (RW) and in T-F (control filter without plants), EP-F (*Echinochloa pyramidalis (Lam) Hutch*) and CA-F (*Cyperus Alternifolius L.*) planted filters

These results confirm the effectiveness of wastewater treatment by filters planted with macrophytes according to the elimination of organic matter. These results are in agreement with those of Mahunon [16] who worked on the phytoremediation of pigsty wastewater using *Eichhornia crassipes* as a purifying plant. Furthermore, after 50 days, we observe a gradual increase in planted filtrates COD content. This can be explained by the aging or death of certain macrophytes in the filters. Indeed, the decomposition of macrophytes in water following this mortality causes the environment enrichment in nutrients and organic compounds [17; 18].

### 3.5 Ammonium $\text{NH}_4^+$ ions concentration evolution in wastewater filtered using plants


Figure 12 shows the  $\text{NH}_4^+$  ammonium ions concentration evolution as a function of time in the raw wastewater (RW) from the Total market gutter and in the three distinct filters: T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters. The curves relating to  $\text{NH}_4^+$  ions concentration also show a decreasing trend. Indeed, on the 30th day, it went from 80 mg/l in raw wastewater (RW) to 47.80 mg/l, 22.2 mg/l and 20 mg/l respectively after passing the raw wastewater into in the 3 filters T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters. The reduction rates in  $\text{NH}_4^+$  ion content are therefore at 30 days in order of 40.25% for T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters. At 90 days, the reduction rates in the  $\text{NH}_4^+$  ion content are in order of 54.12% for T-F (control filter without plants), F-EP (*Echinochloa pyramidalis* (Lam) Hutch) and F-CA (*Cyperus Alternifolius* L.) planted filters. Planted filters present a better drop in  $\text{NH}_4^+$  ions content certainly due to nitrification (the passage of  $\text{N-NH}_4$  into  $\text{N-NO}_3$ ) favored by suitable nutritional and oxygenation conditions [19].

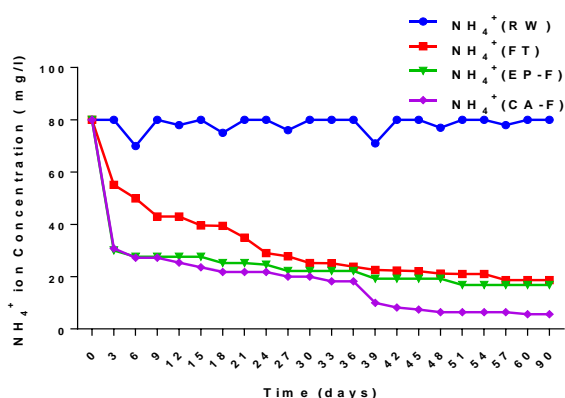

**Figure 12 :**  $\text{NH}_4^+$  ions concentration evolution as a function of time in raw wastewater (RW) and in T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters

### 3.6 Nitrate $\text{NO}_3^-$ ions concentration evolution in wastewater filtered using plants

Figure 13 shows the  $\text{NO}_3^-$  nitrate ions concentration evolution as a function of time in raw wastewater (RW) from the Total market gutter and in the three distinct filters: T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters. The curves relating to  $\text{NO}_3^-$  ions concentration also show a decreasing trend. We notice a rapid drop in the  $\text{NO}_3^-$  concentration from the 6th day. On the 90th day, this decreased from 90 mg/L in the raw wastewater (RW) to 45 mg/l, 0.45 mg/l and 9.80 mg/l respectively after passing the raw wastewater into the 3 filters T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters. The reduction rates in the  $\text{NO}_3^-$  ions concentration are therefore at 90 days in order of 50% for the T-F control filter, 99.5% for the EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and 89.11% for the CA-F (*Cyperus Alternifolius* L. F-CA) planted filters. This reduction could be explained by the rapid growth of macrophytes which consume a lot of nitrates ions given that it is the soluble form of nitrogen which is easily absorbed by plants [20].

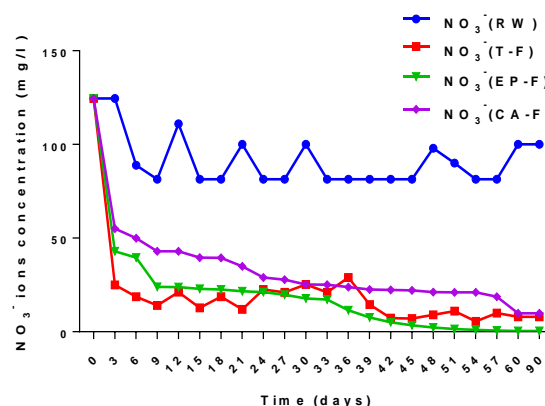


**Figure 13 :**  $\text{NO}_3^-$  ions concentration evolution as a function of time in raw wastewater (RW) and in T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters

### 3.7 Orthophosphates $\text{PO}_4^{3-}$ ions concentration evolution in wastewater filtered using plants

Figure 14 shows the  $\text{PO}_4^{3-}$  orthophosphate ions concentration as a function of time in raw wastewater (RW) from the Total market gutter and in the three distinct filters: T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters. A drop in the  $\text{PO}_4^{3-}$  ions concentration in filtered wastewater is also observed. On the 30th day, the  $\text{PO}_4^{3-}$  ions concentration decrease from 75 mg/l in raw wastewater (RW) to 35 mg/l, 16 mg/l and 18 mg/l respectively in the 3 filters

T-F (control filter without plant), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters.

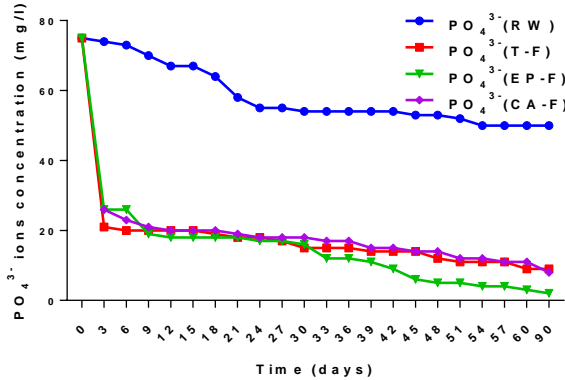

**Figure 14 :** PO<sub>4</sub><sup>3-</sup> ions concentration evolution as a function of time in raw wastewater (RW) and in T-F (control filter without plants), EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and CA-F (*Cyperus Alternifolius* L.) planted filters


The PO<sub>4</sub><sup>3-</sup> ions reduction rates are therefore at 30 days in order of 42.64% for the T-F control filter, 72.63% for the EP-F (*Echinochloa pyramidalis* (Lam) Hutch) and of 69.20% for the CA-F (*Cyperus Alternifolius* L.) planted filters. At the end of treatment at 90 days, the PO<sub>4</sub><sup>3-</sup> ions concentration is around 29 mg/l for the EP-F (*Echinochloa pyramidalis* (Lam) Hutch) planted filter and 2 mg/l for the CA-F (*Cyperus Alternifolius* L.) planted filter. Or a reduction rate at 90 days of 99.73% for the EP-P (*Echinochloa pyramidalis* (Lam) Hutch) planted filter and 98.93% for the CA-F (*Cyperus Alternifolius* L.) planted filter while that of the control filter T-F is around 61.33%. This can be explained by the direct use of P-PO<sub>4</sub> by plants [21] or attributed to adsorption on the soil particles [22] and precipitation reactions [23]. At the same time, microbial populations that reside in submerged roots can assimilate PO<sub>4</sub><sup>3-</sup> ions

present in wastewater [24].

### 3.8 Evolution of COD and NH<sub>4</sub><sup>+</sup>, NO<sub>3</sub><sup>-</sup>, PO<sub>4</sub><sup>3-</sup> ions concentrations in the EP (*Echinochloa pyramidalis* (Lam) Hutch) and CA (*Cyperus Alternifolius* L.) plants

#### 3.8.1 Evolution of COD and NH<sub>4</sub><sup>+</sup>, NO<sub>3</sub><sup>-</sup>, PO<sub>4</sub><sup>3-</sup> ions concentrations in the EP (*Echinochloa pyramidalis* (Lam) Hutch) plant

We evaluated the effectiveness of the experimental device by measuring the contents of COD and NH<sub>4</sub><sup>+</sup>, NO<sub>3</sub><sup>-</sup> and PO<sub>4</sub><sup>3-</sup> ions in EP (*Echinochloa pyramidalis* (Lam) Hutch) plant before and after raw wastewater (RW) passage into this planted filter. It appears for the EP plant (*Echinochloa pyramidalis* (Lam) Hutch) that (Figure 15): the COD increases with time after raw wastewater (RW) passage into the plant compared to the plant before raw wastewater passage. It goes from 17.5 mg O<sub>2</sub>/l before treatment to 51.84 mg O<sub>2</sub>/l after 30 days of treatment with wastewater and to 89.84 mg O<sub>2</sub>/l after 90 days of treatment with wastewater. The NH<sub>4</sub><sup>+</sup> ions concentration also increases over time inside the plant. In fact, it goes from 8.4 mg/kg before raw wastewater passage to 41.35 mg/kg after 30 days of treatment with wastewater and to 49.95 mg/kg after 90 days of treatment with wastewater. The NO<sub>3</sub><sup>-</sup> ions concentration also increases with time inside the plant. Indeed, it goes from 13.40 mg/kg before raw wastewater passage into the plant to 45.95 mg/kg after 30 days of treatment with wastewater and to 65.35 mg/kg after 90 days of treatment with wastewater. The PO<sub>4</sub><sup>3-</sup> ions concentration increases until the 30th day of treatment with wastewater then decreases at 90 days inside the plant. In fact, it goes from 4.3 mg/kg before raw wastewater passage to 21.87 mg/kg after 30 days of treatment with wastewater and to 16.54 mg/kg after 90 days of treatment with wastewater.

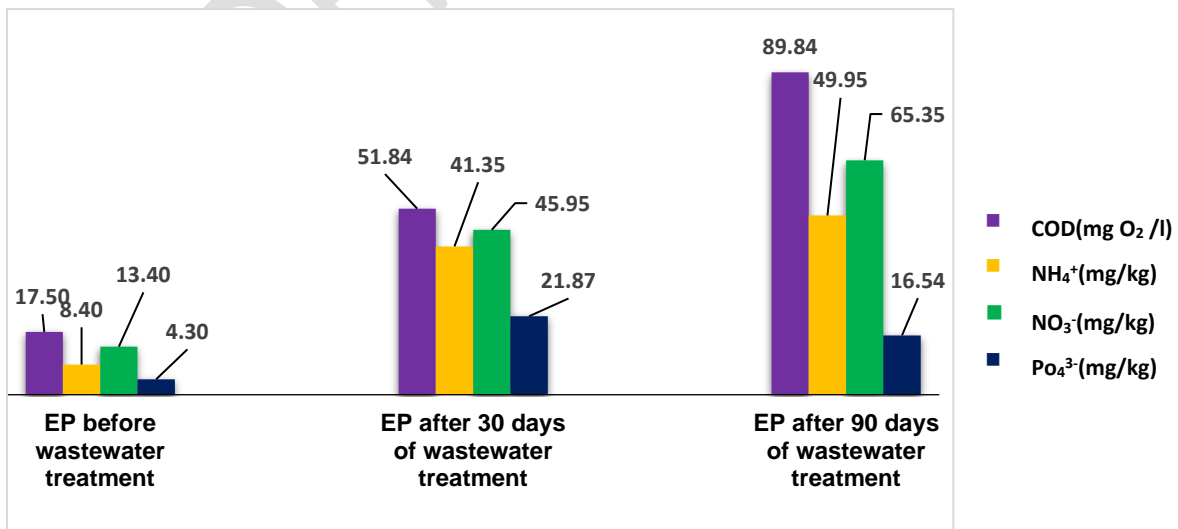


**Figure 15:** Evolution of COD and NH<sub>4</sub><sup>+</sup>, NO<sub>3</sub><sup>-</sup> and PO<sub>4</sub><sup>3-</sup> ions concentration as function of time in the EP (*Echinochloa pyramidalis* (Lam) Hutch) plant before and after 30 and 90 days of treatment with wastewater

### 3.8.1 Evolution of COD and $\text{NH}_4^+$ , $\text{NO}_3^-$ , $\text{PO}_4^{3-}$ ions concentrations in CA (*Cyperus Alternifolius L.*) plant

We evaluated the effectiveness of the experimental device by measuring the contents of COD and  $\text{NH}_4^+$ ,  $\text{NO}_3^-$  and  $\text{PO}_4^{3-}$  ions in CA (*Cyperus Alternifolius L.*) plant. Concerning the CA (*Cyperus Alternifolius L.*) plant, we noted the following (Figure 16): the COD increases with time after raw wastewater (RW) passage into the plant compared to the plant before raw wastewater passage into plant. It goes from 20.5 mg  $\text{O}_2/\text{l}$  before treatment with wastewater to 40.68 mg  $\text{O}_2/\text{l}$  after 30 days of treatment with wastewater and to 63.68 mg  $\text{O}_2/\text{l}$  after 90 days of treatment with wastewater.

The  $\text{NH}_4^+$  ions concentration also increases over time inside the plant. Indeed, it goes from 7.4 mg/kg before treatment with wastewater to 20.46 mg/kg after 30 days of treatment with wastewater and to 34.79 mg/kg after 90 days of treatment with wastewater. The  $\text{NO}_3^-$  ions concentration also increases with time inside the plant. Indeed, it goes from 11.73 mg/kg before treatment with wastewater to 30.79 mg/kg after 30 days of treatment with wastewater and to 57.46 mg/kg after 90 days of treatment with wastewater. The  $\text{PO}_4^{3-}$  ions increases with time and slightly between 30 and 90 days inside the plant. In fact, it goes from 3.09 mg/kg before treatment with wastewater to 19.02 mg/kg after 30 days of treatment with wastewater and to 20.74 mg/kg after 90 days of treatment with wastewater.

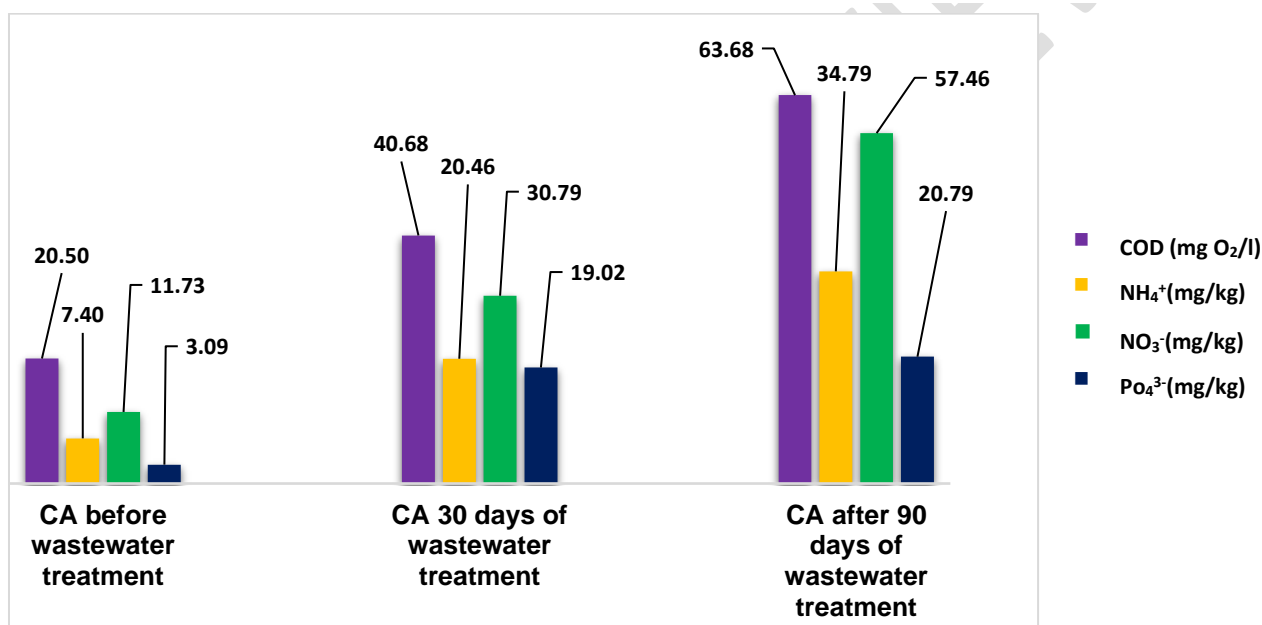

**Figure 16:** Evolution of COD and  $\text{NH}_4^+$ ,  $\text{NO}_3^-$  and  $\text{PO}_4^{3-}$  ions concentration as function of time in the CA (*Cyperus Alternifolius L.*) plant before and after 30 and 90 days of treatment with wastewater

The results obtained show an increase in the COD content within the plant itself. This shows that organic pollution and organic oxidizable materials are the main sources of plant nutrition [25]. The high concentrations of nitrate  $\text{NO}_3^-$  ions and ammonium  $\text{NH}_4^+$  ions found in EP (*Echinochloa pyramidalis (Lam) Hutch*) CA (*Cyperus Alternifolius L.*) plants after wastewater treatment were extracted from wastewater because macrophytes mainly absorb inorganic nitrogen in the form of nitrates ( $\text{NO}_3^-$ ) and ammonium ( $\text{NH}_4^+$ ) which are essential for plant tissues growth and can be stored in the different organs (roots, rhizomes, stems and leaves) [26]. This explains the reduction in these elements, observed

in our study for filters installed during wastewater treatment. Concerning the high  $\text{PO}_4^{3-}$  ions orthophosphate concentrations in EP (*Echinochloa pyramidalis (Lam) Hutch*) CA (*Cyperus Alternifolius L.*) plants after wastewater treatment could result from plant assimilation and by the absorption of  $\text{PO}_4^{3-}$  in the plant [27]. Indeed, phosphate is an essential constituent for the development of plants, assimilated in the form of orthophosphates at their roots and transported to the rest of the plant. These results confirm the reduction of  $\text{PO}_4^{3-}$  ions concentrations in wastewater at the outlet of two purification systems that was observed upstream of this study.

## Conclusion

This study aimed to evaluate the purifying power of two Congolese plant filters EP-F (*Echinochloa Pyramidalis (Lam)Hutch*) and CA-F (*Cyperus Alternifolius L.*) on wastewater from the Total market in Brazzaville (Congo). The results obtained show that wastewater from the Total market gutter has low oxygenation and significant concentrations of suspended matter (SM), turbidity, COD,  $\text{NH}_4^+$  ions,  $\text{NO}_3^-$  ions and  $\text{PO}_4^{3-}$  ions. The planted filters device entirely irrigated by wastewater made it possible to obtain their purification by the removal of nutrients contained in wastewater and by the supply of oxygen into the environment. For the two planted filters, the purification efficiency or the rate of reduction for turbidity is almost 100%, between 45%-80% for SM, between 75%-93% for COD, between 76%-93% for  $\text{NH}_4^+$  ions, between 89%-99% for  $\text{NO}_3^-$  ions and between 98%- 99% for  $\text{PO}_4^{3-}$  ions. However, we note that CA-F (*Cyperus Alternifolius L.*) plant filter has a purification efficiency slightly higher than EP-F (*Echinochloa Pyramidalis (Lam)Hutch*) plant filter for SM, COD and  $\text{NH}_4^+$  ions. The EP-F (*Echinochloa Pyramidalis (Lam)Hutch*) plant filter ensured better oxygenation of wastewater and has a purifying efficiency slightly higher than CA-F (*Cyperus Alternifolius L.*) plant filter for  $\text{NO}_3^-$  ions and  $\text{PO}_4^{3-}$  ions. The quantification of organic and minerals materials in the macrophytes EP (*Echinochloa Pyramidalis (Lam)Hutch*) and CA (*Cyperus Alternifolius L.*) after wastewater treatment showed higher levels of these elements in the plants compared to the plants before wastewater treatment. This confirms that these are indeed the plants which are responsible for this purification of wastewater. In view of the various results obtained, this plants treatment technique or phytoremediation can be considered for improving the wastewater quality for their reuse or before their release into the environment.

## DATA AVAILABILITY

The experimental data used to support the findings is included within the article.

## REFERENCES

- [1] UN Environment. 2017. Freshwater Strategy 2017-2021. United Nations Environment Programme, Nairobi, Kenya.
- [2] WWAP (World Water Assessment Program). 2017. United Nations World Water Development Report 2017. Wastewater – An untapped resource. Paris, UNESCO.
- [3] Sato, T., Qadir, M., Yamamoto, S., Endo, T. and Zahoor, A. 2013. Global, regional, and country level need for data on wastewater generation, treatment, and use. *Agricultural Water Management*, Vol. 130, pp. 1–13.
- [4] Boutin, C., Héduit, A., and Helmet, J-M. 2008. Final report on purification technologies for reuse of treated wastewater (REUT). ONEMA-CEMAGREF-2008 partnership agreement.
- [5] Wenclawlak, B; Pangou, S.V. 2005. Environmental audit of the Congolese coastline: case of the coasts of the city of Pointe-Noire. Association for the Protection of the Environment of the Gulf of Guinea, 1-6.
- [6] Origo, N., Wicherek, S., and Hotyat, M. 2012. Remediation of polluted sites by phytoremediation. *The Electronic Journal of Environmental Sciences*, Vol 12 (2).
- [7] Daverey A., Pakshirajan K., 2011. Pretreatment of synthetic dairy wastewater using the sophorolipid producing yeast *Candida bombicola*. *Appl. Biochem. Biotechnol.* 163 :720.
- [8] Zobeidi, A. 2018. Wastewater purification by aerated lagoon in an arid zone - Case of the El-Oued region. Influential parameters and choice of optimal conditions, Doctoral thesis, Kasdi Merbah-Ouargla University. Algeria.
- [9] Matsodoum Nguembé, P., Djumyom Wafo, G.V., Djocgoue, P.F., Kengne Noumsi, I.M. and Wanko Ngnien, A. 2017. Phytoremediation of soils polluted by hydrocarbons: evaluation of the potential of six tropical plant species. *Journal of Water Sciences.* 30(1):13-19.
- [10] Gherib, A., Boufendi, M., Temime, A. and Bedouh, Y. 2016. Applications of phytoremediation in wastewater treatment in Algeria. *Larhyss Journal*, ISSN 1112-3680. 27:23-27.
- [11] Rejsek, F. 2002. Water analysis, regulatory and technical aspects. Ed CRDP, Aquitaine. France. p1-358.
- [12] Fekhaoui, M., Pattee, E. 1993. Impact of the city of Fez on Wadi Sebou: physico-chemical study. *Bull. Ins.Sci.(Rabat)*, 17, 1-12.
- [13] Makhoukh M., Sbaa M., Berrahou, A., and Clooster, M. 2011. Contribution to the physicochemical study of the surface waters of the Moulouya wadi. (Oriental Morocco), *Larhyss journal*, 9 (5), 149-169.

- [14] Molle, P., Liénard, A., Boutin, C., Merlin, G., Iwema, A. 2004. Treatment of domestic wastewater by artificial marshes: state of the art and performance of filters planted with reeds in France. *Engineering Special issue 2004*, 23-32.
- [15] Mimeche, L., Debabeche, M., Mancer, H. 2012. Analysis of the Purifying Power of a Phragmite Australis Implanted Filter for the Treatment of Wastewater in a Semi-Arid Climate - Biskra Region. *Journal International Environmental Conflict Management*, Santa Catarina – Brazil, 1,10-15.
- [16] Mahunon, S. E. R., Aina, M. P., Akowanou, A. V. O., Kouassi, E. K., Kouassi, Y.B., and Kopoin, A. 2018. Optimization process of organic matter removal from wastewater by using *Eichhornia crassipes*. *Environmental Science and Pollution Research*. 25 (29) 29219 - 29226.
- [17] Ntakiyiruta, P., Briton, B. G. H., Nsavyimana, G., Adouby, K., Nahimana, D., and G. Ntakimazi. 2020. Combined actions of *Eichhornia crassipes* and *Pistia stratiotes* for tertiary treatment of effluent from the facultative basins of the Buterere wastewater treatment plant, Burundi. *International Journal of Biological and Chemical Sciences*, 14 (24) (2020) 63 -75.
- [18] Mpawenayo, P.C., Ntakiyiruta, P., and Rucakumugufi, D. 2022. Tertiary treatment of wastewater in the natural lagoon system by Phytoremediation: case of the Buterre wastewater treatment plant, Burundi. *Africa Science*, 20(2), p131-145.
- [19] Feray, C. 2000. Nitrification in freshwater sediment: impact of wastewater treatment plant discharges on the dynamics of nitrifying communities. Doctoral thesis from Claude Bernard Lyon I Villeurbanne University. France.
- [20] Ting, W. H. T., Tan, I. A. W., Salleh, S. F., and Wahab, N. A. 2018. Application of water hyacinth (*Eichhornia crassipes*) for phytoremediation of ammoniacal nitrogen: A review. *Journal of Water Process Engineering*, 22 :239 249.
- [21] Mollier, A. 2016. Modeling soil-plant transfer of phosphorus in agroecosystems. Doctoral thesis from the University of Bordeaux. France.
- [22] Nobile, C. 2017. Phytoavailability of phosphorus in agricultural soils of Reunion Island fertilized over the long term with organic residues: is the input dose the only determinant to take into account. Doctoral thesis from the University of Réunion, 2017.
- [23] Eutamene, R. 2022. Chemical precipitation of phosphates in fluidized bed: hydrodynamic, thermodynamic, kinetic and environmental assessment. Thesis from Badji Mokhtar University. Annaba. Algeria.
- [24] Taktek, S. 2015. Biological dissolution of phosphates: Bacteria – mycorrhizae interaction. Doctoral thesis in agri-food microbiology. University of Laval. Quebec. Canada.
- [25] Atakpa-Bassabi, F., Kanda, M., Badjare, B., Atato, A., Batawila, K., and Akpagana, K. 2023. Phytoremediative potentialities of water hyacinth (*Eichhornia crassipes*) in the purification of wastewater in Togo. *Rev. Mar. Sci. Agron. Vet.* 11(4), 577-585.
- [26] Benrejda, F., and Ghoualem, H. 2017. Use of an aquatic plant for the purification of rainwater in the Algiers region. *Biological treatment by filters planted with macrophytes*. *Algerian Journal of Environmental Science and Technology* December edition. Vol.3. No. 3-B.
- [27] Kurniawan, A., Khasanah, K., and Jayatri, F. N.M. 2022. Study on the Application of Phytoremediation of Phosphate Content to Eutrophication in Cengklik Reservoir. *International Conference on Disaster Management and Climate Change IOP Conf. Series: Earth and Environmental Science*. Universitas Gadjah Mada, Yogyakarta 55281, Indonesia. Universitas Gadjah Mada, Yogyakarta 55281, Indonesia.