

Prospects of Solar Pump for Irrigation and Household Applications for Climate Resilience in the coastal Region of Bangladesh

ABSTRACT

Bangladesh is a climate vulnerable and agricultural country. Coastal region of Bangladesh is severely affected by climate change. To mitigate climate, change a solar pump of flow rate 180 L/minute was designed and tested in farmers' fields of Kalapara and Galachipa *Upazila* (sub-district) of Patuakhali district, Barguna Sadar and Amtali *Upazila* of Barguna district and Char Fasson and Lalmohon *Upazila* of Bhola district in the coastal region of Bangladesh for irrigating in high value crops like tomato and brinjal using pond/canal water. One solar pump was installed in each *Upazila* of off-grid area in 2018 and experiments were conducted during 2018-2021. Each solar pump was operated with 1200 W_p photovoltaic panels and the panels were also used for supplying electricity to home appliances and home water supply when the irrigation time was over. In farmers' fields, water saving irrigation methods such as drip irrigation and alternate furrow irrigation were conducted. The water savings from drip and alternate furrow irrigation methods over farmers' practice (every furrow irrigation) for tomato were 48.79% and 30.39% and those for brinjal were 47% and 35%, respectively. The benefit cost ratio of the demonstrated solar PV system was found to be 1.62 which was higher than low lift diesel pump (1.30). A small solar pump of 0.8 kW reduced 1.76 ton of carbon emission per year than a similar diesel engine operated pump. The farmers in the project areas are using the solar panels for irrigation, lightings, operating fans, supplying drinking water, sanitation and other purposes. Therefore, solar pump is an environment friendly and climate resilient technology with multiple benefits for small holder farmers in the coastal region of Bangladesh.

Keywords: Climate resilient; solar energy; PV panel; irrigation; low lift pump; coastal region; BCR

1. INTRODUCTION

The effects of global warming are ever-growing and include rising sea levels, irregular precipitation, increased drought, salinity intrusion, shorter winter, flash floods, typhoons, and cyclones. Bangladesh is a climate vulnerable predominantly agricultural country and Agriculture is negatively impacted, which lowers the yields of crops. Use of renewable energy especially solar energy may be one of the solutions to reduce carbon emission as well as global warming. Last year (2023) the main theme of World Food Day (16 October) was 'Water is Life, Water is Food, Leave No One Behind'. Irrigation is an important input for modern agriculture [1]. Irrigation started for cultivation of high yielding crops since the evolution of green revolution in Bangladesh. Net irrigation area in Bangladesh is 66.51% in which the contribution of surface water is 15,46,535 ha (27.35%) and groundwater is 41,08,254 ha (72.65%). There are 16,55,558 irrigation pumps are used for irrigating 5.65 million hectares of land. The irrigation area coverage of shallow tubewell (STW), low lift pump (LLP), deep tubewell (DTW) solar irrigation pump (SIP) and other methods are 53.16%, 22.76%, 19.19%, 0.31% and 4.59%, respectively [2]. About 56% area is irrigated by diesel engine operated pump which consumed 1.15 million tons of imported diesel producing about 3.0 million tons of carbon emission. For electricity generation renewable energy only contributes 5% that requires to be increase around 10% by 2025 and 20% by 2030 [3]. Irrigation sector became dependent on imported diesel, resulting in high fiscal pressures. In 2012-13, subsidies for petroleum products rose to US\$ 1.6 billion, a large part of which was for diesel. Roughly 3.5 million tons of CO₂ emission in Bangladesh in a year is from diesel-based irrigation, which is 4.4% of total annual production-based CO₂ emissions of 78.9 million tons [4]. So, there is huge scope to use SIP for irrigation instead of diesel fuel operated irrigation pumps to mitigate carbon emission as well as saving foreign currency incurred for importing diesel fuel and lubricating oil.

According to the Global Climate Risk Index, Bangladesh is the most climate change vulnerable country in the world [5]. Total greenhouse gas (GHG) emission in Bangladesh was 224.35 Mt CO₂e in 2020 which was 0.47% of global emission. In 2020, the agriculture sector contributed 86.2 MtCO₂e GHG emissions, which represented 41.72% of its total emissions [6]. Today, and in to the coming decades, the country is likely to be negatively affected by sea level rise and saltwater intrusion, mean temperature increases (1.7°C by 2050), rainfall variability, and an increase in the frequency and intensity of extreme weather events [6]. Through Climate-resilient agriculture, increasing agricultural production to cope with the harmful effects and SIP is prioritized as climate-resilient as well as climate smart agricultural technology in Bangladesh [7].

Recently price of diesel fuel has increased about 60% and small farmers are facing difficulties to pay the diesel price for operation of irrigation pumps. On the other hand, price of grid power has also increased and farmers are facing load shedding to operate electric pump. Solar pump may be an alternative solution of the fuel and energy crisis for irrigation. Large solar pump is very costly and beyond the purchasing capacity of smallholder farmers. In winter season, most of the lands remain fallow in coastal region due to water salinity, lack of fresh water and very low rainfall. The surface water sources of this areas are mainly river, canal, fish pond, homestead pond, etc. The salinity level is more in river, canal and *Gher* (Saline water fish ditch) water rather than homestead pond and around 20% of rural people have homestead pond [8].

In Bangladesh, the available ranges of solar radiation are between 4.0 and 6.5 kWh m⁻²day⁻¹ and the bright sunshine hours vary from 6 to 9 hours/day [9]. So, solar radiation in Bangladesh is suitable for operation of solar appliances. Though the initial cost of solar pump is higher than the conventional diesel engine operated pump, solar pump has lower maintenance cost which makes it cost effective over the years [9]. Therefore, this study was undertaken to find out the technical and economic suitability of solar photovoltaic (PV) systems for irrigation and household applications in the coastal region of Bangladesh.

2. MATERIAL AND METHODS

A series of activities were performed in the design and demonstrations of the solar PV system. These are presented sequentially in the following subsections. The design works were mostly undertaken in Bangladesh Agricultural Research Institute, Gazipur.

2.1 Base Line Survey

Survey was conducted in 2018 in the project locations to get information on availability of literacy of the respondents, land use, land type, cropping pattern, existing irrigation systems, socio-economic conditions of the farmers, and fresh and surface water availability in the area. From each site 30 farmers were interviewed. Secondary data were collected from books, journal articles, researched reports, internet, etc.

2.2 Solar Pump and Solar Home System

The solar pump was designed, fabricated and installed in the selected sites for irrigation and solar home system (SHS). The command area of solar pump was calculated based on water requirement of crop (vegetables) and minimum discharge of solar pump. For household uses of solar power, maximum load was calculated using information generated from base line survey. The maximum desired load for SHS was calculated on the basis of the number of equipment used in a family. Four solar panels each of 325 W_p and 24 V were used for water pumping and one was used for operation of home appliances. The main features of solar pump and SHS are given in Table 1 and Table 2, respectively.

Table 1. Main features of BARI solar pump and solar panel

| Main Features | |
|---|-----------------------|
| (a) Specification of solar pump: | |
| Name | BARI Solar Pump |
| Suitability | Surface water lifting |
| Maximum suction head | 6.50 m |
| Power of solar panel | 1300 W _p |
| Type of motor | DC, 48 V |
| Power of motor | 910 W |
| Motor speed | 3500 rpm |
| Diameter of pipe (Suction and delivery) | 51 mm |

| | |
|--|--------------------|
| Average discharge | 180 L/min |
| Made in | Bangladesh |
| (b) Specification of solar panel: | |
| Type | Mono-crystalline |
| Model | RAS-130W-S |
| Rated peak power (P_{max}) | 325 W _p |
| Size | 127cm × 65cm |
| Rated voltage (V_{mp}) | 17.5 V |
| Rated current (I_{mp}) | 7.70 A |
| Rating | CLASS-C |
| Made in | China |
| Total cost of solar pump (Excluding SHS) | US\$ 870 |
| Total cost of solar pump (Including SHS) | US\$ 1250 |

Table 2. The maximum desired load for solar home system in the study locations

| Item | Number | Unit load (W) | Total load (W) | Operating time (hrs/day) | Total load (WH) |
|----------------|--------|---------------|----------------|--------------------------|-----------------|
| DC light | 04 | 09 | 36 | 06 | 216 |
| DC fan | 02 | 25 | 50 | 05 | 250 |
| LCD television | 01 | 50 | 50 | 02 | 100 |
| Mobile charger | 01 | 10 | 10 | 01 | 10 |
| Total | | | 146 | | 576 |

2.3 Land and Soil Types

The land types in the study areas were high land (7.65%), medium high land (80.40%), medium low land (11.48%) and low land (0.47%). Medium high lands were above 55% in all the sites. High land and medium high land are suitable for vegetable production. In the selected sites, while most of the soil were found clay loam except in Galachipa and LalmohonUpazila, the soils were clay and sandy loam, respectively.

2.4 Irrigation Scheduling

Irrigation to crop field was done by drip and alternate furrow irrigation (AFI) methods. Irrigation scheduling was followed by measuring daily crop evapotranspiration. The following equation was used to measure crop evapotranspiration [10].

$$ET_{crop} = ET_o \times K_c \quad (1)$$

Where, ET_{crop} = crop evapotranspiration, ET_o = reference crop evapotranspiration and K_c = crop coefficient. ET_o was calculated by Penman-Monteith equation using the software, CROPWAT on a daily basis from daily meteorological and geographical data [11]. In drip method, the average discharge of a dripper was 3.3 Lh^{-1} at 2.0 m head of water. In case of furrow method, the required depth of irrigation water was measured by soil moisture monitoring and it was calculated by water balance method using the following equation [12].

$$P + L_m = ET + SR + I_f \quad (2)$$

Where, P = precipitation (mm) for the cropping period, L_m = moisture loss from the soil in the form of capillary rise, ET = evapotranspiration, SR = storage in rootzone and I_f = infiltration to the vadose zone (soil water). As the moisture loss from the soil was replenished by irrigation water and water was applied to root zone depth, L_m was replaced by I_d (depth of irrigation). So, the equation can be written as

$$P + I_d = SR + I_f + ET \pm \Delta S \quad (3)$$

$$\text{So, } \pm \Delta S = P + I_d - SR - I_f - ET \quad (4)$$

Where, ΔS = changes in subsurface storage of water.

2.5 Installation and Field Trials of Solar Pump and SHS

district, BargunaSadar and AmtaliUpazila of Barguna district and Char Fasson and LalmohonUpazila of Bhola district. A water supply system was installed in every house of the selected farmers having ponds near to their houses. A 500-liter overhead tank was used to store water for each house. The pond was used as the source of pumping water for household uses. The tank water was used for washing dishes, using in toilet, feeding cattle, bathing, washing hands and feet etc. The solar pump was also connected to a hand tube well if available in farmer's house for drinking and other water uses. The solar home system was installed in the houses of all the selected farmers. Most of the solar panels were installed on

the rooftop of the house with a clear view of the sun. A battery (Brand: Hamko, model: HDP120T, 12 V, 120 AH) with a charge controller (Digital PWM, model: PVSC20A, 12V/24V, 20 A) and circuit breaker (30 A) was connected to the panel. During the Rabi (Dry winter) seasons of 2019-20 and 2020-21, tomato (Variety: Diganto) and brinjal (BARI Bt Begun-1) were planted in the selected farmers' fields under solar pump irrigation systems. Diganto variety of tomato is late variety and salinity tolerant and BARI Bt Begun-1 variety of brinjal is fruit and shoot borer resistance suitable for coastal region. Row to row and plant to plant distances of tomato and brinjal were 100 cm and 80 cm, respectively. Experiments of tomato and brinjal were laid out in RCB design with three treatments and four replications as follows.

- T₁= Drip irrigation system
- T₂= Alternate furrow irrigation system
- T₃= Farmers' practice i.e. every furrow irrigation (control)

2.6 Environmental Benefit of the Solar Pump System

In this study solar DC pump of 1.0 kW used for surface water lifting for irrigation. One megawatt hour electricity is similar to 200 liter of diesel fuel. Total amount of diesel used in LLP for lifting surface water can be expressed the following ways [13].

$$TDA = LLP_d + LLP_e \quad (5)$$

Where, TDA = Total amount of diesel fuel used in LLP, LLP_d = Amount of diesel used in diesel operated LLP and LLP_e = Amount of diesel used in electricity operated LLP. In this study environmental benefit was measured by calculating total amount of diesel used in each diesel operated low lift pump in 20 years. For calculation of CO₂ emission, the amount of diesel that combusted is multiply by amount of carbon content in diesel. Burning of one liter of diesel fuel contributes 2.640 kg CO₂ to the atmosphere [14]. One liter of diesel weights 835 g. Diesel consists for 86.20% of carbon, or 720 g of carbon per liter diesel. In order to combust this carbon to CO₂, 1920 g of oxygen is needed. The sum is then 720 + 1920 = 2640 g or 2.640 kg of CO₂L⁻¹ diesel. Small amount of other gas such as CO and SO₂ emitted during burning of diesel and lubricating oil. Therefore, total Diesel use remains a great source of greenhouse gas (GHG) emitted from burning of one liter of diesel is equivalent 2.80 kg of CO_{2e}[15]. The environmental benefit of solar pump was determined by following equation [16].

$$EB \text{ of solar irrigation pump} = TDA \times 2.8 \text{ kg CO}_{2e} \quad (6)$$

Where, EB = environmental benefit (Reduction of CO_{2e} emission), TDA = Total fuel (diesel) combusted in 20 years in liter (2.8 kg CO_{2e} emitted from one liter of diesel combustion [17].

The EB of solar pump can be said as monetary terms in the following way.

$$EB \text{ of monetary terms} = \frac{EB \text{ of solar pump}}{1000} \times \text{Cost reduction of CO}_{2e} \quad (7)$$

The cost required for removal one ton of carbon dioxide from atmosphere is around one hundred USD [18].

3. RESULTS AND DISCUSSION

3.1 Baseline Survey

Baseline surveys were conducted in Patuakhali, Barguna and Bhola districts. The selected Upazila were Kolapara and Galachipa of Patuakhali, Sadar and Amtali of Barguna and Char Fasson and Lalmohan of Bhola districts. Irrigation status in the study areas of Patuakhali, Barguna and Bhola districts is given in Table 3. In all study areas, 100% of irrigation was done by small diesel engine (3.5-9.0 kW) operated (82%) was done custom hired basis. Solar pump was not found to irrigate crops. Surface water was only source of irrigation water in the study areas. Krupnik [19] reported that in coastal region of Bangladesh almost 100% surface water is used for irrigation due to lower pumping cost of surface water.

Table 3. Irrigation status in the selected areas in Patuakhali, Barguna and Bhola district

| Items | Patuakhali | | Barguna | | Bhola | | Mean of all |
|--------------------------------|------------|-----------|---------|--------|-------------|----------|-------------|
| | Kolapara | Galachipa | Sadar | Amtali | Char Fasson | Lalmohon | |
| LLP (%) | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| Diesel (%) | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| Owned (%) | 19.23 | 34.48 | 11.54 | 17.39 | 17.25 | 10.35 | 18.37 |
| Hired (%) | 80.77 | 65.52 | 88.46 | 82.61 | 82.75 | 89.65 | 81.63 |
| Maintenance cost (US\$/season) | 28.24 | 38.35 | 27.45 | 19.12 | 42.35 | 44.71 | 33.37 |

3.2 Testing of Solar PV System in Farmers' Field

The solar pumps were tested in all study areas individually. The suction heads were kept constant at 1.22 m, 1.25 m, 1.23 m, 1.21 m, 1.20 m and 1.15 m at BargunaSadar, Amtali, Kolapara, Galachipa, Lalmohon and Char FassonUpazila, respectively. A sample graph of BargunaSadar is presented in Fig. 1. It is revealed from the graph that the tested parameters e.g. solar radiation, voltage, current, and pump discharge were found to vary from location to location and at different times of a day. In all locations, the average and the maximum voltage varied from 24.48 to 28.94V, the current from 11.76 to 14.01 A, the solar radiation from 557 to 907 W/m². The discharge of the solar pump varied with solar radiation and solar radiation was also varied with time of the day and it reached to 907 W/m² at 1.00 pm and then maximum discharge was found to be 191.9 L/min. In other locations identical results to BargunaSadar were found out.

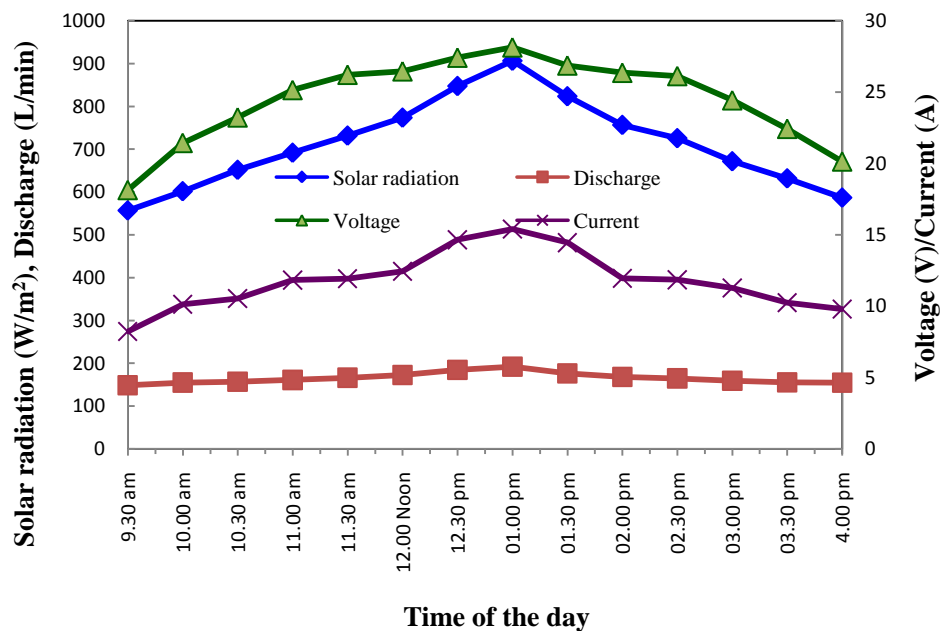


Fig. 1. Voltage, current, discharge and solar radiation at BargunaSadar.

3.3 Irrigation of Tomato

Yield and yield contributing parameters of tomato at BargunaSadarUpazila of Barguna district in 2019-20 are shown in Table 4. The plant population was 1.25 per m² in all locations. Significantly the highest yield (66.31 t/ha) of tomato was obtained from drip irrigation treatment followed by alternate furrow irrigation (AFI) (58.93 t/ha) and farmers practice i.e. every furrow irrigation (FI) (60.77 t/ha). There was significant difference between AFI and FI methods. In drip irrigation, plants get optimum water for nutrient uptake and produced higher plant height, number of fruits per plant, unit weight of fruit and fruit dimension than other treatments and hence produced highest yield of tomato. At AmtaliUpazila of Boguna district, significantly the highest yield of tomato was obtained in 2020-21 from drip irrigation than AFI and FI. AFI and FI treatments were statistically alike (Table 5). The trend of results of tomato for other locations were found similar.

Table 4. Yield and yield contributing characters of tomato at BargunaSadar, Barguna in 2019-20

| Treatment | Plant height (cm) | No. of fruits plant ⁻¹ | Unit weight (g fruit ⁻¹) | Fruit length (cm) | Fruit diameter (cm) | Yield (t ha ⁻¹) |
|-----------|-------------------|-----------------------------------|--------------------------------------|-------------------|---------------------|-----------------------------|
| Drip | 80.48 | 37.93a | 84.97 | 6.52 | 6.41 | 76.31a |
| AFI | 78.19 | 31.67b | 82.16 | 6.02 | 6.17 | 58.93b |
| FI | 74.14 | 31.16b | 83.06 | 6.22 | 6.28 | 60.77b |
| LSD | NS | 5.26 | 7.63 | NS | NS | 12.48 |
| CV (%) | 4.36 | 7.21 | 4.56 | 4.61 | 5.16 | 8.80 |

Note: AFI=alternate furrow irrigation, FI= Farmers practice (every furrow irrigation)

Table 5. Yield and yield contributing characters of tomato at Amtali, Barguna in 2020-21

| Treatment | Plant height, (cm) | No. of fruits plant ⁻¹ | Unit weight (g fruit ⁻¹) | Fruit length (cm) | Fruit diameter (cm) | Yield (t ha ⁻¹) |
|-----------|--------------------|-----------------------------------|--------------------------------------|-------------------|---------------------|-----------------------------|
| Drip | 113.43a | 55.93a | 49.32 | 4.63a | 5.11 | 75.81a |
| AFI | 104.64b | 48.92b | 47.51 | 4.35ab | 4.98 | 63.93b |
| FI | 105.59ab | 50.41b | 45.16 | 4.29b | 4.98 | 65.27ab |
| LSD | 8.60 | 5.22 | NS | 0.33 | NS | 11.37 |
| CV (%) | 3.67 | 4.65 | 6.35 | 3.46 | 2.34 | 7.66 |

3.4 Irrigation of Brinjal

Yield and yield contributing parameters of brinjal at BargunaSadarUpazila of Barguna district in 2019-20 are given in Table 6. There were 40 plants per 32 m² land i.e. plant population was 1.25 per m² at all locations for brinjal. The highest yield of brinjal was obtained from drip irrigation than AFI and FP methods. But it was statistically similar with FP. There were no significant differences in yield contributing parameters among the treatments except fruit diameter. Significantly higher fruit diameter of drip irrigation enhanced the highest yield in drip treatment. Similar results of brinjal were found for Amtali, Kalapara, Galachipa, Char Fasson. In Lalmohon, significantly higher yield was found in 2020-21 from drip and FP than AFI as shown in Table 7. But drip irrigation method and FI were statistically insignificant. Hence number of fruits per plant contributed higher yield in drip irrigation treatment as well as FI method. Hossain [20] presented similar results for drip irrigation in brinjal in plain land.

Table 6. Yield and yield contributing characters of brinjal at BargunaSadar, Barguna in 2020-21

| Treatment | Plant height (cm) | No. of fruits plant ⁻¹ | Unit weight (g fruit ⁻¹) | Fruit length (cm) | Fruit diameter (cm) | Yield (t ha ⁻¹) |
|-----------|-------------------|-----------------------------------|--------------------------------------|-------------------|---------------------|-----------------------------|
| Drip | 101.32 | 45.75 | 74.23 | 12.99 | 7.86a | 34.71a |
| AFI | 98.96 | 40.50 | 66.47 | 12.24 | 7.23b | 27.99b |
| FI | 99.83 | 41.75 | 69.39 | 12.66 | 7.47ab | 32.63ab |
| LSD | NS | NS | NS | NS | 0.54 | 5.99 |
| CV (%) | 2.64 | 8.41 | 5.73 | 4.32 | 3.33 | 8.68 |

Table 7. Yield and yield contributing characters of brinjal at Char Fasson, Bhola in 2020-21

| Treatment | Plant height (cm) | No. of fruits plant ⁻¹ | Unit weight (g fruit ⁻¹) | Fruit length (cm) | Fruit diameter (cm) | Yield (t ha ⁻¹) |
|-----------|-------------------|-----------------------------------|--------------------------------------|-------------------|---------------------|-----------------------------|
| Drip | 100.69 | 35.50 | 79.57 a | 10.87 | 7.80 | 28.53a |
| AFI | 97.71 | 32.00 | 67.48 b | 10.48 | 7.00 | 21.81b |
| FI | 98.71 | 33.25 | 72.95 ab | 10.54 | 7.40 | 26.45ab |
| LSD | NS | NS | 7.15 | NS | NS | 5.69 |
| CV (%) | 2.06 | 7.77 | 4.49 | 2.96 | 8.47 | 10.24 |

3.5 Water Applied to Tomato by Solar Pumps

Average amounts of water applied to tomato by solar pump for irrigation in different locations using different irrigation methods in 2019-20 is shown in Table 8. It is observed from the table that about double amount of water was required in

FI than drip method. Irrigation water savings in tomato by drip method and AFI method over FI in the study locations of the coastal region were 46-47%, and 31-35%, respectively. So, drip irrigation was method found a water saving technology for irrigating in tomato followed by AFI method. Similar results were found in the year 2020-21. This result is agreed with the findings of Hossain [20].

Table 8. Amount of water applied and water savings in tomato during 2019-20 in different locations

| Water application method | BargunaSadar | | Amtali | | Golachipa | | Lalmohon | |
|--------------------------|--------------------|------------------|--------------------|------------------|--------------------|------------------|--------------------|------------------|
| | Water applied (mm) | Water saving (%) | Water applied (mm) | Water saving (%) | Water applied (mm) | Water saving (%) | Water applied (mm) | Water saving (%) |
| Drip | 213 | 50.23 | 217 | 47.84 | 205 | 46.75 | 235 | 47.31 |
| AFI | 268 | 37.38 | 275 | 33.89 | 264 | 31.43 | 292 | 34.53 |
| FI | 428 | | 416 | | 385 | | 446 | |

3.6 Water Applied to Brinjal by Solar Pumps

The average water application in all locations by different irrigation methods using solar pump for irrigation in brinjal in 2019-20 is given in Table 9. Irrigation water savings in brinjal in AFI method and drip method over FI in different locations of the southern region were 34-36% and 47-49%, respectively. So, drip irrigation method was found the best water saving technology for irrigation in brinjal followed by AFI method. Similar results were obtained in the year 2020-21.

Table 9. Amount of applied water and water savings of brinjal during 2019-20 in different locations

| Water application method | BargunaSadar | | Amtali | | Golachipa | | Kolapara | | Char Fasson | | Lalmohon | |
|--------------------------|--------------|-------|--------|-------|-----------|-------|----------|-------|-------------|-------|----------|-------|
| | AW | WS** | AW | WS | AW | WS | AW | WS | AW | WS | AW | WS |
| Drip | 242 | 47.96 | 246 | 47.88 | 237 | 47.57 | 238 | 48.48 | 252 | 48.78 | 248 | 48.76 |
| AFI | 298 | 35.91 | 310 | 34.32 | 294 | 34.96 | 305 | 33.98 | 324 | 34.15 | 322 | 33.47 |
| FI | 465 | | 472 | | 452 | | 462 | | 492 | | 484 | |

*AW = Applied water (mm); **WS = Water saving (%)

3.7 Water Productivity of Tomato and Brinjal

Water productivity of tomato in the year 2019-20 are given in Table 10. Water productivity of solar pump drip irrigation and AFI in comparison of FP in 2019-20 were 181% and 121% higher. Drip irrigation required 48% and 21% lesser water than AFI and FI respectively for tomato production. There was no rainfall during the tomato growing season. In case of FI, seasonal water use was higher than drip (52%) and AFI (26%) due to loss of soil moisture. Yield of drip irrigated tomato was also higher than AFI and FI. Therefore, the highest water productivity was found from drip irrigation followed by AFI. Similar results were found for the year 2020-21. Water productivity of brinjal in the year 2020-21 are shown Table 11. It is observed from the table that drip irrigation and AFI saved 49% and 27.5% water respectively than conventional FI. Seasonal water use was also 32.7% lower than drip irrigation and 7.7% lower than AFI. Hence, water productivity of brinjal was 162% and 110% higher than drip and AFI, respectively. Similar results were also observed in 2019-20. It is also observed from the tables (Table 10 and Table 11) that water productivity of tomato was higher than brinjal due to crop duration of brinjal (4 months) was higher than tomato (3 months) and required more water in brinjal than tomato.

Table 10. Water productivity of tomato in 2019-2020

| Water application method | Average yield (t ha ⁻¹) | Applied water (mm) | Soil moisture use (mm) | Seasonal water use (mm) | Water productivity (kg ha ⁻¹ mm ⁻¹) | Water productivity as a % of FP |
|--------------------------|-------------------------------------|--------------------|------------------------|-------------------------|--|---------------------------------|
| Drip | 68.86 | 218 | 47 | 265 | 259.85 | 181.43 |
| AFI | 55.75 | 275 | 46 | 321 | 173.68 | 121.27 |
| FI | 57.86 | 419 | -15 | 404 | 143.22 | - |

Table 11. Water productivity of brinjal in 2020-2021

| Water application method | Average yield (t ha ⁻¹) | Applied water (mm) | Soil water use (mm) | Effective Rainfall (mm) | Seasonal water use (mm) | Water productivity (kg ha ⁻¹ mm ⁻¹) | Water productivity as a % of FP |
|--------------------------|-------------------------------------|--------------------|---------------------|-------------------------|-------------------------|--|---------------------------------|
| Drip | 45.85 | 283 | 36 | 20 | 339 | 135.25 | 161.61 |
| AFI | 42.76 | 403 | 30 | 32 | 465 | 91.96 | 109.88 |
| FP | 42.18 | 556 | -52 | 0 | 504 | 83.69 | - |

3.8 Solar Home System

Four panels each of 325 W_p (325 W_p×4 =1300 W_p) were required for operation of solar pump. Only one panel 325 W_p was used for SHS as shown in Table 12. The load for operating five LED dc bulb, two dc table fan and one mobile charger with total load was 75 W. Solar pump was used for irrigation as well as supplying of potable water for drinking and sanitation purposes. So, solar pump was used for multipurpose works in farm level such as irrigation, lightings, operating fans, supplying drinking water, sanitation and other purposes. Solar pump is used for irrigation purpose for about four months. Other than the irrigation season, the solar panels were successfully utilized for household uses such as lightings, operating fans, supplying drinking water, sanitation, etc.

Table 12. Field performance of solar home system at Kolapara, Patuakhali

| Item | PV (W) | Battery AH | Volt | Name of appliances | Numbers/ quantity | Power per appliance (W)/services | Total Load (W)/ quantity | Remarks |
|--------------|--------|------------|------|--------------------------------|-------------------|----------------------------------|--------------------------|-----------------------------------|
| SHS | 325 | 100 | 12 | Light | 5 | 7 | 35 | Working well |
| | | | | Fan | 2 | 12 | 24 | |
| | | | | Mobile phone | 2 | 8 | 16 | |
| Water supply | 1300 | | | Sanitation and drip irrigation | 500 L tank | Basin tap | 1 | Improved sanitation and hand wash |
| | | | | | | Toilet tap | 1 | |
| | | | | | | Bath tap | 2 | |

3.9 Environmental Benefits of Solar Pump

Amount of the carbon emitted from the diesel and electricity operated LLPs is given in Table 13. Considering 8 hours per day of irrigation operation in 80 days per season it is noticed from the table that total amount of diesel emitted from LLP was 108406272 L from which carbon emission was found 303538 ton per year. It was also found that using single solar pump of 0.8 kW instead of diesel pump of 2.98 kW about 1.76 ton of carbon emission can be reduced per year and during 20 years of economic life 35.28 ton of carbon can be reduced and the monetary benefit would be about USD 30353756. Solar energy is environment friendly and zero carbon emission renewable energy. Therefore, solar irrigation pump can be used for irrigation purpose that can make environment pollution free and clean.

Table 13. Carbon emission and environmental monetary benefit from solar pump in 20 years

| Name of the pump | LLP | LLP |
|-------------------------------|-------------|--------|
| Mode of operation | Electricity | Diesel |
| Number of the pump | 11822 | 164656 |
| Operation per season, day | 80 | 80 |
| Operation hour/day | 8 | 8 |
| Capacity, kW | 2 | 2.98 |
| Power consumption, kWh/season | 1280 | - |
| Fuel used, L/season | - | 640 |

| | | |
|--|-----------|-----------|
| Total diesel used for surface water lifting, MWh | 15132 | - |
| Amount of diesel, L | 3026432 | 105379840 |
| Total amount of diesel | 108406272 | - |
| CO _{2e} , ton | 303538 | - |
| Money, USD | 30353756 | - |

3.10 The Opportunity and Benefit of Solar Systems

Solar panel can be used in versatility such as solar home system, use of small farm machinery, use pump for drinking purpose, drainage purposes which finally balance the capital cost of solar irrigation systems. In this study it was observed that using large solar pumps return per year from SHS, drinking purpose, drainage purpose and small agricultural machinery like winnower used for winnowing purpose were USD 30 (for single panel of 250 W_p), USD 85, USD 3.50 and USD 70 per year, respectively. In such way, solar system can reduce the cost of electricity and maintain a quality life of user. After fulfilling own requirement, solar pump owner also work as a service provider. As there was no complicated device to operate the solar pump and related system. Only on-off switch was used to start and stop the pump. So, woman can easily use this system without environmental and health hazard.

4. CONCLUSION

In the areas under experimentation, 100% of irrigation was done using surface water by small diesel engine operated LLP. The discharge of the solar pump varied with solar radiation and time of a day. Yields of tomato and brinjal in drip irrigation were higher than AFI and FI. Similar yields of tomato and brinjal were found in AFI and FI. Solar pump was found more economical than diesel operated pump for vegetable cultivation. Its maintenance cost, energy cost and operating cost were lower compared to those of diesel-powered pump. A small solar pump of 0.8 kW reduced 1.76 ton of carbon emission per year than a similar diesel engine operated pump. The solar panels were used for both irrigation and household use thus making it more profitable than low lift pump. Farmers in the project areas are using the solar panels for irrigation, lightings, operating fans, supplying drinking water, sanitation and other purposes. Therefore, solar pump is a technology for small holder farmers enabling them climate resilient in the coastal region of Bangladesh.

REFERENCES

- Hossain, MA. Solar pump irrigation in Bangladesh: A sustainable solution to mitigate energy crisis. A Key-note paper presented in the BAS-IAP-AASSA Symposium on Nature for Sustainable Development on 7-8 October, 2023 at Bangladesh Academy of Sciences (BAS), Dhaka, Bangladesh.
- BADC. Minor Irrigation Survey Report 2020-21(Rabi Season). Bangladesh Agricultural Development Corporation (BADC), Nagar Sech-Bhaban, Manikmia Avenue, Sher e Bangla, Dhaka-1207.2022.
- Hossain MA, Hoque MA, Kamar SSA, Rahman MA, Mottalib MA. Economic feasibility of solar pumps in southern region of Bangladesh. *Bangladesh Journal of Agricultural Research*. 2022; 47(2): 241-255.
- Mitra A, Alam MF, Yashodha Y. Solar irrigation in Bangladesh: a situation analysis report. Colombo, Sri Lanka: International Water Management Institute (IWMI). 2021; 39p. doi: <https://doi.org/10.5337/2021.216>
- CVI. Climate Vulnerability Index. Local Government Initiative on Climate Change (LoGIC, UNDP. 2023; www.undp.org
- Climatewatch. Historical GHG Emissions. 2023; https://www.climatewatchdata.org/ghg-emissions?breakBy=gas&end_year=2020&gases=®ions=WORLD%2CBGD&source=Climate%20Watch&start_year=1990
- World Bank. Climate-Smart Agriculture in Bangladesh. CSA Country Profiles for Asia Series. International Center for Tropical Agriculture (CIAT); World Bank. Washington, D.C. 2017; 28 p.
- Belton B, Azad A. The characteristics and status of pond aquaculture in Bangladesh. *Journal of Aquaculture*. 2012; 53(2) 358–359.
- Biswas H, Hossain F. Solar pump: A possible solution of irrigation and electric power crisis of Bangladesh. *International Journal of Computer Applications*. 2013; 62(16):1-5.
- Doorenbos, J, Pruitt WO. Guidelines for predicting crop water requirements. Irrigation and Drainage Paper 24, Food and Agriculture Organization of the United Nations. Rome. 1977.
- Smith M. CROPWAT. A computer program for irrigation planning and management. FAO Irrigation and Drainage Paper 46. Food and Agriculture Organization of the United Nations. Rome. 1992; pp: 126.
- Okasha AM, Deraz N, Elmetwalli AH, Elsayed S, Falah MW, Farooque AA, Yaseen ZM. Effects of irrigation method and water flow rate on irrigation performance, soil salinity, yield, and water productivity of cauliflower. *Agriculture*.2022;12:1164. <https://doi.org/10.3390/agriculture12081164>.

13. Hossain MA, Hassan, MS, Mottalib, MA, Hossain M. 2015. Feasibility of solar pump for sustainable irrigation in Bangladesh. *International Journal of Energy and Environmental Engineering*. 2015; 6: 147-155.
14. Grace PR. Rice-wheat system and climatic change. In *Addressing Resource Conservation Issues in Rice-Wheat Systems of Sough Asia: A Resource Book*, Rice-Wheat Consortium for the Indo-Gangetic Plains. International. Maize and Wheat Improvement. Center, New Delhi, India. 2003; pp 63-67.
15. Hossain M Ayub, Hoque M Arshadul, Saha KK, Amin MN, Hassan MS. Production of biodiesels from jatropha seeds and use in farm engines. *Procedia Engineering*. 2014.; 431–436.
16. Islam MT, Hossain ME. Economic Feasibility of Solar Irrigation Pumps: A Study of Northern Bangladesh. *International Journal of Renewable Energy Development*. 2022; 11(1) 1-13.
17. Deb A, Bhuiyan MAM, Nasir A. Prospects of solar energy in Bangladesh. *IOSR Journal of Electrical and Electronics Engineering*. 2013; 4(5) 46-57.
18. Keith DW, Holmes G, Angelo D, Heidel K. A Process for capturing CO₂ from the atmosphere. 2018; 2(8):1573–1594.
19. Krupnik Timothy J, UrsSchulthess, Zia Uddin Ahmed, Andrew J McDonald. Sustainable crop intensification through surface water irrigation in Bangladesh? A geospatial assessment of landscape-scale production potential. *Land Use Policy*. 2017; 60: 206–222.
20. Hossain MA, Hassan MS, Ahmmed S, Islam MS. Solar pump irrigation system for green agriculture. *Agricultural Engineering International: CIGR Journal*. 2014; 16(4): 1-15.

UNDER PEER REVIEW