

Influence of Variation in Tie Reinforcement Diameter on the Ductility of Reinforced Concrete Columns

ABSTRACT

Reinforced concrete columns are crucial structural elements in ensuring the strength and stability of buildings. Column ductility, which is the ability to absorb energy and undergo deformation before failure, is a primary concern in structural engineering, especially in extreme external loading situations such as earthquakes. This study aims to evaluate the influence of variation in shear reinforcement diameter on the ductility of reinforced concrete columns using Xtract software. The research method involves creating column structure models with specified dimensions and specifications, followed by the gradual application of axial loads to each model. Three models were created with varying shear reinforcement diameters, namely 10 mm, 12 mm, and 14 mm. Structural analysis was conducted to examine the structure's response to the applied axial and moment loads, including evaluation of stresses, deformations, and column capacities. The analysis results show differences in ductility levels among the models. The model with a 10 mm shear reinforcement diameter achieves higher ductility levels at low axial loads but fails to meet the requirements at higher axial loads according to the SNI 1726:2019 standard. However, models with shear reinforcement diameters of 12 mm and 14 mm also exhibit a similar pattern, with good ductility at low axial loads but failing to meet the requirements at higher axial loads. In conclusion, variations in shear reinforcement diameter affect the ductility of reinforced concrete columns. To ensure full ductility under various axial load conditions, adjustments to the design or specifications of the reinforced concrete column structure are necessary. This research contributes to understanding the factors influencing the ductility of reinforced concrete columns and can serve as a basis for the development of more effective design methods in the future.

Keywords: concrete, columns, Xtract, software

1. INTRODUCTION

In the world of structural engineering, reinforced concrete columns play a crucial role in ensuring the strength and stability of buildings. Columns are responsible for supporting vertical and lateral loads in buildings, making them crucial structural elements [1, 2]. With the advancement of technology and knowledge in the field of structural engineering, significant progress has been made in the methods and techniques of designing and analyzing structures, aiming to improve the ductility performance of reinforced concrete columns [3]. Ductility is one of the important aspects in structural engineering, referring to the ability of a structure to absorb energy and undergo significant deformation before reaching ultimate failure, especially in extreme external loading situations such as earthquakes.

The background of this research refers to the importance of a deep understanding of the factors influencing the ductility of reinforced concrete columns. Although structural engineering practices have reached a high level of complexity, there is still a lack of understanding regarding the influence of shear reinforcement diameter on column ductility

29 [4]. Shear reinforcement, which is a key element in increasing the capacity and ductility of
30 reinforced concrete columns, still requires further research to understand how variations in
31 shear reinforcement diameter can affect ductility behavior.

32
33 The issue addressed in this research is the influence of shear reinforcement diameter
34 variation on the ductility of reinforced concrete columns. To address this issue, the research
35 will delve into the failure mechanisms of reinforced concrete column structures, the
36 principles of concrete and reinforcement steel material behavior, and the theories related to
37 column ductility. Basic concepts such as failure mechanisms in reinforced concrete columns,
38 the role of shear reinforcement in increasing column capacity and ductility, and the principles
39 of structural design under extreme external loading conditions will be the focus of this
40 research.

41
42 The main objective of this research is to systematically evaluate the influence of shear
43 reinforcement diameter variation on the ductility of reinforced concrete columns using Xtract
44 software. It is hoped that this research will make a significant contribution to understanding
45 the structural behavior of reinforced concrete columns in facing various external loading
46 conditions and provide a strong basis for the development of more effective and efficient
47 design methods to improve the ductility of reinforced concrete columns in the future.

48
49 Several previous studies have attempted to understand the influence of shear reinforcement
50 diameter on the ductility of reinforced concrete columns. One significant study is the work of
51 [4 – 7], where researchers conducted a series of experiments to analyze how variations in
52 shear reinforcement diameter affect column capacity and ductility behavior. The results
53 showed that increasing the shear reinforcement diameter can increase column capacity and
54 ductility, but there is an optimal limit that needs to be considered.

55
56 The use of structural analysis software has become an important part of research related to
57 the ductility of reinforced concrete columns [8, 9]. Several studies have used software such
58 as SAP2000, ETABS, and ANSYS to simulate and numerically analyze reinforced concrete
59 columns with various shear reinforcement configurations [10 – 12]. The use of this software
60 allows researchers to model and analyze column behavior under various loading and
61 reinforcement configurations.

62
63 Theories related to the design of reinforced columns are also continuously evolving.
64 Concepts such as performance-based design and failure mechanism-based design are
65 major concerns in efforts to improve the ductility of reinforced concrete columns [13]. This
66 approach allows for designing structures by considering the ductility behavior of columns
67 holistically, rather than focusing solely on structural strength.

68
69 Understanding the behavior of concrete and reinforcement steel materials is also
70 continuously evolving. Experimental research and numerical analysis have been conducted
71 to understand the response of these materials to lateral loads and extreme environmental
72 conditions [14, 15]. This is important in developing accurate mathematical models to predict
73 the ductility behavior of reinforced concrete columns with various reinforcement
74 configurations.

75 In addition to shear reinforcement diameter, there are also studies exploring other factors
76 that affect the ductility of reinforced concrete columns. For example, the influence of
77 structural stiffness, longitudinal reinforcement configuration, and planning and construction
78 methods can play an important role in determining column ductility [15 – 18].

79

80 **2. METHODS**

81

82 The first step is to create a reinforced concrete column structure model using Xtract
83 software. The first model has dimensions of 600 mm x 600 mm with a 75 mm thick concrete
84 cover. This rectangular column shape has dimensions of 600x600 mm for the unconfined
85 region and 450x450 mm for the confined region. The materials used include concrete with a
86 compressive strength of 30 MPa and reinforcement steel with a tensile strength of 420 MPa.
87 The main reinforcement consists of 16 bars with a diameter of 25 mm, while the shear
88 reinforcement has a diameter of 10 mm.

89

90 Next, Model 2 and Model 3 are created, maintaining the specifications of Model 1 except for
91 the shear reinforcement diameter. In Model 2, the shear reinforcement diameter is set to 12
92 mm, while in Model 3, it is set to 14 mm. This variation is done to evaluate the impact of
93 shear reinforcement diameter on the ductility of reinforced concrete columns.

94

95 After the models are created, axial loads are gradually applied to each model. Axial loads of
96 1000 kN, 2500 kN, and 5000 kN are applied to the columns to create different moments
97 about the X-axis (Mxx). Structural analysis is then performed using Xtract software to
98 examine the structure's response to the applied axial and Mxx loads. The analysis includes
99 evaluation of stresses, deformations, and column capacities at each load stage.

100

101 The analysis results will be observed and interpreted to understand the ductility behavior of
102 reinforced concrete columns in each model. The variation in shear reinforcement diameter is
103 evaluated to see its effect on column ductility capacity. A comparison between Model 1,
104 Model 2, and Model 3 is made to draw conclusions about the effects of shear reinforcement
105 diameter variation on the ductility of reinforced concrete columns.

106

107 Thus, it is expected that this research will provide a better understanding of the factors
108 influencing the ductility of reinforced concrete columns and can serve as a basis for the
109 development of more effective design methods in the future.

110

111 **3. RESULTS AND DISCUSSION**

112

113 **3.1 Model 1: Shear Reinforcement Diameter 10 mm**

114

115 The analysis results show that in Model 1, the reinforced concrete column achieves varying
116 levels of ductility depending on the applied axial load. At an axial load of 1000 kN, the
117 Curvature Ductility value obtained is 22.29, indicating that the column has very good ductile
118 capacity. However, at an axial load of 2500 kN, the Curvature Ductility value decreases to
119 15.47, and at an axial load of 5000 kN, it decreases further to 13.71.

120

121 In the context of the SNI 1726:2019 standard, to ensure full ductility of a reinforced concrete
122 column structure, the recommended Curvature Ductility value should be greater than 16.
123 Based on the results obtained, in Model 1, the Curvature Ductility value at an axial load of
124 1000 kN meets this requirement, so the column can be considered to have full ductility
125 according to the standard. However, at axial loads of 2500 kN and 5000 kN, the Curvature
126 Ductility value is below the recommended standard value. This indicates that in both load
127 conditions, the column does not achieve full ductility according to the requirements of SNI
128 1726:2019. The decrease in Curvature Ductility value with increasing axial load indicates
129 that the column experiences a degradation in ductile performance.

130


131 Additionally, the results of modeling the column structure with a 10 mm shear reinforcement
132 diameter are shown in Figure 1. Column structure deformations can also be seen in Figure 2

133 for all tested axial loads. Furthermore, the curvature-moment relation and curvature-moment
 134 bilinearization of the column are displayed in Figure 3 for all axial loads.

135

136 From these results and discussions, it can be concluded that Model 1 meets the requirement
 137 of full ductility according to the SNI 1726:2019 standard at an axial load of 1000 kN but not
 138 at axial loads of 2500 kN and 5000 kN. Therefore, to ensure full ductility under various axial
 139 load conditions, adjustments to the design or specifications of the reinforced concrete
 140 column structure are necessary.

141




142


143

144 **Fig. 1. Modeling of column structure with shear reinforcement diameter of 10 mm**


145



a) Axial load 1000 kN



b) Axial load 2500 kN




c) Axial load 5000 kN


146

147 **Fig. 2. Column structure deformation**


148

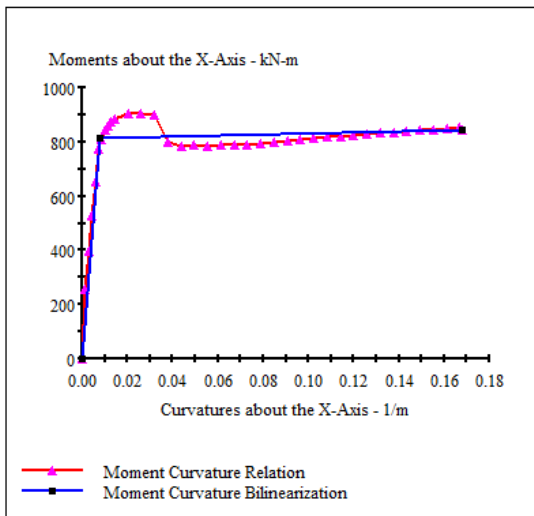

a) Axial load 1000 kN

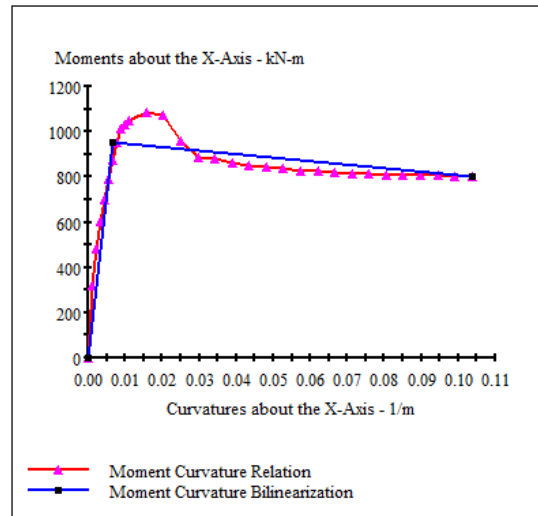

b) Axial load 2500 kN

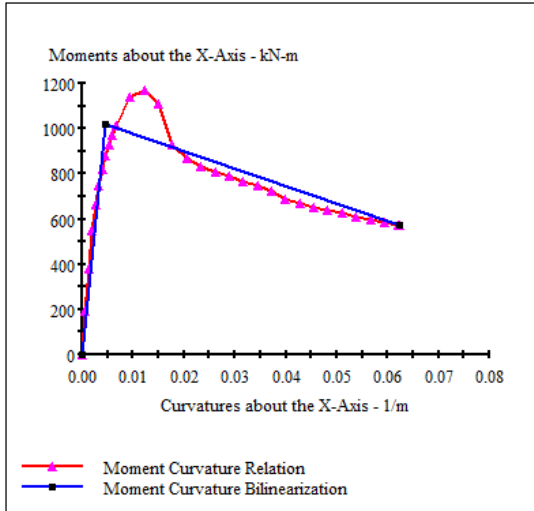

c) Axial load 5000 kN

149

150

Fig. 3. Curvature-moment relation and curvature-moment bilinearization

151

152

3.2 Model 2: Shear Reinforcement Diameter 12 mm

153

154

155

156

157

158

159

The analysis results for Model 2 show variations in the ductility level of the reinforced concrete column depending on the applied axial load. At an axial load of 1000 kN, the Curvature Ductility value obtained is 22.21, indicating that the column has good ductile capacity. Although the Curvature Ductility value in Model 2 is slightly lower than in Model 1 at the same axial load, it still meets the requirement for full ductility according to the SNI 1726:2019 standard.

160

161

162

163

164

At an axial load of 2500 kN, the Curvature Ductility value in Model 2 is 15.46, while at an axial load of 5000 kN, it decreases to 13.75. Although the Curvature Ductility value in Model 2 tends to be lower than in Model 1 at the same axial load, both are still below the minimum value recommended by the standard, indicating that the column does not achieve full ductility under both load conditions.

165


166

167

168

169

The results of modeling the column structure with a 12 mm shear reinforcement diameter are shown in Figure 4. Column structure deformations for Model 2 can be seen in Figure 5 for all tested axial loads. Furthermore, the curvature-moment relation and curvature-moment bilinearization of the column are displayed in Figure 6 for all axial loads.




170

171


172

173


Fig.4. Modeling of column structure with shear reinforcement diameter of 12 mm



a) Axial load 1000 kN




b) Axial load 2500 kN




c) Axial load 5000 kN

174
175
176


Fig. 5. Column structure deformation

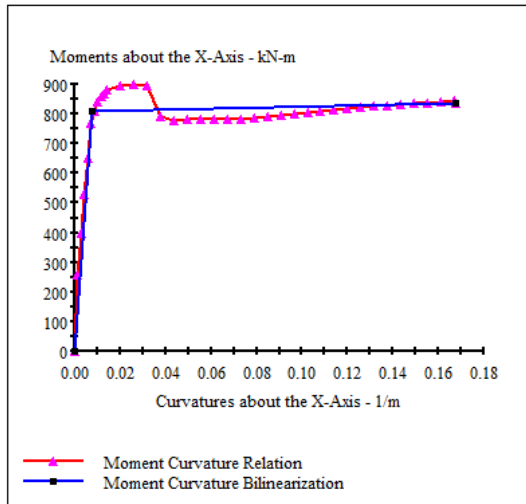

a) Axial load 1000 kN

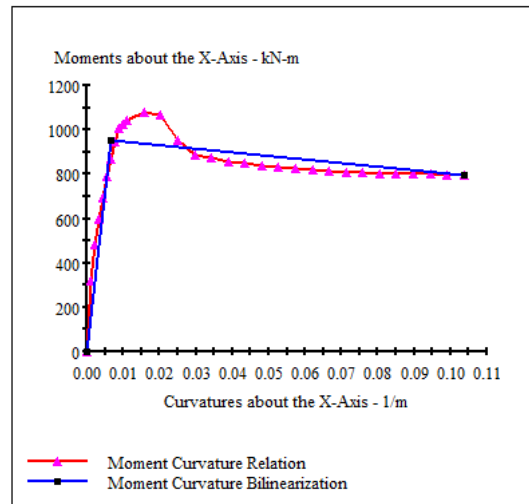

b) Axial load 2500 kN

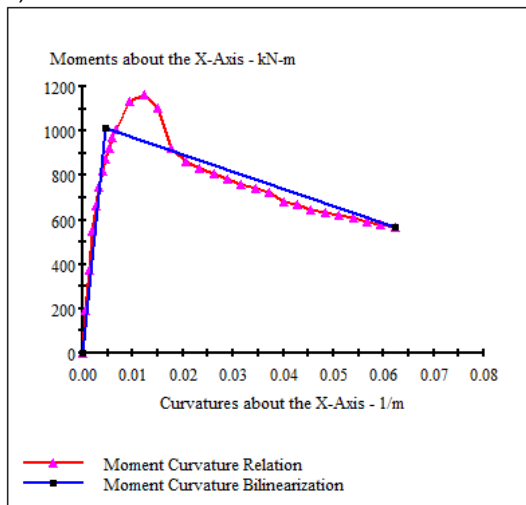

c) Axial load 5000 kN

177
178
179
180
181
182
183

Fig.6. Curvature-moment relation and curvature-moment bilinearization


3.3 Model 3: Shear Reinforcement Diameter 14 mm

The analysis results for Model 3 show variations in the ductility level of the reinforced concrete column depending on the applied axial load. At an axial load of 1000 kN, the

184 Curvature Ductility value obtained is 22.13, indicating that the column has good ductile
 185 capacity. Although the Curvature Ductility value in Model 3 is slightly lower than in Model 1
 186 at the same axial load, it still meets the requirement for full ductility according to the SNI
 187 1726:2019 standard.


188 At an axial load of 2500 kN, the Curvature Ductility value in Model 3 is 15.45, while at an
 189 axial load of 5000 kN, it increases to 13.79. Although there is an increase in the Curvature
 190 Ductility value in Model 3 at an axial load of 5000 kN compared to 2500 kN, both are still
 191 below the minimum value recommended by the standard, indicating that the column does
 192 not achieve full ductility under both load conditions.

193 The results of modeling the column structure with a 12 mm shear reinforcement diameter are
 194 shown in Figure 7. Column structure deformations for Model 3 can be seen in Figure 8 for all
 195 tested axial loads. Furthermore, the curvature-moment relation and curvature-moment
 196 bilinearization of the column are displayed in Figure 9 for all axial loads.
 197




198
 199
 200
 201

Fig.7. Modeling of column structure with shear reinforcement diameter of 14 mm

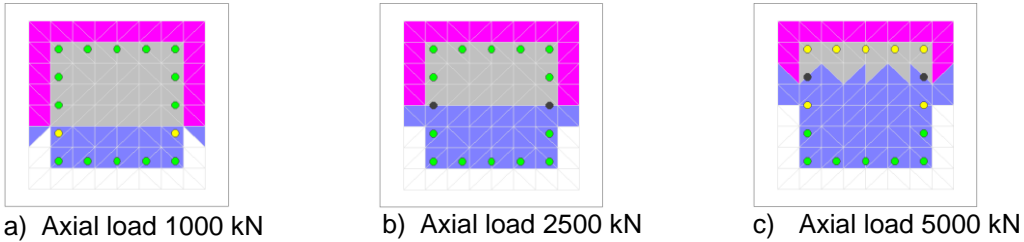


202
 203
 204


Fig. 8. Column structure deformation

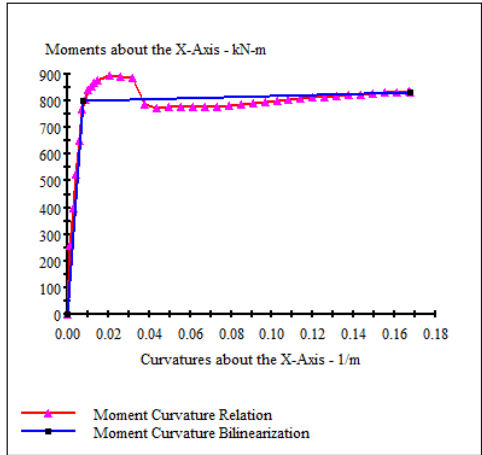

a) Axial load 1000 kN

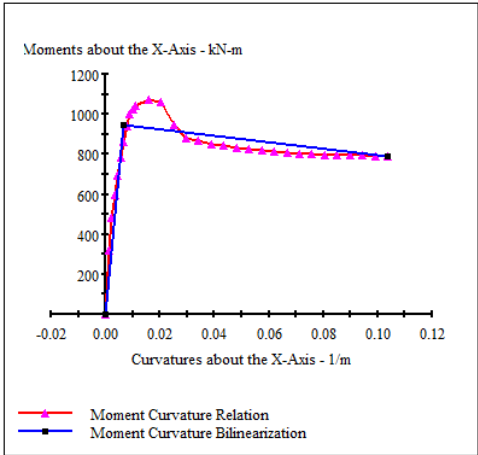

b) Axial load 2500 kN

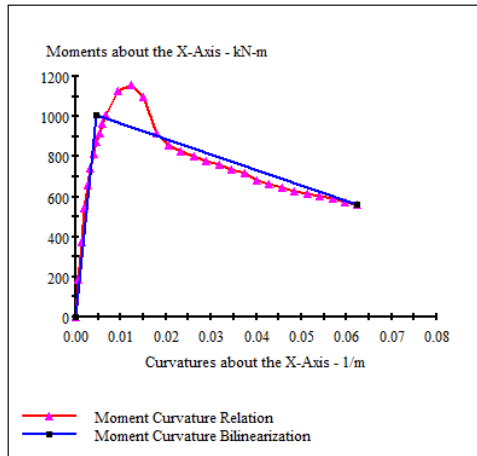

c) Axial load 5000 kN

205

206

Fig.9. Curvature-moment relation and curvature-moment bilinearization

207

208

4. CONCLUSION

209

210

211

212

213

214

215

216

217

218

219

220

221

REFERENCES

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

1. Gkournelos, P. D.; Triantafillou, T. C.; Bournas, D. A. Seismic Upgrading of Existing Reinforced Concrete Buildings: A State-of-The-Art Review. *Engineering Structures*, 2021, 240: 112273.
2. Adam, J. M., Parisi, F., Sagaseta, J., & Lu, X. Research And Practice On Progressive Collapse And Robustness of Building Structures In The 21st Century. *Engineering Structures*, 2018, 173: 122-149.
3. Siddika, A., Al Mamun, M. A., Ferdous, W., & Alyousef, R. Performances, Challenges And Opportunities In Strengthening Reinforced Concrete Structures By Using Frps—A State-of-The-Art Review. *Engineering Failure Analysis*, 2020, 111: 104480.
4. Ou, Yu-Chen; Kurniawan, Dimas P. Shear Behavior of Reinforced Concrete Columns With High-Strength Steel And Concrete. *Aci Structural Journal*, 2015, 112.1: 35-45.
5. Jumaa, Ghazi Bahroz; Yousif, Ali Ramadhan. Numerical Modeling of Size Effect In Shear Strength Of Frp-Reinforced Concrete Beams. In: *Structures*. Elsevier, 2019. P. 237-254.
6. Trejo, David; Link, Timothy B.; Barbosa, André R. Effect of Reinforcement Grade And Ratio On Seismic Performance of Reinforced Concrete Columns. *Aci Structural Journal*, 2016, 113.5.
7. Nogueira, Caio Gorla; Rodrigues, Isabela Durci. Ductility Analysis of Rc Beams Considering The Concrete Confinement Effect Produced By The Shear Reinforcement:

- 242 A Numerical Approach. *Latin American Journal of Solids And Structures*, 2017, 14:
243 2342-2372.
- 244 8. Hidayat, B. A., Hu, H. T., Hsiao, F. P., Han, A. L., Sosa, L., Chan, L. Y., & Haryanto, Y.
245 Seismic Behavior And Failure Modes of Non-Ductile Three-Story Reinforced Concrete
246 Structure: A Numerical Investigation. *Computers And Concrete*, 2021, 27.5: 457-472.
- 247 9. Jin, L., Zhang, S., Li, D., Xu, H., Du, X., & Li, Z. A Combined Experimental And
248 Numerical Analysis on The Seismic Behavior of Short Reinforced Concrete Columns
249 With Different Structural Sizes And Axial Compression Ratios. *International Journal of*
250 *Damage Mechanics*, 2018, 27.9: 1416-1447.
- 251 10. Krishnan, Ragi; Sivakumar, Vidhya Lakshmi. Profound Impact of Shear Wall On
252 Stability of Regular And Irregular Reinforced Concrete Structures—A Review. *Materials*
253 *Today: Proceedings*, 2023.
- 254 11. Lalotra, Balwinder; Singhal, Dharendra. State of The Art Report-A Comparative Study of
255 Structural Analysis and Design Software-Staad Pro, Sap-2000 &Etabs Software.
256 *International Journal of Engineering And Technology*, 2017, 9.2: 1030-1043.
- 257 12. Nasr, N. E., Fayed, M. N., Hussien, G., & El-Makhlasi, A. M. The Effect of Shear Wall
258 Openings on The Response Reduction Factor. *Civil Engineering Journal*, 2022, 8.4:
259 796-822.
- 260 13. Ćosić, Mladen; Brčić, Stanko. He Development of Controlled Damage Mechanisms-
261 Based Design Method for Nonlinear Static Pushover Analysis. *Facta Universitatis*,
262 *Series: Architecture And Civil Engineering*, 2014, 25-40.
- 263 14. He, Xiacong; Gu, Fengshou; Ball, Andrew. A Review of Numerical Analysis of Friction
264 Stir Welding. *Progress in Materials Science*, 2014, 65: 1-66.
- 265 15. McDowell, M. T., Lee, S. W., Nix, W. D., & Cui, Y. 25th Anniversary Article:
266 Understanding The Lithiation of Silicon and Other Alloying Anodes for Lithium-Ion
267 Batteries. *Advanced Materials*, 2013, 25.36: 4966-4985.
- 268 16. Wu, D., Ding, Y., Su, J., Li, Z. X., Zong, L., & Feng, K. Effects Of Tie Detailing
269 Configurations on Reinforcement Buckling and Seismic Performance of High-Strength
270 Rc Columns. *Soil Dynamics And Earthquake Engineering*, 2021, 147: 106791.
- 271 17. AlAjarmeh, O. S., Manalo, A. C., Benmokrane, B., Karunasena, K., Ferdous, W., &
272 Mendis, P. Hollow Concrete Columns: Review of Structural Behavior and New Designs
273 Using Gfrp Reinforcement. *Engineering Structures*, 2020, 203: 109829.
- 274 18. Deng, M., Ma, F., Song, S., Lü, H., & Sun, H. Seismic Performance of Interior Precast
275 Concrete Beam-Column Connections with Highly Ductile Fiber-Reinforced Concrete In
276 The Critical Cast-In-Place Regions. *Engineering Structures*, 2020, 210: 110360.

277
278

APPENDIX