

1
2
3
4
5
6
7
8
9
10

Developing and Assessing Performance of a Laboratory-Scale Fluidized Bed Dryer

ABSTRACT

A laboratory-scale batch fluidized bed dryer with 75 mm bed diameter was designed, fabricated and evaluated to study the hydrodynamics of river sand as well as the drying of cassava mash and bitter kola particulates. The hydrodynamics properties such as minimum fluidization velocity, effect of bed height and pressure drop across the bed, effect of particle size and density on minimum fluidization velocity and stability of the bed column of river sand were studied. Drying of cassava mash to edible garri was carried out at in fluidized bed dryer at controlled temperatures. Drying characteristics of the laboratory fluidized bed dryer was compared with the laboratory WiseVen oven (model number: WOF - 105) using bitter kola particulate material sample. The experimental results from laboratory-scale fluidized bed dryer showed that the minimum fluidization velocity increases as material density increases and the value of the minimum fluidization velocity obtained from the fluidized bed gave good agreement with other empirical correlation such as Kozeny-Carman Equation. The fluidized bed dryer showed high rates of moisture removal over the conventional oven with the ratio of 1:29 under the same operating conditions. Drying of cassava mash to edible garri was achieved at lower drying temperatures of $83\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ at 55 minutes when compared to conventional frying temperatures of cassava mash to edible at $180 - 200\text{ }^{\circ}\text{C}$ thereby saving energy cost. Hence, this fluidized bed dryer is recommended for use in demonstrating hydrodynamics and drying of particulate materials in the laboratory.

11
12
13
14
15
16
17

Keywords: Fluidized bed dryer design, hydrodynamics, heat transfer, minimum fluidization velocity, drying.

1. INTRODUCTION

18
19
20
21
22
23
24
25
26
27
28
29
30
31

Fluidization is a process whereby fine solids are transformed into a fluid-like state in the fluidized bed through contact with a gas [1-2]. Fluidized bed operations are usually carried out within a given flow regime [3]. Due to favourable heat and mass transfer characteristics of fluidization, fluidized beds are primarily used for gas-solid contacting processes [4]. According to [5] and [6], moving particles play an important role in the wall-to-bed heat transfer processes of which wall-to-bed heat transfer processes is higher than those in single-phase gas flow as well as those in fixed beds. Fluidized bed has advantages in industrial applications in areas involving heterogeneous heat transfer, drying, mass transfer and chemical reactor due to the excellent contacting ability between the solid and fluid phase [7]. [8] showed that mixing and heat transfer processes are very rapid and the exit gas usually saturated with vapour for any allowable fluidization velocity.

Studies showed that drying process is greatly affected by the internal heat transfer whereas the gas pressure distribution effect is insignificant [9]. [10] studied the heating of gas in

32 fluidized bed of sand particles irradiated indirectly by concentrated solar energy and pointed
33 out that the heating process is strongly affected by the gas fluidizing velocity and the wind
34 speed. [11] described convective and radiative heat transfer gas-solid in fluidized bed
35 whereas [12] had shown the effect of radiative heat transfer contribution to total heat transfer
36 of about 13% and 18% for at high operating temperature of 400 °C and 600 °C respectively
37 in the gas-solid in fluidized bed. Studies showed that there are three distinct mechanisms of
38 heat transfer in fluidized beds namely (i) fluid-to-particle, (ii) particle-to-fluid and (iii) wall-to-
39 bed [13 -14].

40

41 Heat transfer in gas-fluidized beds may be described as a complex mutual interactions of
42 fluid mechanics, particle dynamics and the thermal properties of the involved media [15].
43 Good knowledge of the heat-transfer characteristics between the fluidization moving
44 particles and the dense bed are important for the design of units utilizing the fluidized bed
45 system [16]. [17] showed that heat transfer characteristics are relevant at transition between
46 packed and fluidized bed operations. Studies showed that fluidized bed is the most useful
47 method for drying particles or granules in pharmaceutical and food industries [18-19] due to
48 increase in surface area of the particles [20]. Thermal efficiency of the fluidized bed
49 dryers is most important item for variety of drying applications [21].

50

51 According to [22], the particle-phase pressure arising from flow-induced velocity fluctuations
52 decreased with increased in concentration of particles. Ergun equation showed that the ratio
53 of pressure gradient to superficial fluid velocity in a column is a linear function of fluid mass
54 flow rate, and the constants of this linear relationship are particle specific surface, fractional
55 void volume, and fluid viscosity [23]. [24] showed that in fluidized bed processes, bed
56 pressure drop is crucial as it determines the pumping power required for fluidization. [25]
57 used pressure signal to investigate the fluid-dynamic behaviour of gas–solid fluidized beds in
58 comparison to those obtained from modelling or experimentation and [26] used pressure
59 fluctuations to investigate the effect of particles distribution in gas–solid fluidized beds.
60 Fluidization processes have wide application in many industries ranging from heavy
61 chemicals, mining, food, fine chemicals, petroleum, and pharmaceutical industries [27]. For
62 drying of powders in the 50 to 2000 μm range, fluidized beds compete successfully with
63 other dryer, such as: rotary, tunnel, conveyor, and continuous tray [28-29].

64

65 Studies showed that fluidized bed dryers are classified based on operating pressures,
66 processing mode, fluidizing gas flow and fluidized materials. According to [28], the
67 advantages of fluidized bed dryer include: ease of control, high drying rates, smaller flow
68 area, higher thermal efficiency, lower capital and maintenance costs when compared to
69 rotatory dryers. However, [28] pointed out some limitations such as: not generally
70 recommended for drying materials when organic solvents need to be removed, higher power
71 consumption needed to suspend the entire bed in gas phase, increase in gas handling, high
72 potential of attrition due to granulation or agglomeration and potential of de-fluidization for
73 feed that is too wet.

74 To overcome some of the limitations or problems encountered with conventional fluidized
75 bed dryer during drying processes, other modified fluidized bed dryers were developed for
76 used by [30]. They are: hybrid fluidized bed dryers, pulsating fluidized bed dryers, fluidized
77 bed dryer with immersed heat exchanger, mechanically assisted fluidized bed dryer, vibrated
78 fluidized bed dryer, agitated fluidized bed dryer/swirl fluidizers, fluidized bed dryers of inert
79 particles, spouted bed dryer, recirculating fluidized bed dryer, jetting fluidized bed dryer,
80 superheated steam fluidized bed dryer, fluidized bed freeze dryer and heat pump fluidized
81 dryers

82

83 The drying application of fluidization technique for particulate materials in industry dated as
84 far back 1940s [31]. According to [32], fluidized bed drying has the advantage of high
85 intensity of drying and high thermal efficiency with controllable temperature due to high rates
86 of heat and mass transfer which reduces the drying time in the fluidized bed dryer. It is
87 convenient to dry heat sensitive food materials in fluidized bed dryer as it prevent them from
88 overheating due to its mixing characteristics [33]. The drying process with fluidized bed
89 drying reduces the drying time in the drying when compared with conventional oven by ten to
90 twenty times [34].According to [35], gelatinization temperatures during garri processing are
91 within (70 - 90 °C), and frying temperatures are within (180 - 200 °C) using traditional
92 methods. [36] used rotary dryer to dry cassava mash to edible garri. [37] developed a
93 fluidized bed dryer with centrifugal blower incorporated with 9 kW air heater to fry 2 kg of
94 garri at drying temperature of 120 -150 °C within 18 - 24 minutes.

95
96
97
98

2. METHODOLOGY

2.1 Mathematical modelling of fluidized bed unit

100 According to Perry and Green [38], the major parts of a fluidized-bed system include:
101 i. Fluidization vessel which comprises (a)fluidized-bed portion, (b) disengaging space
102 or freeboard, and (c) gas distributor
103 ii. Solids feeder or flow control
104 iii. Solids discharge
105 iv. Dust separator for the exit gases
106 v. Instrumentation
107 vi. Gas supply

108

2.1.1 Minimum Fluidization Velocity

109 Minimum fluidization velocity (U_{mf}) which could be determined using the Ergun equation,
110 Kozeny-Carman correlation, voidage method, correlation of Wen and Yu, the heat transfer
111 method, or the pressure drop method [39 – 40]

112

2.1.2 Flow Regime

113 Flow regime which indicates whether the flow is laminar or turbulent is defined by Equation
114 (1).

115

$$116 \quad Re_{mf} = \frac{U_{mf} d_p \rho_g}{\mu_g} \quad (1)$$

117

2.1.3 The Void Fraction

118 The void fraction or porosity (ϵ) depends on the material, shape, and size of the particles.
119 For nearly spherical particles, [41], suggested that ϵ laid in the range 0.4 - 0.45 and therefore
120 increasing with particle size and could be calculated from Equation (2), where bulk density,
121 ρ_b , and ρ_s is the particle density.

122

$$123 \quad \epsilon = 1 - \frac{\rho_b}{\rho_s} \quad (2)$$

124

2.1.4 Maximum or Terminal Velocity

125 Maximum or terminal velocity or the settling velocity is given in Equation (3) for low Reynolds
126 number, where $Re < 500$; and Equation (4) high Reynolds number, where $500 < Re < 20000$.

127

131

$$U_t = \frac{d_p^2 (\rho_s - \rho_g) g}{18 \mu_g} \quad (3)$$

133

$$U_t = \frac{1.75 \sqrt{d_p (\rho_s - \rho_g)}}{\rho_s} \quad (4)$$

1352.1.5 Bed Sizing

136 According to [38], the cross-sectional area of fluidized bed reactor is determined by the
 137 volumetric flow of gas and the allowable or required fluidizing velocity of the gas at operating
 138 conditions. The maximum flow is generally determined by the carry-over or entrainment of
 139 solids, and this is related to the dimensions of the disengaging space (cross-sectional area
 140 and height). Also, [38] showed that bed heights are not less than 0.3 m (12 in) or more than
 141 16 m (50 ft) for fluidized bed dryers. Based on cost evaluation, space, and TDH chart in
 142 Figure 1[42], a 7.5 cm internal diameter fluidized bed was considered for this work.
 143 Determination of the bed height involved additionally the following hydrodynamic
 144 parameters:

- 145 i. Minimum fluidization velocity was determined using the expression Kozeny-Carman
 146 [43] in Equation (5).

$$U_{mf} = \frac{d_p^2 (\rho_s - \rho_g) g \Phi_s^2}{150 \mu_g} \left(\frac{\varepsilon_{mf}^3}{1 - \varepsilon_{mf}} \right) \quad (5)$$

148

- 149 ii. Terminal or maximum velocity was calculated from Stokes law using in Equation (6).

$$U_t = \frac{d_p^2 (\rho_s - \rho_g) g}{18 \mu_g} \quad (6)$$

151

- 152 iii. The superficial velocity of the gas during the operation considering the relation
 153 between the expanded and minimum heights of the fluidized bed H/H_{mf} , according
 154 to [44] is given Equation (7).

$$\frac{H}{H_{mf}} = 1 + \frac{10.978 \cdot (U - U_{mf})^{0.738} \cdot \rho_p^{0.376} \cdot d_p^{1.006}}{U_{mf}^{0.937} \cdot \rho_g^{0.126}} \quad (7)$$

156

157 For the bubbling fluidized bed the restriction suggested in Equation (8) was used [5]:

$$1.2 < \frac{H}{H_{mf}} < 1.4 \quad (8)$$

159

160 For this design, a value of 1.3 was selected for H/H_{mf} , and Equation (7) was solved to
 161 determine the value of fluidization velocity ($U - U_{mf}$)

- 162 iv. Transport Disengaging Height, TDH, was extrapolated from the graph of TDH vs.
 163 ($U - U_{mf}$) in Figure 1.


- 164 v. Overall height H_t , of the fluidized bed chamber was established by the expression
 165 shown in Equation (9) [5]:

$$H_t = TDH + H \quad (9)$$

166

- 167 vi. The maximum expanded height of the bed H , was assumed as 0.15 m, being twice
 168 the internal diameter of fluidized bed, with the purpose of diminishing the slugging
 169 phenomena. [45] considered that the slugging regime appears in beds where the
 170 bed height (H) over the bed diameter (D) is larger than two (2). This requirement
 171 ensures that bubbles have enough time to coalesce in bigger bubbles called slugs,
 172 when the bubbles grow to two-third of the bed diameter the system enters to a
 173 slugging regime

174

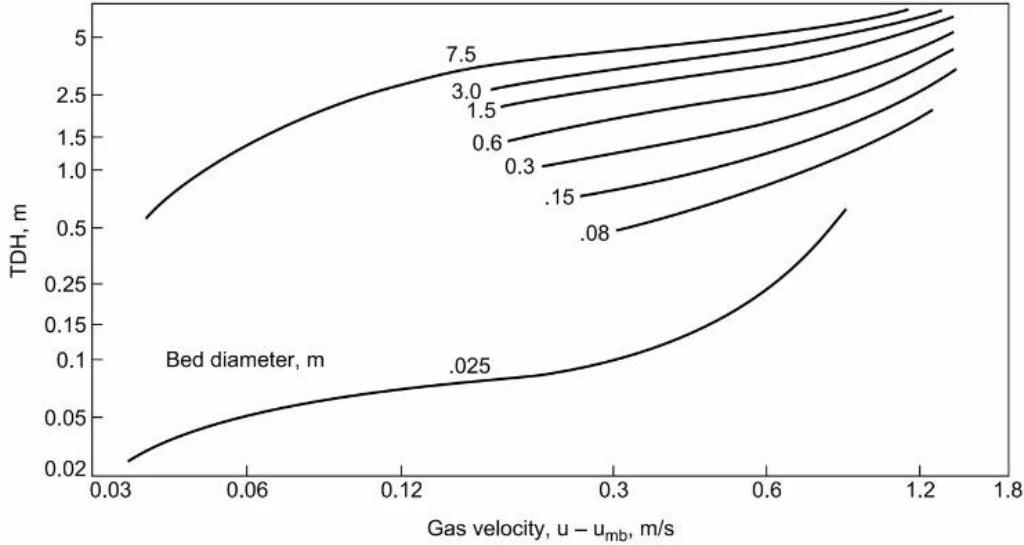

175
176
177
178

Figure 1: The graph of TDH vs. $(U - U_{mf})$

Source: [42]

179 **2.1.6 Wind Box**

180 The gas stream nozzle was made to enter the gas chamber vertically through the bottom. To
181 prevent mal-distribution, the nozzle should be placed at a distance H_w below the distributor
182 plate [46], where H_w is given by:

$$183 \quad H_w = 3 \times (D_w - D_{noz}) \quad \text{for } D_{noz} > \frac{D_w}{36} \quad (10)$$

$$184 \quad \text{Or, } H_w = 100 \times D_{noz} \quad \text{for } D_{noz} < \frac{D_w}{36} \quad (11)$$

185

186 Where D_w is the bed diameter, D_{noz} is the gas nozzle diameter or the gas entry pipe, and H_w
187 is the distance of the nozzle from the distributor plate

188

189 **2.1.7 Air Distributor Plate**

190 Perforated distributor plate design was adopted for this work considering the following
191 design criteria:

192 i. [47] showed that $\Delta P_{grid} \geq 0.3 \Delta P_{bed}$ for upwardly and laterally directed flow, and
193 under no circumstances should the pressure drop across a large-scale commercial
194 grid be less than 2500 Pa.

195 Also, the gas velocity through the grid hole, (U_h) , is related to ΔP_{grid} in orifice as
196 shown in Equation (12)

$$197 \quad \Delta P_{grid} = \frac{U_h^2 \rho_g}{2C^2} \quad (12)$$

$$198 \quad \text{And } U_h = C \sqrt{\frac{2 \Delta P_{grid}}{\rho_g}} \quad (13)$$

199 U_h is the velocity in hole at inlet condition, ρ_g is the density of the fluid, ΔP_{grid} is the
200 pressure drop, and C is the orifice coefficient or constant, dimensionless (typically
201 0.8 for gas distributors)

202 ii. Number of grid holes required is related to volumetric flow rate, Q

203
$$Q = ANU_h \quad (14)$$

204 Where Q is the volumetric flow rate in the holes (m/s), N is the number of holes, and A is
 205 cross-sectional area of the bed (m²).

206
 207 iii. The hole density, N_d , is defined as the number of grid holes required per unit
 208 area.

209
$$N_d = \frac{N}{A} \quad (15)$$

210 This work considered grid holes pitch configuration in a triangular arrangement as given by
 211 Equation (16)

212
$$L_h = \frac{1}{\sqrt{N_d \sin 60}} \quad (16)$$

213

214 **2.2 Particulate Material Selection and Preparation**


215 For this study, particulate materials were selected using the four criteria: (i) fluidization
 216 behavior, (ii) size range, (iii) density, and (iv) aspect ratio [48] while cassava mash and bitter
 217 kola were prepared using local grating method.

218

219

220 **2.3 Experimental Set-up**

221 The schematic of experimental set-up from [49] shown in Figure 2 consist of air compression
 222 system (COM 101 and CAM 101), air shut off vale (ASV 101), pressure control valve (PCV
 223 101), flow temperature indicators (TI), helical coil heat exchanger (HCHE), fluidized bed
 224 vessel (FBV), differential pressure manometer (DP), flow meter (rotameter), pressure gauge
 225 (PG), temperature controller (TC) and level indicators (LI). In this system hot air for
 226 fluidization drying was produced from heat transfer in HCHE.

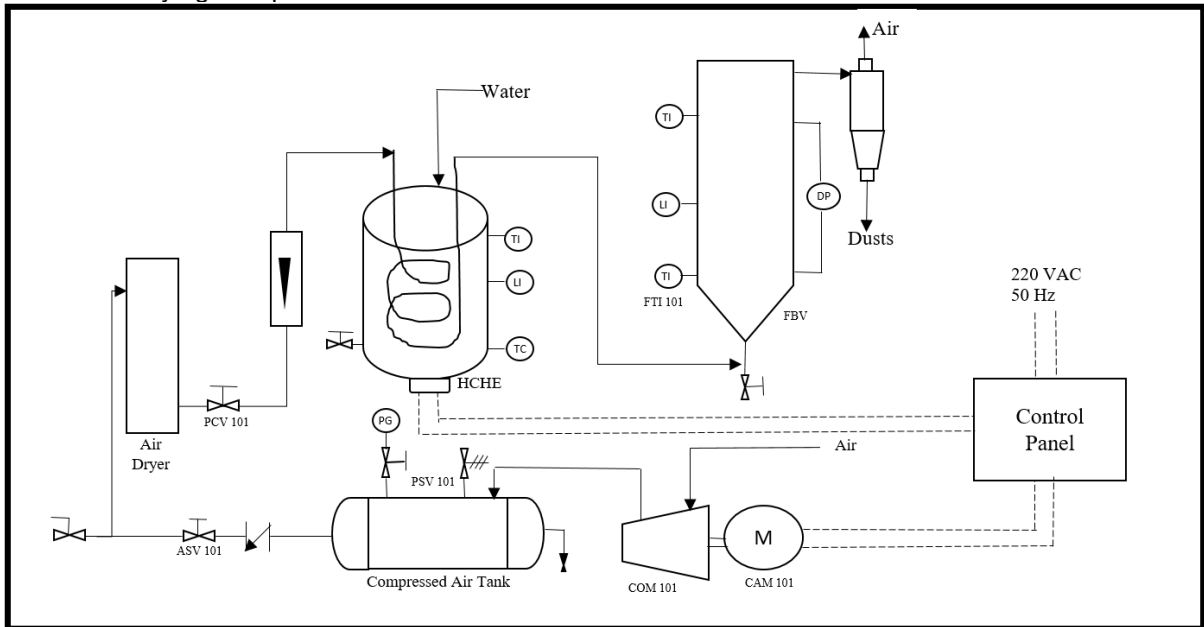

227

228

229

230

231

232 **2.3.1 Hydrodynamics Studies in Fluidized Bed**

233

234 Hydrodynamics experiments were conducted at ambient conditions. Particulates materials
 235 were poured into the bed up to the desired bed height/weight of particles. Hence, the
 236 following procedures were considered:

- 237 i. Measurement of the bed heights directly using a scale attached along the height of
 238 column.
- 239 ii. Switch on the mains supply.
- 240 iii. Start the compressor to compress the air above 100 psi.
- 241 iv. Open the valve upstream of the air flow meter and adjust the flow rate to achieve
 242 good fluidization
- 243 v. Measure air flow rate and pressure drop from the instruments.
- 244 vi. Plot pressure drop against superficial air velocity to determine minimum fluidization
 245 velocity according to [5].
 246

247 **2.3.2 Drying of Cassava Mash to Garri in Fluidized Bed Dryer**

248
 249 The drying of cassava mash to edible garri was carried out in the fluidized bed dryer with the
 250 ratio of the bed height to bed diameter (H/D) of 1.8. The initial mass of cassava mash was
 251 224.76 g with the mean particle size of 834 μm . The drying temperature was 50 ± 3 $^{\circ}\text{C}$ at
 252 initial stage for 15 minutes to avoid gelatinous formation. During this drying period,
 253 fluidization of the bed material was supported by vibrating the bed. This was due to the
 254 damp and sticky nature of the cassava mash particulates material. From 20 minutes of the
 255 drying period, the particles where loose and the mixing was improved up to 35 minutes and
 256 the drying temperature was set at 70 ± 3 $^{\circ}\text{C}$. Thereafter, fluidizations were adequate till the
 257 end of drying time of 55 minutes in which the drying temperature was controlled at 83 ± 3 $^{\circ}\text{C}$.
 258 The mass of the cassava mash sample during drying was recorded at intervals 5 minutes
 259 and the corresponding moisture content were determined.
 260

261 **3. RESULTS AND DISCUSSION**

262 **3.1 Design Parameters for Fluidized Bed Column, Plenum and Distributor** 263 **Plate**

264 Design parameters of the fluidized bed column as shown on Table 1

265 **Table 1 Design parameters of the fluidized bed column**

S/N	Parameters	Value
1	Minimum Fluidization Velocity U_{mf} ,	0.12 m/s
2	Terminal Velocity U_t	9.6 m/s
3	Calculated Value of $(U - U_{mf})$	0.49 m/s
4	Design value of $(U - U_{mf})$	0.5 m/s
5	Bed height, L_B	0.15 m
6	Transport Disengaging Height, TDH	0.8 m
7	Bed height, L_B	0.15 m
8	Total Bed Height H_t	0.95 m

268

269

270 Design parameters for plenum and distributor plate as shown on Table 2

271 **Table 2: Design parameters for plenum and distributor plate**


S/N	Parameters	Value
1	Fluidized Bed Diameter D_w	75 mm
2	Nozzle Diameter D_{noz}	20 mm

3	Nozzle distance from the distributor plate H_w	0.165 m
4	Orifice Coefficient C	0.78
5	Grid Plate Thickness t	1.5 mm
6	Grid Hole Diameter d_h	4 mm
7	Pressure drop across the distributor plate ΔP_{grid}	2500 Pa
8	Volumetric gas flow Q	$2.2 \times 10^{-3} \text{ m}^3/\text{s}$
9	Number of grid holes N	3.3
10	Hole density, N_d	$750/\text{m}^2$
11	Holes pitch length, L_h	39 mm
12	Grid hole velocity U_h	52.58 m/s

272

273 3.2 Experimental Determination of Minimum Fluidization Velocity

274 The relationship of change in bed pressure drop and superficial velocity to determine
 275 minimum fluidization velocity of river sand particles with mean diameter, d_p , of $521 \mu\text{m}$ using
 276 different bed heights were carried out and the graphical representation as shown in Figure 3,
 277 indicated the minimum fluidization velocity of 0.15 m/s.
 278

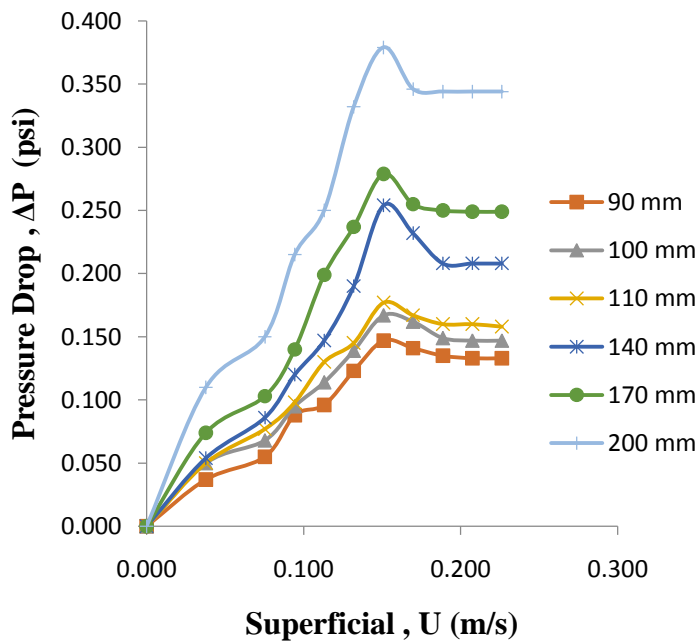

279

280 **Figure 3: The relationship of change in bed pressure drop and superficial**
 281 **Velocity**

282

283

284 3.3 Comparison of Experimental and Predicted Minimum Fluidization

285 **Velocity**

286 The experimental result and the empirical correlations as proposed by Kozeny-Carman [43],
 287 [50 - 52], were analysed in Table 3. There was a good agreement of the experimental value
 288 with prediction of Kozeny-Carman [44]. According to [52], some forms of predictive
 289 correlation entailed relatively large error of 30-40% and is only valid for limited conditions as
 290 shown in Ergun [50] and [51]. This errors are due to these correlations relying on a small
 291 number of specific experiments and in some cases do not take into consideration the effect
 292 of particle sphericity [52].

293

294

295

296

297

298

299

300

301 **Table 3: Comparison of experimental and predicted values for minimum**
 302 **fluidization velocity**

Author	Experimental Correlation	/Empirical	Errors Based on Experiment Value			
			Values	Absolute Error	% error	Relative error
Experiment	Experiment		0.1500	0.0000	0.000	0.0000
Kozeny- Carman [43]	$U_{mf} = \frac{d_p^2(\rho_s - \rho_g)g \Phi_s^2}{150\mu_g} \left(\frac{\varepsilon_{mf}^3}{1 - \varepsilon_{mf}} \right)$		0.1530	0.0030	0.300	0.0030
Leva [59]	$U_{mf} = 9.23 \times 10^{-3} d_p^{1.811} \left(\frac{\rho_g}{\mu_g} \right)^{0.88} \left(\frac{\rho_s}{\rho_g} \right)^{0.94}$		0.1800	0.0300	20.000	0.2000
Ergun [50]	$U_{mf} = \frac{(\rho_s - \rho_g)g}{1650\mu_g}$		0.2180	0.068	45.300	0.4530
Sidorenko [51]	$U_{mf} = \frac{0.0093 d_p^{1.82} (\rho_s - \rho_g)^{0.94}}{\mu_g^{0.88} \rho_g^{0.06}}$		0.2200	0.0700	46.700	0.4700
Baeyens [52]	$U_{mf} = \frac{0.000701 d_p^2 (\rho_s - \rho_g)g}{\mu_g}$		0.2500	0.1000	66.700	4.4000

303


304

305


306

3.4 Effect of Bed Height and Pressure Drop across the Bed on the U_{mf}

307 The readings of bed pressure drops were recorded by increasing superficial velocity until the
308 packed bed reached its minimum fluidization velocity. These sets of experiments were
309 carried out with different bed heights and different particle sizes distributions as shown on
310 Figure 4 and 5. The figures represented the relationship between pressure drops with
311 different bed height for 400 μm , and 500 μm . From the figures, it showed that increase in
312 bed height in fluidized bed led to increase in the pressure drop across the packed bed and
313 these results corroborate data presented by [53-54].
314
315

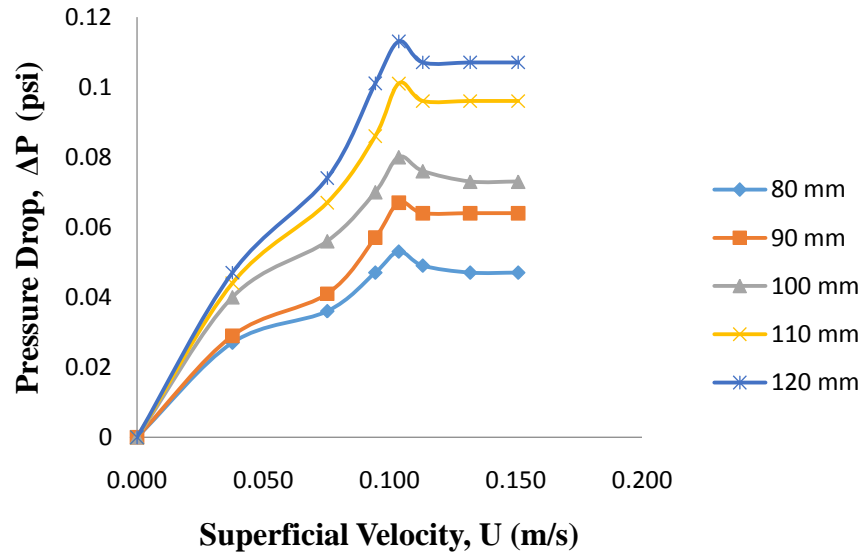

316
317 **Figure 4: Relationship of bed height with pressure drop on U_{mf} for 400 μm**
318 **sand**
319 **particle**
320

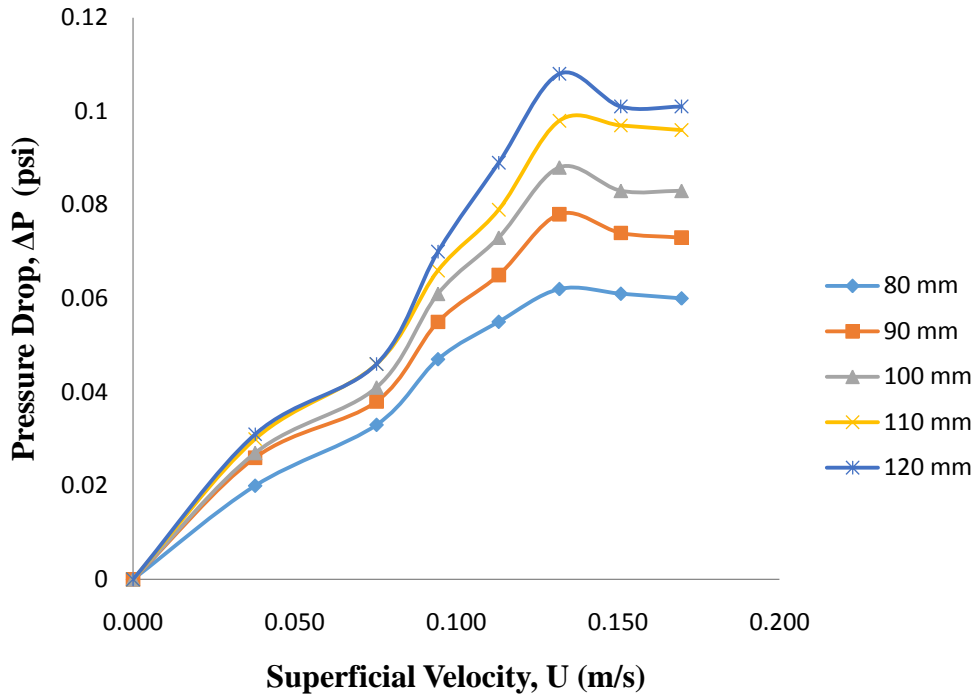


321
 322 **Figure 5: Relationship of bed height with pressure drop on U_{mf} for 500 μm**
 323 **sand**
 324 **particle**

325
 326
 327
 328 **3.5 Effect of Particle Size and Density on Minimum Fluidization Velocity**

329 The influence of particle sizes of the a particular sand sample with mean particle sizes of
 330 400 μm , 500 μm , 521 μm with densities of 2357 kg/m^3 , 2362 kg.m^3 and 2500 kg/m^3
 331 respectively were analysed using the same bed height to bed diameter ratio of 1.5.
 332 Graphical representation indicated that particle size distribution influences the minimum
 333 fluidization velocity as shown in Figure 5. Also, a denser material required a higher
 334 superficial gas velocity to start fluidization. Therefore, the minimum fluidization velocity
 335 increases as material density increases. These experimental results also corroborate data
 336 presented by [55].

337

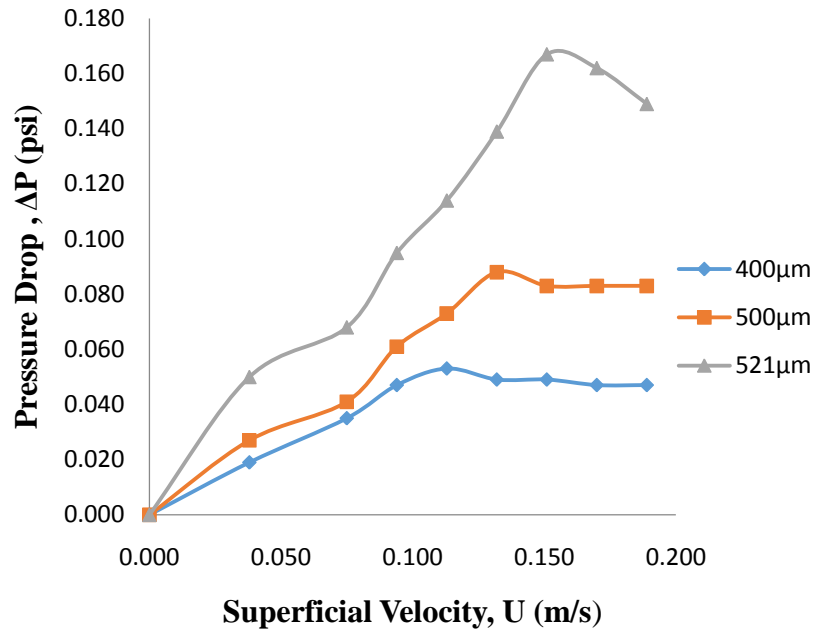

338
339
340
341
342
343

Figure 6: Influence of particle size distribution and density on minimum fluidization velocity

3.6. Stability of the Column

344
345
346
347
348
349
350
351
352


For better fluidization, the ratio of bed height to diameter of bed (H/D) is usually maintained between 1 and 2 [56] and [44]. This is with the purpose of diminishing the slugging phenomena, which is associated with pressure fluctuation and vibration of the fluidized bed vessel (FBV). The maximum expanded height of the bed according to the design was 150 mm being twice the bed height. The evaluation of the FBV stability was tested with several bed height (H), to bed diameter (D), (H/D ratios) from 1 to 2.6. It was observed that from the H/D of 2.2 and above, there was slugging in the bed which was accompanied by little vibration during fluidization. This phenomenon corroborates what was presented by [44].

353

3.7. Drying of Cassava Mash to Garri in Fluidized Bed Dryer

354
355
356
357
358
359

The time taken for drying of cassava mash to edible garri was 55 minutes at controlled drying temperature of 83 ± 3 °C against 120 – 150 °C [37] and 180 – 200 °C [35] by other conventional fluidized bed dryer and traditional methods respectively. The relationship of moisture content and time for garri particulate material as shown in Figure 7 showed a steady state drying characteristics curve which corroborate the drying curve as presented by [58].

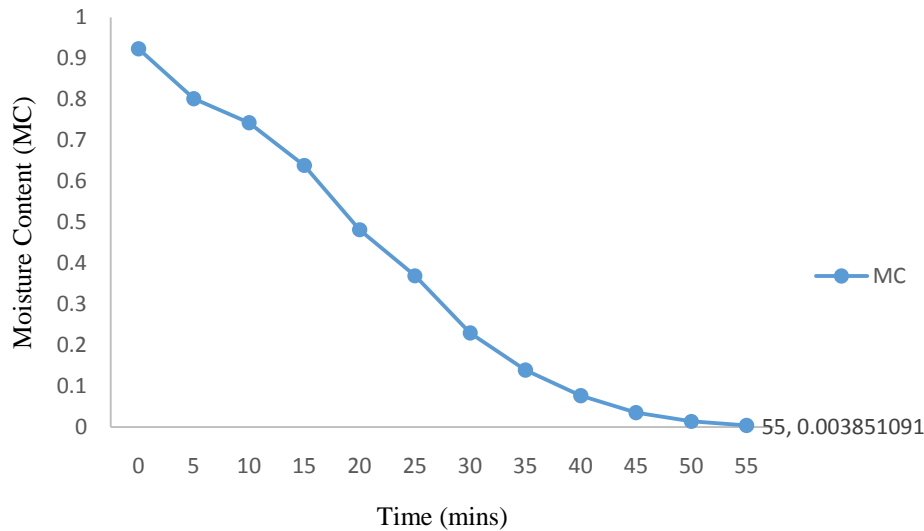

360
361
362
363
364
365

Figure 7: Moisture content as a function of time for garri particulates material

3.8. Comparing Drying of Bitter Kola in WiseVen Oven and Fluidized Bed Dryer

366
367
368
369
370
371
372
373
374
375
376
377
378

The base line moisture content of the sample was determined by drying 5 g of bitter kola particulate in oven at temperature of 105 °C until there was no change in mass and the moisture content removed was 2.56 g. Equal mass of bitter kola particulates each 170 g were dried in WiseVen oven and fluidized bed dryer at 50 °C for 60 minutes. The mass of moisture content removed from the oven studied was 2 g and that of fluidized bed dryer was 56.4 g. The results showed that 1.02 g of moisture was removed from the oven and that of fluidized bed dryer was 28.88 g representing the ratio of 1:29. The results corroborate data presented by [34]. Hence, the fluidized bed dryer has a high rates of moisture removal due to high heat and mass transfer rates over conventional oven considering the same operating conditions.

379
380

4. CONCLUSION

381
382
383
384
385
386
387
388
389
390
391

Laboratory-scale fluidized bed dryer was designed, fabricated for fluidization hydrodynamics and fluidization drying. From the performance evaluation of the fluidized bed dryer, the following conclusions were drawn from the study:

- i. The design was efficient for laboratory applications.
- ii. The unit was designed for non-corrosive and Galdart group A and B materials only
- iii. Excellent fluidization was achieved with particulate materials whose aspect ratio was tending to unity.
- iv. Drying rate was effective in the ratio of 1:29 over conventional oven
- v. The design was made for batch operations.
- vi. The operational stability of this equipment with excellent fluidization of particles in the bed occurred between the H/D ratios of 1.5 – 2

392 vii. Fabricated laboratory scale FDB offers excellent drying performance. Interestingly,
393 cassava mash were dried to edible garri within 55 minutes at maximum temperature
394 of 83 ± 3 °C against 120 – 150 °C and 180 – 200 °C by other conventional fluidized
395 bed and traditional methods respectively.
396

397

398

ACKNOWLEDGEMENTS

399

400 The authors wish to express their gratitude to University of Uyo for providing the
401 necessary support towards the success of this research work.
402

403

404

COMPETING INTERESTS

405

406 The authors declare no conflicts of interest regarding the publication of this paper.
407

408

AUTHORS' CONTRIBUTIONS

409

410 This work was carried out in collaboration among all authors. All authors read and approved
411 the final manuscript

412

REFERENCES

413

1. Mittal B. Pharmaceutical Unit Operation. Jones K. Elsevier, Academic Press, United
414 Kingdom; 2017.

415

416

2. Silva GG, Jiménez, NP, Salazar, OF. Fluid Dynamics of Gas – Solid Fluidized Beds.
Advance Fluid Dynamics 2018; 39 – 48. Available:
417 <https://www.researchgate.net/publication/324114924>

418

419

420

3. Jaiswal R, Agu CE, Thapa, RK, Moldestad BME. Study of fluidized bed regimes using
computational particle fluid dynamics. Proceedings of the 59th Conference on
Simulation and Modelling (SIMS 59), Oslo Metropolitan University, Norway; 2018.

421

422

423

4. Patil DJ, Smit J, Annaland MVS, Kuipers JAM. Wall-to-bed heat transfer in gas–
solid bubbling fluidized beds, American Institute of Chemical Engineers. 2005; 52
(1): 58-74.

424

425

426

5. Kunii D, Levenspiel O. Fluidization Engineering, second edition, Butterworth-
Heinemann, Boston; 1991.

427

428

429

6. Shi D, Nicolai R, Reh L. Wall-to-bed heat transfer in circulating fluidized beds,
Chemical Engineering and Processing: Process Intensification. 1998; 37 (4): 287-
293.

430

431

432

7. Baeyens J, Shuo L, Dewil R, Leuven K, Zhang H. Fluidized bed technology:
Challenges and perspectives, Conference Series Earth and Environmental Science.
2022; 952(1):1-10.

433

434

435

8. Souraki BA, Mowla D. Experimental and theoretical investigation of drying behavior of
garlic in an inert medium fluidized bed assisted by microwave, Journal of Food
Engineering. 2008; 8(8): 438-449.

436

437

9. Wand ZH, Chen G. Heat and mass transfer in batch fluidized-bed drying of porous
particles, Chemical Engineering Science. 2000; 55(10): 1857-1869.

- 438 10. Bouhadda M, Dounit S, Soulimani O. Modeling of heat transfer in a fluidized bed
439 reactor irradiated indirectly by concentrated solar energy. International Conference
440 on Technologies and Materials for Renewable Energy, Environment and
441 Sustainability, TMREES15, Energy Procedia. 2015; 74: 381 – 388.
- 442 11. Zhang Y, Li Q, Zhou H. Heat transfer in fluidized beds. Theory and Calculation of
443 Heat Transfer in Furnaces, Academic Press Cambridge; 2016.
- 444 12. Lee JC, Han GY, Yi CK. Heat transfer in high temperature in fluidized bed, Korean
445 Journal of Chemical Engineering. 1999; 16: 260 – 264.
- 446 13. Molerus O, Wirth KE. Heat transfer in fluidized beds. Powder Technology Series.
447 Springer Science & Business Media, Germany; 2012.
- 448 14. Oppong F. Recent Studies of Heat Transfer Mechanisms in a Fluidized Bed,
449 Research and Development Journal of the South African Institution of Mechanical
450 Engineering. 2018; 34: 72-82.
- 451 15. Ganguli A, Bhatt V. CFD simulations to study bed characteristics in gas–solid
452 fluidized beds with binary mixtures of Geldart-B particles: A qualitative analysis.
453 Frontiers in Energy Researcher. 2023; 11: 1 - 19.
- 454 16. Ehsani M, Movahedirad S, Shahhosseini S. The effect of particle properties on the
455 heat transfer characteristics of a liquid-solid fluidized bed heat exchanger,
456 International Journal of Thermal Sciences. 2016; 102:111-121.
- 457 17. Zhang H, Degreve J, Baeyens J, Dewil R. Wall-to-bed heat transfer at minimum gas-
458 solid fluidization. Journal of Powder Technology. 2014; 1 - 8. Available:
459 <https://doi.org/10.1155/2014/163469>
- 460 18. Bodhanwalla H, Manickam R. Parameters affecting the fluidized bed performance: A
461 review. REST Journal on Emerging Trends in Modelling. 2017; 3(1): 17 – 21.
- 462 19. More MM, Nerkar NK. A review of fluidized bed dryer, Asian Journal of Research and
463 Pharmaceutical Sciences; 2023; 3(1):67 – 68.
- 464 20. Majumder P, Deb B, Gupta R, Sablani, SS. A comprehensive review of fluidized bed
465 drying: Sustainable design approaches, hydrodynamic and thermodynamic
466 performance characteristics, and product quality. Sustainable Energy Technologies
467 and Assessments. 2022; 53 (1): 102643. Available:
468 https://www.researchgate.net/publication/363082088_
- 469 21. Haron NS, Zakaria JH, Batcha MF. Recent advances in fluidized bed drying, IOP
470 Conference Series: Materials Science and Engineering. 2017; 234: 1-6.
- 471 22. Sundaresan S. Instabilities in fluidized beds. Annual Review of Fluid Mechanics.
472 2003; 35: 63 - 88.
- 473 23. Quinn HM. A Reconciliation of Packed Column Permeability Data: De-convoluting
474 the Ergun Papers. Hindawi Publishing Corporation Journal of Materials. 2014
475 Available: <https://doi.org/10.1155/2014/548482>.
- 476 24. Venkiteswaran KV, Jun GJ, Sing CY, Sulaiman SA Raghavan VR. Variation of bed
477 pressure drop with particle shapes in a swirling fluidized bed, Journal of Applied
478 Sciences. 2012; 12: 2598-2603.
- 479
480

- 481 25. Sasic S, Leckner B, Johnson F. Characterisation of fluid dynamics of fluidised beds
482 by analysis of pressure fluctuations, *Progress in Energy and Combustion Science*.
483 2007; 33(5):453-496.
- 484 26. Jiang H, Chen H, Gao J, Lu J, Wang Y, Wang C. Characterization of gas–solid
485 fluidization in fluidized beds with different particle size distributions by analyzing
486 pressure fluctuations in wind caps, *Chemical Engineering Journal*. 2018; 352: 923-
487 939
- 488 27. Chew JW, LaMarche WCQ, Cocco RA. 100 years of scaling up fluidized bed and
489 circulating fluidized bed reactors. *Powder Technology*. 2022; 409, 117813.
490 Available: <https://dx.doi.org/10.1016/j.powtec.2022.117813>.
- 491 28. Mujumdar AS, Devahastin S. Applications for Fluidized Bed Drying.
492 Yang W. Handbook of Fluidization and Fluid-Particle Systems, Marcel Dekker Inc.,
493 Pittsburgh, Pennsylvania, U.S.A; 2003.
- 494 29. Rashid AG, Hegazi AA, Okasha F. An Investigation on Drying Process in a Novel
495 Configuration of Fluidized Bed, *Mansoura Engineering Journal*. 2015; 40(4): 1-9.
- 496 30. Saini P, Kumar N, Kumar S, Panghal A. Fluidized Bed Drying: Recent Developments
497 and Applications, *Thermal Food Engineering Operations* 2022; 197-219.
- 498 31. Reay D. Fluid bed drying. Geldart D. Gas Fluidization Technology. John Wiley and
499 Sons Ltd., Great Britain; 1986.
- 500 32. Oluwaleye IO, Adeyemi MB. Experimental evaluation of a batch hot air fluidized bed
501 dryer, *International Journal of Modern Engineering Research (IJMER)*. 2013; 3(1):
502 497-503.
- 503 33. Gilbert H, Baxerres JL, Kim H. Blanching time in fluidized bed. Linko P. Food
504 Processing Engineering, Applied Science Publishers, London; 1980.
- 505 34. Yenchen Machinery. Fluid Bed Dryer / Spray Granulator, 2024. Available:
506 https://www.yenchen.com.tw/en/product/fluid_bed_dryer.html
- 507 35. Ali OA, Saturday A, Nathaniel OE, Ifeanyi AA, Ajagun EG Oluwatomi K. Gelatinization
508 and frying temperatures stabilization of a 'garri' frying machine using a PID
509 microcontroller-matlab-simulink, *Scholars Journal of Engineering and Technology*.
510 2017; 5(6):295-306.
- 511 36. Obadina AO, Oyewole OB Ayoola AA. Quality Assessment of Gari Produced Using
512 Rotary Dryer. In: V. C. Bellinghouse (Editor), *Food Processing: Methods,
513 Techniques and Trends*. Nova Science Publishers, Inc. New York, USA; 2008.
- 514 37. Ismail SO, Ojolo SJ, Olatunji O. Design and development of a continuous fluidized-
515 bed garri dryer, *International journal of Engineering Innovations*. 2012; 4 (3): 54 –
516 64.
- 517 38. Perry RH, Green DW. Perry's Chemical Engineers' Handbook, eighth edition,
518 McGraw-Hill, New York; 2007.
- 519 39. Gupta CK, Sathiyamoorthy D. Fluid Bed Technology in Materials Processing. CRC
520 Press, Boca Raton, Florida; 1999.

- 521 40. Bui TT, Duc LA. Determination on fluidization velocity types of the continuous refined
522 salt fluidized bed drying. 2020; 1 - 23. Available:
523 <http://dx.doi.org/10.5772/intechopen.92077>.
- 524 41. McCabe WE, Smith JC, Harriott P. Unit Operations of Chemical Engineering.
525 McGraw Hill, seventh edition, New York; 2004.
- 526 42. Perry RH, Green DW. Perry's Chemical Engineers' Handbook, seventh edition,
527 McGraw-Hill, New York; 1997.
- 528 43. Carman PC. Pressure drop and minimum velocity at fluidized bed, Transactions of the
529 Institution of Chemical Engineers. 1937; 20 (11): 1196-1200.
- 530 44. Chatterjee PK, Datta AB, Kundu KM. Fluidized bed gasification of coal. The
531 Canadian Journal of Chemical Engineering. 1995 73, 204–210.
- 532 45. Yang WC. Flow through fixed beds. Handbook of Fluidization and Fluid-Particle
533 Systems. Marcel Dekker Inc., Pittsburgh, Pennsylvania, U.S.A; 2003.
- 534 46. Latif A. A Study of the Design of Fluidized Bed Reactors for Biomass Gasification.
535 PhD Thesis. University of London, UK; 1999.
- 536 47. Karri SBR, Werther J. Gas distributor and plenum design in fluidized beds. Handbook
537 of Fluidization and Fluid-Particle Systems, Marcel Dekker Inc., Pittsburgh,
538 Pennsylvania, U.S.A; 2003.
- 539 48. Franka NP. Visualizing Fluidized Beds with X-Rays. MSc Dissertation. Iowa State
540 University, Ames, IA, USA; 2008.
- 541 49. Uwa IJ. Heat Transfer Enhancement in Helical Coil Heat Exchanger Using Selected
542 Colloidal Fluids. PhD Thesis. University of Uyo, Uyo; 2024.
- 543
544 50. Ergun S, Orning A. Fluid flow through packed columns, Chemical Engineering Progress.
545 1952; 48(2):89–94.
- 546 51. Sidorenko I, Rhodes MJ. Pressure effects on gas-solid fluidized bed behavior,
547 International Journal of Chemical Engineering. 2003; 1(1): 1542-6580.
- 548 52. Baeyens J, Geldart D. Predictive Calculations of Flow Parameters in Gas
549 Fluidized Beds and Fluidization Behaviour of Various Powders. Proceeding of the
550 Conference of Fluidization and Applications, Cepadues Editions, Toulouse, France,
551 1973.
- 552 53. Farshi A. Experimentation measurement of different fluidization parameters,
553 Petroleum and Coal. 2013; 55 (4): 311-321.
- 554 54. Gunn DJ, Hilal N. The expansion of gas-fluidized beds in bubbling fluidization,
555 Chemical Engineering Science. 1997; 52(16): 2811-2822.
- 556 55. Sau DC, Mohanty S, Biswal KC. Minimum fluidization velocities and maximum bed
557 pressure drops for gas-solid tapered fluidized beds, Chemical Engineering Journal.
558 2007; 132, 151-157.
- 559 56. Chikerema P, Moys M. Effects of particle size, shape, and density on the performance
560 of an air fluidized bed in dry coal beneficiation, International Journal of Coal
561 Preparation and Utilization. 2012; 32 (2): 80-94.

- 562 57. Ramírez JJ, Martínez JD, Petro SL. Basic design of a fluidized bed gasifier for rice
563 husk on a pilot scale, Latin American Applied Research. 2007; 37:299-306.
- 564 58. Chukwunonye CD, Nnaemeka NR, Chijioke OV, Obiora NC. Thin layer drying
565 modelling for some selected Nigerian produce: A Review, American Journal of Food
566 Science and Nutrition Research. 2016; 3 (1): 1-15.
- 567 59. Leva M. Fluidization. McGraw-Hill, New York; 1959...
- 568
- 569