

# **Estimation of Surface Runoff from Dapoli Watershed Using Remote Sensing and GIS**

## **Abstract**

Soil and water are the two basic natural resources for the survival of living organisms and the future of the world depends largely on the effective management, utilization and development of these resources. In this present study, Dapoli watershed located in Ratnagiri District of Maharashtra, has been considered as the study area for the estimation of surface runoff by SCS Curve Number method using remote sensing and GIS. SRTM DEM of 30m resolution and SENTINEL 2 satellite imagery of 10m resolution were used to generate thematic maps such as elevation map, HSG map, stream order map and LULC map. The results of this study showed that the highest rainfall was observed in the year 2021 and the lowest rainfall was observed in the year 2015. The maximum and minimum annual runoff depth from 1993-2022 were in the years 2021 (2505.14 mm) and 2001 (734.81 mm) respectively. The study revealed that in the past 30 years, 41.68 % of the rainfall was contributed to runoff and SCS-CN method coupled with remote sensing and GIS can serve as a useful tool for estimating surface runoff in similar watersheds.

**Keywords:** Surface Runoff, Curve Number, DEM, LULC, HSG, AMC, Remote Sensing, GIS.

## **1. Introduction**

Soil and water are the two basic natural resources for the survival of living organisms. These two resources have been interacting with each other in various phases of their respective natural cycle and the future of the world depends largely on the effective management, utilization and development of these resources in a coherent and far-reaching manner. All water resources need to be carefully monitored and managed in order to achieve their sustainability and continue to be beneficial to the society [1]. Surface runoff occurs after satisfying the infiltration and abstraction losses and flows on the surface in the direction of the slope. Surface runoff of rain is a major component of the hydrological cycle and helps to provide suitable circumstances for many types of ecosystems, scheduling of irrigation, water for hydroelectric power plants [2]. Knowing the amount of runoff from a watershed is important particularly for planning the hydraulic structures and taking necessary erosion control measures. In this study, Soil Conservation Services (SCS) Curve Number modified for Indian condition is used for estimation of runoff of the study area. The runoff curve number is based on the area's hydrologic soil group, land use and antecedent moisture condition. The study area region is characterized by hilly terrains and heavy rainfall thus making the region prone to soil loss and surface runoff issues. Therefore, an accurate understanding of the hydrological behaviour of the watershed is important for effective watershed management.

## **Study Area Details**

Dapoli watershed has a total area of 26635.08 ha and is located at Ratnagiri District, in the Konkan region of Maharashtra. The topography of the study area is slightly undulating with small hillocks, maximum area is plain with gentle slope. The location map of the study area is shown in Fig.1.

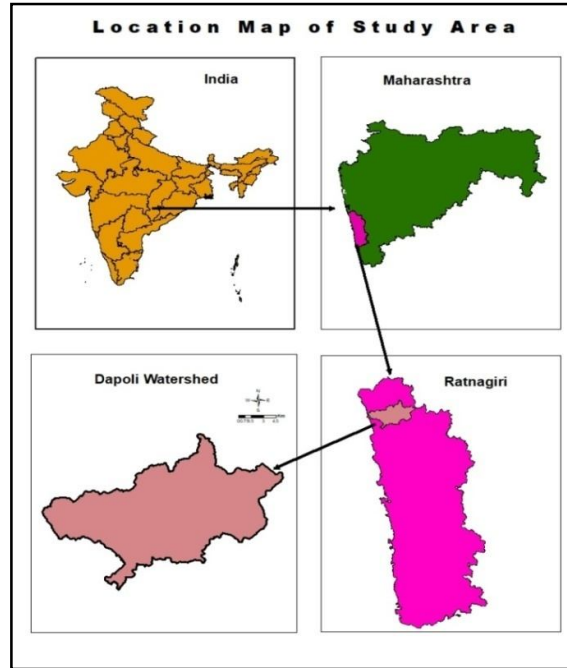


Fig. 1: Location map of study area

## 2. Materials and Methods

Various data and information were collected from different sources for carrying out this present study. The boundary maps of the state and country were obtained from DIVA GIS website (<https://www.diva-gis.org/website>). Digital elevation model (DEM) of shuttle radar topographic mission (SRTM) having 30m resolution was downloaded from USGS Earth Explorer website (<https://earthexploral.usgs.gov/>) for delineating the watershed of the study area. Sentinel 2 satellite imagery downloaded from Copernicus Data Space Ecosystem (<https://dataspace.copernicus.eu>) was used to prepare the land use land cover map of the year 2022. Soil data was collected from the National Bureau of Soil Survey Land Use Planning (NBSS LUP), Nagpur and the rainfall data was obtained from the Agro-meteorology Observatory, Department of Agronomy, DBSKKV, Dapoli.

### Software Used

The ArcGIS 10.8 software which is available in the Department of Soil and Water Conservation Engineering, CAET, DBSKKV, Dapoli was used to view, edit geospatial data, delineate and to create thematic maps. MS Office Suit 2019 was used for documenting, calculating and organizing notes related to this study. Google Earth Pro 10.8 was used for checking the accuracy of the land use land cover (LULC) map.

### Soil conservation service- curve number (CN) method


SCS- Curve Number method, developed by Soil Conservation Service (SCS) of USA in 1969, is a simple, predictable and stable conceptual method for estimation of direct runoff depth based on storm rainfall depth. This method, also known as the Hydrologic Soil Cover Complex Number method, is based on the recharge capacity of the watershed. The recharge capacity is determined by antecedent moisture conditions and by the physical characteristics of the watershed. The flowchart for estimation of surface runoff using SCS Curve Number method is shown in Fig.2.

The depth of the runoff is estimated using the formula-

$$Q = \frac{(P-0.2S)^2}{P+0.8S} \quad \text{for } P \geq 0.2 S \quad (1)$$

$$Q = 0 \quad \text{for } P < 0.2 S$$

Where , Q = runoff depth (mm), P = rainfall (mm) and S = potential retention

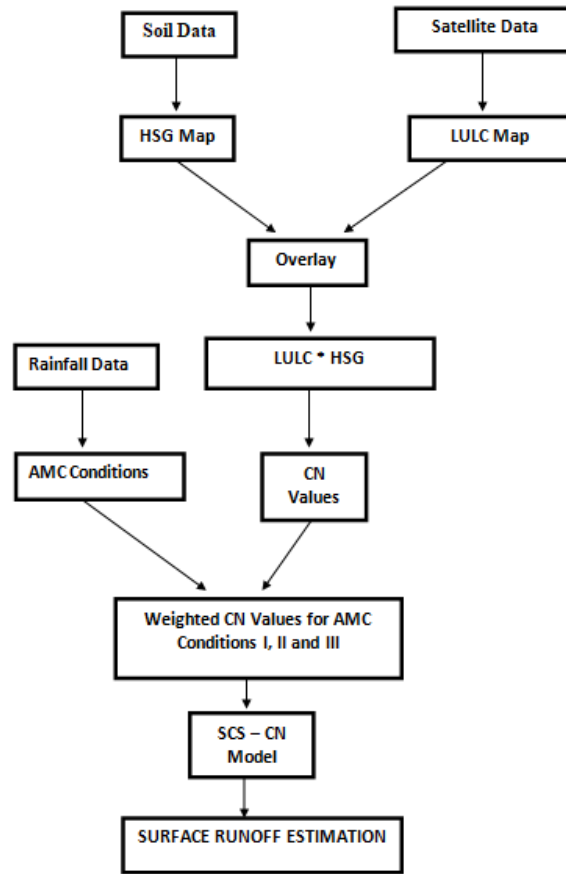

**Fig. 2: Flow chart for estimation of runoff using SCS CN method**

For convenience in practical application, the Soil Conservation Services (SCS) has expressed a relationship between the potential maximum retention 'S' and the dimensionless curve number parameter CN as –

$$CN = \frac{25400}{254+S} \quad (2)$$

Where,

S = the potential retention/infiltration after the runoff begins given by following equation-

$$S = \frac{25400}{CN} - 254 \quad (3)$$

CN is dimensionless and its value varies from 0 to 100. For CN=0, watershed is completely pervious (ideal condition) and for CN=100, watershed is completely impervious. As CN increases, imperviousness also increases. In other words, the value of Curve Number near or equal to 0 indicated low runoff. The requirements for this method are rainfall data and curve number. The value of Curve Number (CN) is different for different land use conditions and hydrologic soil group.

The value of the Curve Number (CN) is determined by –

- i. Land Use Land Cover (LULC)
- ii. Hydrological Soil Group (HSG)
- iii. Antecedent Moisture Condition (AMC)

#### **Land Use Land Cover (LULC) Map**

Land Use Land Cover (LULC) maps are used to provide information to help understand a particular area or landscape based on the natural and human activities. Supervised classification method was adopted for preparing the LULC map of the study area. The Kappa Coefficient is generated to evaluate the accuracy of the classification. The accuracy of land use land cover for Dapoli watershed was calculated using the Kappa coefficient and the formulae used is shown in Table 1. A better understanding on the values of Kappa coefficient and its interpretation is shown in Table 2.

**Table 1: Formulae used to calculate Accuracy and Kappa coefficient of LULC map.**

| Sr. No. | Accuracy Type       | Formula   |
|---------|---------------------|---|
| 1.      | Producer's Accuracy | $PA = \frac{\text{No. of correctly classified pixels in each category}}{\text{Total no. of classified pixels in that category}} \times 100$   |
| 2.      | User's Accuracy     | $UA = \frac{\text{No. of correctly classified pixels in that category}}{\text{Total no. of reference pixels in that category}} \times 100$  |
| 3.      | Kappa Coefficient   | $Ka = \frac{(TS \times TCS) - \sum (ColumnTotal \times RowTotal)}{TS^2 - \sum (ColumnTotal \times RowTotal)} \times 100$ <p>Where, TS = Total Sample<br/>TCS = Total Corrected Sample</p> |

**Table 2: Rating criteria of Kappa statistics (Islami et al., 2022)**

| Kappa statistics | Strength of agreement |
|------------------|-----------------------|
| Below 0.00       | Poor                  |
| 0.00 – 0.20      | Slight                |
| 0.21 – 0.40      | Fair                  |
| 0.41 – 0.60      | Moderate              |
| 0.61 – 0.80      | Substantial           |
| 0.81 - 1         | Almost Perfect        |

#### Hydrological Soil Group (HSG) Map

Based on US Soil Conservation Services (SCS), soils are divided into four hydrologic soil groups- A, B, C and D with respect to rate of runoff probable and final infiltration for the classification of soils in the watershed (Table 3). The important soil characteristics that influence hydrological classification of soils are effective depth of soil, average clay content, infiltration characteristics and permeability.

**Table 3: Soil Conservation Service Classification (USDA, 1974)**

| Hydrologic Soil Group (HSG) | Soil Textures                                | Runoff potential | Water transmission | Final infiltration (mm/h) |
|-----------------------------|--|------------------|--------------------|---------------------------|
| Group – A                   | Deep, well drained sand and gravels          | Low              | High rate          | >7.5                      |
| Group – B                   | Moderately deep, well drained                | Moderate         | Moderate rate      | 3.8 – 7.5                 |
| Group – C                   | Soil with moderate to fine texture           | Moderate         | Moderate rate      | 1.3 – 3.8                 |
| Group – D                   | Clay soil that swells significantly when wet | High             | Low rate           | < 1.3                     |

#### Hydrological Soil-Cover Complex and Computation of Weighted CN

A combination of the hydrological soil group (HSG) and the land use land cover (LULC) is called Hydrological Soil-Cover Complex. Based on the hydrological soil-cover complex, curve number values are given to the different soil classes using the values as shown in Table 4 for Indian conditions (AMC-III).

Weighted Curve Number (CN) for the watershed is calculated using the following formula:

$$CN = \frac{\sum CN_i \times A_i}{A} \quad (4)$$

Where, CN = Weighted Curve Number,  $CN_i$  = Curve Number from 1,2,3,...,i

$A_i$  = Area with curve number  $CN_i$ ,  $A$  = Total area of the watershed

**Table 4: Runoff curve numbers for the Indian conditions (AMC-II)**

| Sl. No. | Land Use           | Treatment or Practice    | Hydrologic Condition | Hydrologic Soil Group |    |    |    |
|---------|--------------------|--------------------------|----------------------|-----------------------|----|----|----|
|         |                    |                          |                      | A                     | B  | C  | D  |
| 1.      | Cultivated         | Straight Row             | -                    | 76                    | 86 | 90 | 93 |
|         |                    | Contoured                | Poor                 | 70                    | 79 | 84 | 88 |
|         |                    |                          | Good                 | 65                    | 75 | 82 | 86 |
|         |                    | Contoured & Terraced     | Poor                 | 66                    | 74 | 80 | 82 |
|         |                    |                          | Good                 | 62                    | 71 | 77 | 81 |
|         |                    | Bunded                   | Poor                 | 67                    | 75 | 81 | 83 |
| Good    | 59                 |                          | 69                   | 76                    | 79 |    |    |
|         | Paddy              | -                        | 95                   | 95                    | 95 | 95 |    |
| 2.      | Orchards           | With Understory Cover    | -                    | 39                    | 53 | 67 | 71 |
|         |                    | Without Understory Cover | -                    | 41                    | 55 | 69 | 73 |
| 3.      | Forest             | Dense                    | -                    | 26                    | 40 | 58 | 61 |
|         |                    | Open                     | -                    | 28                    | 44 | 60 | 64 |
|         |                    | Scrub                    | -                    | 33                    | 47 | 64 | 67 |
| 4.      | Pasture            | -                        | Poor                 | 68                    | 79 | 86 | 89 |
|         |                    | -                        | Fair                 | 49                    | 69 | 79 | 84 |
|         |                    | -                        | Good                 | 39                    | 61 | 74 | 80 |
| 5.      | Wasteland          | -                        | -                    | 71                    | 80 | 85 | 88 |
| 6.      | Roads              | -                        | -                    | 73                    | 83 | 88 | 90 |
| 7.      | Hard Surface Areas | -                        | -                    | 77                    | 86 | 91 | 93 |

(Handbook of Hydrology, 1972)

#### Antecedent Moisture Condition (AMC)

Antecedent Moisture Condition (AMC) refers to the moisture content present in the soil at the beginning of the rainfall-runoff event. It is determined by total rainfall in 5-day period preceding a storm as shown in Table 5. SCS developed three antecedent soil-moisture conditions and labelled them as I, II, III, according to soil conditions and rainfall limits for dormant and growing seasons.

**Table 5: Group of Antecedent Soil Moisture Classes**

| AMC Class | Soil Characteristics | 5-Days Antecedent Rainfall (mm) |                |
|-----------|----------------------|---------------------------------|----------------|
|           |                      | Dormant Season                  | Growing Season |
| I         | Wet Condition        | Less than 13                    | Less than 36   |
| II        | Average Condition    | 13 - 28                         | 36 - 53        |
| III       | Heavy Rainfall       | > 28                            | > 53           |

(Handbook of Hydrology, 1972)

To get the curve number values for AMC I and III, the correction factors were applied. The curve numbers for AMC-I and AMC-III had been obtained by conversion of AMC-II (weighted CN) using the following formulae:

**For AMC-I:**

$$CN_I = \frac{CN_{II}}{2.281 - 0.01281CN_{II}} \quad (5)$$

**For AMC-III:**

$$CN_{III} = \frac{CN_{II}}{0.427 + 0.00573CN_{II}} \quad (6)$$

Where,

CN I = Curve Number for dry condition.

CN II = Curve Number for normal or average condition.

CN III = Curve Number for wet condition.


### 3. Results and Discussion

**Land use land cover map:** The LULC map of Dapoli watershed is divided into seven classes i.e. agricultural land, forest land, scrub land, barren land, orchards, settlement and waterbodies as shown in Fig 3. Supervised classification with maximum likelihood classification was performed for Dapoli watershed. The overall accuracy of the LULC map for Dapoli watershed for the year 2022 was found to be 90.47%. The validation of land use mapping was done using Kappa coefficient and it was observed that the grade of accuracy was excellent as per [3]. The kappa coefficient for the LULC map of Dapoli watershed was 0.89. The area covered by different LULC classes is shown in Table 6.

**Table 6: Area covered by different LULC classes in Dapoli watershed**

| SI. No. | LULC              | Area (ha) | Percentage (%) |
|---------|-------------------|-----------|----------------|
| 1       | Forest Land       | 11200.17  | 42.05          |
| 2       | Orchards          | 7062.53   | 26.52          |
| 3       | Scrub Land        | 4700.27   | 17.65          |
| 4       | Agricultural Land | 1666.03   | 6.26           |
| 5       | Settlement        | 953.95    | 3.58           |

|   |              |                 |            |
|---|--------------|-----------------|------------|
| 6 | Barren Land  | 848.67          | 3.19       |
| 7 | Waterbodies  | 203.46          | 0.76       |
|   | <b>Total</b> | <b>26635.08</b> | <b>100</b> |

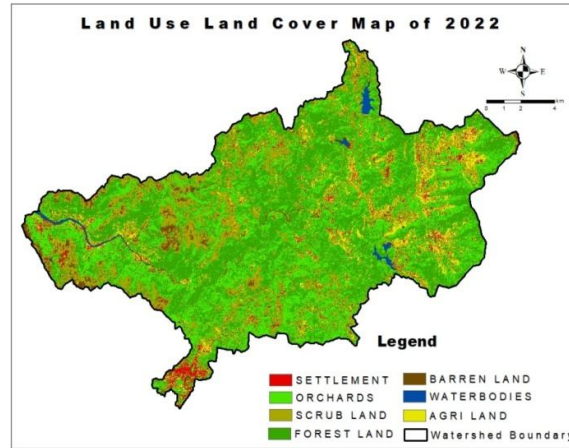


**Fig 3: Land Use Land Cover Map of 2022**

**Hydrologic soil group (HSG) map:** Dapoli watershed indicates two types of hydrological soil group i.e. soil group C and soil group D. Maximum area of the watershed is covered by HSG- C i.e. 88.26% (23508.23 ha) and HSG- D covers 11.74% (3126.85 ha). Hydrologic soil group map is shown in Fig 4 and the area covered by different hydrological soil group in Dapoli watershed is shown in Table 7.

**Table 7: Area covered by different hydrological soil group in Dapoli watershed**


| Sr. No. | Hydrological Soil Group | Area (ha)       | Area (%)   |
|---------|-------------------------|-----------------|------------|
| 1.      | Group – C               | 23508.23        | 88.26      |
| 2.      | Group – D               | 3126.85         | 11.74      |
|         | <b>Total</b>            | <b>26635.08</b> | <b>100</b> |

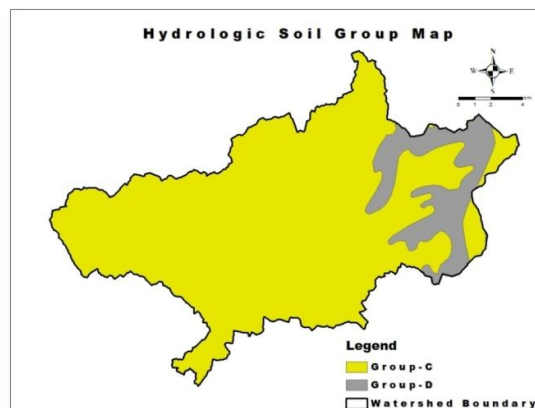

**Fig 4: Hydrological Soil Group Map**

**Computation of weighted Curve Number (CN):** The land use land cover map and hydrologic soil group map are combined on the ArcGIS software using the Union tool in the Arc toolbox. A curve number is assigned to each unique land use-soil group polygon, based on the SCS curve number

values as shown in Table 4. The CN grid map of Dapoli watershed is shown in Fig 5. The curve number for AMC II condition of Dapoli watershed is calculated by area-weighting the land use-soil group polygons within the watershed using equation (4) the calculated value of the weighted CN for AMC II is 67.83.

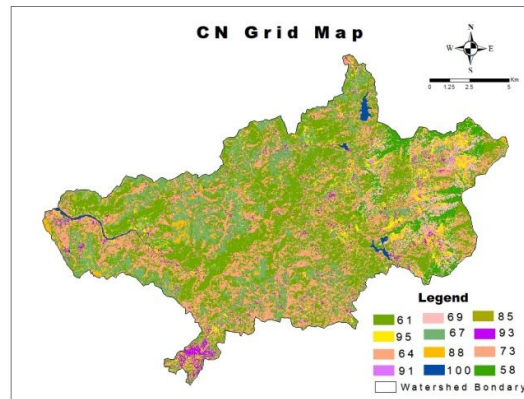

**Fig. 5 Curve Number grid map of Dapoli watershed**

**Antecedent moisture condition (AMC):**Antecedent moisture condition has been labelled according to the soil condition and rainfall limits for dormant and growing seasons viz. AMC I for dry soils but not to wilting point, AMC II for average conditions and AMC III for when sufficient rainfall has occurred within the immediate past 5 days. The curve number values further calculated for AMC I and AMC III were 48.03 and 83.16 respectively.

**Estimation of surface runoff:**Comparison of the annual rainfall and runoff depth of Dapoli watershed for 30 years is shown in Fig 6. In the year 2021, the highest rainfall was recorded i.e. 5421.2 mm and the lowest rainfall was recorded in the year 2015, i.e. 2330.6 mm. The average annual rainfall for last 30 years is 3701.85 mm. The maximum runoff observed was 2505.14 mm in the year 2021 i.e. 46.21% of the annual rainfall. The minimum runoff observed was in the year 2001 with a depth of 734.81 mm i.e. 30.57 % of the annual rainfall. The average annual runoff depth of Dapoli watershed for 30 years is 1543.12 mm. The annual rainfall-runoff depth of Dapoli watershed is shown in Table 8. It was observed that from the year 1993 to 2022, 41.68% of the rainfall was contributed to runoff. The rainfall and runoff was strongly correlated with a correlation coefficient of 0.94 as shown in Fig 7.

**Table 8: Annual Rainfall-Runoff Depth of Dapoli watershed (Year 1993-2022)**

| Sr. No. | Year | Annual Rainfall (mm) | Annual Runoff (mm) | Annual Runoff (%) |
|---------|------|----------------------|--------------------|-------------------|
| 1       | 1993 | 3848                 | 1588.89            | 41.29             |
| 2       | 1994 | 2918.5               | 928.69             | 31.82             |
| 3       | 1995 | 3140.1               | 1052.51            | 33.52             |
| 4       | 1996 | 3112.5               | 1147.29            | 36.86             |
| 5       | 1997 | 3843.1               | 1736.43            | 45.18             |
| 6       | 1998 | 3829.6               | 1568.67            | 40.96             |
| 7       | 1999 | 4226.2               | 1745.28            | 41.30             |
| 8       | 2000 | 4619.05              | 2339.71            | 50.65             |
| 9       | 2001 | 2403.4               | 734.81             | 30.57             |
| 10      | 2002 | 2739.5               | 936.61             | 34.19             |
| 11      | 2003 | 3004                 | 1155.28            | 38.46             |
| 12      | 2004 | 3535.6               | 1427.89            | 40.39             |
| 13      | 2005 | 3654.2               | 1547.35            | 42.34             |
| 14      | 2006 | 3558.8               | 1226.37            | 34.46             |
| 15      | 2007 | 4261.97              | 2031.72            | 47.67             |
| 16      | 2008 | 3011.4               | 1215.77            | 40.37             |

|             |      |                |                |       |
|-------------|------|----------------|----------------|-------|
| 17          | 2009 | 2697.3         | 879.81         | 32.62 |
| 18          | 2010 | 4721.1         | 2132.91        | 45.18 |
| 19          | 2011 | 4932.2         | 2349.25        | 47.63 |
| 20          | 2012 | 3654           | 1555.19        | 42.56 |
| 21          | 2013 | 4748           | 2202.77        | 46.39 |
| 22          | 2014 | 3370.2         | 1552.17        | 46.06 |
| 23          | 2015 | 2330.6         | 788.77         | 33.84 |
| 24          | 2016 | 4504.1         | 2027.3         | 45.01 |
| 25          | 2017 | 3633.5         | 1452.62        | 39.98 |
| 26          | 2018 | 3071.8         | 1154.27        | 37.58 |
| 27          | 2019 | 5130.9         | 2342.41        | 45.65 |
| 28          | 2020 | 4145.4         | 1604.92        | 38.72 |
| 29          | 2021 | 5421.2         | 2505.14        | 46.21 |
| 30          | 2022 | 2989.1         | 1362.84        | 45.59 |
| <b>Mean</b> |      | <b>3701.85</b> | <b>1543.12</b> |       |


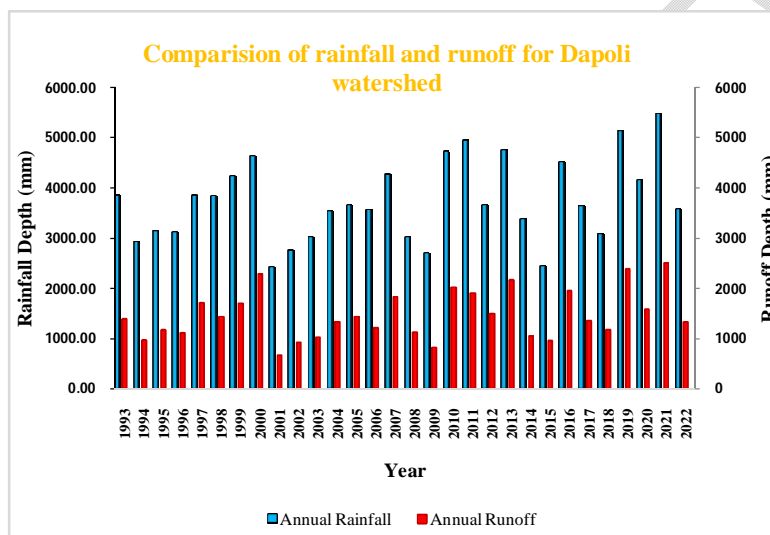


Fig. 6: Comparison of annual rainfall-runoff of Dapoli watershed (Year 1993-2022)

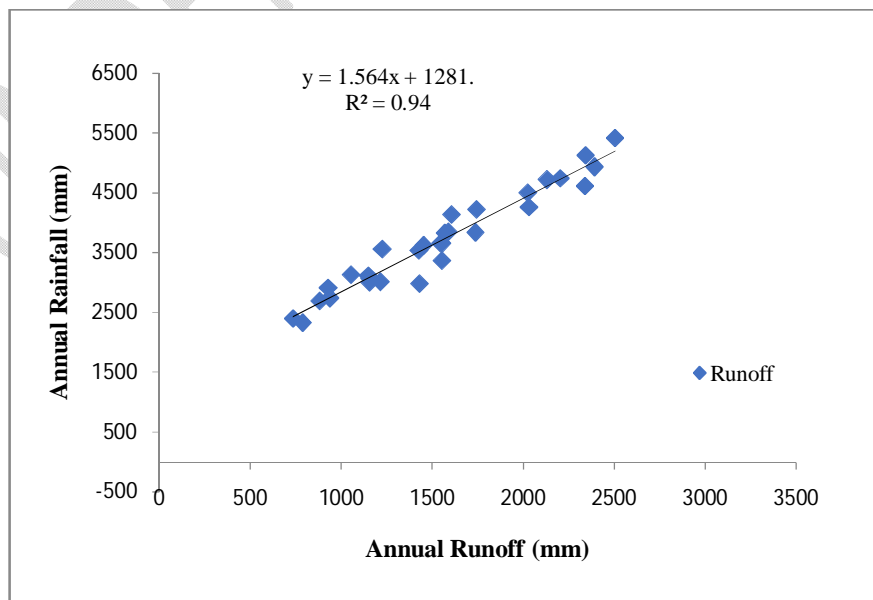

**Fig. 7: Scatter plot between rainfall and estimated runoff**

#### **4. CONCLUSION:**

In this present study, the SCS Curve Number method coupled with remote sensing and GIS has made the estimation of surface runoff more convenient and efficient. The LULC map showed that in Dapoli watershed, forest land covered maximum area and least area was covered by waterbodies. The calculated curve number for Dapoli watershed for AMC I, II and III are 48.03, 67.83 and 83.16 respectively. Based on the results of this study, it was concluded that 41.68 % of the total rainfall for 30 years was contributed to runoff where the rainfall and runoff was strongly correlated with a correlation coefficient of 0.94. This method could also be applied for estimation of surface runoff in other similar watersheds for effective watershed management.

#### **REFERENCES:**

1. Matomela N., Tianxin L., Morahanye L., Bishoge O.K., Ikhumhen H. O., 2019. Rainfall-runoff estimation of Bojiang lake watershed using SCS-CN model coupled with GIS for watershed management. *Journal of Applied and Advanced Research*, 4(1) 16–24.
2. Muthu A. C. L and Santhi H. M., 2015. Estimation of Surface Runoff Potential using SCS-CN Method Integrated with GIS. *Indian Journal of Science and Technology*, 8(28): 1-6.
3. Islami F.A., Tarigan S.D., Wahjunie E.D and Dasanto B.D., 2022. Accuracy assessment of land use change analysis using google earth in Sadar watershed Mojokerto regency, IOP Conf. Ser.: Earth Environment Science, 950012091.
4. USDA (1974). Soil Survey of Travis County, Texas College Station, Tex.: Texas Agricultural Experiment Station, and Washington, D.C: USDA Soil Conservation Service.
5. Handbook of Hydrology, 1972. Soil Conservation Department, Ministry of Agriculture, New Delhi.
6. Dhaigude S.D., Bhange H.N., Ayre B.L., Patil S.T. and Bansode P.B., 2021. Assessing land use and land cover change detection using remote sensing in Ratnagiri District of Maharashtra. *The Pharma Innovation*, 10(2):1308-1311.
7. Dhawale A.W., 2013. Runoff Estimation for Darewadi Watershed using RS and GIS. *International Journal of Recent Technology and Engineering*, 1(6): 46-50.