

Original Research Article

Exergy and Energy Analysis of Forced Convective Thin-Layer Solar Drying of Tiger Nuts

ABSTRACT

Aims: To study the exergy and energy analysis for thin-layer solar drying of tiger nuts; and also to determine the drying kinetics for the thin-layer solar drying of tiger nuts.

Study design: Yellow variety of tiger nuts were dried in a forced convection solar dryer to determine the exergy and energy indices.

Place and Duration of Study: Federal University of Technology, Owerri, Nigeria between October, 2022 to March, 2023.

Methodology: The experiment was conducted at three different air velocities of 1.5, 2.5, and 3.5 m s⁻¹ and two different load densities of 70 and 140 g. The tiger nuts were dried from average initial moisture content of 52% (wb) to final moisture content of 10.2% (wb). Energy utilization, exergy loss rate, exergy efficiency, improvement potential, and sustainability index were determined.

Results: The results of energy utilization, exergy loss rate and improvement potential ranged from 2.1 to 5.09 W, 0.25 to 0.93 W and 0.08 to 0.54 W respectively; however, these values increased with increasing air velocities and load densities. The results of exergy efficiency and sustainability index ranged from 41.8 to 68.49% and 1.72 to 3.17 respectively; these values increased with decreasing air velocities and load densities.

Conclusion: The results from this research will serve as a guide in reduction of energy costs for the optimum design of convective dryers.

Keywords: Air velocity; convective dryers; forced convection; load density; moisture content.

1. INTRODUCTION

Tiger nuts (*Cyperus esculantus*) are crops belonging to the family cyperaceae, which is cultivated throughout the world [1]. The tubers contain a significant amount of dietary fiber; they also contain minerals such as potassium, phosphorus, calcium, magnesium, zinc, copper, vitamins C and E, essential fatty acids like myristic acid and Linoleic acid [2]. The black, brown and yellow varieties of this nut are in existence. Okafor et al. [3] stated that only the yellow and brown varieties are readily available in the Nigerian market; and that the yellow variety is preferred to all other varieties because of its qualities like its bigger size, colour and fleshier body. Tiger nuts can be eaten raw or be made into a refreshing beverage called tiger nut milk [4].

The main purpose of drying agricultural products is to improve food stability and minimize chemical and physical changes during storage [5]. The conventional methods of crop drying include open sun drying, drying in the fireplace, and the use of mechanical dryers. These methods are faced with some limitations such as inadequate heat transfer to the food materials, high drying energy consumption, low overall efficiency, longer drying time, and poor dried product quality [6, 7]. The solar drying method, which has gained good popularity in the crop drying industry in recent years is a good replacement for the conventional dryers. The relatively low operating requirements and the low cost of running a solar dryer justifies its economic usage in the rural farming environment of Nigeria. The use of solar dryer in Nigeria is justified because of the renewable nature of solar energy, low operating cost, and the abundance of sunshine available in Nigeria throughout the year.

One of the major challenges encountered in drying operations is to seek the reduction in the costs associated with energy sources in order to increase efficiency in drying facilities, while also leading to high quality dried products [8]. Golpour et al. [9] established that thermodynamic analysis plays a pivotal role when analyzing the energy utilization efficiency in industrial processes; and that exergy analysis in particular has proven as an essential instrument to the design, analysis and optimization of thermal systems. Exergy analysis aims at evaluating the energy available at different points of the system and offers useful information that allows choosing appropriate operating conditions and parameters to design engineering systems [10].

Several research have been done both in the determination of drying kinetics of tiger nuts and exergy and energy analysis of agricultural products. Research by Abano et al. [4] revealed that temperature and the state of the tiger nuts affected their drying kinetics; and that the Midilli et al model was best apt for predicting the thin-layer drying performance of tiger nuts. It is reported in the literature that different agricultural products as potato slices, okra, chili pepper pieces, eggplant, and mulberry displayed that the exergy and energy indices changed with varying drying temperatures, air velocities and load densities [9, 11, 12, 13, 8].

Although a lot of work has been done on the exergy and energy analysis of agricultural materials, however, information on the exergy and energy analysis of tiger nuts is scarce in literature. Therefore, the objective of this work is to conduct the exergy and energy analysis for thin-layer solar drying of tiger nut. The work will further explore the energy and exergy indices for drying tiger nuts as affected by dryer and crop parameters.

2. MATERIAL AND METHODS

The materials used in the experiment are the Solar dryer, yellow variety of tiger nut samples, Electronic weighing balance (OHAUS: PAJA 102; resolution: 0.01 g), digital thermometer/hygrometer (sensitivity: 0.01 °C), Stop watch.

2.1 Sample Preparation

Large quantity of the yellow variety of tiger nuts were bought from Eke ukwu market in Owerri town, Imo state, Nigeria. The nuts were selected by close observation according to uniform size. The mean diameter of the tiger nuts was determined as 8.52 ± 0.52 mm using

a micrometer screw gauge. The nuts were washed and kept in a refrigerator at a temperature of 4 °C to slow down the physiological and chemical changes.

2.2 Description of the Equipment and Experimental Procedure

The dryer used in the research is a flat plate solar cabinet dryer (Fig. 1). The top of the dryer was covered with plain glass. A dark-coloured galvanized steel plate acts as the absorber plate, which overlay a thermal storage base. The drying chamber consists of two drying trays. The axial flow fan that was used was equipped with a microprocessor-controlled speed regulator; this allowed air velocity values of choice to be typed-entered on the keypad and the values will be displayed on the digital display unit. The fan was powered by a 20 watts capacity solar cell, that was connected to a 12 Volts direct current (DC) battery for power storage. The experiment was designed as a 3x2 factorial in a completely randomized design in three replications with factors: air flow velocity (1.5, 2.5, and 3.5 m s⁻¹); and load density (70 and 140 g). At the beginning of the experiment, the solar dryer was switched on, a fan speed was selected, then the dryer was allowed to run at the preset conditions until the dryer reached equilibrium conditions. The tiger nut samples were then placed on drying trays, weighed and placed inside the dryer. The initial moisture content of the samples was determined as 52% (wb) in accordance with the standards of [14]. The sample masses, the dryer and exhaust air relative humidity, as well as both the ambient and dryer temperatures at intervals of 30 minutes were also taken and recorded. The experiment continued until equilibrium moisture content of the tiger nut samples was reached. This point was characterized by three equal consecutive mass readings. The procedure was repeated for all the experimental treatments. The drying experiment was done at Federal University of Technology, Owerri, Nigeria (latitude 5° 27' North, longitude 7° 2' East and altitude of 90.91 m above sea level)

Comment [A1]: The experiment does not mention measurement of SOLAR RADIATION nor the values, which is the source of energy for drying and varies with time of the day.

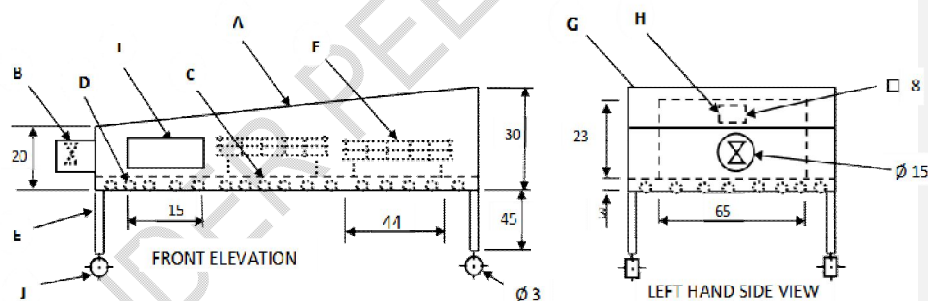


Fig. 1. Schematic representation of the equipment

Where A- Glass surface, B- Fan, C - Absorber plate, D - Thermal storage, E - Stand, F - Drying rack, G - Loading/unloading door, H - Exit hole for moist air, I - Access door, J - Rollers/Wheels.

The samples were oven-dried by standards of [14] for moisture content determination. The moisture content (wb) of the samples was determined using Equation (1).

$$M_{wb} = \frac{m_{ws} - m_{ds}}{m_{ws}} \quad (1)$$

Where: M_{wb} - Moisture content (%), m_{ws} - Mass of the wet sample (g), M_{ds} - Mass of the dry sample (g)

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

2.3 Energy Analysis

The energy analysis for the drying experiment was done by using the equation utilized by Davishiet *al.* [8]. The conservation of mass for the drying air is mathematically expressed in Equation (2) as

$$\sum M_i = \sum M_o \quad (2)$$

Where M_i - Inlet mass flow rate of air (kg s^{-1}), M_o = Outlet mass flow rate of air (kg s^{-1})
The conservation of energy is mathematically expressed as

$$\sum E_i = \sum E_o \quad (3)$$

Where E_i and E_o are the input and output energy values (J) respectively.
Equation (3) is further expanded as

$$Q - W = \sum M_o \left(h_o + \frac{v_o^2}{2} \right) - \sum M_i \left(h_i + \frac{v_i^2}{2} \right) \quad (4)$$

Where h_i - Air enthalpy at the temperature entering the dryer (J kg^{-1}), h_o - Air enthalpy at the temperature leaving the dryer (J kg^{-1}), Q - Inflow of heat energy (W), W - Mechanical work production rate (W), v_i , v_o - Velocities of air into and out of the dryer (m s^{-1}).

$\frac{v_o^2}{2}$ and $\frac{v_i^2}{2}$ have been eradicated from Equation (4) because of no resulting mechanical movement in the drying process. Therefore, Equation (4) can be represented as

$$Q = \sum M_o h_o - \sum M_i h_i \quad (5)$$

Assuming uniformity of mass, $M_o = M_i = M_o$

$$Q = M_o (h_o - h_i) \quad (6)$$

The enthalpy of the drying air (h) was determined according to Nazghelichiet *al.* [15] and expressed in Equation (7) as

$$h = C_{pa} T_{da} + W h_{sat} \quad (7)$$

Where C_{pa} - Specific heat capacity of dry air ($\text{kJ kg}^{-1}\text{K}^{-1}$), T_{da} - Temperature of air during drying ($^{\circ}\text{C}$), W - Humidity ratio during drying ($\text{kg H}_2\text{O}/\text{kg}$ of dry air), h_{sat} - Saturated vapour's enthalpy (kJ kg^{-1}).

The values of W were obtained from the psychrometric chart using the values of temperature and relative humidity. The specific heat capacity of dry air (C_{pa}) is mathematically expressed as per [11] and expressed in Equation (8).

$$C_{pa} = 1.0029 + 5.4 \times 10^{-5} T_{da} \quad (8)$$

The mass of air required for drying was determined by the energy balance equation according to Milan and Stacic [16] and expressed as Equation (9).

$$M_{ar} C_{pa} (T_{da} - T_{\infty}) = M_w L_v \quad (9)$$

Where M_{ar} - Mass of air required for drying (kg), T_{∞} - Ambient temperature ($^{\circ}\text{C}$), M_w - Mass of water used for the drying process (kg), L_v - Latent heat of vaporization of water (kJ kg^{-1}).

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

The mass flow rate of air, M_a (kg s^{-1}) was mathematically expressed as Equation (10).

$$M_a = \frac{M_{ar}}{t} \quad (10)$$

Where t - drying time (secs).

The mass of water utilized for the drying process (M_w) was estimated according to Ehiem et al. [17] and represented in Equation (11) as

$$M_w = M_o \frac{(MC_i - MC_f)}{(100 - MC_f)} \quad (11)$$

Where M_o - Initial mass of sample (kg), MC_i - Initial moisture content of sample (%), MC_f - Final moisture content of sample (%). Energy usage (EU) is mathematically expressed as

$$EU = M_a (h_{ai} - h_{ao}) \quad (12)$$

Where h_{ai} and h_{ao} are enthalpies of inlet and outlet air respectively
Energy efficiency (η_E) is mathematically expressed as

$$\eta_E = \frac{E_i - E_o}{E_i} = \frac{M_a (h_{ai} - h_{ao})}{M_a h_{ai}} \times 100\% \quad (13)$$

2.4 Exergy Analysis

The exergy of the system was determined according to the second law of thermodynamics. Generally, the exergy of a heat transfer system under steady state flow is mathematically expressed as per [18] and represented in Equation (14).

$$EX = M_a C_{pa} \left[(T - T_\infty) - T_\infty \ln \frac{T}{T_\infty} \right] \quad (14)$$

Where EX - Exergy of the system (kW), T - Temperature ($^{\circ}\text{C}$), T_∞ - Ambient temperature ($^{\circ}\text{C}$)
The inflow exergy (EX_i) is mathematically expressed as

$$EX_i = M_a C_{pa} \left[(T_{ai} - T_\infty) - T_\infty \ln \frac{T_{ai}}{T_\infty} \right] \quad (15)$$

Where T_{ai} - Temperature of air at the entrance of the dryer ($^{\circ}\text{C}$).
The outflow exergy (EX_o) is mathematically expressed as

$$EX_o = M_a C_{pa} \left[(T_{ao} - T_\infty) - T_\infty \ln \frac{T_{ao}}{T_\infty} \right] \quad (16)$$

Where T_{ao} - Temperature of the ambient air at the outlet ($^{\circ}\text{C}$).
The exergy loss (EX_L) is given according to [10] as:

$$EX_L = EX_i - EX_o \quad (17)$$

The exergy efficiency (η_{EX}) is determined as per [10] and expressed as

$$\eta_{EX} = \frac{\text{Exergy inflow} - \text{Exergy loss}}{\text{Exergy inflow}} = 1 - \frac{\text{Exergy loss}}{\text{Exergy inflow}}$$

$$\eta_{EX} = 1 - \frac{EX_L}{EX_i} \quad (18)$$

The rate of improvement potential (IP) is determined according to Khanali et al. [19] as:

$$IP = (1 - \eta_{EX})(EX_i - EX_o) \quad (19)$$

The drying process sustainability index (S) is determined as per [20] as:

$$SI = \frac{1}{1 - \eta_{EX}} \quad (20)$$

Formatted: Font: Italic

3. RESULTS AND DISCUSSION

3.1 Experimental Drying Data

The results of temperature and relative humidity values for the thin-layer solar drying of tiger nuts are summarized in Table 1.


Table 1. Temperature and relative humidity values for the thin-layer solar drying of Tignuts

Load density (g)	Velocity (m/s)	Temperature (°C)			Relative humidity (%)		
		Ambient	Dryer	Air exit	Ambient	Dryer	Air exit
70	1.5	32.1	51.2	45.2	68.05	25.94	30.5
	2.5	31.9	50.5	46.4	66.9	22.95	28.2
	3.5	32.1	51.1	47.4	67.46	24.97	27.5
140	1.5	32.1	51.2	43.8	68.05	25.94	31.5
	2.5	31.9	50.5	44.6	66.9	22.95	30.2
	3.5	32.1	51.1	46.2	67.46	24.97	28.5

Comment [A2]: Ambient Temperature and Relative Humidity change throughout the day as the Solar Radiation changes. However, the values of Ambient Temperature and Relative Humidity presented here are constant for each velocity.

3.2 Effect of Air Flow Velocity and Load Density on Energy Usage

Fig. 2. shows a graphical plot of energy usage versus air flow velocity for the varying load densities. It is evident from Fig. 2. that the energy usage increased with increasing air flow velocities and increased with increasing load densities. However, for the load density of 70 g, the effect of air flow velocity on the energy usage is negligible. The phenomenon of the energy usage increasing with load density could be attributed to the fact that at higher load densities, more

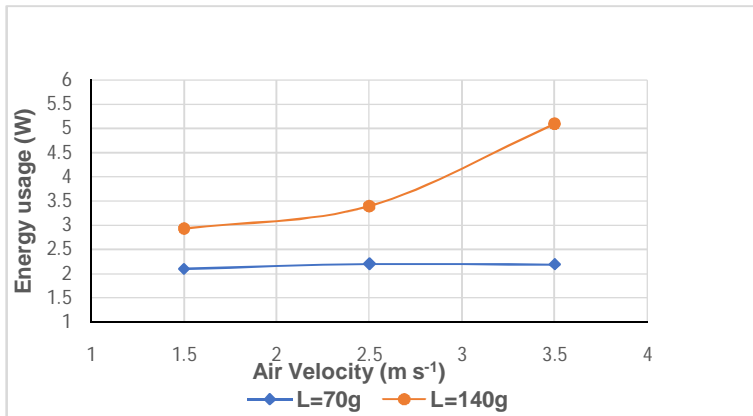


Comment [A3]: Move the graph to the end of the paragraph, just before section 3.3

Fig. 2. Effect of air velocity and load density on the energy usage of tiger nuts


energy is utilized per unit time in water removal during the drying process. Furthermore, the increase in thermal energy usage with increasing air flow velocities could be attributable to the fact that higher air flow velocities facilitates faster moisture removal, thus leading to increased energy utilization. This characteristic behavior of the energy usage with respect to load density and air flow velocity is in agreement with research work by Okunola *et al.* [11] and Akpinaret *et al.* [21], for the thin layer drying of okra and potato slices, respectively.

3.3 Effect of Air Flow Velocity and Load Density on Exergy Loss

The graphical plot of Exergy loss versus air flow velocity (Fig. 3a) shows that exergy loss increased with increasing air flow velocity for all the load densities. Graphical plots of exergy loss versus load density (Fig. 3b) showed that the exergy loss increased with increasing load densities for the various air flow velocities. The maximum exergy loss of 0.93 W was recorded for

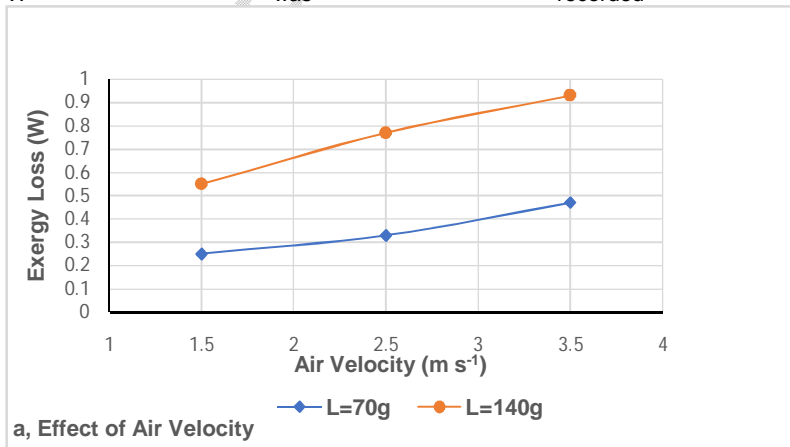

Comment [A4]: Position the graph at the end of the paragraph

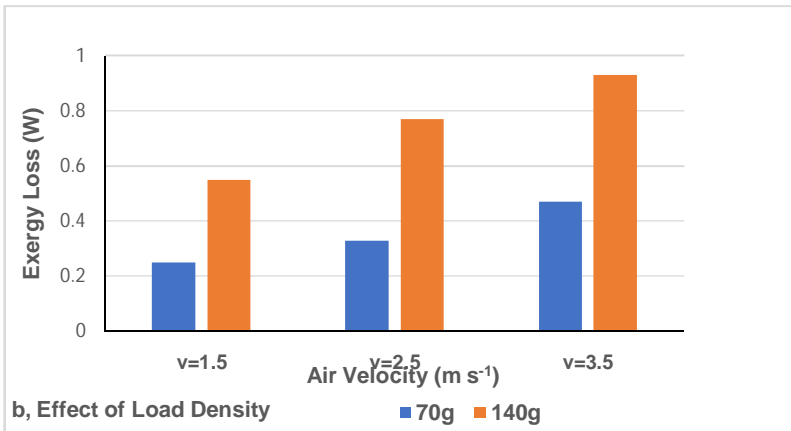

Comment [A5]: Position the graph at the end of the paragraph

Fig. 3. Effect of air velocity and load density on exergy loss of tiger nut

load density of 140 g and air flow velocity of 3.5 m s^{-1} , while the least exergy loss of 0.25 W was recorded for load density of 70 g and air flow velocity of 1.5 m s^{-1} . This characteristic behavior of exergy loss with respect to load density and air flow velocity, demonstrates that a greater portion of the delivered exergy was utilized in the drying process. This trend in exergy loss with air flow velocities and load densities is in agreement with previous research findings by Golpouret *al.* [9] for potato slices, Okunola *et al.* [11] for okra.

3.4 Effect of Air Flow Velocity and Load Density on Exergy Efficiency

Graphical plots of Exergy efficiency versus air flow velocity (Fig. 4) show that the exergy efficiency decreased with increasing air velocities and load densities. The maximum exergy efficiency of 68.49% was obtained for air flow velocity of 1.5 m s^{-1} and load density of 70 g, while the least exergy efficiency of 41.8% was obtained for air flow velocity of 3.5 m s^{-1} and load density

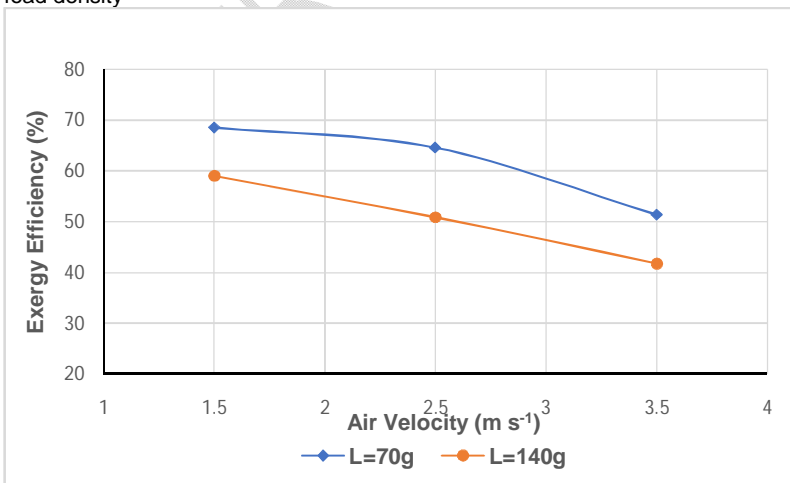


Fig. 4. Effect of air velocity and load density on the exergy efficiency of tiger nuts

of 140 g. This characteristic behavior could be attributed to the fact that higher load densities of crop being dried is normally associated with greater mass of moisture to be removed. This implies that more of the input exergy was utilized (lost) in removing this moisture mass. The higher air flow rates facilitate the effective removal of this moisture, which leads to increased exergy loss and thus a reduction in exergy efficiency. This trend in the variation of exergy efficiency with load density and air flow velocity is in agreement with previous research in literature [11, 9, 19].

3.5 Effect of Air Flow Velocity and Load Density on the Sustainability Index

Fig. 5. describes how the air flow velocity and load density affects the sustainability index for the thin layer drying of tiger nut. It was evident from Fig. 5. that the sustainability index decreased with increasing values of air velocities and increasing values of load densities.

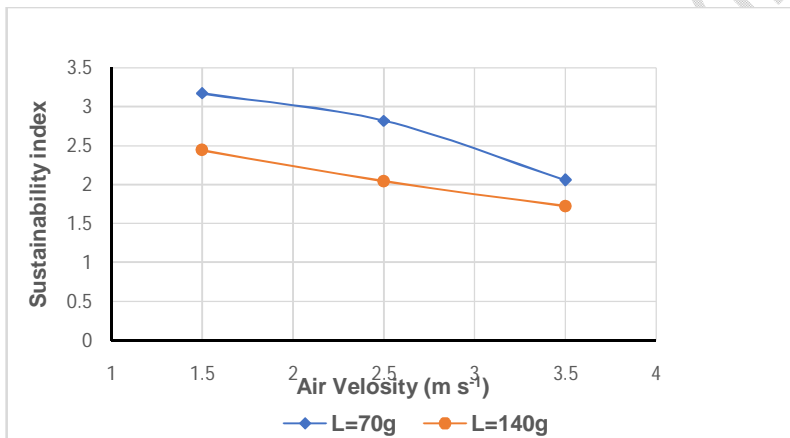


Fig. 5. Effect of air velocity on sustainability index

3.6 Effect of Air Flow Velocity and Load Density on the Improvement Potential

The effect of load density and air flow velocity on the Improvement potential (IP) for the thin layer solar drying of tiger nuts is represented in Fig. 6. It is evident from Fig. 6. that the Improvement potential had a linear relationship with both the air flow velocities and load densities.

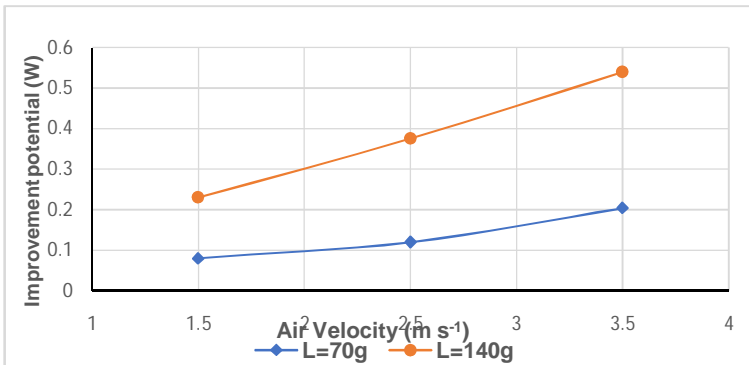
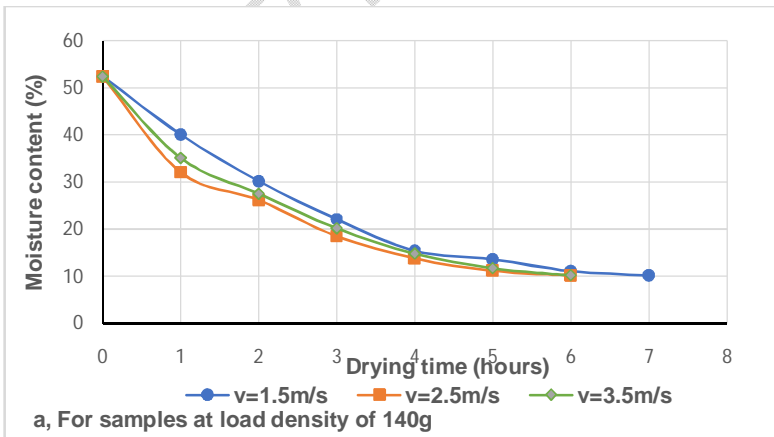


Fig. 6. Effect of air velocity and load density on the improvement potential of tiger nuts

The IP values ranged from lowest value of 0.08 W, obtained for load density of 70 g and air velocity of 1.5 m s⁻¹, to a maximum value of 0.54 W, obtained for load density of 140 g and air flow velocity of 3.5 m s⁻¹. These values are slightly lower than the range of values of 0.97 W to 14.2 W recorded in literature for other agricultural materials [22, 11, 9]. This slight difference in values may be attributed to the range of load densities used, the drying method applied, and the crop being dried. However, the values of Improvement potential increased with the increasing values of both the air flow velocity and load density, which is in tandem with previous research findings [22, 11, 9].

3.7 Drying Kinetics of Tiger Nut

Graphical plots of moisture content with drying time (Fig. 7), produced exponential curves which sloped from the left to the right side of the graph. It was evident from the graph that the moisture content of the tiger nuts decreased with increasing drying time.



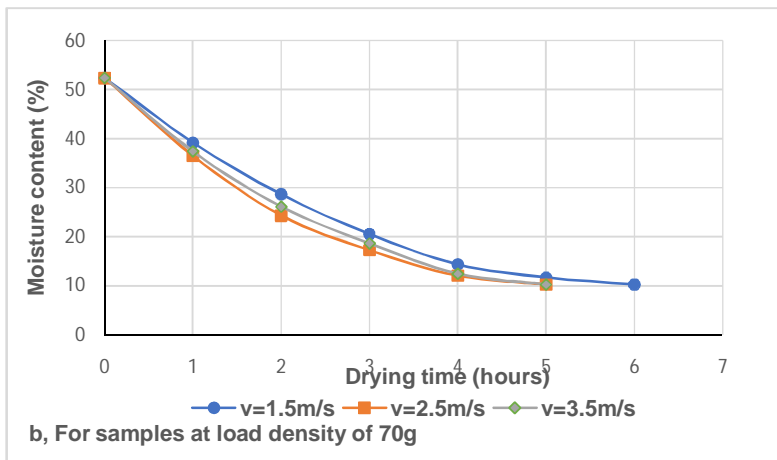


Fig. 7. Moisture desorption curves for the thin-layer drying of tiger nut

The characteristic nature of the curve is indicative of the fact that there was an initial higher rate of drying, which gradually declined with drying time. This characteristic behavior has been reported in literature for other agricultural materials like rossale, cassava noodles, tomato slices; and has been attributed to the various forms and levels at which water is present in food materials [23, 24, 25].

4. CONCLUSION

The aim of this research is to study the effect of air flow velocity and load density on the energy and exergy analysis of thin layer solar drying of tiger nuts. In the course of the study, it was observed that the energy and exergy indices viz: energy usage, exergy loss, exergy efficiency, sustainability index, and exergy improvement potential, all varied with both the air flow velocity and load density. The research revealed that the energy usage, exergy loss and improvement potential, all increased with increasing values of air flow velocity and load density; while the exergy efficiency and sustainability index decreased with increasing values of air flow velocity and load density. The trend in the relationship of the energy and exergy indices with the air flow velocity and load density are in agreement with previous related research in literature. It was evident from the research that the drying kinetics of tiger nuts is in agreement with previous related research. It is recommended that this research should further be conducted for tiger nut, using other sources of heat and at varying temperatures.

REFERENCES

1. Borges O, Gonk B. Nutritional quality of chestnut (*Castanea sativa* mill) cultivars from Portugal. *Food Chemistry*. 2008;106(3):976-984.
2. Ijarotimi OS, Yinusa MA, Adegbenbo PA, Adeniyi MD. Chemical compositions, functional properties, anti-oxidative activities and glycemic indices of raw and fermented tiger nut tubers (*Cyperiusesculantmlativum*) flour. *Journal of Food Biochemistry*. 2018;42(5):el12591.
3. Okafor JN, Mordi JI, Ozumba AU, Solomon HM, Olatunji O. Preliminary studies on

- the characterization of contaminants in tiger nuts (yellow variety). Proceedings of 27th Annual Conference and General Meeting of Nigerian Institute of Food Science and Technology Kano. 2003: 210-211.
4. Abano EE, Akanson J, Kizzie-Hayford N. Drying kinetics and quality of whole, halved, and pulverized tiger nut tubers (*Cyperus esculentus*). *International Journal of Food Science*. 2021;2021:1-11.
 5. Singh F, Katiyar VK, Singh BP. Mathematical modeling to study drying characteristics of apple and potato. *International Conference on Chemical, Environment and Biological Sciences*, Kuala Lumpur, 17-18 September 2014, 172-175.
 6. Motevali A, Minaei S, Banakar A, Ghobadian B. Energy analyses and drying kinetics of chamomile leaves in microwave-convective dryer. *Journal of the Saudi Society of Agricultural Sciences*, [Http://dx.doi.org/10.1016/j.jssas.2014.11.003](http://dx.doi.org/10.1016/j.jssas.2014.11.003).
 7. Yildiz G, İzli G. Influence of microwave and microwave-convective drying on the drying kinetics and quality characteristics of pomelo. *Journal of Food Process and Preservation*. 2018;e13812. DOI: <https://doi.org/10.1111/jfpp.13812>.
 8. Darvishi H, Zarein M, Minaei S, Khafajeh H. Exergy and energy analysis, drying kinetics and mathematical modeling of white mulberry drying process. *International Journal of Food Engineering*. 2014;10: 269-280.
 9. Golpour I, Kaveh M, Chayjan RA, Guine RP. Energetic and exergetic analysis of a convective dryer: a case study of potato drying process. *Open Agriculture*. 2020;2020(5):563-572.
 10. Aghbashlo M, Kianmehr MH, Arabhosseini A. Energy and exergy analyses of thin-layer drying of potato slices in a semi-industrial continuous band dryer. *Drying Technology*. 2008;26:1501–1508.
 11. Okunola A, Adekanye T, Idahosa E. Energy and exergy analyses of okra drying process in a forced convection cabinet dryer. *Research in Agricultural Engineering*. 2021;67(1):08-16.
 12. Akpınar EK. Energy and exergy analysis of drying of red pepper slices in a convective type dryer. *International Community of Heat and Mass Transfer*. 2004;31:1165-1176.
 13. Azadbakht M, Ziaratban A, Torshizi MV, Aghili H. Energy and exergy analysis during eggplant drying in a fluidized bed dryer. *CIGR Journal*. 2017;19:177-182.
 14. AOAC, Association of Official Analytical Chemists. 2015. *Official methods of analysis*. 12th edition. Washington DC.
 15. Nazghelichi T, Kianmehr MH, Aghbashlo M. Thermodynamic analysis of fluidized bed drying of carrot cubes. *Energy*, The 3rd International Conference on Sustainable Energy and Environmental Protection, SEEP 2009, vol. 35; 2010. p. 4679–4684. doi: 10.1016/j.energy.2010.09.036.
 16. Milan B, Stacic C. Numerical study on hygroscopic capillary porous material drying in packed bed. *Thermal Science*. 2000;4(2):59-67.
 17. Ehiem JC, Irtwange SV, Obetta SE. Design and development of an industrial fruit and vegetable dryer. *Research Journal of Applied Sciences, Engineering and Technology*. 2009;1(2):44-53.
 18. Castro M, Roman C, Echegaray M, Mazza G, Rodriguez R. Exergy analysis of onion drying by convection: influence of dryer parameters on its performance. *Entropy*. 2018;20:1-9.
 19. Khanali M, Aghbashlo M, Raphie S, Jafan A. Exergetic performance assessment of plug flow fluidized bed drying process of rough rice. *International Journal of Exergy*. 2013;13:387-408. doi: 10.1504/IJEX.2013.057357.
 20. Aviara NA, Onuoha LN, Falora OE, Igbeka JC. Energy and exergy analysis of native cassava starch drying in a tray dryer. *Energy*. 2014;73:809-817.
 21. Akpınar EK, Midilli A, Bicer Y. Energy and exergy of potato drying process via

- cyclone type dryer. *Energy Conversion and Management*. 2005;46:253-265.
22. Aghbashlo M, Mobili H, Raghiee S, Madadlou A. Energy and exergy analysis of the spray drying process of fish oil microencapsulation. *Biosystems Engineering*. 2012;111:229-241.
 23. Tunde-Akintunde TY, Afon AA. Modeling of hot-air drying of pretreated cassava chips. *CIGR Journal*. 2010;12(2):34-41.
 24. Ezeanya NC, Egwuonwu CC, Istifanus AB, Okafor VC. Determination of thin layer solar drying kinetics of cassava noodles (tapioca). *International Journal of Research in Engineering and Technology*. 2016;5(8):352-360.
 25. Nwakuba N, Chukwuezie O, Asoegwu S, Nwandikom G, Okereke N. Thin layer modeling and determination of thermodynamic properties of tomato slices during hot air drying. *Agricultural Engineering*. 2018;63(1):39-51.

UNDER PEER REVIEW