

1
2
3

Improvement of Public Cab Transportation System Through Computer Simulation

13
14

ABSTRACT

Aims: Public transportation is a dynamic problem which depends of different variables such as service schedules, route times, demand rates, and traffic density. Due to these features, mathematical modelling for improvement purposes is a difficult and complex task. Thus, computer simulation is proposed as a more comprehensive and efficient approach.

Study design: A transportation case study is considered with the main feature variables. Data was obtained from a cab system within a town in Mexico. The reported problems consisted of economic losses due to low service level and cab utilization,

Methodology: The transportation problem consists of a cab system with four main routes which are served twice a day. Data associated to route times, demand rates, cab capacities, fleet size, service restrictions and fare costs was collected to develop a simulation model and analyze the current state of the real system. Once validated, an improvement approach was performed on the simulation model.

Results: The validated simulation model corroborated the problems reported by the case study. The proposals to improve performance, which consisted of reduction of cab fleet and route length led to reduce operative costs without affecting service level.

Conclusion: Simulation is an important tool to improve complex logistic systems which cannot be addressed by standard mathematical modelling.

15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31

Keywords: Discrete-Event Simulation, Transportation System, Business Analytics, Operative Costs

1. INTRODUCTION

Public transportation systems are the main resource for mobility of people in urban and rural areas. Particularly in some towns in Mexico, where narrow streets are common, cabs are more suitable in contrasts to buses or large vehicles. Figure 1 presents an example of these systems and street features.

In contrast to standard cab services which are hired for a single user or group, cabs in these systems are shared with other users and follow specific routes (just as a standard bus service would do). Each vehicle can load up to 5 passengers excluding the driver. A frequent problem, which is observed at busy times, is low service level which leads to economic losses.

32



33

34

35

Fig. 1. Features of cab fleet and streets

36

37

38

39

Because cabs must serve specific routes through crowded and narrow streets, transportation or route times are variable and extensive. This reduces the availability of vehicles even though the cab fleet may be large. If routes are served at specific schedules, this reduces service levels and increases operative costs.

40

41

42

43

44

45

Transportation problems are frequently studied within the logistic and operational research fields through different tools such as mathematical programming and combinatorial optimization. However, these cab systems involve many dynamic and static variables such as route times, demand rates, cab capacities, fleet size, service restrictions and fare costs, which restrict the use of these tools for analysis and improvement purposes.

46

47

48

49

50

51

52

53

This is the reason to apply discrete-event simulation, which also enables the analysis of metrics such as resource utilization which is difficult to measure in the real system or through mathematical modelling. Computer simulation uses virtual elements to represent real life scenarios to test and validate specifications for decision-making. It significantly reduces design costs and provides immediate feedback on decisions, alternatives and performance for each individual element [1, 2].

54

55

56

57

58

59

The application and results of this tool are described in the present work as follows: in Section 2 we describe the case study data (times, costs, user statistics, etc.). Then, in Section 3 we present the details of the simulation model. In Section 5 we present the results of the validated simulation model. In Section 6 these results are analyzed to support the changes to improve the system's performance. Finally, in Section 7 we present our conclusions.

60

61

2. CASE STUDY

62

63

64

65

66

67

68

69

A company manages four routes within a community in Mexico. Each route is served by a fleet of 5 vehicles with a capacity of five passengers (excluding the driver). These vehicles are Tsuru type from the Nissan company. Table 1 presents the service schedules for these routes including the route times and length. Note that these times are already modelled with a probability function, and both times and length cover the route which starts and ends at the cab station.

Table 1. Service schedule and route times.

Route	Service Schedule	Service/Route Time (T, minutes)	Route Length (L, kilometers)
To Zone1	06:00 to 08:00 hours 14:00 to 16:00 hours	Normal (25, 2)	12.5
To Zone 2	08:00 to 10:00 hours 16:00 to 18:00 hours	Triangular (20,30,40)	20.2
To Zone 3	10:00 to 12:00 hours 18:00 to 20:00 hours	Uniform (30, 40)	16.7
To Zone 4	12:00 to 14:00 hours 20:00 to 22:00 hours	Exponential (30)	14.4

70

71 Although the maximum load capacity is five passengers, sometimes the cab can start the route
 72 with less passengers. Once the cab arrives at the station, it waits up to 10 minutes. After this
 73 time, the cab starts the service route independently of the loaded passengers.

74 Regarding the passengers, Table 2 presents their arrival rates (demand) within a period of
 75 five days, considering Monday and Friday as the busiest.

76 **Table 2. Passenger arrival rate at cab station (number of passengers per hour)**

Time	Monday	Tuesday	Wednesday	Thursday	Friday
06:00-08:00	40	30	35	30	50
08:00-10:00	45	30	30	30	40
10:00-12:00	30	25	30	25	40
12:00-14:00	50	45	25	30	40
14:00-16:00	30	30	30	30	40
16:00-18:00	35	25	30	40	35
18:00-20:00	35	25	30	35	40
20:00-22:00	35	30	25	30	40

77

78 Of the total number of passengers, approximately 60% are adult men, 30% are adult women,
 79 and 10% are children. The single trip fare is 0.30 USD for adults and 0.15 USD for children.

80 Although it is reported that vehicles leave with half capacity, which increases operative costs,
 81 many passengers remain at the station, unable to get a cab on their preferred schedule (i.e.,
 82 if a passenger cannot get the cab to Zone 1 within 08:00 and 10:00 hours, the passenger must
 83 wait until the next schedule service at 14:00 to 16:00 hours, and if the passenger misses this
 84 service, then it must wait until the next day).

85 Each cab consumes approximately 1.0 liter of gasoline (95 octanes, regular) per 9 kilometers,
 86 and each liter has a cost of 1.2 USD. This leads to the following cost function for fuel
 87 consumption based on route length:

88
$$\text{Cost (L)} = (1.2 \text{ USD} / 9 \text{ km}) \times L. \tag{1}$$

89 Note that the maximum revenue of a cab unit is 0.3 USD × 5 passengers = 1.5 USD which is
 90 very similar to 1.2 USD which is the fuel cost of a 9 km trip. Thus, achieving full capacity is
 91 important to avoid economic losses. Also, the number of passengers who were unable to
 92 reach their preferred service is important to estimate the missed cab fares.

93 Here, there are two main concerns regarding the real economic impacts of these problems:

94 a) The level of utilization of each cab per route (all vehicles are at full capacity?) and
 95 overall service level of the fleet.

96 b) How many passengers (adults and children) are served and how many are not served
 97 (what are the revenues and losses in USD?).

98 A simulation model will be developed to address these concerns and estimated the economic
 99 benefits of measures to improve the current system.


100

101

102 **3. SIMULATION MODEL**

103

104 All simulation models must be developed based on a methodology. This is because we must
 105 ensure that, within statistical parameters, it represents accurately the real process. Also,
 106 different versions of a same model may be conceived before obtaining the adequate, verified
 107 and valid one. Figure 2 shows the relationship held through the modeling process. First, a
 108 conceptual model is born along its conceptual model validation, and this process is repeated
 109 until it is found a suitable conceptual model. Then, a computerized model is designed from the
 110 conceptual model, in addition to its computerized verification, which will be run until
 111 satisfactory. Once satisfactory, validation of the computerized model results takes place. If
 112 any changes on the conceptual or computerized models are needed, then verification and
 113 validation processes must be completed for all stages per change [3].

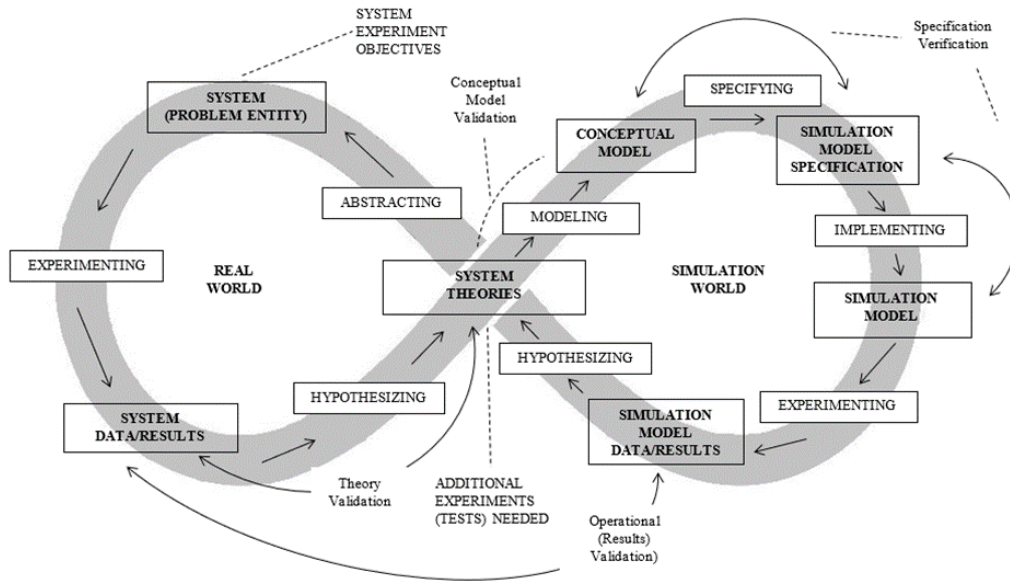

114

115 **Fig. 2. Development of the Simulation model (adapted from [3]).**

116

117 Nowadays, different software is available for simulation, among these, the following can be
 118 mentioned: SIMIO, Rockwell Arena, PROMODEL, etc. In this case we used the Arena platform
 119 due to its use in the improvement of manufacturing and logistics systems [4, 5]. Figure 3
 120 presents the baseline simulation model which was built with the latest version of Arena [6].

121

122 The general description of each section of the model is presented as follows:

123

- 124 A. The arrival of customers for each route X (entities passengersX) is modelled by using
 125 “Create” modules. As these arrivals are dependent of time windows, these are
 126 modelled by using “Schedules”. Figure 4(a) presents an example of both elements for
 127 route 1 (Zone 1). Other elements which are restricted to time windows are the cabs.
 128 Figure 4(a) also presents the schedule for each cab associated to the fleet for rote 1
 129 (Zone 1).
- 130 B. The percentage of adults and children are defined by using a “Decide” module which
 131 separates the incoming entities (passengersX) based on probabilities (90% and 10%
 132 respectively). Figure 4(b) presents an example of this element for route 1 (Zone 1).
- 133 C. Once the incoming entities are separated, these are labelled as “adult” and “children”
 134 by using “Assign” modules. This is important to address the second concern of the
 analysis. An example of these elements is presented in Figure 4(c).

- 135 D. After all entities are labelled, these are batched to comply with the load features of
 136 each cab. For this purpose, an “Adjustable Batch” module is considered. This element
 137 enables batching based on a maximum number, and, if a waiting time is reached,
 138 batching is performed with the available entities in the module. Figure 4(d) presents
 139 an example of this element considering the 10-minute waiting time and the maximum
 140 load capacity of 5 passengers.
- 141 E. Because cab service is restricted to certain time windows throughout the day,
 142 passengers who arrive at times out of these windows are considered to miss the
 143 service. As presented in Figure 5(a), this is modelled by using another “Decide”
 144 module where batches are separated based on the availability of resources (cabs).
 145 Note that the availability of each cab is based on its schedule as presented in Figure
 146 4(a).
- 147 F. Once that all batches are processed, and those missing the service are identified, the
 148 route time is represented. This is performed with “Process” modules which use the
 149 sets of cabs as resources. Note that each fleet is modelled as a “Set” and each one
 150 is filled with the independent cabs associated to each route. This was performed to
 151 address the first concern of the analysis. Figure 5(b) presents an example of this
 152 element for route 1 (Zone 1).
- 153 G. After the transport service time is completed, the batches are separated to obtain the
 154 independent entities (single passengers labelled as “adult” and “children”. This is
 155 performed with a “Separate” modules which is presented in Figure 5(c).
- 156
- 157 Finally, the model is terminated with “Dispose” modules. Validation of the model was
 158 performed with real service data (number of passengers served) through a two-week
 159 period.
 160

161 **4. RESULTS OF THE BASELINE SIMULATION MODEL**

162

163 The simulation model was run through a five-day period. To address the two concerns
 164 presented in Section 2 we report on the following data: resource (cab) utilization, and number
 165 of passengers served within their preferred time window (adults and children), and number of
 166 passengers not served. Table 3 presents the statistics regarding the number of passengers
 167 served with the associated income and loss (in case of not served passengers). The service
 168 level is also computed. Table 4 presents the utilization of each cab on the fleet which serves
 169 each route. Total Operative Cost (TOC) is estimated based on the function (1) and considering
 170 the fleet size, the five-day run, and twice a day services as described in Table 1.
 171

172 **Table 3. Passengers served and not served: income and loss estimation**

Served		Not Served			
Adult	2189	0.30×2189	Adult	305	0.30×305
Children	234	0.15×234	Children	44	0.15×44
Total	2423		Total	349	
	Income (\$)	691.80 USD		Losses (\$)	98.10 USD
Service Level	85.6%				

173
 174

175
176
177
178
179



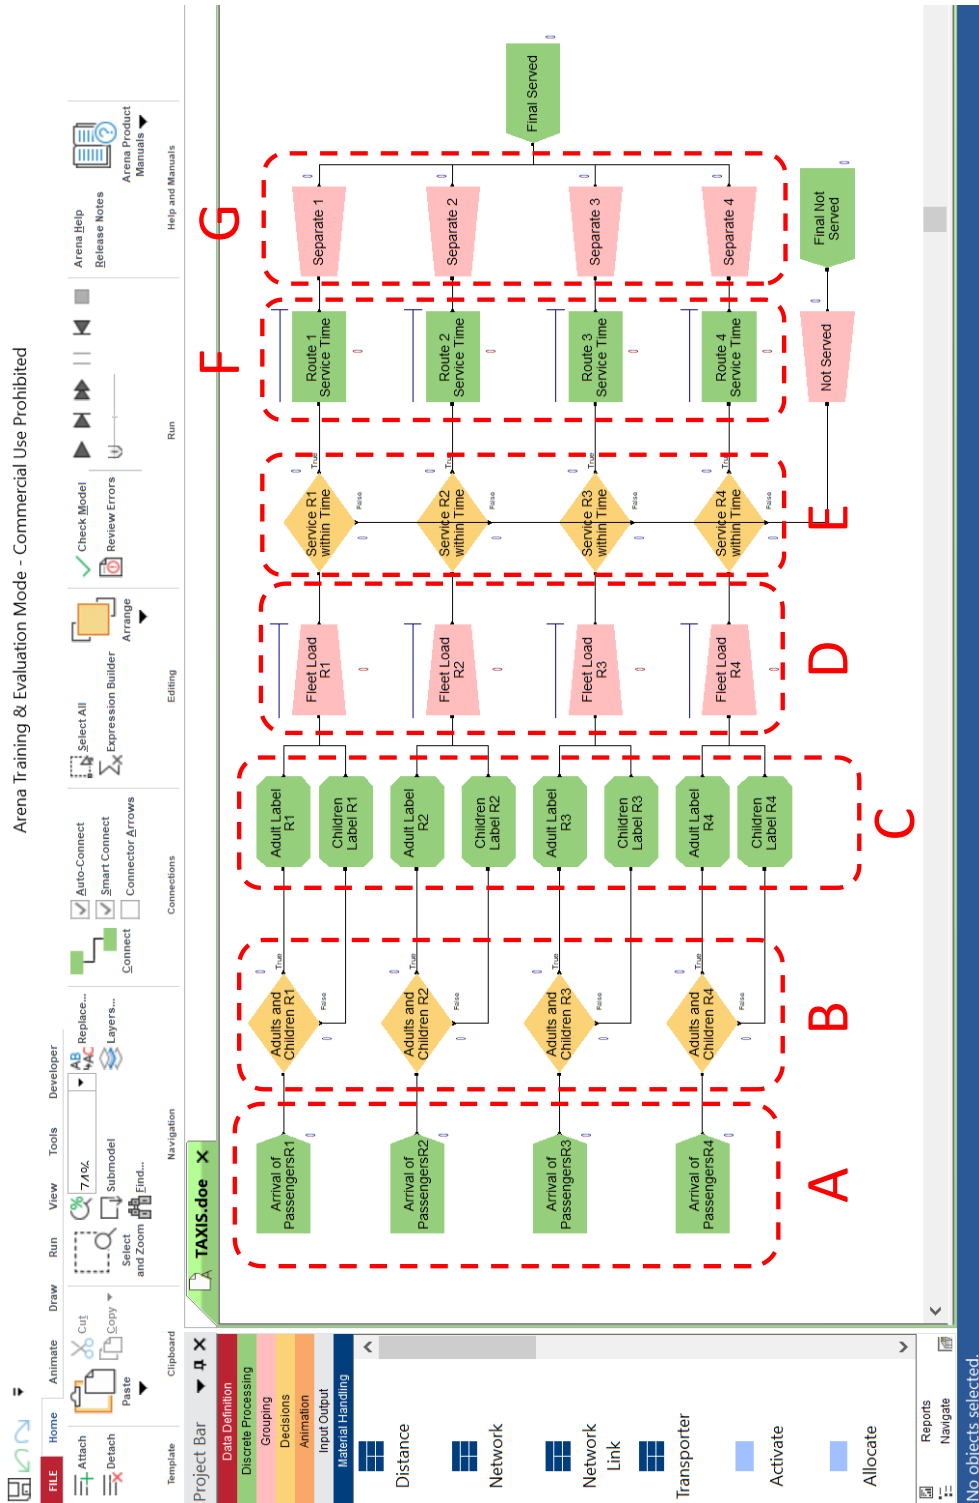


Fig. 3. Baseline Simulation model built with the Arena software

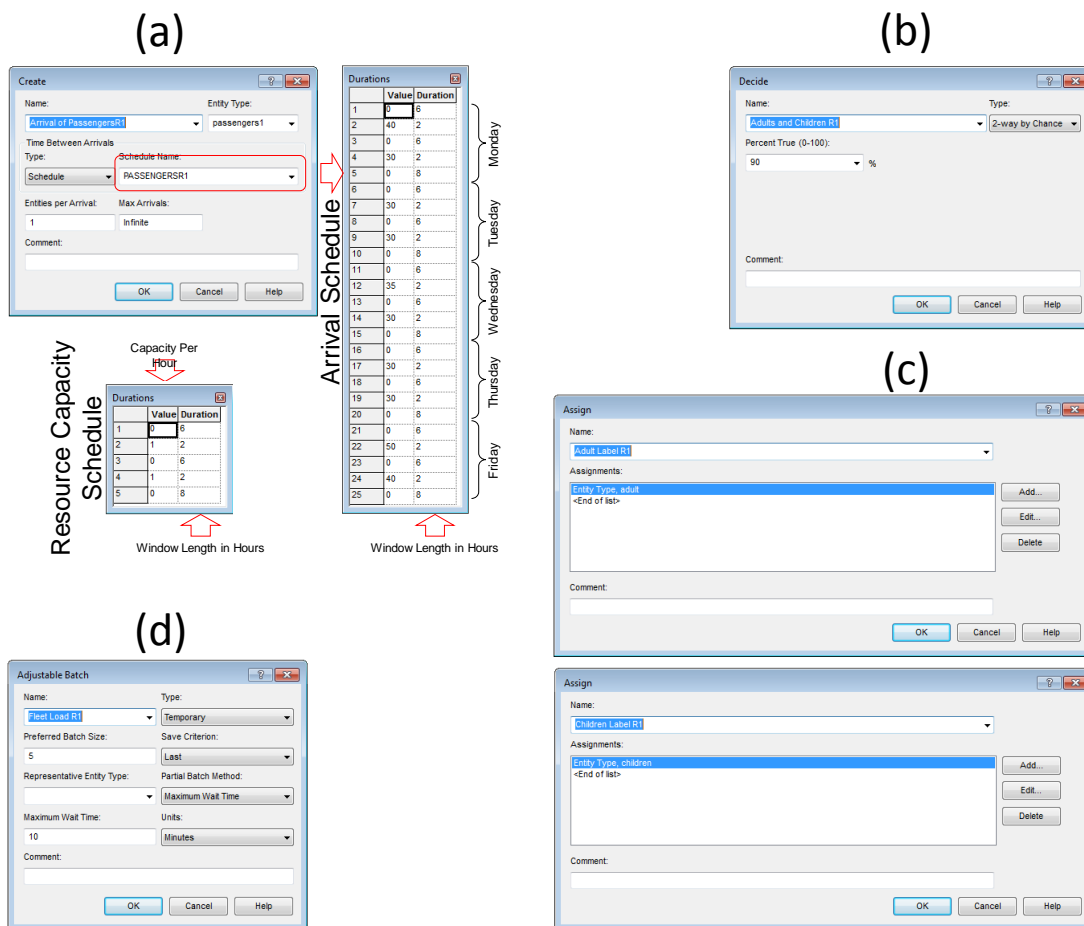

180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195

Fig. 4. Description of the Arena modules used for the simulation of the cab system (part I): (a) “Create” module for arrivals, (b) “Decide” module for separation of entities based on probabilities, (c) “Assign” modules for labelling of entities as “adult” and “children”, and (d) “Adjustable Batch” module for batch creation based on maximum size and waiting time.

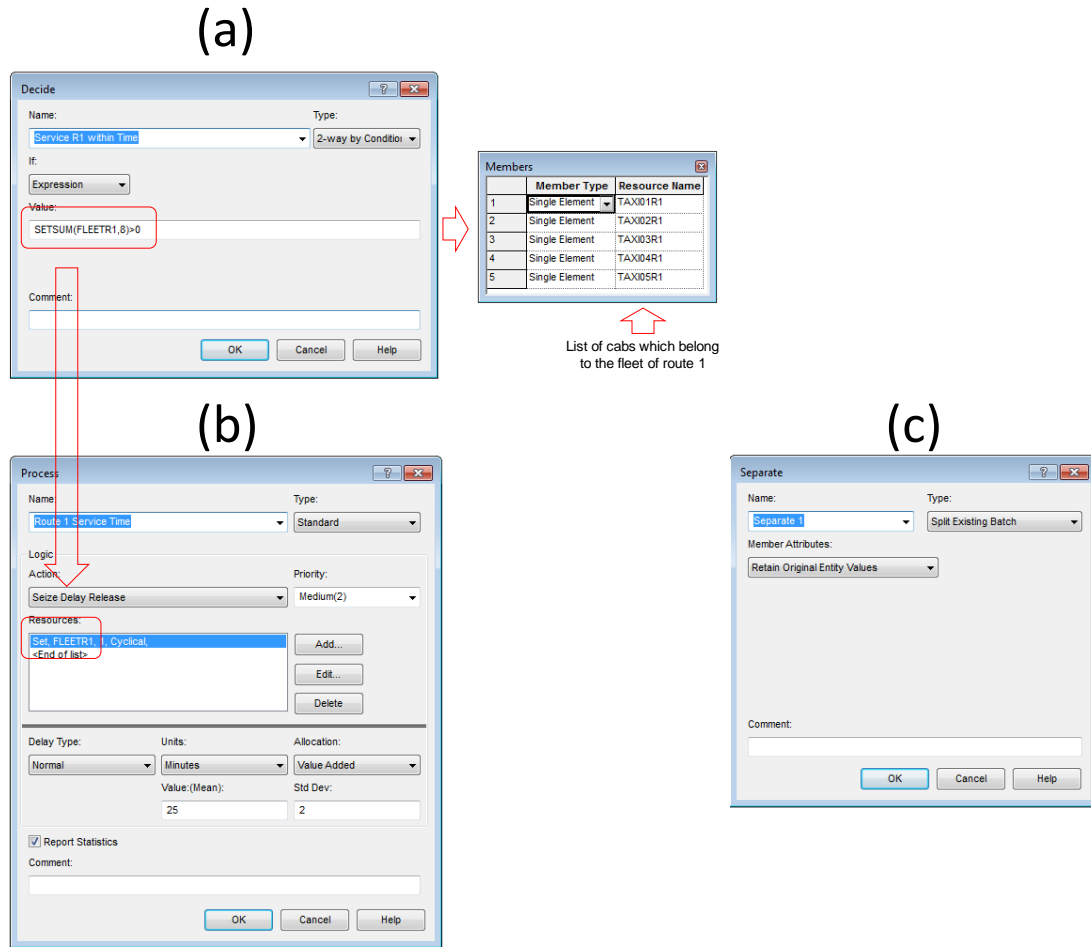

196
197
198
199
200
201
202
203
204
205

Fig. 5. Description of the Arena modules used for the simulation of the cab system (part II): (a) “Decide” module for separation of entities based on availability of resources, (b) “Process” module for representation of route service time, and (c) “Separate” module for separation of batches.

Table 4. Utilization of each cab and estimation of total operative cost (TOC) per route: DW = week salary of the cab driver which is estimated as 40 USD.

Cab	R1	Cost(L)	R2	Cost(L)	R3	Cost(L)	R4	Cost(L)
01	0.49	1.67	0.67	2.69	0.64	2.23	0.63	1.92
02	0.58	x5 cabs	0.68	x5 cabs	0.73	x5 cabs	0.73	x5 cabs
03	0.60	x2 trips	0.62	x2 trips	0.69	x2 trips	0.59	x2 trips
04	0.60	x5 days	0.70	x5 days	0.63	x5 days	0.54	x5 days
05	0.55	+DW	0.71	+DW	0.64	+DW	0.57	+DW
	TOC	83.5	TOC	134.5 +	TOC	111.5 +	TOC	96.0 +
		+40 =		40 =		40 =		40 =
		123.5		174.5		151.5		136.0

206
207

208 By considering all cost data, we can estimate the global profit as 691.80 USD -
 209 (123.5+174.5+151.5+136.0) = 691.80-585.5 =106.3 USD with a virtual loss of 98.10 USD due
 210 to missing services. This leads to estimate the profits as 15.3% of all incomes with a potential
 211 loss of 14.18%.

212

213 **5. IMPROVEMENT CHANGES**

214

215 From the utilization data reported in Table 4, it is observed that there is availability of
 216 resources, particularly for route 1. Thus, the first change to test is to reduce the cab fleet to
 217 four units per route.

218

219 While this may affect the number of clients served, based on the loss analysis, it is observed
 220 that operative costs are higher (585.5 USD vs. 98.10 USD). Another aspect to be considered
 221 is to improve the service route. Although in practice this is a difficult task due to the current
 222 street infrastructure and traffic density, a reduction of 3.4 km (16.8 km) and 2.2 km (14.5 km)
 223 were obtained for routes 2 and 3 respectively with *Google Maps* ®. With the same tool,
 224 throughout the day, we estimated route times and the following expressions were obtained for
 225 routes 2 and 3: Uniform (25, 32) and Normal (24, 3). By following the same analysis described
 226 in Tables 2 and 3, we report the expected incomes and losses with four main scenarios (see
 227 Table 5):

228

229

230

231

232

233

234

235

- (1) reduce the fleets to four cabs and keep routes 2 and 3 unchanged;
- (2) reduce the fleets to four cabs and consider the reduced routes 2 and 3;
- (3) keep the fleets unchanged and consider the reduced routes 2 and 3;
- (4) keep routes 1 and 4 with five cabs, and routes 2 and 3 (the routes with higher TOC) with four cabs. Consider the reduced routes 2 and 3.

Table 5. Service levels, incomes, TOCs and Profits with Improvement Actions

Scenario	1	2	3	4
Served				
Adults	2003	1987	2229	2162
Children	198	217	246	238
Not Served				
Adults	458	408	197	323
Children	52	33	21	43
Service Level	76.8%	80.0%	91.2%	84.8%
Income	630.6	628.7	705.6	684.3
Losses	145.2	127.4	62.3	103.4
TOC	500.3	470.4	548.0	506.3
Profit	130.3	158.3	157.6	178.1

236

237

238

239

240

241

242

243

244

245

246

247

248

Considering the baseline profit of 106.3 USD all scenarios represent an improvement. Scenarios 1 and 2 are the less suitable if the baseline service level of 85.6% is considered. As presented in scenario 4, reducing the fleet for routes with the higher TOC can improve the profits without significantly affecting the service level

249 **6. CONCLUSIONS**

250

251 Discrete-event simulation is an important tool to improve logistic systems. In the present case
252 study, a significant reduction in operative costs can be achieved if reassignment of resources
253 is performed. Such actions do not require additional investment and their suitability can be
254 addressed by the simulation model which reduces the cost risks of early implementation.

255

256 The steps followed to design the simulation model can be adapted to address other
257 transportation systems in similar communities. However, an important aspect to address is
258 route planning as most operative costs are associated to it.

272 **REFERENCES**

273

274 1. Sinha, R., Paredis, C., Liang, V., and Khosla, P. Modeling and Simulation Methods for
275 Design of Engineering Systems. *Journal of Computing and Information Science in*
276 *Engineering*. 2000; 1(1): 84-91.

277 2. Obaidat, M.S., Nicopolitidis, P. and Zarai, F. Modeling and Simulation of Computer
278 Networks and Systems: Morgan Kaufmann Ed.; 2015.

279 3. Sargent, R. Verification and Validation of Simulation Models. *Journal of Simulation*. 2010;
280 7: 12-24.

281 4. Kamrani, M., Abadi, S.M.H., and Golroudbary, S.R. Traffic simulation of two adjacent
282 unsignalized T-junctions during rush hours using Arena software. *Simulation Modelling*
283 *Practice and Theory*. 2014; 49: 167-179.

284 5. Zahraee, S., Esrafilian, R., Kardan, R., Shiwakoti, N., and Stasinopoulos, P. Lean
285 construction analysis of concrete pouring process using value stream mapping and Arena
286 based simulation model. *Materials Today*. 2021; 42(2): 1279-1286.

287 6. Kelton, W., Sadowski, R., and Zupick, N. *Simulation with Arena*. 6th ed. United States: SEM;
288 2014.

289

COMPETING INTERESTS DISCLAIMER:

Authors have declared that no competing interests exist. The products used for this research are commonly and predominantly use products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these products as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the authors.