

## Original Research Article

### Rock Physics and Geo-Mechanical Analysis to enhance Sanding Prediction in Oil Wells in

#### “Chi Field” Offshore Niger Delta.

#### Abstract

The data used for this study include suite of wireline logs from three wells, base map and checkshot. concept of geomechanics was used in evaluating and understanding the rock mechanical properties of the reservoirs. Two reservoirs (RES1 and RES2) were delineated and interpreted. Elastic and geomechanical parameters were evaluated within the field, the parameters include; Poisson ratio, Young modulus, Bulk modulus, Shear modulus, and UCS. The elastic properties of rocks are affected by geological factors which include: Lithology, Depth and Anisotropy. In addition, rock physics analysis was carried out using the friable, constant and contact cement model to quantitatively characterize the lithology and also investigate the degree of cementation, compaction trend and environment of deposition with emphasis on the reservoir. The geomechanical parameters reveal that the reservoirs within the study area is predominantly unconsolidated sandstone and friable shale which serves as reservoir seal. The result shows that the reservoir sand units have low Poisson ratio, Young modulus, Bulk modulus, Shear modulus and high Unconfined compressive strength (0.31Gpa, 11.5GPa, 0.06GPa, 4.3GPa, 337.5psi respectively), with high compressibility value of 0.08GPa and porosity value of 0.3 at reservoirs intervals. This suggest that the reservoir rocks are brittle with high potential to tensile failure.

Keywords: Geomechanical, Poisson ratio, Young modulus, Bulk modulus and Unconfined compressive strength (UCS).

#### 1. Introduction


The petroleum industry is facing a future where new technologies, creativity and integration of different disciplines, are the core of focus for higher exploration success rates and improved oil recovery. The recent increases in global demand for hydrocarbons and declining production from mature provinces are driving a new phase of international exploration for petroleum resources in deep offshore basin (Lewis *et al.*, 2008). Sanding is a common problem in production and injector wells located in weak or poorly consolidated sandstone reservoirs (Khamehchi, 2014). Recent clastic sediments of the Pliocene and younger Tertiary ages

are particularly troublesome and sand production problem maybe expected whenever wells are completed in unconsolidated formations (Osisanya, 2010). Sand failures also occurs in older formation when in-situ rock strength is reduced by poor completion and production practice. Sanding prediction is necessary because some sand control techniques such as downhole solidification, emulsification, and gravel packing are very costly hence, it is better to predict the possibility of a formation to produce sand rather than applying sand control techniques without knowledge. The crucial step to effective rock mechanics solutions is hidden in obtaining rock mechanical parameters data like elastic moduli and estimating the strength of rock formation. Therefore, an economic production in such reservoirs will require a good understanding of the reservoir geomechanics. Adequate knowledge of the geomechanical properties of hydrocarbon reservoirs play an important role in designing recovery well, enhance recovery, and in safe drilling (Abijah and Tse 2016; Saikia *et al.* 2018).

Identified areas where severe sanding problems are experienced among others include Nigeria, Trinidad, Indonesia, Egypt, Venezuela, Malaysia, Canada tar sands and Gulf of Mexico. The reservoirs in these formations lie between 3,500 ft and 10,000 ft (Osisanya, 2010).

## 2 Geology of the study Niger Delta area

The Niger Delta has been proved over recent years to be a prolific oil and gas province that is situated in the Gulf of Guinea in the West Coast of Central Africa **Fig. 1**. These province covers about 300,000sqkm and includes the geologic extent of the Tertiary Niger Delta Petroleum System. The Niger Delta started to evolve in early Tertiary times when Classic River input increased (Udo, *et al.*, 2015, Orife and Avbovbo, 2013). Generally, the delta prograded over the subsidizing continental-oceanic lithospheric transition zone, and during the Oligocene spread on to oceanic crust of the Gulf of Guinea. The weathering flanks of outcropping continental basement sourced the sediments through the Benue-Niger drainage basin (Ubong *et al.*, 2017). The Stratigraphic sequence of the Niger Delta comprises three broad lithostratigraphic units namely a continental

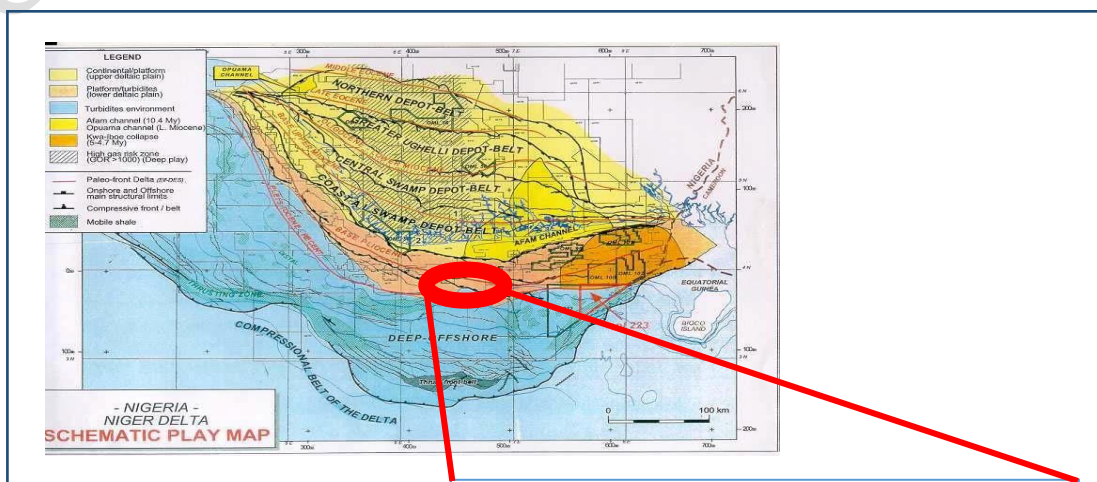

shallow massive sand sequence the Benin Formation a coastal marine sequence of alternating sands and shales the Agbada Formation and a basal marine shale unit-the Akata Formation (Anderson 2009, Agbasi *et al.* 2013, Akpabio *et al.*, 2014). The sediments were deposited in pro delta environments; the sand percentage here is generally less than 30%. The Agbada Formation consists of alternating sand and shales representing sediments of the transitional environment comprising the lower delta plain (mangrove swamps, floodplain, and marsh) and the coastal barrier and fluviomarine realms. The sand percentage within the Agbada Formation varies from 30 to 70%, which results from the large number of depositional off lap cycles. A complete cycle generally consists of thin fossiliferous transgressive marine sand, followed by an off lap sequence which commences with marine shale and continues with laminated fluviomarine sediments followed by barrier sand/or fluvial sediments terminated by another transgression (Akpankpo *et al.*, 2015; Inyang *et al.*, 2017; Okoli *et al.*, 2018). The Benin Formation is characterized by high sand percentage (70 – 100%) and forms the top player of the Niger Delta depositional sequence. The massive sands were deposited in continental environment comprising the fluvial realms (braided and meandering systems) of the upper delta plain.

### **3 Materials and Methodology**

Three suite of well logs data acquired in a field around Niger Delta sedimentary basin was utilized for this research. Hydrocarbon and non-hydrocarbon bearing sands were identified from gamma ray, resistivity, neutron and density responses. Well log correlation was done using the principle of similarities in log signatures across the wells. Rock physics concept was utilized to understand the nature of the sediments with respect to the geology. Using rock physics relationships, several cross-plots were employed for the qualitative characterization of the reservoir sands. Mechanical properties of the field were determined using wireline logs. Several Geomechanical parameters were deduced for the study area of the field in order to enhance the prediction of Sanding in oil wells within the field. Sanding prediction was done using Schlumberger sanding prediction index method (S/I). The method was used to generate the prediction of sanding parameters of the studied reservoir in the study area. The results from this study will provide a better understanding in sanding prediction within the field. The result affirms the high potential sanding of the studied reservoirs.


#### **3.1 Elastic and Geomechanical Parameters**

The reservoir elastic and properties were deduced. The estimated elastic parameters were cross-plotted to discriminate between the nature of sediments in term of compaction, cementation and other diagenetic events in relation to geology in the target reservoirs.

### **4 Results and Discussion**

#### **4.1 Well Log Interpretation**

Two hydrocarbon-bearing reservoirs (RES1 and RES2) were identified and correlated across the two wells using gamma ray and resistivity logs **Fig. 2**. The reservoirs correlated were based on the high resistivity readings and continuity across the sand beds (indicating the presence of hydrocarbon), continuity of the sand units across the wells, and relative formation density and neutron logs separation. Well-log correlation was performed to delineate the geometry and continuity of sand bodies within the field. The general stratigraphy is alternation of sand and shale layers typical of Agbada Formation. The sand units are generally dirty comprising thin shale interbedding.

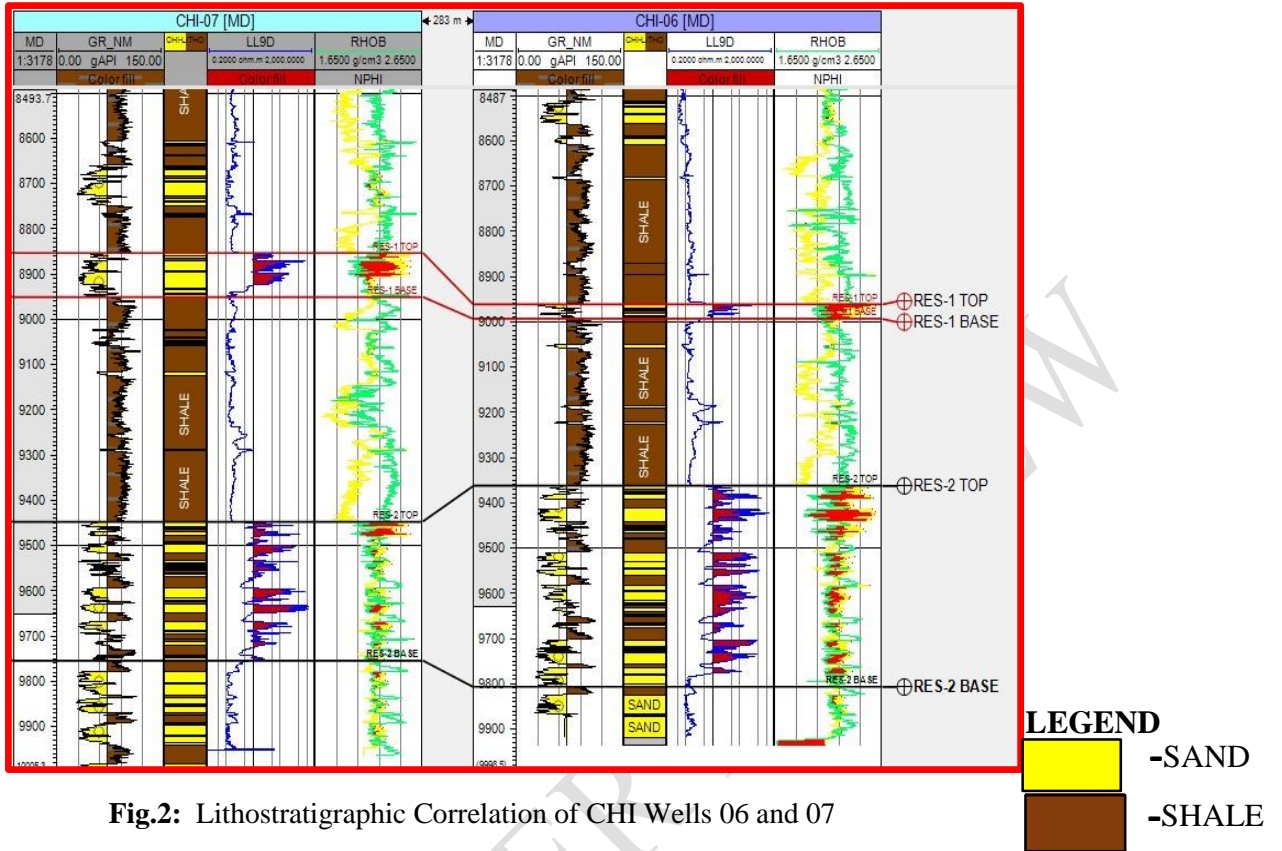

**Fig.2:** Lithostratigraphic Correlation of CHI Wells 06 and 07

#### 4.2 Rock physics Analysis

Sediment compaction were investigated for the degree of cementation it exhibited and the effect on the porosity. To investigate this, rock physics cement models were utilized. These models account for the data of the porosity and velocity, color coded by gamma ray and depth. The models of contact cement, constant cement and friable sand are color red, light green and purple respectively.

**Fig. 3a** shows the cross plot of porosity and velocity for CHI-02 well sediments color coded with gamma ray. The three rock physics cement models utilized for this research were overlaid. The two major lithology where validated with low gamma ray said to be sand and high gamma ray shale. It could also be observed that most of the data points from the wells scattered between the cement and constant cement model. This suggest that the reservoir sands are not cemented compare to the friable shale unit. **Fig. 3b** shows the cross-plot of porosity and velocity for CHI-02 well sediment color coded with depth with the three rock physics cement models utilized for this research. It could be observed that handful of data set from the deeper depth in the region of 4500 meters cluster around the constant cement sand model which is an indication that the intervals

experienced cementation. But the porosity values are considerably high indicating the initial cementation stage (Avseth *et al.*, 2005).

Generally, the higher porosity values cluster across the constant sand line, while lower porosity values cluster across the friable cement line. These reservoir formations can therefore, be interpreted as fairly cemented sand to unconsolidated sands compare to the friable shales. The crossplot for the reservoir intervals show that the reservoir sediments are unconsolidated (Fig. 4a and b).

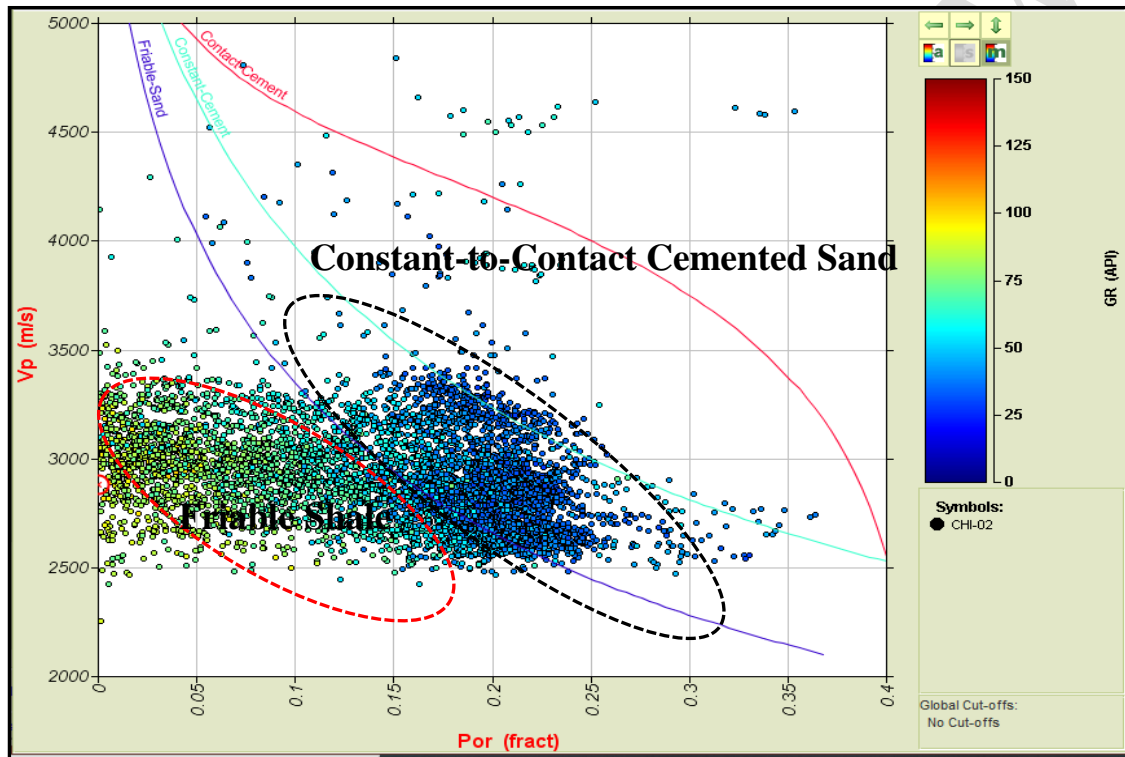
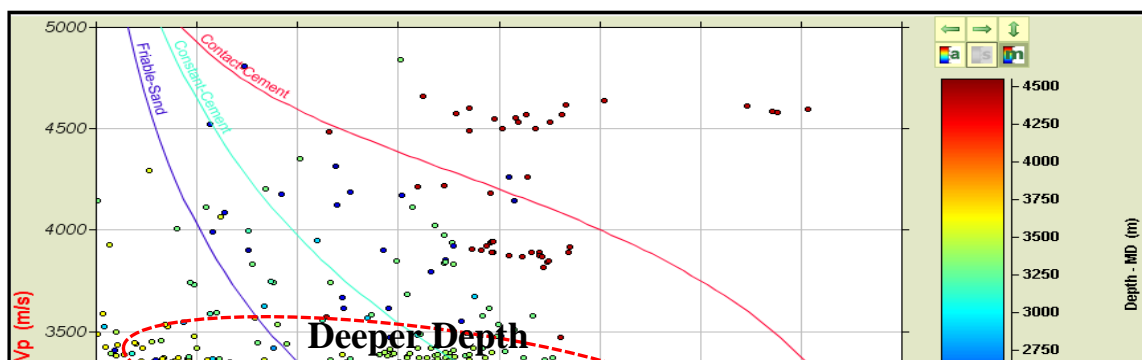


Fig. 3a: Cross plots of Velocity against Porosity Color-coded With gamma ray

### 4.3 Elastic Parameters

Elastic parameters estimated/observed in a particular geologic environment is directly related to the nature of the sediments. These parameters were generated to give better understanding on the nature of the sediments within the studied field. The parameters generated include; Poisson ratio, Young modulus, Vp/Vs ratio, Mu rho, Lambda rho, Acoustic impedance, Shear impedance, Bulk modulus and Shear modulus.




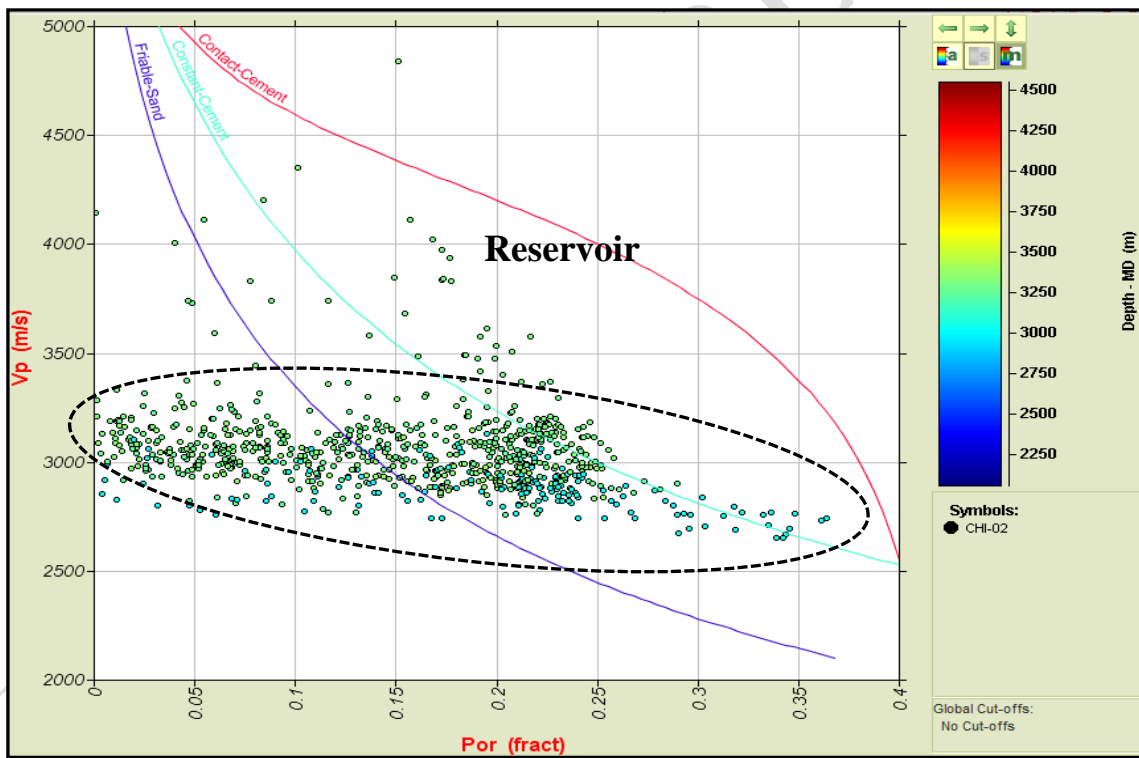


Fig. 4a: Cross-plots of Velocity against Porosity Color-coded at reservoir interval with Depth for CHI-02 Well

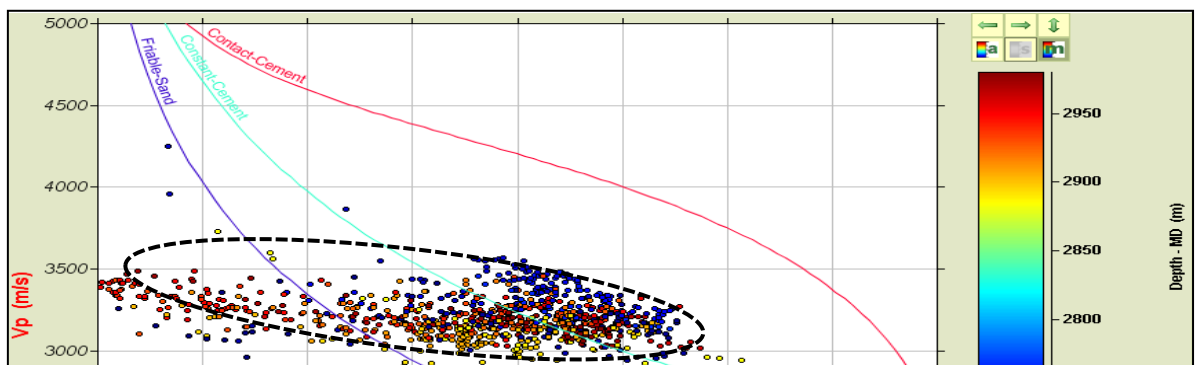

1.

**Fig. 4b:** Cross-plots of Velocity against Porosity Color-coded at reservoir interval with Depth for CHI-09 Well

**Fig. 5a and b** shows the elastic parameters generated for CHI-02 well. The parameters are Acoustic impedance,  $V_p/V_s$ , Poisson ratio, Young modulus, Bulk modulus, and Shear modulus. Reservoir intervals RES 1 and RES 2 and their corresponding cap rock intervals which are shale that serves as the reservoir seal were all estimated and interpreted. The significant variations in properties between the cap rocks and the reservoir sand units in individual well unit can be observed.

The cap rocks which are shale could be seen to have high Poisson ratio, low Young modulus and high elastic moduli. Hence, this makes the shale more ductile, stiffer, and less compressible. This will make the shale more prone to compressive shear failure, but better fracture stimulation barriers. However, the reservoir rocks, have relatively low Poisson ratio, high Young modulus and elastic moduli. Hence, strength of the rock is more brittle

with higher potential for tensile failure.

#### **4.4 Sanding Prediction**

Sanding prediction was done using Schlumberger sanding prediction index method (S/I). When the Schlumberger sand production index of a formation is less than  $1.24 \times 10^{12} \text{psi}^2$  the formation is likely to produce sand and sand control may be necessary (Bianlong *et al.*, 2013). This method solely depends on the calculated geomechanical parameters (Table 1). The method was used to generate the prediction of sanding parameters of the studied reservoir in the studied area.


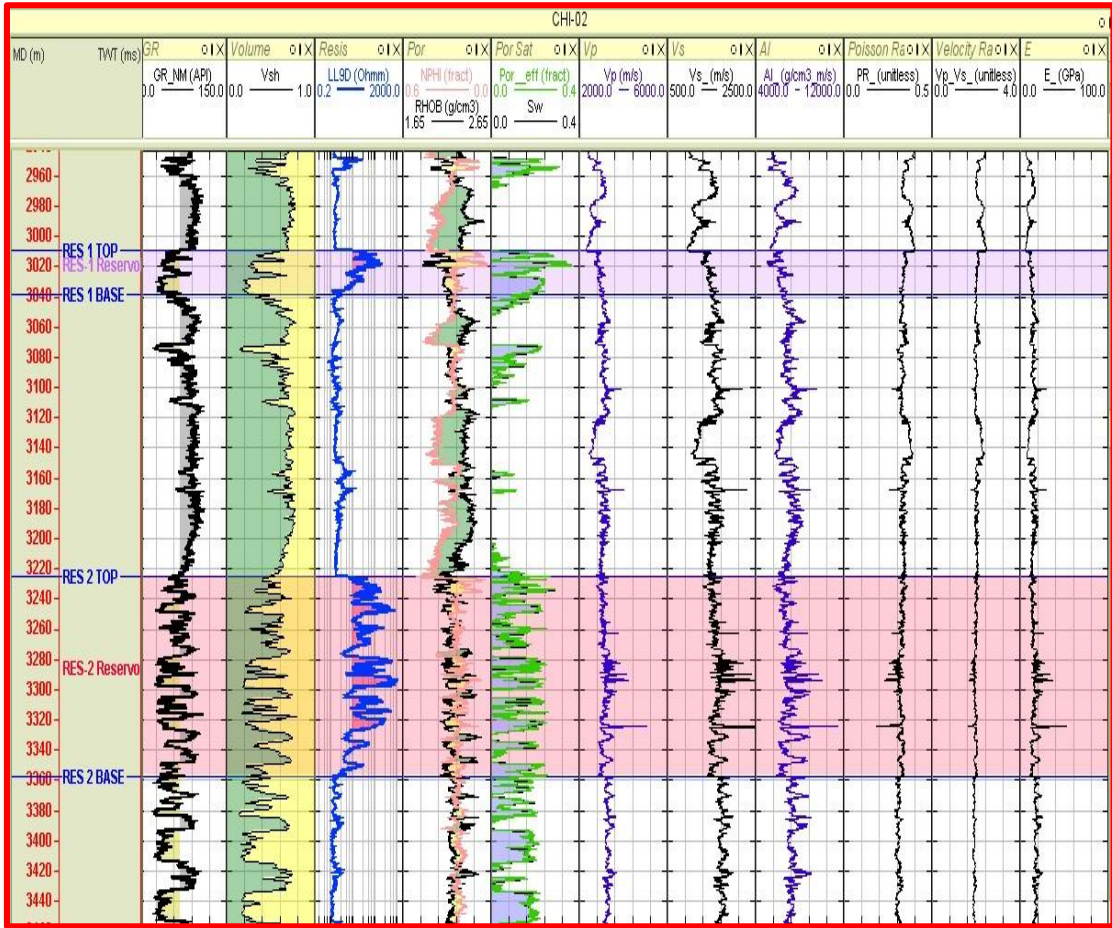


Fig. 5a: Log Plots of Elastic and Reservoir Parameters Generated for CHI-02 Well

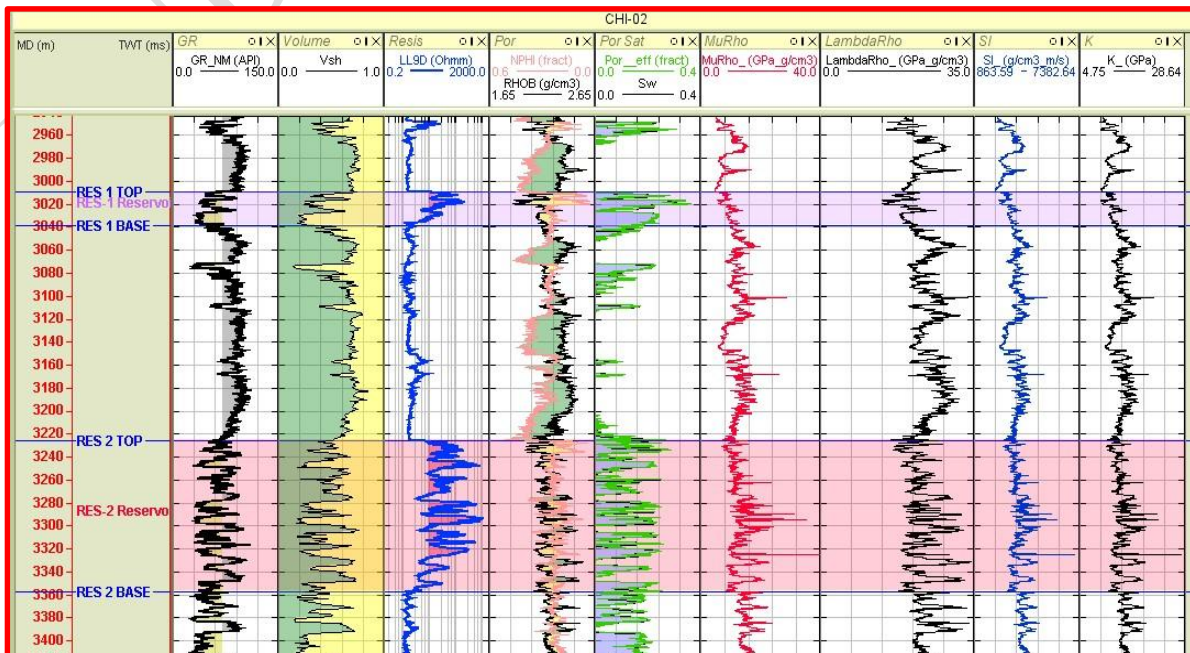

From the table the value ranges between  $0.99 \times 10^{12} \text{psi}^2$  and  $1.00 \times 10^{12} \text{psi}^2$  with an average of  $0.99 \times 10^{12} \text{psi}^2$ . The result shows that reservoir RES1 and RES2 formations fall below the threshold cutoffs of sanding. This suggests that reservoirs RES1 and RES2 will have high potential of sand influx. Similarly, this result validate that the delineated reservoirs are highly unconsolidated.

**Table 1:** Summary of Sand Prediction Method of the Studied Reservoir using the Schlumberger Prediction Index

WELLS	BULK MODULUS (K) Gpa	COMPRESSIBILITY(Cb) Gpa	S/I
CHI-02			
RES 1	11.91355	0.083938	0.99
RES 2	14.16398	0.070602	1.0
CHI-09			
RES 1	14.968	0.066809	0.99
RES 2	14.362	0.069628	1.0
CHI-12			
RES 1	14.897	0.067128	0.99
RES 2	15.049	0.06645	1.0

## 5 Conclusion

An integrated approach of rock physics and geomechanical analyses was adopted in this study to enhance the prediction of sanding in oil wells within 'CHI' field offshore Niger Delta. The data used for this studied include a suite of wireline log from three wells, base map, and checkshot. Gamma ray log was used to identify the lithology in the study area, resistivity log was employed for fluid discrimination (oil, water) and neutron-density logs indicated porosity as well as fluid types. The concept of geomechanics was used in evaluating and understanding the rock mechanical properties of the reservoirs. Rock physics diagnostic aided in evaluating the rock properties of the reservoir sands. Elastic and geomechanical parameters were evaluated to determine the mechanical properties of the formation rocks within the oil well in the field, the parameters include; Poisson ratio, Young modulus, Bulk modulus, Shear modulus, and  $V_p/V_s$  ratio. The elastic properties of rocks are affected by geological factors such as: Depth of burial, Lithology and Anisotropy etc. In addition, rock physics analysis was carried out using the Dvorkin and Nur 1996 model to quantitatively characterize the lithology and also investigate the degree of cementation, compaction trend and environmental deposition of the sediment with more emphasis on the reservoir sands of 'CHI' field. The cross plots validated the lithology's from the gamma ray log. The model quantitatively revealed that sediments that falls between the constant cement and friable sand was interpreted as sands that are poorly cemented or unconsolidated sands. This sand lithology is influenced by depth of burial, depositional trends and other diagenetic events. The quantitative interpretation of geomechanical parameters reveal that the reservoirs within the 'CHI' field is predominantly unconsolidated sandstone and friable shale which serves as reservoir seal. The result shows that the reservoir sand units have low Poisson ratio, Young modulus, Bulk modulus, Shear modulus and Unconfined compressive strength, higher compressibility and porosity at the reservoirs intervals. This suggest that the reservoir rocks are brittle with high potential to tensile failure. Furthermore, cap rock showed high value of Poisson ratio due to its ductility which is controlled primarily by clay content, high Young modulus, Bulk modulus, Shear modulus and unconfined compressive strength, lower compressibility and porosity. This suggest the cap rock is stiffer due to high moduli. Adopting Schlumberger sand production index for sanding prediction analysis, the result affirms the high potential sanding of the studied reservoirs.

## References

- Abijah FA, Tse AC (2016) Geomechanical evaluation of an onshore oil field in the Niger Delta, Nigeria. IOSR  
J Appl Geol Geophys 4(1):99–111
- Agbasi, E. O., Inyang, N. and Ibout, J. (2013), Estimation of Water Saturation in Niger Delta Nigeria Using Wire-Line logs. IOSR, Journal of Applied Physics (IOSR-JAP). E-ISSN: 2278 – 4861, volume 3, issue 4(2013) pp.66 -71.
- Akpabio, I., Ibuot, J., Agbasi, O. E and Ojo, O. T. (2014), Petrophysical Characterization of eight wells from Wire-line Logs, Niger Delta Nigeria. Asian Journal of Applied Science, ISSN 2521 - 0893, volume 02, Issue 02, 105 -109.
- Akankpo, A.O., Umoren E.B., and Agbasi O.E., (2015). Porosity Estimation Using Wire-Line Log to Depth in Niger Delta, Nigeria. IOSR Journal of Applied Geology and Geophysics (IOSRJAGG) eISSN: 2321– 0990, p-ISSN: 2321–0982. Volume 3, Issue 4 Ver. II (Jul - Aug. 2015), PP 31-38  
www.iosrjournals.org. Applied Studies. ISSN 2028-9324 Vol. 3 No. 3 July 2013, pp. 765-773
- Anderson P.F., (2009). Comparing post-stack AVO inversion to pre-stack inversion for estimating rock properties, Frontiers Innovation, CSPG, CSEG, CWLS Convention, Canada.
- Avbovbo, A. A., (1978). Tertiary lithostratigraphy of Niger Delta: American Association of Petroleum Geologists Bulletin, v. 62, p. 295-300.
- Avseth, T. Mukerji and G. Mavko, (2005). Quantitative Seismic Interpretation – Applying Rock Physics Tools to Reduce Interpretation Risk, Cambridge University Press, Cambridge, 52 – 210.
- Bianlong, Z., Ma, D., Li, L., Juncheng, H. (2013). Application of Logging Data in Predicting Sand Production in Oilfield. Egyptian Journal of Petroleum, 18, 6173-6180.
- Dvorkin, J. And A. Nur, A (1996). Elasticity of high-porosity sandstones: Theory for two North Sea data sets. Geophysics, 61, pp. 1363-1370.

Farquhar, R. A, Somerville S. M., Smart, B. G. D. (1994). Porosity as a Geomechanical Indicator: an application

of core log data and Rock Mechanics. In proceedings of the European Petroleum conference. Part 1 (of 2), 481-489.

Khamehchi, I. Rahimzadeh Kivi, M.R. Akbari (2014), A novel approach to sand production prediction using artificial intelligence, J. Petrol. Sci. Eng. 123 147–154.

Lewis, J., Clinch S., Meyer D., Richards M., Skirius C., Stokes R., and Zarra L. (2008). Exploration and Appraisal challenges in the Gulf of Mexico deep water WilcoX; part- Exploration Overview, Reservoir Quality, and Seismic Imaging. Chevron North America Exploration and Production company, vol.13, No7, pp 398-414.

Orife J. M. and Avbovbo A.A., (2013). Stratigraphic and unconformity traps in the Nige Delta: AAPG Bulletin. 66(2): 1982, 251-262.

Osisanya, S. O. (2010) “Practical Guidelines for Predicting Sand Production”, SPE 136980, paper presented at the 34th Annual SPE International Conference and Exhibition held in Tinapa, Calabar, Nigeria.

Orife J. M. and Avbovbo A.A. (2013). Stratigraphic and unconformity traps in the Nige Delta: AAPG Bulletin. 66(2): 1982, 251-262.

Okoli Emeka Austin, Onyekuru Smauel I, Agbasi Okechukwu Ebuka and Zaidoon Taha Abdulrazzaq (2018). Application of Model-Based Inversion Technique in a Field in the Coastal Swamp Depobelt, Niger Delta. International Journal of Advanced Geosciences, 6 (1). 122 – 126.

<https://doi.org/10.14419/ijag.v5i2.7890>.

Ubong E. Essien, Akaninyene. O. Akankpo and Okechukwu. E. Agbasi (2017). Evaluation of Reservoir's Petrophysical Parameters, Niger Delta, Nigeria. International Journal of Advanced Geosciences, 5 (1) (2017) 19-25. <https://doi.org/10.14419/ijag.v5i1.7456>.

Udo K.I., Akpan M.J., Agbasi OE (2015) Estimation of overpressures in onshore niger delta using wire-line data.

Int J Sci Res 4(5):2780–2784

Saikia K, Ikuku CE (2018) Sarkar BC (2018) An integrated approach to discretized 3D modeling of

geomechanical properties for unconventional mature field appraisal in the western Canadian sedimentary basin. J Pet Explor Prod Technol 8:417–429. <https://doi.org/10.1007/s1320-017-0406-3>

UNDER PEER REVIEW