

Biochar production technologies from agricultural waste, its utilization in agriculture and current global biochar market- A comprehensive review

Abstract

This review comprehensively describes biochar, the term which is gaining exponential attention nowadays. The technologies to convert the agriculture waste to biochar include slow pyrolysis, flash pyrolysis, and hydrothermal carbonization. Biochar production methods are based on batch processes and continuous processes. Biochar production processes and steps involved are also discussed. Different biochar reactors are also reviewed, including the continuous type of biochar reactor and microwave pyrolysis reactors. Kinetics of biochar, bio-oil, and syngas production is also reviewed briefly with kinetic equations. Uses of biochar are comprehensively reviewed and discussed, including advanced applications such as catalyst production, activated Carbon production, water treatment, soil amendment, etc. All biochar characterization methods are briefly described, including proximate analysis, ultimate analysis, physiochemical analysis, surface analysis, and molecular structure analysis. Factors affecting biochar production are reviewed in this article. Biochar yield from different crop waste s is tabulated with temperatures involved. Post-production processing methods of biochar are included in this review. The global biochar market and current status and opportunities are also reviewed, the data of biochar manufacturers in India are compiled. The utilization of biochar in agriculture is reviewed in two subcategories: the effect of biochar application on soil health and the effect of biochar application on crop yield. At last engineered or designed biochar concept is reviewed.

Key Words- Agricultural waste, Biochar, Activated Carbon, Continuous Biochar Reactor, pyrolysis, Biomass, Kinetics of pyrolysis.

1. Introduction

Globally, 140 billion metric tons of biomass is generated every year from agriculture[1]. According to recent MNRE-sponsored research, India's current biomass availability is projected to be over 750 million metric tonnes per year. According to the study, surplus biomass availability is anticipated to be over 230 million metric tonnes per year for agricultural wastes, equating to a renewable energy generation potential of around 28 GW[2]. Scientists and policymakers increasingly recognise biochar's potential significance in carbon sequestration[3]. Converting agricultural wastes into environmentally acceptable low-cost biochar is a sensible recycling method and cure for pollution control[4]. Agricultural waste biochar can be an efficient alternative strategy for managing pollutants because of its cheap cost, high efficiency, ease of use, ecological, and public safety reliability. India has taken the commitment of reducing GHG's emission intensity of its GDP by 33-35% from 2005 levels by 2030[5]. Biochar application can help reduce carbon dioxide (CO₂), methane (CH₄), and nitrous oxide (N₂O) emissions in the environment by increasing the carbon sink in soil[6]. Biochar has achieved significant advances in lowering greenhouse gas emissions, soil nutrient management, sequestering atmospheric carbon into the soil, enhancing agricultural output, and reducing environmental pollutants [7]. Biochar is becoming increasingly popular for soil fertility improvement because of its ability to enhance soil quality, boost crop production, and sequester carbon from the atmosphere-biosphere pool into the soil [8]. By storing atmospheric carbon in the soil for a long time, the application of biochar can reduce GHG emissions[9].

2. What is Bio Char?

The term 'biochar' was coined by 'Read' (Read et al., 2004) to describe charcoal used for soil improvement[10]. Biochar is a carbon-rich substance produced by heating up organic materials without oxygen or in a limited supply of oxygen. In other words, bio char is produced by dry carbonisation or pyrolysis and gasification of biomass [11][12]. Pyrolysis is thermal decomposition process takes place in inert atmosphere. The pyrolysis process usually takes between 400 to 850 °C [13]. The thermal decomposition in a pyrolysis reactor takes place in order of hemicellulose, cellulose and lignin destruction in increasing order of temperature. during the

pyrolysis hemicelluloses decomposes below 350 °C while cellulose the degradation occurs at temperature between 250 - 500 °C since the decomposition temperature of hemicellulose and cellulose overlap their degradation represented by only one peak is defined the primary pyrolysis [14]. The biochar is produced by various methods like slow pyrolysis, flash carbonisation, hydrothermal carbonisation etc[15]. In matters of hydrothermal carbonisation water is used as a medium for carbonisation while all other methods oxygen-free atmosphere is used for heating or biomass and then biochar is obtained[16]. The pyrolysis process is a process in which the biomass is converted into the biochar where; the first step is the moisture reduction step which occurs below 200 degrees °C temperature. After moisture removal, the cellulose decomposition takes place in a temperature of two 400-500 °C. At this temperature, biochar is produced [17].

3. Methods of Biochar production based on technology

Biochar is produced by the method of pyrolysis[18]., Pyrolysis of biomass is the thermal degradation of organic material in the absence of an oxidising agent, or in such a quantity that gasification does not occurs, to produce solid, liquid, and gas by products[19]. The following are the methods of biochar production according to technology employed.

3.1. Slow pyrolysis

The feedstock is heated slowly at a low heating rate (0.1 to 2°C per second) to low temperatures (400°C) for a long time in slow, or conventional, pyrolysis. The biomass is progressively devolatilized during slow pyrolysis, resulting in the generation of tar and char as the major products. Methane dominates the gas produced, with minor hydrogen, propane, ethylene, CO, and CO₂.

Torrefaction is a slow pyrolysis process that is also known as mild pyrolysis[20]. Torrefaction of biomass is moderate pyrolysis that occurs under air conditions at temperatures ranging from 200 to 320°C, with primary pyrolysis beginning at 200°C. Even at the low heating rates used in torrefaction, the warm-up period is relatively short for the low temperatures used in torrefaction[21].

3.2. Flash carbonisation

The adjective "flash" is defined as of sudden origin and short duration a fire. By this, we can say that carbonisation occurs at higher heating rates and higher temperature for short period. The temperature involved in flash carbonisation are up to 1000 °C. for time duration up to few seconds[22].

3.3. Hydrothermal carbonisation

Among all conversion technologies, hydrothermal carbonisation is a promising technique[23]. It takes place in a closed reactor at a temperature of 180–280°C and a pressure of 2–6 MPa for 5–240 minutes[24]. Hydrothermal carbonisation creates a coal-like product called hydro char and aqueous (nutrient-rich) and gas phases (mainly CO₂) as by-products. The advantage of hydrothermal carbonisation is that biomass can be converted to carbonaceous solids without using an energy-intensive drying technique[25]. Hydro char possesses adsorption properties as a possible soil improver or fertiliser [26]. Fig. 1 shows the process of hydrothermal carbonisation.

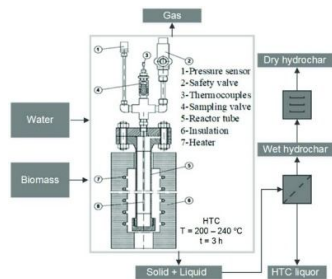


Fig.1 Hydrothermal Carbonization reactor

4. Methods of Biochar production based on process

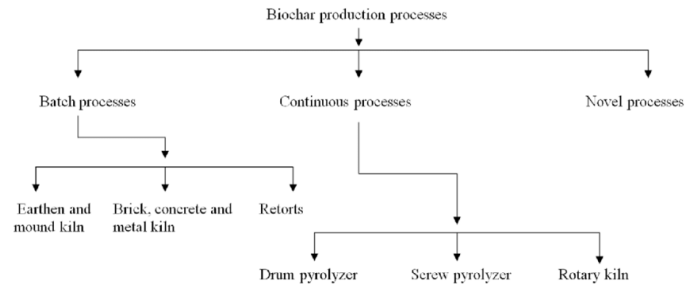


Fig. 2 Biochar production processes [27]

4.1. Batch Type Biochar Reactors

In the batch-type biochar reactors, feed biomass materials are fed in different batches, and biochar preparation is achieved[28].

4.2. Continuous Biochar Reactor

As the name indicated the reactor, the biochar produced in the continuous uninterrupted way in the continuous biochar reactor[29]. It consists of the feed hopper, screw conveyor, heating mechanism etc, as shown in fig. 3 [30]. These types of reactors are suitable for uninterrupted commercial production of biochar.

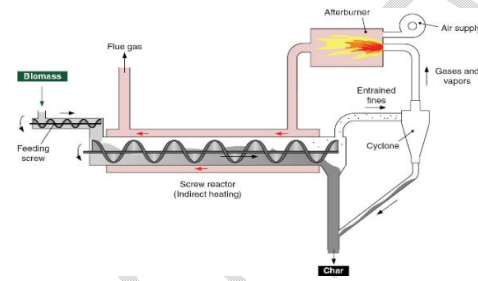


Fig. 3 Continuous Type Biochar reactor[31]

5. Steps involved in biochar Formation

5.1. Heating and Drying

The biomass is heated in this process until it reaches the necessary drying temperature. This procedure takes place at a temperature of 100 °C until all the moisture in the biomass has evaporated[32].

5.2. Torrefaction

It takes place at 200 to 300 °C, and a constant temperature is achieved throughout the process. In this process the biomass is carbonised, and biochar is formed[33].

5.3. Cooling

After the biochar is formed, the temperature is reduced before it is exposed to the air to stop further biomass degradation due to high temperature[34].

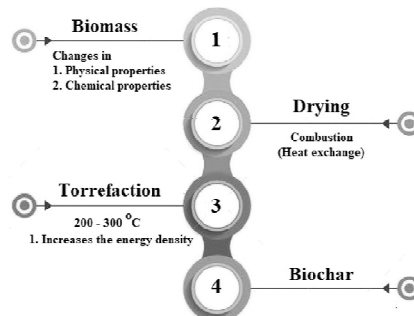


Fig. 4 Steps involved in biochar production process by thermochemical methods [30].

6. Biochar Production Units

6.1. Missouri type charcoal kiln

One typical batch system, the Missouri type charcoal kiln (Figure 1) takes charge of about 16,300 kg (18 tons) of wood and requires about 3 weeks for the complete cycle of manual loading, heating the kiln, carrying out the carbonisation over the temperature range of 260–370 °C, cooling and manually unloading the kiln[35].

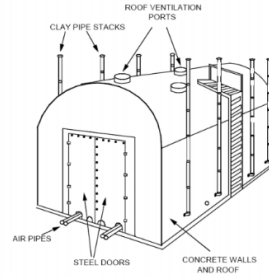


Fig. 5 Missouri type charcoal kiln[36]

6.2. Continuous multiple hearth kiln

In continuous multiple hearth kiln (Figure 2) produces about 2495 kg/hr (2.75 tons/hr) of charcoal [35].

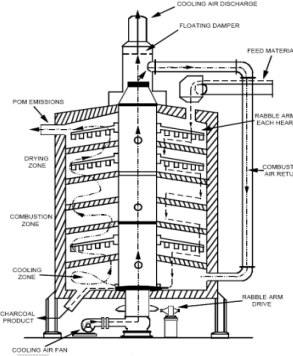


Fig.6 Continuous multiple hearth kiln[36]

6.3. Horizontal auger continuous biochar production unit

This type of unit uses the screw auger to convey the biomass in the hot reactor in which biomass is heated in inert conditions. The inert conditions are maintained by providing inert gases supply such as nitrogen, as shown in fig[37].

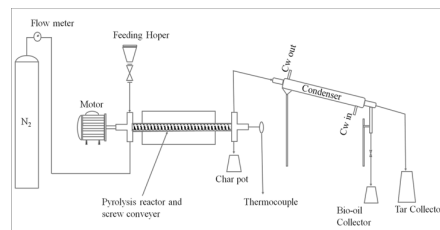


Fig. 7 Continuous screw auger Biochar reactor [37]

6.4. Microwave pyrolysis

Microwave-assisted pyrolysis (MAP) is a novel thermochemical technique for converting biomass into biofuel. MAP pyrolysis is faster, more efficient, selective, controlled, and adaptable than traditional electrical heating pyrolysis [38].

7. Kinetic model of Biochar Production

The pyrolysis process is divided into two parts in the pyrolysis model primary and secondary reactions[39]. The biomass decomposes into three product categories during the primary reaction: gas, bio-oils, and char (reactions K1, K2 and K3). Two parallel reactions (reactions K4 and K5) in the following figure further degrade the bio-oil into gas and char, referred to as secondary reactions [40].

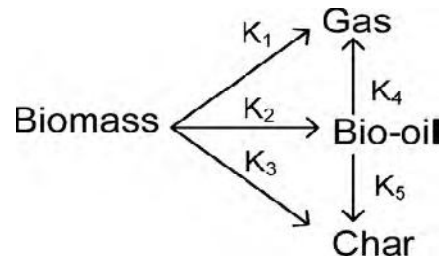


Fig.8 Biomass Pyrolysis kinetics [40]

Pyrolysis Kinetics Reactions which we can use for the prediction of the number of different compounds of pyrolysis are as follows [40]:

$$\frac{dm_{Gas}}{dt} = w_{gas} = (k_1)(m_{Bio}) + (k_4)(m_{Oil})$$

$$\frac{dm_{Oil}}{dt} = w_{oil} = (k_2)(m_{Bio}) - (k_4 + k_5)(m_{Oil})$$

$$\frac{dm_{Char}}{dt} = w_{char} = (k_3)(m_{Bio}) + (k_5)(m_{Oil})$$

$$\frac{dm_{Bio}}{dt} = (-k_1 + k_2 + k_3)(m_{Bio})$$

8. Uses of biochar

Biochar is a black charcoal-like substance[41]. It has been the subject of much discussion in recent days due to its remarkable benefits on soil and compost, is beneficial to more than just your garden. Biochar is one of the most essential elements for the earth's long-term sustainability. It may be incorporated into new organic systems for farming, construction, textiles, electronics and electricals, and various products[42]. The use of biochar as a soil supplement in agriculture has been the emphasis of these early uses, but other applications in environmental remediation engineering may be equally essential[43]. The following are the some of the uses of biochar are discussed here.

8.1. Biochar for Water treatment

Biochar has also been shown to be capable of removing a wide range of chemical and microbiological pollutants from aqueous systems[44]. Biochar's integration into the water-sanitation-nutrient-food nexus has numerous unique features[45]. it provides water security and health advantages, providing a low-cost adsorbent for water treatment.

Biochar can be used for drinking water purification and can be used for the treatment of wastewater[46].

Biochar for soil health

Biochar's use in soils offers a lot of promise for enhancing soil fertility and encouraging plant development. Biochar can be used to manage a variety of soils because a variety of biomass sources can be employed as biochar feedstocks, and the feedstocks can be pyrolyzed at different temperatures. Biochar also has a large surface area, a well-developed pore structure, a high concentration of exchangeable cations and nutritional elements, and a high liming content[47]. Soil characteristics can be improved following biochar treatment. The large surface area and well-developed pore structure could boost water holding capacity and microbial abundance[48]. The number of exchangeable cations and nutrient elements could boost cation exchange capability and nutrient availability[49]. The abundance of liming in biochar is responsible for the elevated pH of soils. As a result, improving the soil's physical, chemical, and biological qualities boosts plant productivity [50].

Biochar products from various sources exhibited a wide range of capabilities and efficiency for soil contaminant stabilisation[51].

Textile industry Uses

Textiles are one of the most important industries in many low- and middle-income nations, particularly in Asia. Due to a lack of economical alternatives, leftover dye solution from textile industry dye facilities is frequently discharged to drains or into the environment. These colours have the potential to harm the environment and human health[52]. Effective filtration conditions were proven to remove the hazardous dyes followed by high dye adsorption onto pine-derived biochar (both in batch and column tests), and recommendations for water reuse were made [53].

8.2. Biochar as Fuel

Biochar made from corn cob and coconut shell biomass samples pyrolysed at 800 °C displayed varied physical and chemical properties. Biochar made from these wastes has a higher volatile matter, fixed carbon, C, and H content, and a higher heating value or gross calorific value. This pyrolysis-to-biochar conversion can be used to replace fossil-derived fuels (coal, oil, etc.) with green renewable energy sources [54].

8.3. Biochar as a Catalyst

Various physical and chemical procedures can fine-tune biochar. Biochar has a high potential to replace costly and non-renewable conventional catalysts in this regard. Biochar-derived catalysts are effective in a variety of processes, including biodiesel generation, tar removal in bio-oil and syngas, deNO_x, syngas production, and biomass hydrolysis[55]. Surface functionality, surface area, porosity, and acidity of biochar catalysts, on the other hand, are strongly dependent on biomass origin, biochar formation circumstances, and pre/posttreatments [56].

8.4. Activated Carbon production from biochar

Because of its enormous specific surface area, activated carbon has been widely employed as a flexible adsorbent for gas separation, organic pollutant removal, and other applications. It has a large surface area, a porous structure, and excellent adsorption characteristics[52]. Numerous studies have been conducted on the preparation of adsorbents made of carbon with a large surface area for adsorption and gas separation is an important step in the process. Manufacturing may be done in two ways [57].

8.4.1. Physical Techniques

Physical activation or thermal activation refers to a process in which an increase in porosity is triggered by a high temperature in an oxidative environment[58]. Temperature, degree of activation, and kind of precursor all have a role in physical activation. It is preferred to activate biochar since oxygen in the air takes less activation energy than CO₂ or steam, making the total process more cost-effective [59].

8.4.2. Chemical Techniques

Chemical activation is a heat treatment method in which raw biochar combines with a chemical activating agent at 450 to 900 °C. Inside the biochar, two sorts of reactions occur dehydration and oxidation, resulting in micropores. Chemical activation has the benefits over physical such as lower temperature, higher carbon yield, large surface area (3600 m²/g), qualitative and quantitative microporosity (highly developed and regulated), and higher efficiency [59].

8.5. Carbon Sequestration

Biochar incorporation into the soil not only aids in carbon sequestration, but it also gives a better choice for agricultural waste management[60]. Due to its priming impact on the soil, biochar has been shown to reduce a significant amount of methane and nitrous oxide emissions from agricultural fields[61]. The kind of feedstock and pyrolysis condition affect biochar output, physical characteristics, and carbon content[62].

9. Biochar Characterisation and its methods

The physicochemical features of biochar can alter soil nutrient and carbon availability, as well as providing physical protection from microorganisms from predators and pathogens[63]. This may change the soil's microbial diversity and taxonomy. The biochar produced by relatively low-temperature pyrolysis has a high

amount of volatile matter, which includes Analytical elements and both hydrogen-Carbon and oxygen-Carbon ratios are measured on readily decomposable substrates that can sustain plant growth[64]. Biochar's are excellent markers of their nature. In order to assess the characteristics of biochar, the following characterisation methods are used. The characterisation of biochar includes the proximate analysis, ultimate analysis, physicochemical analysis, surface analysis and molecular of structural analysis, in these various tests are involved for the characterisation of biochar[65]. There are ASTM standards for characterisation of biomass and biochar[66].

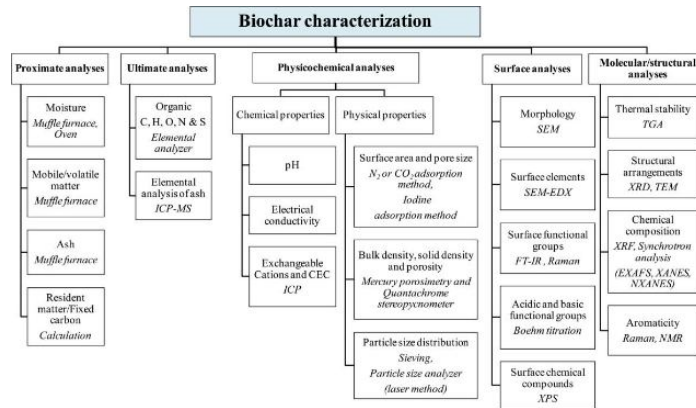


Fig.9 Biochar Characterisation[67][68]

9.1. Proximate analysis

Proximate analysis is a method of determining the entire biomass components of solid fuel in terms of moisture content (ASTM D 1762-84), ash content, volatile solids, and fixed carbon (ASTM D1762-84) [69].

9.2. Ultimate analysis

It includes the analysis of the organic Carbon, oxygen, nitrogen, sulphur, and on the instrument called elemental analyser, the ultimate analysis also includes the analysis of the ash contents of the sample[70].

9.3. Physiochemical analysis

The physicochemical analysis is divided into two subcategories for the determination of physical properties and chemical properties, chemical properties include the determination of pH, Electrical conductivity, and cations exchange capacity, this physical property can be determined on calibrated electric instruments instantly (ASTM D 4972-01)[71]. In physical properties surface area and porosity is determined by either CO₂ and N₂ absorption methods or Iodine absorption methods. Physical properties also include the determination of bulk density (ASTM D 7263-09) and particle size distribution (ASTM D 422-63) which are done by an instrument called a particle size analyser [67][68]. Agriculture application studies have shown that biochar particle size affects soil water storage by change of pore space between particles (interpore) and by adding pores that are part of the biochar (intrapore)[72]. The determination of physicochemical properties of biochar gives a strategy of application as an additive to improve soil quality[73].

9.4. Surface analysis

The surface analysis of biochar includes the determination of the following properties:

9.4.1. Morphology by SEM

Surface morphology is analysed by technique called scanning electron microscopy[74], this technique is used for the visualisation and characterisation of surfaces of various materials including biochar[75].

9.4.2. Surface Elements by SEM-EDX

SEM-EDX does the surface elements analysis. It is the analytical instrument called energy-dispersive X-ray spectroscopy (EDX). It is used to characterise materials analytically or chemically; these systems are typically used in conjunction with an electron microscope, such as a transmission electron microscope (TEM) or a scanning electron microscope (SEM). The EDX method is based on the emission of a specimen's unique X-rays. The peaks connected to the elemental makeup of the studied sample are shown in an EDX spectrum[76].

9.4.3. Surface functional groups by FT-IR and Raman

Recording the infrared spectra of biochar samples, Fourier Transform Infrared Spectroscopy (FT-IR) is used to determine the chemical composition of biochar[77]. Surface functional groups such as Hydroxyl-, aldehyde- and ketone-groups are most important for surface binding of polar contaminants. The appearance of these functional groups can be derived from Fourier-transform-infrared spectroscopy[78]. Raman spectroscopy is an inelastic scattering phenomenon that examines molecular vibrations to determine a material's molecular fingerprint[79].

9.4.4. Acidic and basic functional groups

Acidic and Basic functional groups are determined by Boehm Titration[80]. This method is evaluated for obtaining reliable results in quantifying O₂ containing surface groups in less time[81].

9.4.5 Surface chemical compounds (XPS)

The elemental composition, chemical states, and electronic states of the elements inside the material are measured using X-ray photoelectron spectroscopy (XPS), a surface-sensitive quantitative spectroscopic approach[31]. XPS spectra are acquired by irradiating a material with an X-ray beam while measuring the kinetic energy of electrons that escape from the top 0–10 nanometre of the substance under investigation[82].

9.5. Molecular/Structural analysis

The molecular or structural analysis includes the study of biomass thermal analysis in which TGA is an effective method for determining the thermal stability of materials[83]. Changes in the weight of a specimen are measured as its temperature is raised in this procedure. TGA can determine a sample's moisture and volatile content[84]. The structural analysis is done by X-ray diffraction (XRD), which offers extensive information on materials crystallographic structure, chemical composition, and physical characteristics 85].

10. Factors affecting biochar production

Several technical factors, including pyrolysis temperature and feedstock type, influence biochar characteristics, resulting in products with a wide range of pH, specific surface area, pore-volume, CEC, volatile matter, ash, and carbon content[86].

The following factors mainly influence biochar properties:

- Type of feedstocks,
- Feedstock properties
- Temperature of pyrolysis,
- Size of the particle,
- Heating rate, etc.

These factors have a direct effect on the yield of biochar rather than its quality[87].

11. Biochar yield from different crop waste

Table 01 Biochar yield from different crop waste

Sr. No.	Biomass	Yield (%)	Temperature (°C)	Ref.
1	Cotton stock	46.5	400	[88]
2	Groundnut shells	34.1	450	[89]
3	Paddy straw	49.5	400	[90]
4	Wheat straw	32.9	400	[91]

5	Coconut shell	28	300-400	[92]
6	Bamboo	32.20	400	[93]
7	Pigeon Pea stock	24.5	350	[94]
8	Corn cob	26.55	600	[95]
9	Maize straw	19.65	600	[95]
10	Eucalyptus	21.26	300	[96]
11	Sugarcane bagasse	75	600	[97]
12	Orange peel	25.54	300	[98]
13	Palm Kernel Shell	43.13	400	[99]
14	walnut shell	28.9	500	[100]

12. Optimisation of Biochar Production

Optimisation of biochar production involves the increase in the yield, quality and quantity of the biochar produced in the process, this involves the trials of biochar production on different temperature heating rates moisture contents and other process parameters.

Biochar with a greater yield can be created by pyrolysis of pomegranate peel by using the optimal conditions such as temperature of 300 °C, a yield of optimised biochar of 54.9 percent was produced. The reaction time is 20 minutes, and the particle size is 3 mm[101].

High-performance biochar can be produced using a simple and low-cost method, i.e., Optimising pyrolysis parameters[102].

Response surface approach can optimise biochar preparation from the stem of Eichhornia crassipes for Cd²⁺ adsorption[103].

Biochar production can be optimised by Co-Torrefaction of Microalgae and Lignocellulosic Biomass Using Response Surface methodology[104].

Postproduction processing of biochar

To use the produced biochar, it needs to process in the form in which it is used for specific application, following are the some of the postproduction processing done on the biochar.

- **Grinding-** The size of the biochar is important for the final application. In order to achieve the desired size, size reductio may be required, in which grinding operations are carried out[105].
- **Densification-** Densification is required to increase the density of biochar, for rase of storage and transportation purpose biochar densification is important. Biochar densified into briquettes or pallets and it can be used for combustion fuel[105].
- **Activation-**It the process in which the surface area and the porosity of the char is increased in order to use biochar as absorbent material[105].
- **Blending-**Blending is the process in which biochar is added to various chemicals and fertilisers for increasing its characteristics and application efficiency[43].

13. Global Biochar Market

Biochar is a rapidly growing business that is predicted to substantially impact agricultural crop output and productivity[106]. It improves soil fertility and provides nutrients to crops. Furthermore, new income streams for the biochar industry are projected to emerge from uses in energy generation and greenhouse gas mitigation[107].

The worldwide Biochar market was worth USD 406.5 million in 2020, and it is predicted to grow to USD 885.2 million by 2027, with a CAGR of 11.8 percent between 2021 and 2027[108].

According to a new report by EMR titled, 'Global Biochar Market Report and Forecast 2021-2026', the global biochar market size was valued at USD 1.67 billion in 2020. The market is further expected to reach USD 3.24 billion by 2026[109].

India's National Policy for Management of Crop Waste (NPMCR) has the objective of "Diversified use of crop waste for various purposes like charcoal gasification, power generation, as industrial raw material for production of bio-ethanol, packing material, paper/board/panel industry, composting and mushroom cultivation etc." it shows that Indian government is also promoting the biochar production [46].

13. Commercial Biochar plants in India

Table 02 Commercial Biochar plants in India

Sr. No.	Manufacturer	Address	Ref.
1.	farm2energy PVT. LTD	VPO Bija, Tehsil Khanna, Bija, Punjab 141401	[111]
2	Agrobiochar	Prime Specialities 203, 6-3-652 D/28, 2nd Floor, Dhruvatara, Amrutha Estate, Somajiguda, Hyderabad, Telangana, India. Pin Code-500082.	[112]
3	Appropriate Rural Technology Institute ARTI	Maharashtra	[113]
4	ArSta eco	102/3, Sri Jenu Giri, Bennayakanahalli, K G Palya Post, Tiptur 572201 Tumkur Karnataka	[114]
5	Anulekh Agrotech Pvt. Ltd	Anulekh Agrotech Pvt. Ltd. 207, Shivam Chambers, S.V Road, Goregaon-West, Mumbai-400104	[115]
6.	Greenfield Eco Solutions Pvt. Ltd	Greenfield Eco Solutions Pvt. Ltd. 11/895, CHB, Nandanvan Jodhpur, Rajasthan. India 342001	[116]

14. Utilisation of biochar in agriculture

Biochar is a carbon-sequestering material that can be applied to soils to increase soil health, fertility, and carbon sequestration[117].

The different effects studies of biochar application in agriculture by different researchers are summarised below:

14.1 Effect of biochar application on soil properties

Biochar application reduces bulk density and enhanced the the porosity of the soil considerably when compared to the control[118]. After applying biochar, the rate of soil erosion can be reduced by at least 50%. A significant component in reducing soil losses is the growth of macroaggregates[119]. Biochar can also improve the soil microbial ecology by influencing the community structure and quantity of soil bacteria and regulating the interaction between soil environmental variables and microorganisms[120]. In fine-textured soils, biochar can improve water infiltration and hydraulic conductivity. On the other hand, biochar increases hydraulic conductivity in coarse-textured soils[121]. Biochar can increase soil moisture content, reduced soil bulk density, and increased soil Phosphorus and pH[122]. Increasing biochar application rates shows significant increase in Soil Organic Matter[123]. The use of biochar increases the soil's accessible water content[124]. Organic wastes and biochar can help to improve trace element mobility and toxicity in polluted soils[125].

14.2 Effect of biochar application on crop yield

According to studies, plants cultivated on soil altered with biochar showed yield and nutritional status reactions. Increased agricultural yields go hand in hand with enhanced soil health[126].

In salty sodic soils, adding charcoal to pearl millet compensates for yield loss and increases quality[127]. Combined biochar with NPK increased cucumber production, nutritional contents of cucumber fruit[128]. The biochar of grass and inorganic fertiliser application significantly shows increase in marketable bulb yield of onion[129]. The influence of biochar on the development of oil palm and rubber seedlings might aid in field replanting by boosting growth[130]. The application of biochar in the moderately acidic soil interrelates to ensure that the necessary conditions for cowpea growth are met, resulting increased growth, yield, and nutrient uptake[131]. A higher rate of biochar application shows higher soybean productivity[132]. Application of biochar shows improved soil fertility and enhanced eggplant crop growth in terms of height, leaf number, fresh and dry weight[133]. Field experiment increased the yield of maize by an average of; seven times for the biochar treatment[134]. Increased biochar input boosted rice output under water-saving irrigation. The rice production was best with a high biochar application (40 t/ha). The use of biochar increased the full grain number, productive panicle number, and seed setting rate, all of which increase dice output[135]. The retention and mobilisation of nutrients in biochar-applied soil significantly improve fertiliser efficiency. Furthermore, studies have revealed that most crops, mainly cotton and maize, have increased germination and biomass build up over time and superior yield characteristics [136]. Application of peanut shell derived biochar shows strong potential to improve peanut yield and leaf photosynthesis[137].

15. Engineered/designer Biochar

Engineered/designer biochar is a phrase that is often used to describe biochar modification or synthesis that is application-oriented and outcome-based. Biochar modifications using diverse procedures such as acid, base, amination, surfactant modification, impregnation of mineral sorbents, steam activation, and magnetic modification[138]. Engineered biochar might be used for a variety of purposes, including sustainable agriculture, environmental remediation, and catalytic reactions[139]. Engineered/designer biochar can also be used for the removal of phosphate in water and wastewater[140]. In another pyrolysis process, biochar is modified by ball milling and used to remove hazardous phenol and chlorophenols from polluted aqueous media[141]. Modified biochar is more successful in retaining water in the soil[142]. This shows that the engineered or designer biochar made for specific applications can be the further advancement in the biochar industry.

16. Economics of biochar production

Biochar manufacturing promotes a circular bioeconomy for agricultural waste[143]. Life cycle assessment of biochar production processes showed that it can bring environmental benefits[144]. Even if the biochar market prices become low farmers can apply it in the farms and can get benefits [145]. Biochar's influence in numerous applications is well proven, and the need of the hour is to build a continuous supply chain to commercialise biochar's use in these fields[146].

17. Environmental concerns and future directions for biochar applications

Biochar can enhance soil dust emissions or contain high quantities of contaminants[147]. Biochar amendment in soils may concern food safety and human health dueo polyaromatic hydrocarbons[148]. It is found that biochar produced at higher pyrolysis temperatures (>400 °C) is less hazardous and had lower potencies of AhR-mediated effects, It suggesting that they would be more suited for soil application[149]. The existing state of knowledge is mostly based on small-scale investigations conducted in laboratories and greenhouses. The properties of biochar vary depending on the feedstock used and the method used to make it[150]. Biochar has a low bulk density and a high porosity, making it vulnerable to air escape through natural or mechanical soil disturbance[151].

The following figure explains about the environmental concerns and respective future directions for applications.

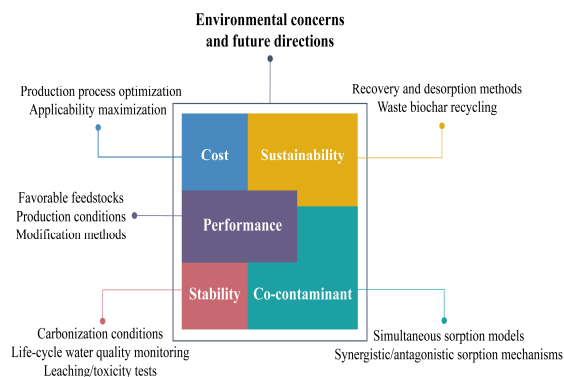


Fig. 10 Environmental concerns and future research directions of biochar application[152].

Conclusion

From this review it can be concluded that although biochar has tremendous potential in the agriculture, industrial, pharmaceutical, and environmental sectors, its potential is undraped and needs more compressive research in the domains of biochar production and its utilisation. The cons of biochar such as toxicity environmental impacts need to be studied and accordingly, the promotion to biochar should be given.

REFERENCES

- [1] REPORT UNEP, "Converting Waste agricultural Biomass into a resource Compendium of Technologies," 2009.
- [2] G. of India. Ministry of New and Renewable Energy (MNRE), "Current Status." <https://mnre.gov.in/bio-energy/current-status> (accessed Nov. 30, 2021).
- [3] S. Das, S. Mohanty, G. Sahu, M. Rana, and K. Pilli, "Biochar: A Sustainable Approach for Improving Soil Health and Environment," *Soil Erosion - Current Challenges and Future Perspectives in a Changing World*, Apr. 2021, doi: 10.5772/INTECHOPEN.97136.
- [4] H. Elbasiouny *et al.*, "Agricultural Waste Management for Climate Change Mitigation: Some Implications to Egypt," 2020, pp. 149–169. doi: 10.1007/978-3-030-18350-9_8.
- [5] P. D. Phadtare, O. S. Karpe, and A. G. Mohod, "APPLICATION OF RENEWABLE ENERGY SOURCES: AGRICULTURE AND AGRO-BASED INDUSTRY", [Online]. Available: www.ycjournal.net
- [6] S. K. Das, G. K. Ghosh, and R. Avasthe, "Biochar application for environmental management and toxic pollutant remediation," *Biomass Conversion and Biorefinery*, Oct. 2020, doi: 10.1007/s13399-020-01078-1.
- [7] A. Abukari, Z. Abukari Imoro, A. Zarouk Imoro, and A. Ballu Duwiejuah, "Sustainable Use of Biochar in Environmental Management," in *Environmental Health [Working Title]*, IntechOpen, 2021. doi: 10.5772/intechopen.96510.
- [8] A. K. Mensah and K. A. Frimpong, "Biochar and/or Compost Applications Improve Soil Properties, Growth, and Yield of Maize Grown in Acidic Rainforest and Coastal Savannah Soils in Ghana," *International Journal of Agronomy*, vol. 2018, 2018, doi: 10.1155/2018/6837404.

- [9] A. Mohammadi, B. Khoshnevisan, G. Venkatesh, and S. Eskandari, "A Critical Review on Advancement and Challenges of Biochar Application in Paddy Fields: Environmental and Life Cycle Cost Analysis," *Processes*, vol. 8, no. 10, p. 1275, Oct. 2020, doi: 10.3390/pr8101275.
- [10] I. Baidoo, D. B. Sarpong, S. Bolwig, and D. Ninson, "Biochar amended soils and crop productivity: A critical and meta-analysis of literature," *International Journal of Development and Sustainability*, vol. 5, no. 9, pp. 414–432, 2016, Accessed: Dec. 17, 2021. [Online]. Available: www.isdsnet.com/ijds
- [11] B. Chandra Verma, S. Mandal, and B. U. Choudhury, "Application of biochar in agriculture to improve soil health Organic conservation agriculture View project." [Online]. Available: <https://www.researchgate.net/publication/269688738>
- [12] Z. He, S. M. Uchimiya, and M. Guo, "Production and Characterisation of Biochar from Agricultural By-Products: Overview and Use of Cotton Biomass Waste s," 2015, pp. 63–86. doi: 10.2136/sssaspecpub63.2014.0037.5.
- [13] F. Polat and E. Toklu, "Calculation of optimum length for pyrolysis reactor," 2017. [Online]. Available: www.journaleras.com
- [14] A. Kanca, "Investigation on pyrolysis and combustion characteristics of low quality lignite, cotton waste, and their blends by TGA-FTIR," *Fuel*, vol. 263, Mar. 2020, doi: 10.1016/j.fuel.2019.116517.
- [15] N. T. L. Chi *et al.*, "A review on biochar production techniques and biochar based catalyst for biofuel production from algae," *Fuel*, vol. 287, p. 119411, Mar. 2021, doi: 10.1016/j.fuel.2020.119411.
- [16] R. W. Nachenius, F. Ronsse, R. H. Venderbosch, and W. Prins, "Biomass Pyrolysis," in *Advances in Chemical Engineering*, vol. 42, Academic Press Inc., 2013, pp. 75–139. doi: 10.1016/B978-0-12-386505-2.00002-X.
- [17] C. Z. Zaman *et al.*, "Pyrolysis: A Sustainable Way to Generate Energy from Waste," in *Pyrolysis*, InTech, 2017. doi: 10.5772/intechopen.69036.
- [18] "Biochar Production Technologies - biochar-international." <https://biochar-international.org/biochar-production-technologies/> (accessed Dec. 27, 2021).
- [19] L. Maestri Kimura, L. Cardoso Santos, P. Fraga Vieira, P. Martins Parreira, and H. Molinar Henrique, "Biomass Pyrolysis: Use of Some Agricultural Wastes for Alternative Fuel Production."
- [20] M. M. Ramirez-Corredores, "Emerging Technologies and Ideas with Potential," *The Science and Technology of Unconventional Oils*, pp. 489–676, 2017, doi: 10.1016/B978-0-12-801225-3.00006-1.
- [21] H. Al-Haj Ibrahim, "Introductory Chapter: Pyrolysis," in *Recent Advances in Pyrolysis*, IntechOpen, 2020. doi: 10.5772/intechopen.90366.
- [22] M. J. Antal, K. Mochidzuki, and L. S. Paredes, "Flash carbonisation of biomass," *Industrial and Engineering Chemistry Research*, vol. 42, no. 16, pp. 3690–3699, Aug. 2003, doi: 10.1021/ie0301839.

- [23] M. P. Maniscalco, M. Volpe, and A. Messineo, "Hydrothermal Carbonization as a Valuable Tool for Energy and Environmental Applications: A Review," *Energies*, vol. 13, no. 16, p. 4098, Aug. 2020, doi: 10.3390/en13164098.
- [24] M. Nasrollahzadeh, Z. Nezafat, and N. Shafiei, "Lignin chemistry and valorisation," *Biopolymer-Based Metal Nanoparticle Chemistry for Sustainable Applications*, pp. 145–183, 2021, doi: 10.1016/B978-0-12-822108-2.00011-9.
- [25] S. T. Yoganandham, G. Sathyamoorthy, and R. R. Renuka, "Emerging extraction techniques: Hydrothermal processing," in *Sustainable Seaweed Technologies*, Elsevier, 2020, pp. 191–205. doi: 10.1016/b978-0-12-817943-7.00007-x.
- [26] K. Czerwińska, M. Śliz, and M. Wilk, "Hydrothermal carbonisation process: Fundamentals, main parameter characteristics and possible applications including an effective method of SARS-CoV-2 mitigation in sewage sludge. A review," *Renewable and Sustainable Energy Reviews*, vol. 154, p. 111873, Feb. 2022, doi: 10.1016/J.RSER.2021.111873.
- [27] N. L. Panwar, Ashish Pawar and B. L. Salvi, "Comprehensive review on production and utilization of biochar," *SN Applied Sciences*, 2019, 1:168, doi : 10.1007/s42452-019-0172-6.
- [28] M. T. Amin, A. A. Alazba, and M. Shafiq, "Application of biochar derived from date palm biomass for removal of lead and copper ions in a batch reactor: Kinetics and isotherm scrutiny," *Chemical Physics Letters*, vol. 722, pp. 64–73, May 2019, doi: 10.1016/j.cplett.2019.02.018.
- [29] S. Li, C. Y. Chan, M. Sharbatmaleki, H. Trejo, and S. Delagah, "Engineered Biochar Production and Its Potential Benefits in a Closed-Loop Water-Reuse Agriculture System," *Water*, vol. 12, no. 10, p. 2847, Oct. 2020, doi: 10.3390/w12102847.
- [30] Anand Akshay, Priyak Nellikka Kandiyar, and Payyanad Sachin, "Modelling and design of a continuous biochar production reactor," *Mukt Shabd Journal*, vol. IX, no. VII, pp. 822–826, 2020.
- [31] J. Telegdi, A. Shaban, and G. Vastag, "Biocorrosion-steel," *Encyclopedia of Interfacial Chemistry: Surface Science and Electrochemistry*, pp. 28–42, Jan. 2018, doi: 10.1016/B978-0-12-409547-2.13591-7.
- [32] X. Li, C. Yin, S. Knudsen Kaer, and T. Condra, "A detailed pyrolysis model for a thermally large biomass particle," 2020.
- [33] G. Stewart, "Adjuncts," *Brewing Materials and Processes: A Practical Approach to Beer Excellence*, pp. 27–46, Jun. 2016, doi: 10.1016/B978-0-12-799954-8.00002-2.
- [34] P. R. Yaashikaa, P. S. Kumar, S. Varjani, and A. Saravanan, "A critical review on the biochar production techniques, characterisation, stability and applications for circular bioeconomy," *Biotechnology Reports*, vol. 28. Elsevier B.V., Dec. 01, 2020. doi: 10.1016/j.btre.2020.e00570.
- [35] F. Holcomb, "ERDC/CERL TR-07-32, Direct Carbon Fuel Cells: Converting Waste to Electricity," 2007. [Online]. Available: <https://www.researchgate.net/publication/235181115>
- [36] F. Holcomb, "ERDC/CERL TR-07-32, Direct Carbon Fuel Cells: Converting Waste to Electricity," 2007. [Online]. Available: <https://www.researchgate.net/publication/235181115>
- [37] A. Ahmed *et al.*, "Sawdust pyrolysis from the furniture industry in an auger pyrolysis reactor system for biochar and bio-oil production," *Energy Conversion and Management*, vol. 226, Dec. 2020, doi: 10.1016/j.enconman.2020.113502.

- [38] Y. Zhang *et al.*, “Microwave-Assisted Pyrolysis of Biomass for Bio-Oil Production,” in *Pyrolysis*, InTech, 2017. doi: 10.5772/67442.
- [39] S. J. Ojolo, C. A. Oshoku, and M. G. Sobamowo, “Analytical Investigations of Kinetic and Heat Transfer in Slow Pyrolysis of a Biomass Particle,” *International Journal of Renewable Energy Development*, vol. 2, no. 2, pp. 105–115, Jun. 2013, doi: 10.14710/ijred.2.2.105-115.
- [40] P. Kaushal and J. Abedi, “A simplified model for biomass pyrolysis in a fluidised bed reactor,” *Journal of Industrial and Engineering Chemistry*, vol. 16, no. 5, pp. 748–755, Sep. 2010, doi: 10.1016/j.jiec.2010.07.008.
- [41] N. Jamaludin, S. A. Rashid, and T. Tan, “Natural biomass as carbon sources for the synthesis of photoluminescent carbon dots,” *Synthesis, Technology and Applications of Carbon Nanomaterials*, pp. 109–134, Jan. 2018, doi: 10.1016/B978-0-12-815757-2.00005-X.
- [42] M. Ayaz, D. Feizienė, V. Tilvikienė, K. Akhtar, U. Stulpinaitė, and R. Iqbal, “Biochar Role in the Sustainability of Agriculture and Environment,” *Sustainability 2021, Vol. 13, Page 1330*, vol. 13, no. 3, p. 1330, Jan. 2021, doi: 10.3390/SU13031330.
- [43] T. Xie, K. R. Reddy, C. Wang, E. Yargicoglu, and K. Spokas, “Characteristics and Applications of Biochar for Environmental Remediation: A Review,” <https://doi.org/10.1080/10643389.2014.924180>, vol. 45, no. 9, pp. 939–969, May 2015, doi: 10.1080/10643389.2014.924180.
- [44] L. Liang, F. Xi, W. Tan, X. Meng, B. Hu, and X. Wang, “Review of organic and inorganic pollutants removal by biochar and biochar-based composites,” *Biochar 2021 3:3*, vol. 3, no. 3, pp. 255–281, Jul. 2021, doi: 10.1007/S42773-021-00101-6.
- [45] X. Tan *et al.*, “Application of biochar for the removal of pollutants from aqueous solutions,” *Chemosphere*, vol. 125, pp. 70–85, Apr. 2015, doi: 10.1016/j.chemosphere.2014.12.058.
- [46] W. Gwenzi, N. Chaukura, C. Noubactep, and F. N. D. Mukome, “Biochar-based water treatment systems as a potential low-cost and sustainable technology for clean water provision,” *Journal of Environmental Management*, vol. 197. Academic Press, pp. 732–749, Jul. 15, 2017. doi: 10.1016/j.jenvman.2017.03.087.
- [47] Y. X. Seow *et al.*, “A review on biochar production from different biomass wastes by recent carbonisation technologies and its sustainable applications,” *Journal of Environmental Chemical Engineering*, p. 107017, Dec. 2021, doi: 10.1016/J.JECE.2021.107017.
- [48] Y. Ding *et al.*, “Biochar to improve soil fertility. A review,” *Agronomy for Sustainable Development 2016 36:2*, vol. 36, no. 2, pp. 1–18, May 2016, doi: 10.1007/S13593-016-0372-Z.
- [49] U. C. Ugochukwu, “Characteristics of clay minerals relevant to bioremediation of environmental contaminated systems,” *Modified Clay and Zeolite Nanocomposite Materials: Environmental and Pharmaceutical Applications*, pp. 219–242, Dec. 2018, doi: 10.1016/B978-0-12-814617-0.00006-2.
- [50] Y. Ding *et al.*, “Biochar to improve soil fertility. A review,” *Agronomy for Sustainable Development*, vol. 36, no. 2. Springer-Verlag France, Jun. 01, 2016. doi: 10.1007/s13593-016-0372-z.

- [51] M. Guo, W. Song, and J. Tian, "Biochar-Facilitated Soil Remediation: Mechanisms and Efficacy Variations," *Frontiers in Environmental Science*, vol. 8, p. 183, Oct. 2020, doi: 10.3389/FENV.S.2020.521512/BIBTEX.
- [52] B. Lellis, C. Z. Fávoro-Polonio, J. A. Pamphile, and J. C. Polonio, "Effects of textile dyes on health and the environment and bioremediation potential of living organisms," *Biotechnology Research and Innovation*, vol. 3, no. 2, pp. 275–290, Jul. 2019, doi: 10.1016/J.BIORI.2019.09.001.
- [53] H. Mamane, S. Altshuler, E. Sterenzon, and V. K. Vadivel, "Decolorization of dyes from textile wastewater using biochar: a review," *Acta Innovations*, no. 37, pp. 36–46, Dec. 2020, doi: 10.32933/actainnovations.37.3.
- [54] S. Suman, "Conversion of Solid Biomass into Biochar: Act as a Green, Eco-Friendly Energy Source and a Substitute of Fossil Fuel Inputs," *Proceedings*, vol. 58, no. 1, p. 34, Sep. 2020, doi: 10.3390/wef-06916.
- [55] J. Lee, K.-H. Kim, and E. E. Kwon, "Biochar as a Catalyst," *Renewable and Sustainable Energy Reviews*, vol. 77, pp. 70–79, Sep. 2017, doi: 10.1016/j.rser.2017.04.002.
- [56] J. Lee, K. H. Kim, and E. E. Kwon, "Biochar as a Catalyst," *Renewable and Sustainable Energy Reviews*, vol. 77. Elsevier Ltd, pp. 70–79, 2017. doi: 10.1016/j.rser.2017.04.002.
- [57] H. W. W. Shuahua, W. Meixia, X. Qiaoli, and N. Mei, "The comparison of different activation techniques to prepare activated carbon materials from waste cotton fabric," *Autex Research Journal*, vol. 17, no. 3, pp. 287–294, Sep. 2017, doi: 10.1515/aut-2016-0026.
- [58] C. I. Contescu, S. P. Adhikari, N. C. Gallego, N. D. Evans, and B. E. Biss, "Activated Carbons Derived from High-Temperature Pyrolysis of Lignocellulosic Biomass," *C 2018, Vol. 4, Page 51*, vol. 4, no. 3, p. 51, Sep. 2018, doi: 10.3390/C4030051.
- [59] A. K. Sakhiya, A. Anand, and P. Kaushal, "Production, activation, and applications of biochar in recent times," *Biochar*, vol. 2, no. 3. Springer Science and Business Media B.V., pp. 253–285, Sep. 01, 2020. doi: 10.1007/s42773-020-00047-1.
- [60] T. Allohverdi, A. K. Mohanty, P. Roy, and M. Misra, "A Review on Current Status of Biochar Uses in Agriculture," *Molecules*, vol. 26, no. 18, Sep. 2021, doi: 10.3390/MOLECULES26185584.
- [61] B. A. Oni, O. Oziegbe, and O. O. Olawole, "Significance of biochar application to the environment and economy," *Annals of Agricultural Sciences*, vol. 64, no. 2, pp. 222–236, Dec. 2019, doi: 10.1016/J.AOAS.2019.12.006.
- [62] N. Jamaludin, S. A. Rashid, and T. Tan, "Natural biomass as carbon sources for the synthesis of photoluminescent carbon dots," *Synthesis, Technology and Applications of Carbon Nanomaterials*, pp. 109–134, Jan. 2018, doi: 10.1016/B978-0-12-815757-2.00005-X.
- [63] Y. Ding *et al.*, "Biochar to improve soil fertility. A review," *Agronomy for Sustainable Development 2016 36:2*, vol. 36, no. 2, pp. 1–18, May 2016, doi: 10.1007/S13593-016-0372-Z.
- [64] F. Ronsse, S. van Hecke, D. Dickinson, and W. Prins, "Production and characterisation of slow pyrolysis biochar: Influence of feedstock type and pyrolysis conditions," *GCB Bioenergy*, vol. 5, no. 2, pp. 104–115, 2013, doi: 10.1111/GCBB.12018.

- [65] K. Jindo, H. Mizumoto, Y. Sawada, M. A. Sanchez-Monedero, and T. Sonoki, "Physical and chemical characterisation of biochars derived from different agricultural waste s," *Biogeosciences*, vol. 11, no. 23, pp. 6613–6621, Dec. 2014, doi: 10.5194/bg-11-6613-2014.
- [66] E. N. Yargicoglu and K. R. Reddy, "Characterisation and Surface Analysis of Commercially Available Biochars for Geoenvironmental Applications," in *IFCEE 2015*, Mar. 2015, pp. 2637–2646. doi: 10.1061/9780784479087.245.
- [67] A. D. Igalavithana *et al.*, "Advances and future directions of biochar characterisation methods and applications," *Critical Reviews in Environmental Science and Technology*, vol. 47, no. 23, pp. 2275–2330, Dec. 2017, doi: 10.1080/10643389.2017.1421844.
- [68] O. D. Nartey and B. Zhao, "Biochar Preparation, Characterisation, and Adsorptive Capacity and Its Effect on Bioavailability of Contaminants: An Overview," *Advances in Materials Science and Engineering*, vol. 2014, pp. 1–12, 2014, doi: 10.1155/2014/715398.
- [69] K. Qian *et al.*, "Effects of Biomass Feedstocks and Gasification Conditions on the Physicochemical Properties of Char," *Energies*, vol. 6, no. 8, pp. 3972–3986, Aug. 2013, doi: 10.3390/en6083972.
- [70] S. Nanda, P. Mohanty, K. K. Pant, S. Naik, J. A. Kozinski, and A. K. Dalai, "Characterisation of North American Lignocellulosic Biomass and Biochars in Terms of their Candidacy for Alternate Renewable Fuels," *BioEnergy Research*, vol. 6, no. 2, pp. 663–677, Jun. 2013, doi: 10.1007/s12155-012-9281-4.
- [71] "Standard Test Method for pH of Soils." <https://www.astm.org/d4972-01.html> (accessed Dec. 17, 2021).
- [72] Z. Liu, B. Dugan, C. A. Masiello, and H. M. Gonnermann, "Biochar particle size, shape, and porosity act together to influence soil water properties," *PLOS ONE*, vol. 12, no. 6, p. e0179079, Jun. 2017, doi: 10.1371/journal.pone.0179079.
- [73] A. Tomczyk, Z. Sokołowska, and P. Boguta, "Biochar physicochemical properties: pyrolysis temperature and feedstock kind effects," *Reviews in Environmental Science and Bio/Technology*, vol. 19, no. 1, pp. 191–215, Mar. 2020, doi: 10.1007/s11157-020-09523-3.
- [74] M. Faraldos and A. Bahamonde, "Multifunctional photocatalytic coatings for construction materials," *Nanotechnology in Eco-efficient Construction: Materials, Processes and Applications*, pp. 557–589, Jan. 2018, doi: 10.1016/B978-0-08-102641-0.00023-2.
- [75] M. de Assumpção Pereira-da-Silva and F. A. Ferri, "Scanning Electron Microscopy," *Nanocharacterization Techniques*, pp. 1–35, Mar. 2017, doi: 10.1016/B978-0-323-49778-7.00001-1.
- [76] M. Toofan and J. Toofan, "A Brief Review of the Cleaning Process for Electronic Device Fabrication," *Developments in Surface Contamination and Cleaning*, pp. 185–212, 2015, doi: 10.1016/B978-0-323-29961-9.00005-3.
- [77] I. ben Salem, M. B. Saleh, J. Iqbal, M. el Gamal, and S. Hameed, "Date palm waste pyrolysis into biochar for carbon dioxide adsorption," *Energy Reports*, vol. 7, pp. 152–159, Sep. 2021, doi: 10.1016/j.egyr.2021.06.027.

- [78] R. Janu *et al.*, “Biochar surface functional groups as affected by biomass feedstock, biochar composition and pyrolysis temperature,” *Carbon Resources Conversion*, vol. 4, pp. 36–46, 2021, doi: 10.1016/j.crcon.2021.01.003.
- [79] “Comparison of Raman and FTIR Spectroscopy: Advantages and Limitations - Gateway Analytical.” <https://www.gatewayanalytical.com/resources/publications/comparison-raman-and-ftir-spectroscopy-advantages-and-limitations/> (accessed Dec. 16, 2021).
- [80] L. Tsechansky and E. R. Graber, “Methodological limitations to determining acidic groups at biochar surfaces via the Boehm titration,” *Carbon*, vol. 66, pp. 730–733, Jan. 2014, doi: 10.1016/j.carbon.2013.09.044.
- [81] J. Schönherr, J. Buchheim, P. Scholz, and P. Adelhelm, “Boehm Titration Revisited (Part I): Practical Aspects for Achieving a High Precision in Quantifying Oxygen-Containing Surface Groups on Carbon Materials,” *C*, vol. 4, no. 2, p. 21, Apr. 2018, doi: 10.3390/c4020021.
- [82] J. Telegdi, A. Shaban, and G. Vastag, “Biocorrosion-steel,” *Encyclopedia of Interfacial Chemistry: Surface Science and Electrochemistry*, pp. 28–42, Jan. 2018, doi: 10.1016/B978-0-12-409547-2.13591-7.
- [83] P. Basu, “Analytical techniques,” *Biomass Gasification, Pyrolysis and Torrefaction: Practical Design and Theory*, pp. 479–495, Jan. 2018, doi: 10.1016/B978-0-12-812992-0.00023-6.
- [84] K. R. Rajisha, B. Deepa, L. A. Pothan, and S. Thomas, “Thermomechanical and spectroscopic characterisation of natural fibre composites,” *Interface Engineering of Natural Fibre Composites for Maximum Performance*, pp. 241–274, 2011, doi: 10.1533/9780857092281.2.241.
- [85] F. Sima, C. Ristoscu, L. Duta, O. Gallet, K. Anselme, and I. N. Mihailescu, “Laser thin films deposition and characterisation for biomedical applications,” *Laser Surface Modification of Biomaterials: Techniques and Applications*, pp. 77–125, Apr. 2016, doi: 10.1016/B978-0-08-100883-6.00003-4.
- [86] A. Tomczyk, Z. Sokołowska, and P. Boguta, “Biochar physicochemical properties: pyrolysis temperature and feedstock kind effects,” *Reviews in Environmental Science and Bio/Technology*, vol. 19, no. 1, pp. 191–215, Mar. 2020, doi: 10.1007/s11157-020-09523-3.
- [87] P. R. Yaashikaa, P. S. Kumar, S. Varjani, and A. Saravanan, “A critical review on the biochar production techniques, characterisation, stability and applications for circular bioeconomy,” *Biotechnology Reports*, vol. 28, p. e00570, Dec. 2020, doi: 10.1016/j.btre.2020.e00570.
- [88] R. al Afif, S. S. Anayah, and C. Pfeifer, “Batch pyrolysis of cotton stalks for evaluation of biochar energy potential,” *E3S Web of Conferences*, vol. 116, p. 00001, Sep. 2019, doi: 10.1051/e3sconf/201911600001.
- [89] H. O. Ogunsuyi and Adejumobi, “Pyrolysis of Groundnut Peels and Shells for Bio-Based Products (Bio-Oil and Bio-Char),” 2020. [Online]. Available: www.rsisinternational.org
- [90] W. Wu *et al.*, “Chemical characterisation of rice straw-derived biochar for soil amendment,” *Biomass and Bioenergy*, vol. 47, pp. 268–276, Dec. 2012, doi: 10.1016/j.biombioe.2012.09.034.
- [91] A. Sedmihradská *et al.*, “Pyrolysis of wheat and barley straw,” *Research in Agricultural Engineering*, vol. 66, no. No. 1, pp. 8–17, Mar. 2020, doi: 10.17221/26/2019-RAE.

- [92] R. Sari, S. Gea, B. Wirjosejono, S. Hendrana, and Y. Hutapea, "Improving Quality and Yield Production of Coconut Shell Charcoal Through a Modified Pyrolysis Reactor with Tar Scrubber to Reduce Smoke Pollution," *Polish Journal of Environmental Studies*, vol. 29, no. 2, pp. 1815–1824, Feb. 2020, doi: 10.15244/pjoes/110582.
- [93] S. S. Sahoo, V. K. Vijay, R. Chandra, and H. Kumar, "Production and characterisation of biochar produced from slow pyrolysis of pigeon pea stalk and bamboo," *Cleaner Engineering and Technology*, vol. 3, p. 100101, Jul. 2021, doi: 10.1016/j.clet.2021.100101.
- [94] D. N. Balaguraviah Acharya Ranga *et al.*, "Biochar production through drum method and characterisation for soil amendment qualities," ~ 544 ~ *The Pharma Innovation Journal*, vol. 10, no. 6, pp. 544–551, 2021, [Online]. Available: <http://www.thepharmajournal.com>
- [95] B. Zhao and M. Filonchyk, "Characterisation of biochars derived from maize straw and corn cob and effects of their amendment on maize growth and loess soil properties," 2018. [Online]. Available: <https://www.researchgate.net/publication/330344321>
- [96] D. Dejene and E. Tilahun, "Characterisation of Biochar Produced from Different Feed Stocks for Waste Management," *International Journal of Environmental Sciences & Natural Resources*, vol. 20, no. 3, pp. 1–5, Jul. 2019, doi: 10.19080/IJESNR.2019.20.556040.
- [97] M. M. Manyuchi, C. Mbohwa, and E. Muzenda, "Bio char Production from Sugar Cane Bagasse and its Application Sugarcane Processing Wastewater Treatment."
- [98] G. Stella Mary, P. Sugumaran, S. Niveditha, B. Ramalakshmi, P. Ravichandran, and S. Seshadri, "Production, characterisation and evaluation of biochar from pod (*Pisum sativum*), leaf (*Brassica oleracea*) and peel (*Citrus sinensis*) wastes," *International Journal of Recycling of Organic Waste in Agriculture*, vol. 5, no. 1, pp. 43–53, Mar. 2016, doi: 10.1007/S40093-016-0116-8/FIGURES/4.
- [99] M. Mohd Hasan, R. Bachmann, S. Loh, S. Manroshan, and S. Ong, "Effect of Pyrolysis Temperature and Time on Properties of Palm Kernel Shell-Based Biochar," *IOP Conference Series: Materials Science and Engineering*, vol. 548, no. 1, p. 012020, Jun. 2019, doi: 10.1088/1757-899X/548/1/012020.
- [100] S. Wijitkosum and P. Jiwonok, "Elemental Composition of Biochar Obtained from Agricultural Waste for Soil Amendment and Carbon Sequestration," 2019, doi: 10.3390/app9193980.
- [101] M. T. H. Siddiqui *et al.*, "Characterisation and Process Optimisation of Biochar Produced Using Novel Biomass, Waste Pomegranate Peel: A Response Surface Methodology Approach," *Waste and Biomass Valorization*, vol. 10, no. 3, pp. 521–532, Mar. 2019, doi: 10.1007/s12649-017-0091-y.
- [102] P. A. da S. Veiga *et al.*, "Production of high-performance biochar using a simple and low-cost method: Optimisation of pyrolysis parameters and evaluation for water treatment," *Journal of Analytical and Applied Pyrolysis*, vol. 148, p. 104823, Jun. 2020, doi: 10.1016/J.JAAP.2020.104823.
- [103] R. Zhou, M. Zhang, J. Zhou, and J. Wang, "Optimisation of biochar preparation from the stem of *Eichhornia crassipes* using response surface methodology on adsorption of Cd²⁺," *Scientific Reports 2019 9:1*, vol. 9, no. 1, pp. 1–17, Nov. 2019, doi: 10.1038/s41598-019-54105-1.

- [104] C. Viegas, C. Nobre, R. Correia, L. Gouveia, and M. Gonçalves, "Optimisation of Biochar Production by Co-Torrefaction of Microalgae and Lignocellulosic Biomass Using Response Surface Methodology," 2021, doi: 10.3390/en14217330.
- [105] S. K. Thengane *et al.*, "Market prospects for biochar production and application in California," *Biofuels, Bioproducts and Biorefining*, vol. 15, no. 6, pp. 1802–1819, Nov. 2021, doi: 10.1002/bbb.2280.
- [106] "BIOCHAR FEASIBILITY STUDY EXPLORING THE ENVIRONMENTAL, SOCIAL AND ECONOMIC VALUE OF A BIOCHAR BUSINESS IN THE METHOW VALLEY," 2011.
- [107] A. Mohammadi, B. Khoshnevisan, G. Venkatesh, and S. Eskandari, "A Critical Review on Advancement and Challenges of Biochar Application in Paddy Fields: Environmental and Life Cycle Cost Analysis," *Processes* 2020, Vol. 8, Page 1275, vol. 8, no. 10, p. 1275, Oct. 2020, doi: 10.3390/PR8101275.
- [108] Valuates Reports, "Valuates Reports." <https://www.prnewswire.com/in/news-releases/biochar-market-size-to-reach-usd-885-2-million-by-2027-at-a-cagr-of-11-8-valuates-reports-849686662.html#> (accessed Dec. 01, 2021).
- [109] "Press Release." <https://www.expertmarketresearch.com/pressrelease/biochar-market> (accessed Dec. 01, 2021).
- [110] GOVERNMENT OF INDIA, "National Policy for Management of Crop Waste s (NPMCR) Incorporation in soil and Mulching Baling/ Binder for domestic/industrial as fuel Government of India Ministry of Agriculture Department of Agriculture & Cooperation (Natural Resource Management Division)," 2014.
- [111] "farm2energy." <https://www.farm2energy.com/biomass-supply-services> (accessed Dec. 01, 2021).
- [112] "Agrobiochar." <https://agrobiochar.com/> (accessed Dec. 01, 2021).
- [113] "<http://www.arti-india.org/>." <http://www.arti-india.org/> (accessed Dec. 01, 2021).
- [114] "ArSta eco." <https://arstaeco.com/> (accessed Dec. 02, 2021).
- [115] "Anulekh Agrotech Pvt. Ltd." <https://www.anulekh.com/index.html> (accessed Dec. 02, 2021).
- [116] "Greenfield Eco Solutions Pvt. Ltd." https://www.greenfieldeco.com/index.php?route=product/product&product_id=69 (accessed Dec. 02, 2021).
- [117] H. S. Jatav *et al.*, "Importance of Biochar in Agriculture and Its Consequence," *Applications of Biochar for Environmental Safety*, Jul. 2020, doi: 10.5772/INTECHOPEN.93049.
- [118] A. O. Adekiya *et al.*, "Effect of Biochar on Soil Properties, Soil Loss, and Cocoyam Yield on a Tropical Sandy Loam Alfisol," 2020, doi: 10.1155/2020/9391630.
- [119] S. H. Jien and C. S. Wang, "Effects of biochar on soil properties and erosion potential in a highly weathered soil," *CATENA*, vol. 110, pp. 225–233, Nov. 2013, doi: 10.1016/J.CATENA.2013.06.021.

- [120] S. Li, Z. Li, X. Feng, F. Zhou, J. Wang, and Y. Li, "Effects of biochar additions on the soil chemical properties, bacterial community structure and rape growth in an acid purple soil," *Plant, Soil and Environment*, vol. 67, no. No. 3, pp. 121–129, Mar. 2021, doi: 10.17221/390/2020-PSE.
- [121] S. Torabian *et al.*, "Biochar: an organic amendment to crops and an environmental solution," *AIMS Agriculture and Food* 2021 1:401, vol. 6, no. 1, pp. 401–415, 2021, doi: 10.3934/AGRFOOD.2021024.
- [122] Md. R. Karim, M. A. Halim, N. v. Gale, and S. C. Thomas, "Biochar Effects on Soil Physiochemical Properties in Degraded Managed Ecosystems in Northeastern Bangladesh," *Soil Systems*, vol. 4, no. 4, p. 69, Nov. 2020, doi: 10.3390/soilsystems4040069.
- [123] P. Bista, R. Ghimire, S. Machado, and L. Pritchett, "Biochar Effects on Soil Properties and Wheat Biomass vary with Fertility Management," *Agronomy* 2019, Vol. 9, Page 623, vol. 9, no. 10, p. 623, Oct. 2019, doi: 10.3390/AGRONOMY9100623.
- [124] K. C. Uzoma, M. Inoue, H. Andry, A. Zahoor, and E. Nishihara, "Influence of biochar application on sandy soil hydraulic properties and nutrient retention," *Journal of Food, Agriculture and Environment*, vol. 9, no. 3 & 4, pp. 1137–1143, 2011, [Online]. Available: <https://www.wfpublisher.com/Abstract/2517>
- [125] J. A. Antonangelo, X. Sun, and H. Zhang, "The roles of co-composted biochar (COMBI) in improving soil quality, crop productivity, and toxic metal amelioration," *Journal of Environmental Management*, vol. 277, p. 111443, Jan. 2021, doi: 10.1016/J.JENVMAN.2020.111443.
- [126] N. Kumar Yadav *et al.*, "Biochar and their impacts on soil properties and crop productivity: a review," ~ 49 ~ *Journal of Pharmacognosy and Phytochemistry*, vol. 7, no. 4, pp. 49–54, 2018.
- [127] E. F. Ali, H. M. Al-Yasi, A. M. S. Kheir, and M. A. Eissa, "Effect of Biochar on CO₂ Sequestration and Productivity of Pearl Millet Plants Grown in Saline Sodic Soils," *Journal of Soil Science and Plant Nutrition* 2021 21:2, vol. 21, no. 2, pp. 897–907, Jan. 2021, doi: 10.1007/S42729-021-00409-Z.
- [128] S. O. Apori, J. Byalebeka, M. Murongo, J. Ssekandi, and G. L. Noel, "Effect of co-applied corncob biochar with farmyard manure and NPK fertiliser on tropical soil," *Resources, Environment and Sustainability*, vol. 5, p. 100034, Sep. 2021, doi: 10.1016/J.RESENV.2021.100034.
- [129] A. B. Aneseyee and T. Wolde, "Effect of Biochar and Inorganic Fertilizer on the Soil Properties and Growth and Yield of Onion (*Allium cepa*) in Tropical Ethiopia," *Scientific World Journal*, vol. 2021, 2021, doi: 10.1155/2021/5582697.
- [130] Z. Hamzah and S. N. A. Shuhaimi, "IOP Conference Series: Earth and Environmental Science Biochar: effects on crop growth You may also like Where should we apply biochar? Characterisation the potential of biochar from cow and pig manure for geoecology application I M Gunamantha and G A B Widana-Effects of Biochar on Soil Water-Soluble Sodium, Calcium, Magnesium and Soil Enzyme Activity of Peach Seedlings Recent citations," *IOP Conf. Ser.: Earth Environ. Sci.*, vol. 215, 2018, doi: 10.1088/1755-1315/215/1/012011.
- [131] E. Yeboah, G. Asamoah, P. Ofori, B. Amoah, and K. O. A. Agyeman, "Method of biochar application affects growth, yield and nutrient uptake of cowpea," *Open Agriculture*, vol. 5, no. 1, pp. 352–360, Jan. 2020, doi: 10.1515/OPAG-2020-0040/MACHINEREADEABLECITATION/RIS.

- [132] Q. ZHU *et al.*, “Effect of biochar on grain yield and leaf photosynthetic physiology of soybean cultivars with different phosphorus efficiencies,” *Journal of Integrative Agriculture*, vol. 18, no. 10, pp. 2242–2254, Oct. 2019, doi: 10.1016/S2095-3119(19)62563-3.
- [133] D. Mohan, K. Abhishek, A. Sarswat, M. Patel, P. Singh, and C. U. Pittman, “Biochar production and applications in soil fertility and carbon sequestration – a sustainable solution to crop-waste burning in India,” *RSC Advances*, vol. 8, no. 1, pp. 508–520, 2018, doi: 10.1039/C7RA10353K.
- [134] S. E. Hale *et al.*, “The effect of biochar, lime and ash on maize yield in a long-term field trial in a Ultisol in the humid tropics,” *Science of The Total Environment*, vol. 719, p. 137455, Jun. 2020, doi: 10.1016/J.SCITOTENV.2020.137455.
- [135] X. Chen, S. Yang, J. Ding, Z. Jiang, and X. Sun, “Effects of Biochar Addition on Rice Growth and Yield under Water-Saving Irrigation,” *Water 2021, Vol. 13, Page 209*, vol. 13, no. 2, p. 209, Jan. 2021, doi: 10.3390/W13020209.
- [136] S. Abul, H. Hussainy, T. Assistant, M. Rajasekar, and A. Karthik, “Effect of biochar on the growth and yield of cotton and maize: A review,” *International Journal of Chemical Studies*, vol. 8, no. 3, pp. 572–578, May 2020, doi: 10.22271/CHEMI.2020.V8.I3G.9271.
- [137] C. Y. Xu *et al.*, “Effect of biochar amendment on yield and photosynthesis of peanut on two types of soils,” *Environmental Science and Pollution Research*, vol. 22, no. 8, pp. 6112–6125, Apr. 2015, doi: 10.1007/S11356-014-3820-9.
- [138] A. U. Rajapaksha *et al.*, “Engineered/designer biochar for contaminant removal/immobilisation from soil and water: Potential and implication of biochar modification,” *Chemosphere*, vol. 148, pp. 276–291, Apr. 2016, doi: 10.1016/J.CHEMOSPHERE.2016.01.043.
- [139] H. Kazemi Shariat Panahi *et al.*, “A comprehensive review of engineered biochar: Production, characteristics, and environmental applications,” *Journal of Cleaner Production*, vol. 270, p. 122462, Oct. 2020, doi: 10.1016/J.JCLEPRO.2020.122462.
- [140] K. Vikrant *et al.*, “Engineered/designer biochar for the removal of phosphate in water and wastewater,” *Science of The Total Environment*, vol. 616–617, pp. 1242–1260, Mar. 2018, doi: 10.1016/J.SCITOTENV.2017.10.193.
- [141] N. Siva Kumar, H. M. Shaikh, M. Asif, and E. H. Al-Ghurabi, “Engineered biochar from wood apple shell waste for high-efficient removal of toxic phenolic compounds in wastewater,” *Scientific Reports* /, vol. 11, p. 2586, 123AD, doi: 10.1038/s41598-021-82277-2.
- [142] K. Ghassemi-Golezani and S. Farhangi-Abri, “Improving plant available water holding capacity of soil by solid and chemically modified biochars,” *Rhizosphere*, vol. 21, p. 100469, Mar. 2022, doi: 10.1016/J.RHISPH.2021.100469.
- [143] M. Nematian, C. Keske, and J. N. Ng’ombe, “A techno-economic analysis of biochar production and the bioeconomy for orchard biomass,” *Waste Management*, vol. 135, pp. 467–477, Nov. 2021, doi: 10.1016/J.WASMAN.2021.09.014.
- [144] M. Owsianiak, H. Lindhjem, G. Cornelissen, S. E. Hale, E. Sørmo, and M. Sparrevik, “Environmental and economic impacts of biochar production and agricultural use in six developing and middle-income countries,” *Science of The Total Environment*, vol. 755, p. 142455, Feb. 2021, doi: 10.1016/j.scitotenv.2020.142455.

- [145] S. P. Galinato, J. K. Yoder, and D. Granatstein, "The economic value of biochar in crop production and carbon sequestration," *Energy Policy*, vol. 39, no. 10, pp. 6344–6350, Oct. 2011, doi: 10.1016/j.enpol.2011.07.035.
- [146] A. K. Sakhiya, A. Anand, and P. Kaushal, "Production, activation, and applications of biochar in recent times," *Biochar*, vol. 2, no. 3, pp. 253–285, Sep. 2020, doi: 10.1007/s42773-020-00047-1.
- [147] D. L. Gelardi, C. Li, and S. J. Parikh, "An emerging environmental concern: Biochar-induced dust emissions and their potentially toxic properties," *Science of The Total Environment*, vol. 678, pp. 813–820, Aug. 2019, doi: 10.1016/J.SCITOTENV.2019.05.007.
- [148] J. Wang *et al.*, "Polyaromatic hydrocarbons in biochars and human health risks of food crops grown in biochar-amended soils: A synthesis study," *Environment International*, vol. 130, p. 104899, Sep. 2019, doi: 10.1016/j.envint.2019.06.009.
- [149] H. Lyu *et al.*, "Effect of pyrolysis temperature on potential toxicity of biochar if applied to the environment," *Environmental pollution (Barking, Essex : 1987)*, vol. 218, pp. 1–7, Nov. 2016, doi: 10.1016/J.ENVPOL.2016.08.014.
- [150] V. D. Nair, P. K. R. Nair, B. Dari, A. M. Freitas, N. Chatterjee, and F. M. Pinheiro, "Biochar in the agroecosystem-climate-change-sustainability Nexus," *Frontiers in Plant Science*, vol. 8, p. 2051, Dec. 2017, doi: 10.3389/FPLS.2017.02051/BIBTEX.
- [151] D. L. Gelardi, C. Li, and S. J. Parikh, "An emerging environmental concern: Biochar-induced dust emissions and their potentially toxic properties," *The Science of the total environment*, vol. 678, pp. 813–820, Aug. 2019, doi: 10.1016/J.SCITOTENV.2019.05.007.
- [152] X. Wang, Z. Guo, Z. Hu, and J. Zhang, "Recent advances in biochar application for water and wastewater treatment: a review," *PeerJ*, vol. 8, p. e9164, May 2020, doi: 10.7717/peerj.9164.