

The production of second-generation bioethanol From Lignocellulosic biomass Using Two Strains of *Sacharomyces cerevisiae*

ABSTRACT

AIM: To examines the bioethanol production potential of three lignocellulosic biomass residues: corn cob, corn husk, and corn stem, as well as their physiochemical and mineral composition before and after fermentation.

METHODOLOGY: Before fermentation, the corn waste samples were hydrolyzed into sugar monomer and the hydrolysate was fermented separately to produce bioethanol for five days at 282°C using two Saccharomyces cerevisiae strains: typed yeast ATCC 3585 and Baker's yeast ATCC 204508/S288c. At one-day intervals, the pH, simple sugar and ethanol production were measured. ANOVA was used to find significant differences between the investigated organisms.

RESULT: The results showed that Saccharomyces cerevisiae ATCC 35858 produces more ethanol than the other strain (20.25 ± 0.63). Corn cob also produced more ethanol than stem and husk. During fermentation, the typed yeasts outperformed the Baker's yeast in pH, reducing sugar, and specific gravity. Average dry yeast cell mass (ADM) of Saccharomyces cerevisiae ATCC 35858 and Saccharomyces cerevisiae ATCC 204508/S288c were 1.82 ± 0.07 and 1.98 ± 0.03 , respectively. According to proximate composition, fermentation lost over 50 % of the corn waste's nutrients (ash), while recovering over 50 % of the minerals (nitrogen, phosphorus, and potassium). The ability of the two Saccharomyces cerevisiae strains to produce bioethanol was not significantly different at P value 0.05.

CONCLUSION: The findings in this work supported the use of lignocellulosic biomass such as corn waste (corn stem, husk and cob wastes) to produce bioethanol using the two strains of Saccharomyces cerevisiae studied.

Keywords: Second Generation Bioethanol, Lignocellulosic Biomass, Fermentation, *Sacharomyces cerevisiae*, Corn waste.

1. INTRODUCTION

The production of Bioethanol from second-generation feedstocks, primarily lignocellulosic biomass, offers the possibility of a cleaner, lower-carbon biofuel that can be used as a substitute for fossil fuels (Ayodele *et al.*, 2020; J. Chen *et al.*, 2021). Because Fossil fuel is a non-renewable resource that also contributes significantly to greenhouse gas emission, excessive fossil fuel consumption is also the primary cause of today's global energy crisis and climate deterioration (Muthuvelu *et al.*, 2019; Rempel *et al.*, 2019). However, due to costly pre-treatment technologies, one major constraint is the high cost of production. Bioethanol from first-generation feedstocks, on the other hand, is created from starch- and sugar-based feedstocks such as corn, wheat, and sugarcane, which are commonly used as human and livestock feed (Davani-Davari *et al.*, 2019; Rodrigues *et al.*, 2018; K. Wang *et al.*, 2013). However, using food crops to produce bioethanol has resulted in an unbridgeable gap between energy and food security (Ayodele *et al.*, 2020). As a result, the focus of bioethanol research has shifted to the transformation of lignocellulosic biomass, which is a product of plant photosynthesis, such as straw, leaves, and other agricultural or forest wastes, which produces a large amount of bioethanol every year (Boshoff *et al.*, 2016; J. Chen *et al.*, 2021; K. Wang *et al.*, 2013). Lignocellulosic biomass is one of the potential feedstocks for bioethanol production because it is abundant, renewable, and non-edible (Baeyens *et al.*, 2015; Xu *et al.*, 2018).

Bioethanol can be made from a variety of feedstocks, including sucrose, starch, lignocellulosic and algal biomass, using a microorganism-mediated fermentation process. Yeasts, particularly *Saccharomyces cerevisiae*, are the most commonly used microbes in ethanol production due to their high ethanol productivity, ethanol tolerance, and ability to ferment a wide range of sugars (Mohd Azhar *et al.*, 2017).

Each year, nearly 1.5 billion tons of biomass feedstock, forestry wastes, and dedicated energy crops are produced around the world, yielding more than 442 billion liters of bioethanol if they are all used. Biomass resources in Nigeria have the potential to generate 2.33 EJ of energy, while agricultural residues have about 1.09 EJ of energy potential, with cassava, maize, oil palm, plantain, rice, and sorghum being the significant contributors (Jekayinfa *et al.*, 2020). It was also estimated that 20 to 70 % of generated waste in Nigeria is collected in different locations, with

household waste having great potential for bioconversion, organic waste becomes a viable alternative and promising way for generating renewable energy (Biodun *et al.*, 2021).

Therefore, this work investigated the possibility of transforming corn (*Zea mays*) wastes (stem, husk and cob) to ethanol using two strains of *Saccharomyces cerevisiae*; *S. cerevisiae* from FIIRO and baker's yeast., and also carried out physiochemical analysis of the hydrolysis residue of corn wastes for possible use as biofertilizer and animal feedstock.

2. MATERIALS AND METHODS

2.1. Collection and Physical Pretreatment of Corn Wastes

Four kilograms (4 kg) of fresh corn wastes (cob, husk, and stem) were collected from Elemere farm, Kwara State University, Malete, Kwara State, in a clean polythene bag. They were identified at the Herbarium unit of the Department of Plant Biology, University of Ilorin, Ilorin, Kwara State Nigeria, the corn wastes were identified as corn cob, corn husk, and corn stem, respectively. All corn wastes required for the study were washed with tap water to remove soil and dirt before being air dried to crispiness on the laboratory bench for one week at room temperature 28 ± 2 °C. Using a mortar and pestle, the dried corn wastes were crushed into rough particles. Finally, it was milled into powder using an electric blender (Sonik Japan) and stored in labeled substrates bags in the refrigerator at 4 °C for future use.

2.2. Collection and Characterization of Ethanol Producing Strain of *Saccharomyces cerevisiae*

The ethanol-producing strain of *Saccharomyces cerevisiae* ATCC 36858 was obtained from the Federal Institute of Industrial Research Oshodi (FIIRO) in Lagos, Nigeria and the organism was physically identified on yeast peptone dextrose agar plates. For two days, the organism (typed yeast) was cultured on Yeast Peptone Dextrose agar (YPDA) plate at 30 °C.

2.3. Morphological and Microscopic Characteristics

The colonies were observed and described on (YPDA). The morphological and cultural characteristics of the Typed yeasts (ring formation, colony color, colony elevation, colony texture, and colony shape) were observed and recorded. Under the microscope, characteristics

such as (shape, ascospore, budding, pseudomycelium or mycelium, etc.) were observed and recorded (Choi *et al.*, 2010).

2.4. Biochemical Characteristics

The organism was Gram stained following the method of Fawole and Oso (2004). Then, Sugar Fermentation test and Nitrate test were carried out following the method of Tofighi et al. (2014) (Tofighi *et al.*, 2014).

2.5. Collection and Activation of Baker's Yeast

Dry baker's yeast (*Saccharomyces cerevisiae* ATCC 204508/S288c) was obtained from Dangote flour mill PLC, Ilorin, Kwara State, Nigeria. It was activated on Yeast Peptone Dextrose Agar YPDA containing 2.5 g yeast extract, 5 g peptone water, 5 g dextrose, 3.75 g agar and 250 ml distilled water. The preparation was autoclaved at 121°C for 15 min and was allowed cool down. 15 ml was dispensed into small plates (60 x15 mm) disposable Petri dishes. 2g of the dry yeast was grown on the agar plate at 30 °C for two days to activate the yeast. A loopful of the yeast colony was transferred from the agar plate into 100 ml of 5 % yeast peptone dextrose broth (which was obtained by dissolving 2 g of dextrose, 2 g of peptone water, 1 g of yeast extract and 95 ml of distilled water) and incubated at room temperature on a shaker (Stuart Orbital Shaker SSL1) at 130 rpm for two days. 7ml of the broth was centrifuged at 4500 rpm for 5 minutes. The supernatant was decanted and the pellet was re-suspended in 10 ml of sterile distilled water twice, centrifuged and the supernatant was decanted. The pellet was re-suspended in 1/10 of 50 ml (5 ml) citrate buffer (1 g of citric acid and 1.47 g of sodium citrate) and was used as inoculum (Suh *et al.*, 2007).

2.6. Acid Hydrolysis of Corn Wastes

The above-mentioned pretreated corn wastes were degraded using both dilute and concentrated Tetraoxosulphate (vi) acid (H₂SO₄). Each of the milled corn wastes (cobs, husks and stems) was mixed with 25 grams of dilute H₂SO₄ (1.5 percent). The hydrolysis was performed by placing the mixture in an oven at 160 °C for 30 minutes. The polysaccharide was hydrolyzed into sugar monomers in this process, and the liquid fraction was recovered by passing it through No 1 Whatman filter paper (90 mm) to separate the filtrate from the residue. The sugar monomers obtained during the hydrolysis process were then subjected to microbial fermentation, while the residues were analyzed proximally (Chen *et al.*, 2007).

2.7.Ethanol Production (Yeast Fermentation)

Hundred (100) ml of the above hydrolysates (sugar monomers) were transferred into another set of labeled conical flasks, covered, and autoclaved at 121 °C for 15 minutes before cooling. The flasks were inoculated with 2 ml of two days' broth culture containing approximately 1.5×10^{12} cfu/ml of ethanol producing yeast (EPY) and activated bakers' yeast (BY) and properly covered to ferment for five (5) days at 28 ± 2 °C. At one-day intervals, samples were aseptically taken from the fermenting medium (5 ml) and centrifuged at 4500 rpm for 6 minutes, with the supernatant used for ethanol production, simple sugar, specific gravity, pH, and the residue used for yeast cell mass (Gustafson *et al.*, 2015).

2.7.1. Ethanol Assay

Using a vinometer, 1 ml of supernatant was poured into the funnel at the top of the vinometer (Vinometer FIW 13 0-25 %) until it was about half full. The funnel was used to support the vinometer until 6 drops of sample fell from the tip. The tester was immediately inverted to drain the remaining liquid. The funnel was turned on its side. Until the residual liquid in it no longer drops. The scale's percentage ethanol yield was read and recorded (Abouziied & Reddy, 2006).

2.8.pH Determination

During the 5 days of fermentation, the pH of each sample was measured every day with a pH meter (OHAUZ STARTAR 2000). The electrode was immersed in the supernatant and the pH of the solution was read and recorded for each sample after the function selector was switched from standby to pH (Abouziied & Reddy, 2006).

2.9.Determination of Reducing Sugar Content (brix level) and Specific Gravity

This was accomplished through the use of a refractometer. The refractometer's front end (Refractometer RF 110) was aimed in the direction of a bright light, and the diopter's adjusting ring was adjusted until the reticle was clearly visible. The refractometer was calibrated by opening the cover plate and placing two drops of distilled water on the prism with a dropping pipette. The cover plate was closed, lightly pressed, rotated, and the calibration screw was adjusted to align the light/blue boundary (made up of the brix level and specific gravity scale) with the null line. The cover plate was removed, and the prism's surface was cleaned with cotton wool. Two drops of the sample to be measured were dropped on the prism, the replaced plate

was covered and lightly pressed, and the corresponding scale of the light/blue boundary was read and recorded (Abouzed & Reddy, 2006).

2.10. Yeast Dry Weight Measurement

The dry weight of yeast cells was determined using the filter paper method. Conical flasks containing fermentation medium were shaken for 1 minute to ensure yeast cell homogenization, 5 ml of the fermenting medium was withdrawn and centrifuged at 4500 rpm for 6 minutes, and the wet weight of the pellets was transferred to pre-weigh filter paper. It was dried in the oven for 10 minutes at 40 °C . The dried weight of the pellets was determined using an electronic weighing balance (CAS-44). The yeast weight was calculated by subtracting the initial weight of the filter paper from the final weight (Liu *et al.*, 2011).

2.11. Proximate Analysis Before and After Fermentation of the Corn Wastes

The proximate content of the corn wastes before and after fermentation in terms of total ash, crude fibre, crude fat, crude protein, moisture and crude carbohydrate was carried out according to AOAC (2000; (Raimi *et al.*, 2012).

2.11.1. Total Ash

Total ash content as total inorganic matter was determined before and after fermentation of corn wastes by incineration of a sample at 600⁰C (Horwitz, 2000). One (1) gram was placed in a pre-weighed crucible and incinerated at 600⁰C in a muffle furnace. The crucible was removed from the oven and cooled in a desiccator before being reweighed. The ash content was calculated using the following formula: Percentage ash = $\frac{ashweight}{sampleweight} \times 100$

2.11.2. Crude Fat

After extraction with a Soxhlet extraction unit, the crude fat was calculated (Horwitz, 2000). Two grams (2 g) of corn waste before and after fermentation were weighed into a labeled thimble in a 250 ml boiling flask. The thimble was plugged with cotton wool, and 300 ml of petroleum ether was added to the boiling flask samples. This was done in a reflux mode with a Soxhlet apparatus for 6 hours at 60 °C. The petroleum ether containing fat extracts was poured into a container, oven dried for 30 minutes at 102 °C, and the percentage (percent) fat was calculated using the formula.: Percentage (%) Fat = $\frac{ashweight}{sampleweight} \times 100$

2.11.3. Moisture Contents

Moisture content was calculated using (Horwitz, 1990). Clean silica Petri dish dried in an oven and cooled in a desiccator. W1 weighed the empty Petri dish, and 5 g of the sample was placed in the Petri dish and recorded (W2). It was placed in a preheated oven at 105 °C for 3 hours. Remove and cool in a desiccator before weighing (W3).

$$\text{Percentage moisture content} = \frac{W1-W3}{W2-W1} \times 100$$

2.11.4. Crude Fibre

The AOAC (2000) method was used to determine crude fiber. A gram of defatted sample (waste) was placed in a glass crucible and attached to the extraction unit. The sample was digested for 30 minutes with 1.25 percent boiling 150 ml sulphuric acid, then drained and washed with boiling distilled water. The sample was digested with 1.25 percent NaOH in 150 ml, then washed with boiling distilled water. The crucible was removed, dried in an oven at 110°C, cooled in a desiccator, and weighed (W1). The sample was ashed for 2 hours in a 550°C muffle furnace, cooled in a desiccator, and reweighed (W2). The formula was used to calculate the percentage of fiber (Horwitz, 2000):

$$\text{Percentage crude fibre} = \frac{\text{Digested sample}(W1) - \text{Ashed sample}(W2)}{\text{weight of sample}} \times 100 \frac{\text{weight of digested sample}(W1) - \text{Weight of ash sample}(W2)}{\text{sample of weight}} \times 100$$

2.11.5. Crude Protein

Ten (10) grams of waste were placed in 50 ml Kjeldhal flasks. The flasks were filled with two milliliters of distilled water and left for 30 minutes. A total of 0.2 g of powdered pumice, 1.33 g of K₂SO₄ catalyst mixture, and 1.5 g of concentrated H₂SO₄ were added. On the digestion rack, this was heated until the frothing stopped. To condense H₂SO₄ to about one-third of the way up the flask's neck, the temperature was raised to gently boil. The isolated particle was washed with a 30% H₂O₂ solution before boiling for 1 hour and cooling. Slowly swirling ten ml of deionized water was added. Total crude protein was determined spectrophotometrically at 550 nm using a two-ml aliquot of each diluted solution (Horwitz, 2000).

2.11.6. Determination of Total Carbohydrate

Raimi et al (2012) method was used to calculate total carbohydrate. To disperse the sample, two grams (2 g) of the pretreated sample were weighed into a 100 ml measuring cylinder containing 10.0 ml of water and thoroughly stirred with a glass rod. A total of 13ml (13.0 ml) of 52 percent perchloric acid reagent was added. For 25 minutes, it was frequently stirred with a glass rod. The content was prepared to a volume of 100 ml, then transferred to a volumetric flask of 250 ml and prepared to a volume of 250 ml. The flask was shaken, and the contents were filtered into a test tube using filter paper. 1ml of filtrate was pipetted into test tubes, 1.0ml of diluted glucose standard solution was used to make a duplicate standard, and 5.0ml of freshly prepared anthrone reagent was added to each tube. After thoroughly mixing the tubes, they were placed in a boiling water bath for 10 minutes. The tubes were quickly cooled to room temperature by immersing them in a cool water bath. At 620 nm, the optical densities of the sample and the glucose standard were measured against a reagent blank. The absorbance was plotted against a graph of standard.

If the weight of the sample = w, Absorbance of dilute standard = a, Absorbance of dilute sample = b. The percentage total carbohydrate was calculated to be = $\frac{2b \times b}{a \times w}$

2.11.7. Determination of Mineral Content (NPK) in the Waste Before and After Fermentation

The amount of Nitrogen, Phosphorus and Potassium in the corn waste was determined according to the method described by Onwuka (2005).

2.11.8. Phosphorus Determination Before and After Fermentation

Onwuka (2005) vanadate colorimetric method was employed. In 20 ml of distilled water, three (3) grams of the ashes obtained before and after hydrolysis were dissolved. 2 ml of the ached mixture were pipetted into a 100 ml volumetric flask, followed by 2.5 milliliters of vanadate molybdate reagent and thoroughly mixed. It was filled to the brim with distilled water and set aside for 10 minutes. In a 100 ml volumetric flask, 2 ml of distilled water and 2.5 ml vanadate reagent were mixed together and made up to the mark with distilled water. At 540 nm, the absorbance of the test and control was measured and compared to a standard curve of potassium dihydrogen phosphate (KH₂PO₄).

Percentage phosphorus = $A \times \frac{10}{W} \times V$. Where A = concentration of dilute ash, W = weight of original food ashed, V = volume of ashed solution to 100 ml.

2.11.9. Determination of Nitrogen in the Waste Before and After Fermentation

The Nitrogen was determined using the Micro Kjeldahl method (Onwuka, 2005). Two grams (2 g) of corn wastes labeled before and after fermentation were digested in a tube with 4 ml H₂SO₄ and 2 Klehdahl tablets for 30 minutes at 420 °C until a clear solution was obtained. It was cooled and watered down. The distillation unit was connected to the tube containing the diluted sample, and the condenser outlet was connected to a conical flask containing 25 ml of boric acid. Distillation was carried out for 4 minutes after 25 milliliters (25 ml) of 40 % NaOH was dispensed into the conical flask. The ammonium borate solution was titrated with 0.1M HCl until it reached a purplish – grey end point.

Percentage Nitrogen = $\frac{0.14 \times A}{\text{weight of the corn wastes} \in \text{gram.}}$ A = volume (ml) of 0.1M HCl used in the titration.

2.11.10. Determination of Potassium in the Waste Before and After Fermentation

Flame photometry was used to determine potassium (Onwuka, 2005). Five (5) grams of waste were ashed and digested with 10 mL of HCl. The ash was transferred to a 100 ml volumetric flask and filled to the line with deionized water. Absolute KCl standards of varying concentrations were prepared. The absorbance of both the sample and the standard was measured using a flame photometer set to potassium wavelength. The KCl concentration was plotted against the sample absorbance, and the percentage potassium was calculated.

2.12. Data Analysis

The mean and standard error of mean replicates are presented as the results. To establish significant differences, a one-way analysis of variance (ANOVA) and Duncan's multiple range test (DRMT) were used with the statistical R- app and Graph pad prism version 6. P 0.05 was used to determine significance.

3. Results and Discussion.

3.1. Morphological, Microscopic and Biochemical Characteristics of *Saccharomyces cerevisiae* ATCC 36858

The characteristics of the ethanol producing strain of *Saccharomyces cerevisiae* obtained from the Federal Institute of Industrial Research Oshodi (FIIRO) are shown in Tables 1-3. The FIIRO yeast were cream-white in color, flat, with a smooth surface, small oval shape, fission cell types, and no filament was observed. The sugar utilization test showed that the isolates were capable of utilizing a wide range of sugars as carbon and energy sources but could not utilize nitrate.

Table 1: Colonial Morphology of the Yeasts

Characteristics	Typed Yeast
Color	cream white
Elevation	Flat
Texture	Moist smooth
Margin	Entire

Table 2: Microscopic Characteristic of the Yeasts

Characteristics	Typed Yeast
Cell – Shape	Small pointed oval

Gram stain	Ascospores G –ve Vegetative cell G +ve
Ascospore	Present
Pseudohyphae	Absent
True mycellium	Absent
Cell types	Fission
Organism	<i>Saccharomyces cerevisiae</i> ATCC 36858

Table 3: Biochemical Characteristics of Yeast

Characteristics	Typed Yeast
Ferment glucose	Yes
Ferment Sucrose	Yes
Ferment Galactose	Yes
Ferment Maltose	Yes
Ferment fructose	Yes
Nitrate ability	NO
Organism	<i>Saccharomyces cerevisiae</i> ATCC 36858

3.2.Ethanol Yield

The percentage (%) yield of bioethanol after five days of fermentation of *Zea mays* wastes with *Saccharomyces cerevisiae* ATCC 36858 and *Saccharomyces cerevisiae* ATCC 204508/S288c is presented in Figure 1 and 2 respectively: There was increase in ethanol yield from day 1 until they reached their peak on day 4 of fermentation. A decreasing yield was recorded on day 5. This was in contrast to Michelle (2011) report, where yield of ethanol increased beyond day 4. The ability of these yeasts to produce ethanol can be attributed to an enzyme capable of breaking down sugar monomers into ethanol, reportedly found in *Saccharomyces* (Raj *et al.*, 2014) *Saccharomyces cerevisiae* ATCC 36858 was observed to have the higher ethanol yield compared

to the baker's yeast. Also, corn cobs have the highest ethanol yield among the corn wastes. Statistical analysis revealed that there was no significant difference in ethanol yield at p value ≤ 0.05 . Means were compared based on the yield of each organism on the three substrates.

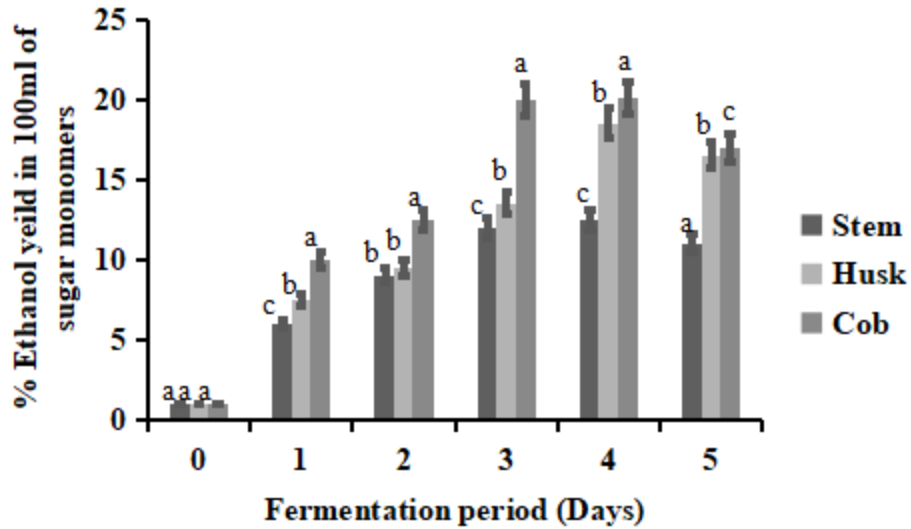


Figure 1: Ethanol Yield During the Fermentation of Corn Waste Using *Saccharomyces cerevisiae* ATCC 36858

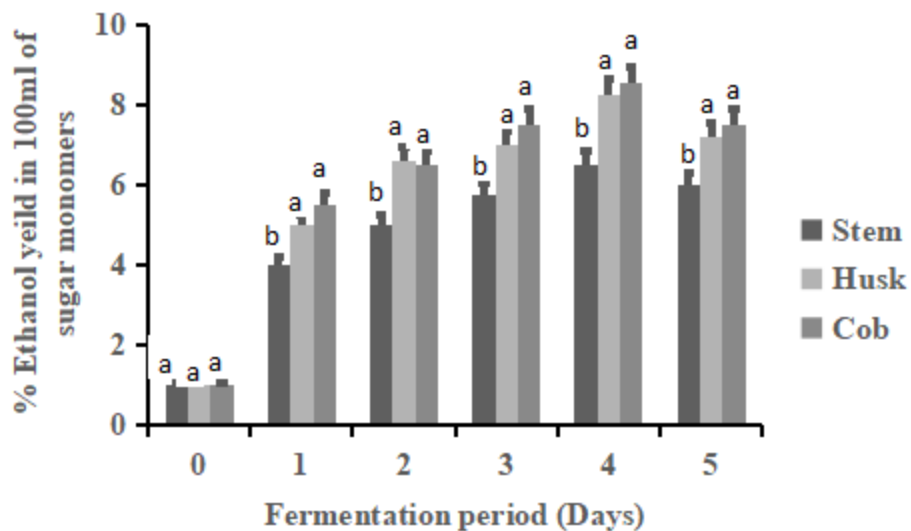


Figure 2: Ethanol Yield During the Fermentation of Corn Waste Using *Saccharomyces cerevisiae* ATCC 36858.

The ability of *Saccharomyces cerevisiae* ATCC 35858) to produce more ethanol than *Saccharomyces cerevisiae* ATCC 204508/S288c (Figure 1 & 2) as previously mentioned was not unusual. The *Saccharomyces cerevisiae* ATCC 35858 is a unique yeast strain that has been known and typed as ethanol producing yeast which carries the enzyme alcohol dehydrogenase. Alcohol dehydrogenases are key enzymes in the production of ethanol, and they also aid in the continuation of fermentation at high ethanol concentrations; enhance alcohol tolerance. This study supports the findings of Oyeleke et al. (2012) and Raj et al. (2014). *Saccharomyces cerevisiae* ATCC 36858 also outperformed the competition in terms of sugar uptake, sugar monomers are the direct substrate for ethanol production. The percentage ethanol yields from corn cob and leaf with *Saccharomyces cerevisiae* ATCC 35858 in this study were higher than those reported by Oyeleke & Jibrin (2009), but the yield from the three substrates with *Saccharomyces cerevisiae* ATCC 204508/S288c was lower than that reported by Oyeleke & Jibrin (2009). This could be due to differences in hydrolysis methods used by the authors. Corn wastes can be considered as convenient substrates for ethanol production, as shown in Figure (1 & 2), with corn cob having the highest yield among the wastes (Figure 1 & 2). This was due to the ease of conversion of its high carbohydrate content to sugar monomers because of its lower density; thus, making it easier for *Saccharomyces* to begin ethanol production; this is in line with the findings of Boonchuay et al. (2018); Katsimpouras et al. (2016)

3.3.Simple Sugar Content During Fermentation.

Reducing sugar of the samples decreased generally throughout the fermentation period, with the least sugar level observed at day 5. The result is presented in Figure 3. At p value ≤ 0.05 there were no significant differences between the reducing sugar contents during fermentation.

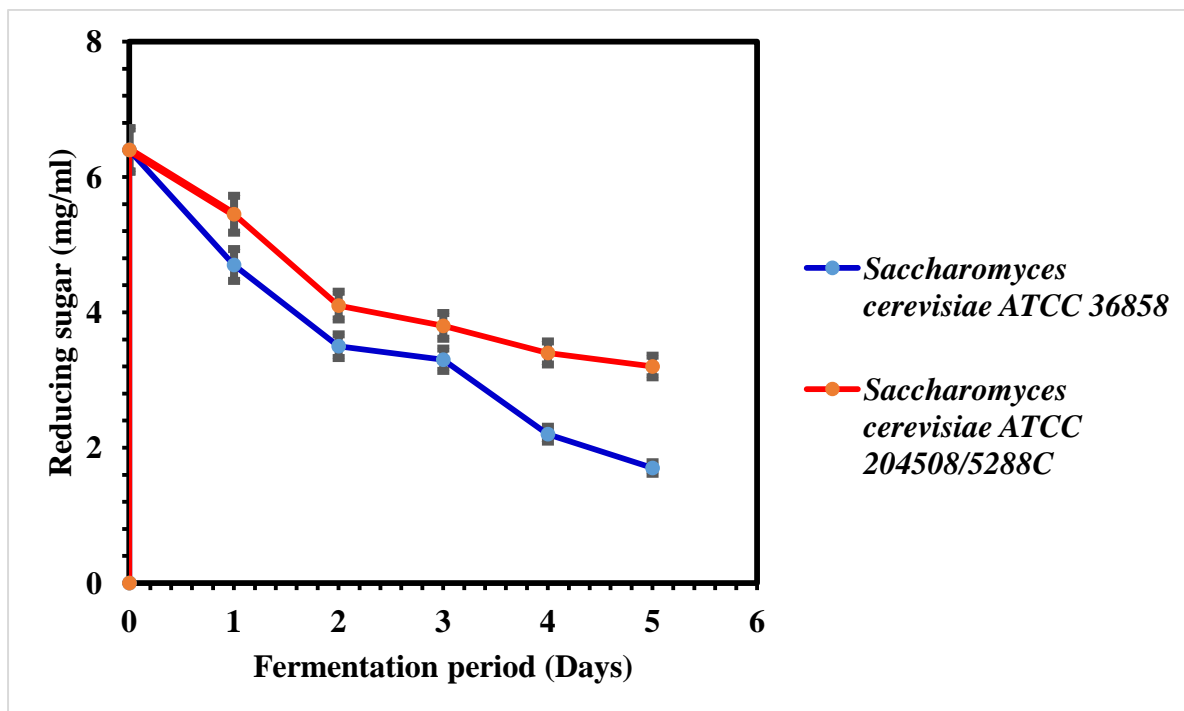


Figure 3: Simple Sugar Content During the Fermentation of Corn Waste by the Three Strains of *Saccharomyces cerevisiae*

Values are means of replicates with standard error of mean (SEM)

3.4. Specific Gravity During Fermentation

Specific gravity of the fermenting substrate gradually decreases as the fermentation days increased; the least specific gravity was with *Saccharomyces cerevisiae* ATCC 36858. Detailed of this result is presented in Figure 4. Statistical analysis reveals that the average specific gravity of the yeasts during fermentation was insignificant at P value ≤ 0.05 .

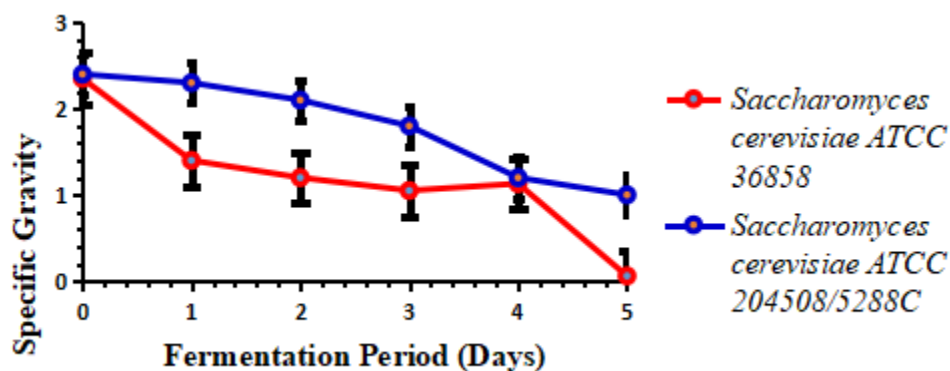


Figure 4: Specific Gravity During the Fermentation of Corn Waste Using the two strains of *Saccharomyces cerevisiae*

Values are means of replicates with standard error of mean (SEM).

Throughout the fermentation period, reducing sugar and specific gravity were decrease (Figures 3 and 4). Usually, as the sugar in the medium was fermented to ethanol, the total soluble solids decreased (Jerry *et al.*, 2016; Li *et al.*, 2012; Lin *et al.*, 2012). The depletion of sugar was very rapid on day four (4) of fermentation, and the ethanol yield was highest; this period corresponds to the exponential phase of yeast growth, product formation is usually at peak during late exponential(Wang *et al.*, 2016).

3.5.pH of Sample During Fermentation

There was fluctuation in pH value during fermentation. An initial decrease in pH was followed by an increased pH recorded during the period of fermentation. This is common to the two yeasts strains. It was observed that pH 4.5 was optimum for best ethanol yield (Figure 5). Statistically there was no significant difference between the pH values of the yeasts during fermentation at P value ≤ 0.05 . The decrease in pH observed encourages yeast growth and ethanol formation, it could also serve as deterrent to bacterial contaminants also favoring more catabolic reactions (Doğan *et al.*, 2014; Oiwoh *et al.*, 2018).

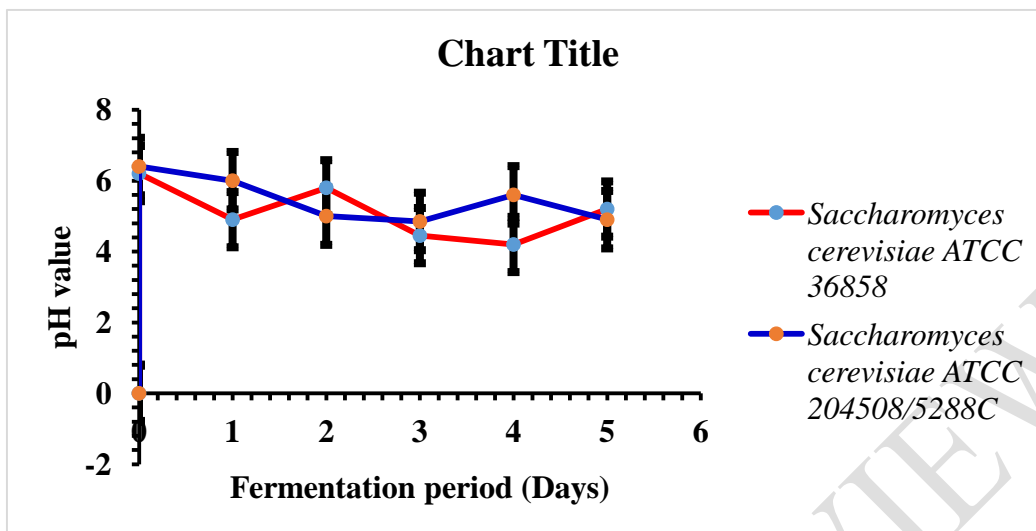


Figure 5: Change in the pH Value During the Fermentation of Corn Waste Using the two Strains of *Saccharomyces cerevisiae*

Values are means of replicates with standard error of mean (SEM)

3.6. Dry Weight of Yeasts Cell During Fermentation

Dry weight of yeasts cell increases during ethanol production as presented in Figure 6. *Saccharomyces cerevisiae* ATCC 36858 cell mass reduced on the last day of fermentation while *Saccharomyces cerevisiae* ATCC 204508/S288c (Baker's yeast) recorded the highest dry yeast cell weight and increased throughout the fermentation period. Statistical analysis revealed that the difference in average dry weight of the yeasts cell were insignificant. There was rapid cell growth as evidenced by the increase in dry yeast cell mass (figure 6). The increase in cell mass was directly proportional to ethanol yield. Growth is proportional to an organism's ability to produce metabolic products (Endah *et al.*, 2016).

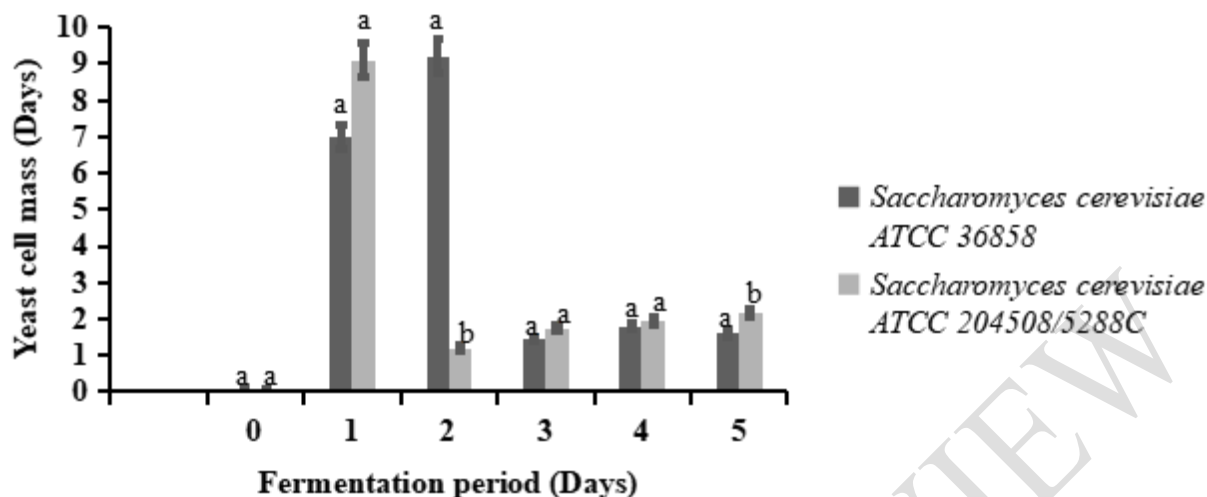


Figure 6: Change in Dry Cell #Weight of the Two Strains of *S. cerevisiae* During the Fermentation

Values are means of replicates with standard error of mean (SEM)

Means with the same letter are not significantly different at 5 % level of probability using Duncans Multiple Range Test (DMRT).

3.7. Proximate Composition Before and After Fermentation of the Corn Wastes

Proximate composition of the dried milled corn (*Zea mays*) wastes before and after fermentation is presented in Figure 7 and 8. Highest carbohydrate content was recorded with cob, crude fibre was found to be highest with stem while protein content was found to be highest in leaf before and after fermentation. The average ash contents, moisture contents and total fat in the samples were observed within a close range of value in before and after fermentation. At $p \leq 0.05$, the differences between the average values of ash, moisture content, total fat, protein and crude fibre both before and after fermentation were insignificant while the values for carbohydrate were significantly different ($p \text{ value} \leq 0.05$).

The mineral composition of the *Zea mays* wastes before and after fermentation quantified the presence of important minerals Nitrogen, phosphorous and potassium (NPK) is presented in Figure 9 and 10. Nitrogen was the highest mineral in all the corn wastes. High nitrogen, potassium and phosphorous was found with corn husk. It was also observed that cob had the

least value of mineral composition in the corn wastes and these values were insignificantly different at p value ≤ 0.05 .

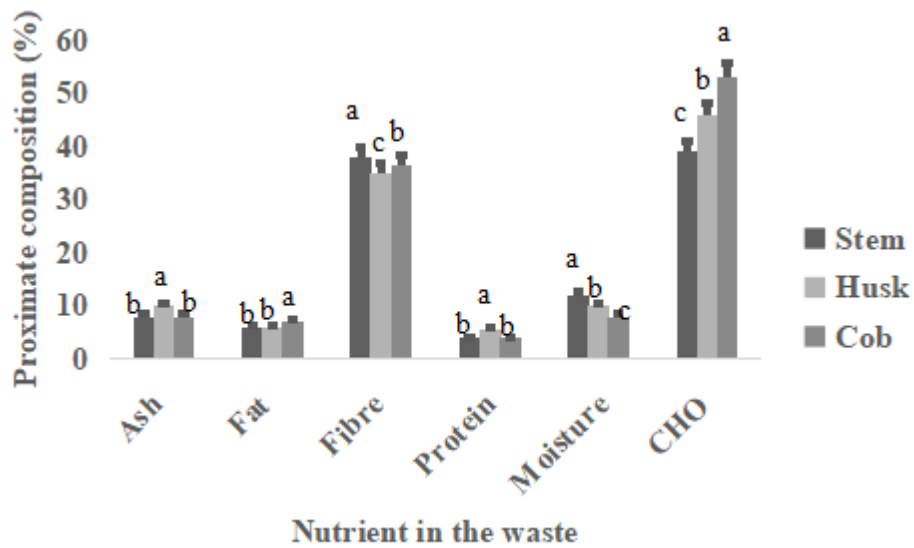


Figure 7: Proximate composition of corn wastes before fermentation

Values are means of replicates with standard error of mean (SEM)

Means with the same letter are not significantly different at 5 % level of probability using Duncans Multiple Range Test (DMRT).

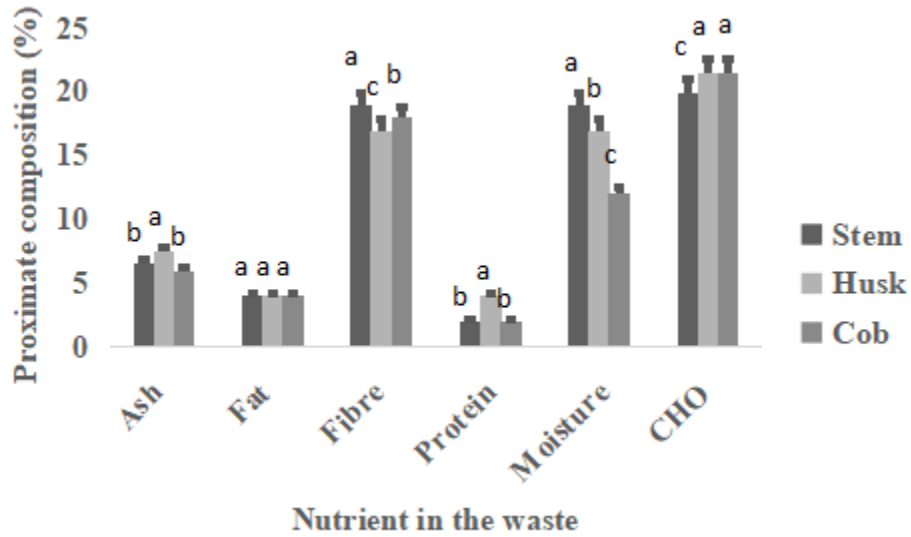


Figure 8: Proximate composition of corn wastes After fermentation

Values are means of replicates with standard error of mean (SEM)

Means with the same letter are not significantly different at 5 % level of probability using Duncans Multiple Range Test (DMRT).

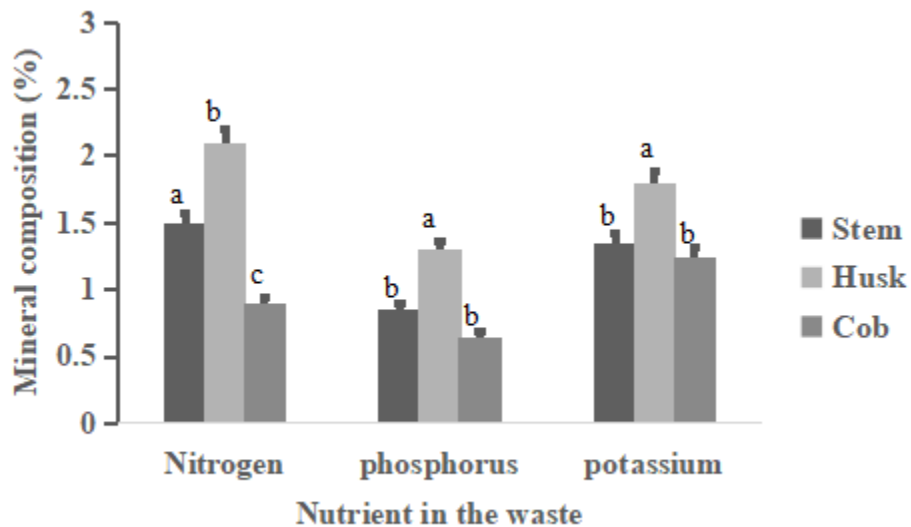


Figure 9: Nitrogen, Potassium and phosphorus in the waste before fermentation

Key:

Values are means of replicates with standard error of mean (SEM)

Means with the same letter are not significantly different at 5 % level of probability using Duncans Multiple Range Test (DMRT).

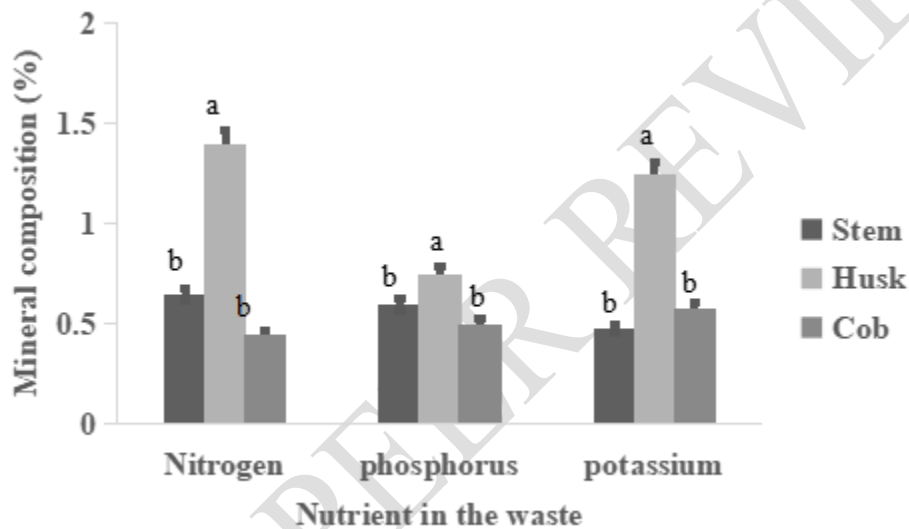


Figure 10: Nitrogen, Potassium and phosphorus in the waste before and after fermentation

Key:

Values are means of replicates with standard error of mean (SEM)

Means with the same letter are not significantly different at 5% level of probability using Duncans Multiple Range Test (DMRT).

After fermentation, the residue can still be used in livestock feed as a source of total CHO. This is because the available total CHO (Figure 7 & 8) still meets livestock's daily nutritional needs, as recommended by Akinfemi et al. (2009), Salah et al. (2014), Abubakar et al. (2016), and Mekuanint & Girma, (2017). There was a loss of about 50 % of the nutrients in the corn wastes

(Figure 7 & 8). The nutrient uptake by fermenting yeast for growth and metabolism, as well as bioconversion into ethanol, could account for the lost (Selim *et al.*, 2018). Though, the crude fiber and net CHO levels were still relatively high. This could be due to residual or unhydrolyzed cellulose and hemicellulose in the corn wastes, which became trapped in the fiber and carbohydrate matrix (Adeolu & Enesi, 2013). If used as supplements, the nutrients available after fermentation of the corn wastes could be advantageous to livestock and fish farming (Abubakar *et al.*, 2016; Gustafson *et al.*, 2015).

The observed reduction in minerals (NPK) was due to the yeast cell metabolism (figure (9 & 10)). The observation is similar to Bušić *et al.*, (2018). Similar findings have been reported earlier (Aro, 2008; Eze, 2010; Singh *et al.*, 2013). However, there was noticeable mineral conservation after fermentation of corn wastes, with about half of the mineral composition recovered, thus, fermentation residues could be used to supplement livestock feed or as part of biofertilizer components (Hanapi *et al.*, 2013).

4. Conclusions.

The findings in this work supported the use of lignocellulosic biomass such as corn waste (corn stem, husk and cob wastes) to produce bioethanol using the two strains of *Saccharomyces cerevisiae* studied. The residual wastes after fermentation were found to still meet the total CHO requirements of livestock feed and could be used to augment feed for fish and livestock and as well as production of biofertilizer. Therefore, corn wastes could be potential wastes to wealth that are key to creating marketable value-added products. The prospective knowledge of waste management and wastes to wealth may be extended to farmer as these can gear them toward increasing agricultural produce, and proper handling of wastes rather than leaving the wastes unexploited or allowing them to constitute havoc to the environment. Furthermore, the nutritional and mineral value of the corn wastes after fermentation can be improved by supplementing with other cheap sources of high nutritional compounds from leguminous and other agricultural waste to formulate livestock feed and biofertilizer.

COMPETING INTERESTS DISCLAIMER:

Authors have declared that no competing interests exist. The products used for this research are commonly and predominantly use products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these products as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the authors.

REFERENCES

- Abouzied, M. M., & Reddy, C. A. (2006). Direct fermentation of potato starch to ethanol by cocultures of *Aspergillus niger* and *Saccharomyces cerevisiae*. *Applied and Environmental Microbiology*, 52(5), 1055–1059. <https://doi.org/10.1128/aem.52.5.1055-1059.1986>
- Abubakar, U. S., Yusuf, K. M., Safiyanu, I., Abdullahi, S., Saidu, S. R., Abdu, G. T., & Indee, A. M. (2016). Proximate and mineral composition of corn cob, banana and plantain peels. *International Journal of Food Science and Nutrition*, 1(6), 25–27.
- Adeolu, A. T., & Enesi, D. O. (2013). Assessment of proximate, mineral, vitamin and phytochemical compositions of plantain (*Musa paradisiaca*) bract – an agricultural waste. *International Research Journal of Plant Science*, 4(7), 192–197.
- Akinfemi, A., Adesanya, A. O., & Aya, V. E. (2009). Use of an in vitro gas production technique to evaluate some Nigeri. 7.
- Aro, S. O. (2008). *Improvement in the nutritive quality of cassava and its by-products through microbial fermentation*. 9.

- Ayodele, B. V., Alsaffar, M. A., & Mustapa, S. I. (2020). An overview of integration opportunities for sustainable bioethanol production from first- and second-generation sugar-based feedstocks. *Journal of Cleaner Production*, 245, 118857. <https://doi.org/10.1016/j.jclepro.2019.118857>
- Baeyens, J., Kang, Q., Appels, L., Dewil, R., Lv, Y., & Tan, T. (2015). Challenges and opportunities in improving the production of bio-ethanol. *Progress in Energy and Combustion Science*, 47, 60–88. <https://doi.org/10.1016/j.pecs.2014.10.003>
- Biodun, M. B., Fayomi, O. S. I., & Okeniyi, J. O. (2021). The Possibility of Biogas production in Nigeria from Organic Waste Material: A Review. *IOP Conference Series: Materials Science and Engineering*, 1107(1), 012166. <https://doi.org/10.1088/1757-899X/1107/1/012166>
- Boonchuay, P., Techapun, C., Leksawasdi, N., Seesuriyachan, P., Hanmoungjai, P., Watanabe, M., Takenaka, S., & Chaiyaso, T. (2018). An integrated process for xylooligosaccharide and bioethanol production from corncob. *Bioresource Technology*, 256, 399–407. <https://doi.org/10.1016/j.biortech.2018.02.004>
- Boshoff, S., Gottumukkala, L. D., van Rensburg, E., & Görgens, J. (2016). Paper sludge (PS) to bioethanol: Evaluation of virgin and recycle mill sludge for low enzyme, high-solids fermentation. *Bioresource Technology*, 203, 103–111. <https://doi.org/10.1016/j.biortech.2015.12.028>
- Bušić, A., Marđetko, N., Kundas, S., Morzak, G., Belskaya, H., Komes, D., Novak, S., Croatia, Šantek, B. (2018). Bioethanol Production from Renewable Raw Materials and its Separation and Purification: A Review. *Food Technology and Biotechnology*, 56(3). <https://doi.org/10.17113/ftb.56.03.18.5546>
- Chen, J., Zhang, B., Luo, L., Zhang, F., Yi, Y., Shan, Y., Liu, B., Zhou, Y., Wang, X., & Lü, X. (2021). A review on recycling techniques for bioethanol production from lignocellulosic biomass. *Renewable and Sustainable Energy Reviews*, 149, 111370. <https://doi.org/10.1016/j.rser.2021.111370>

- Chen, Y., Sharma-Shivappa, R. R., Keshwani, D., & Chen, C. (2007). Potential of Agricultural Residues and Hay for Bioethanol Production. *Applied Biochemistry and Biotechnology*, 142(3), 276–290. <https://doi.org/10.1007/s12010-007-0026-3>
- Choi, G.-W., Um, H.-J., Kim, Y., Kang, H.-W., Kim, M., Chung, B.-W., & Kim, Y.-H. (2010). Isolation and characterization of two soil derived yeasts for bioethanol production on Cassava starch. *Biomass and Bioenergy*, 34(8), 1223–1231. <https://doi.org/10.1016/j.biombioe.2010.03.019>
- Davani-Davari, D., Negahdaripour, M., Karimzadeh, I., Seifan, M., Mohkam, M., Masoumi, S., Berenjian, A., & Ghasemi, Y. (2019). Prebiotics: Definition, Types, Sources, Mechanisms, and Clinical Applications. *Foods*, 8(3), 92. <https://doi.org/10.3390/foods8030092>
- Doğan, A., Demirci, S., Aytekin, A. Ö., & Şahin, F. (2014). Improvements of Tolerance to Stress Conditions by Genetic Engineering in *Saccharomyces Cerevisiae* during Ethanol Production. *Applied Biochemistry and Biotechnology*, 174(1), 28–42. <https://doi.org/10.1007/s12010-014-1006-z>
- Endah, R. S., Anang, M. L., Munifatul, I., & Purwanto, P. (2016). Kinetic Growth of *Saccharomyces cerevisiae* in Non Dairy Creamer Wastewater Medium. *Journal of Environmental Studies*, 2(1). <https://doi.org/10.13188/2471-4879.1000009>
- Eze, J. I. (2010). *Global Journal of Researches in Engineering*. 8.
- Gustafson, J. L., Neklesa, T. K., Cox, C. S., Roth, A. G., Buckley, D. L., Tae, H. S., Sundberg, T. B., Stagg, D. B., Hines, J., McDonnell, D. P., Norris, J. D., & Crews, C. M. (2015). Small-Molecule-Mediated Degradation of the Androgen Receptor through Hydrophobic Tagging. *Angewandte Chemie International Edition*, 54(33), 9659–9662. <https://doi.org/10.1002/anie.201503720>
- Hanapi, S. Z., Awad, H. M., Ali, S. I. S., Sarip, S. H. M., Sarmidi, M. R., & Aziz, R. (2013). Agriculture wastes conversion for biofertilizer production using beneficial microorganisms for sustainable agriculture applications. *Malaysian Journal of Microbiology*. <https://doi.org/10.21161/mjm.43812>

- Horwitz, W. (1990). *Official methods of analysis of AOAC International* (18th Edition). Washington, D.C. : AOAC.
- Horwitz, W. (2000). *Official methods of analysis of AOAC International* (17th Edition). Washington, D.C. : AOAC.
- Jekayinfa, S. O., Orisaleye, J. I., & Pecenka, R. (2020). An Assessment of Potential Resources for Biomass Energy in Nigeria. *Resources*, 9(8), 92. <https://doi.org/10.3390/resources9080092>
- Jerry, O., Aleke, K., Chika, E., Anthonia, N., Ikechukwu, M., Stanley, E., & Emmanuel, U. (2016). Bioethanol Production from Corn cob Hydrolysed by Cellulase of *Aspergillus niger* Using *Zymomonas mobilis* and *Saccharomyces cerevisiae* Isolated from Palm Wine. *International Journal of Current Research in Biosciences and Plant Biology*, 3(1), 39–45. <https://doi.org/10.20546/ijcrbp.2016.301.004>
- Katsimpouras, C., Christakopoulos, P., & Topakas, E. (2016). Acetic acid-catalyzed hydrothermal pretreatment of corn stover for the production of bioethanol at high-solids content. *Bioprocess and Biosystems Engineering*, 39(9), 1415–1423. <https://doi.org/10.1007/s00449-016-1618-5>
- Li, M., Zhang, H., Wang, J., & Pan, Y. (2012). A new essential protein discovery method based on the integration of protein-protein interaction and gene expression data. *BMC Systems Biology*, 6(1), 15. <https://doi.org/10.1186/1752-0509-6-15>
- Lin, Y., Zhang, W., Li, C., Sakakibara, K., Tanaka, S., & Kong, H. (2012). Factors affecting ethanol fermentation using *Saccharomyces cerevisiae* BY4742. *Biomass and Bioenergy*, 47, 395–401. <https://doi.org/10.1016/j.biombioe.2012.09.019>
- Liu, C.-G., Lin, Y.-H., & Bai, F.-W. (2011). A kinetic growth model for *Saccharomyces cerevisiae* grown under redox potential-controlled very-high-gravity environment. *Biochemical Engineering Journal*, 56(1–2), 63–68. <https://doi.org/10.1016/j.bej.2011.05.008>

- Mekuanint, G., & Girma, D. (2017). Livestock feed resources, nutritional value and their implication on animal productivity in mixed farming system in Gasera and Ginnir Districts, Bale Zone, Ethiopia. *International Journal of Livestock Production*, 8(2), 12–23. <https://doi.org/10.5897/IJLP2016.0297>
- Michelle, L. M. (2011). Factors Effecting Ethanol Fermentation via Simultaneous Saccharification and Fermentation. *Biotechnology*, 12(3), 1–42.
- Mohd Azhar, S. H., Abdulla, R., Jambo, S. A., Marbawi, H., Gansau, J. A., Mohd Faik, A. A., & Rodrigues, K. F. (2017). Yeasts in sustainable bioethanol production: A review. *Biochemistry and Biophysics Reports*, 10, 52–61. <https://doi.org/10.1016/j.bbrep.2017.03.003>
- Muthuvelu, K. S., Rajarathinam, R., Kanagaraj, L. P., Ranganathan, R. V., Dhanasekaran, K., & Manickam, N. K. (2019). Evaluation and characterization of novel sources of sustainable lignocellulosic residues for bioethanol production using ultrasound-assisted alkaline pre-treatment. *Waste Management*, 87, 368–374. <https://doi.org/10.1016/j.wasman.2019.02.015>
- Oiwoh, O., Ayodele, B. V., Amenaghawon, N. A., & Okieimen, C. O. (2018). Optimization of bioethanol production from simultaneous saccharification and fermentation of pineapple peels using *Saccharomyces cerevisiae*. *Journal of Applied Sciences and Environmental Management*, 22(1), 54. <https://doi.org/10.4314/jasem.v22i1.10>
- Onwuka, G. I. (2005). *Food Analysis and Instrumentation: Theory and Practice* (Naphthali Print, Lagos.).
- Oyeleke, S. B., Dauda, B. E. N., Oyewole, O. A., Okoliegbe, I. N., & Ojebode, T. (2012). Production of bioethanol from cassava and sweet potato peels. *Advances in Environmental Biology*, 6(1), 241–245.
- Oyeleke, S. B., & Jibrin, N. M. (2009). *African Journal of Microbiology Research*, 3(4), 147–152.

- Raimi, O. G., Olaitan, S. N., Fajana, O. O., & Sanni, J. O. (2012). *Activity of Guinea Corn (Sorghum vulgare)*. 22(2), 5.
- Raj, S. B., Ramaswamy, S., & Plapp, B. V. (2014). Yeast Alcohol Dehydrogenase Structure and Catalysis. *Biochemistry*, 53(36), 5791–5803. <https://doi.org/10.1021/bi5006442>
- Rempel, A., de Souza Sossella, F., Margarites, A. C., Astolfi, A. L., Steinmetz, R. L. R., Kunz, A., Treichel, H., & Colla, L. M. (2019). Bioethanol from *Spirulina platensis* biomass and the use of residuals to produce biomethane: An energy efficient approach. *Bioresource Technology*, 288, 121588. <https://doi.org/10.1016/j.biortech.2019.121588>
- Rodrigues, K. C. S., Sonogo, J. L. S., Cruz, A. J. G., Bernardo, A., & Badino, A. C. (2018). Modeling and simulation of continuous extractive fermentation with CO₂ stripping for bioethanol production. *Chemical Engineering Research and Design*, 132, 77–88. <https://doi.org/10.1016/j.cherd.2017.12.024>
- Salah, N., Sauvant, D., & Archimède, H. (2014). Nutritional requirements of sheep, goats and cattle in warm climates: A meta-analysis. *Animal*, 8(9), 1439–1447. <https://doi.org/10.1017/S1751731114001153>
- Selim, K., El-Ghwas, D., Easa, S., & Abdelwahab Hassan, M. (2018). Bioethanol a Microbial Biofuel Metabolite; New Insights of Yeasts Metabolic Engineering. *Fermentation*, 4(1), 16. <https://doi.org/10.3390/fermentation4010016>
- Singh, A. K., Masih, H., Nidhi, P., Kumar, Y., Peter, J. K., & Mishra, S. K. (2013). *Production of Biofertilizer from Agro-waste by using Thermotolerant Phosphate Solubilising Bacteria*. 19.
- Suh, S.-O., Zhang, N., Nguyen, N., & Gross, S. (2007). *LAB MANUAL FOR YEAST STUDY*. 38.
- Tofighi, A., Mazaheri Assadi, M., Asadirad, M. H. A., & Zare Karizi, S. (2014). Bio-ethanol production by a novel autochthonous thermo-tolerant yeast isolated from wastewater. *Journal of Environmental Health Science and Engineering*, 12(1), 107. <https://doi.org/10.1186/2052-336X-12-107>

- Wang, D., Li, F.-L., & Wang, S.-A. (2016). Engineering a natural *Saccharomyces cerevisiae* strain for ethanol production from inulin by consolidated bioprocessing. *Biotechnology for Biofuels*, 9(1), 96. <https://doi.org/10.1186/s13068-016-0511-4>
- Wang, K., Zhang, J., Tang, L., Zhang, H., Zhang, G., Yang, X., Liu, P., & Mao, Z. (2013). Establishment and assessment of a novel cleaner production process of corn grain fuel ethanol. *Bioresource Technology*, 148, 453–460. <https://doi.org/10.1016/j.biortech.2013.08.095>
- Xu, Y., Zhang, M., Roozeboom, K., & Wang, D. (2018). Integrated bioethanol production to boost low-concentrated cellulosic ethanol without sacrificing ethanol yield. *Bioresource Technology*, 250, 299–305. <https://doi.org/10.1016/j.biortech.2017.11.056>