

Empirical Models for the Determination of the Compression Index from the ~~Limits of Atterberg~~ Limits: Case of the soils of the Issaba depression in Benin

Style Definition: Heading 1

ABSTRACT

The good realization of any infrastructure in civil engineering requires the implementation of geotechnical investigations. During these investigations, the physical properties of the soil, especially the mechanical ones, must be determined with care and precision because of their capital importance in the preliminary studies before the realization of the work. The soil compression index is one of these mechanical parameters, ~~which is~~ determined by laboratory tests. It allows the calculation of settlements and is therefore essential, especially for fine clay or silty soils which are often subject to swelling phenomena. However, the realization of the test to find the compression index in the laboratory takes time, and the test itself proves delicate. Several authors have therefore proposed the determination of this index from the limits of Atterberg, which can be obtained more quickly and easily. Through this study, empirical models have been proposed to easily calculate the compression index. Regression analyses in Matlab with 2D and 3D graph systems were performed for this purpose. The model was established for the soils of the Issaba depression in the Republic of Benin, where clayey and silty soils are very swelling. The models obtained show very good correlations with R^2 coefficients higher than 0.80 and the RMSE error minimized to less than 0.5.

Keywords: empirical model; correlation; regression; compression index; Atterberg limits; Issaba depression

1. ~~4~~-INTRODUCTION

A sustainable realization of any infrastructure requires the implementation of geotechnical investigations. During these investigations, the physical properties of the soil, especially the mechanical properties, must be determined with care and precision because of their crucial importance in the preliminary studies for the realization of the work. The soil compression index is one of these mechanical parameters, ~~which is~~ determined by laboratory tests. It allows the calculation of settlements and is therefore essential, especially for fine clay or silty soils which are often subject to instability phenomena. However, it takes time to carry out the laboratory test to find the compression index, and the test itself is

delicate. Several authors have therefore proposed the determination of this index from the Atterberg limits, which can be obtained more quickly and easily.

Correlations and empirical relationships are used extensively in geotechnical engineering. The use of correlations and empirical relationships provides a fast, cost-effective means of predicting the value of a parameter based on the values of some other, possibly more easily determined, parameters provided that the appropriate correlations are employed. Generally, the more easily obtained parameters are correlated to the difficult to obtain parameters. The correlation between two or more soil properties ~~has been found to be~~ dependent in varying degrees on soil type,

Formatted: Numbered + Level: 1 +
Numbering Style: 1, 2, 3, ... + Start at: 1 +
Alignment: Left + Aligned at: 0.25" + Indent
at: 0.5"

the testing method used to obtain the numerical value of the parameter itself, and the homogeneity of the soil [3]. Many correlations between soil properties have been published. In the last ~~decade~~^{decade}, ~~many researches~~^{much research} were performed to correlate the physical properties with the mechanical properties [1].

Knowledge of the consolidation properties ~~of aof~~ soil is important in geotechnical design, particularly as they relate to ~~the~~ settlement of structures. These properties are usually determined by oedometer testing, and determined in terms of the compression index C_c and recompression index C_s . ~~Compression-The~~ ~~compression~~ index (C_c) is one of the salient parameters which the geotechnical engineer seeks to unravel to establish the safety of the proposed structure immediately after construction and during the ~~life time~~^{lifetime} of the structure [4].

~~Compression-A~~ ~~compression~~ index value is required by the geotechnical to determine the soft clay soil settlement. [5]. The compression index C_c is an important one-dimensional compressibility parameter with particular relevance to primary settlement calculations for normally consolidated or lightly overconsolidated natural soils [6].

However, the value of ~~c~~compression index testing in the laboratory requires much more time and the cost of laboratory testing is relatively expensive compared to other soil characteristics testing. For comparison, the calculation of unit weight and void ratio can be completed within 1-2 days, while the calculation of the ~~C~~compression index with ~~a~~ one-dimensional consolidation test in ~~the~~ laboratory is completed in more than 1 week [5]. The cost of consolidation testing is relatively high compared to other common engineering tests and may be considered cost prohibitive for very small projects. Hence it is cost effective to develop correlations between consolidation

properties and other easily obtained properties, like the index properties. ~~—~~In view of the cost implications of the consolidation test, investigators have correlated the consolidation properties of soils and other easily and cheaply obtained properties, like the index properties [7]. Whereas planners and engineers usually needed that data quickly, so the use of the empirical formula is preferred [5].

Index properties of soil such as Atterberg ~~Limits~~^{limits}, moisture content and initial void ratio are basic properties of soils. Therefore, it is possible to use these index properties to predict the compression index of the soil. Empirical models relating various index properties to the compression index have been presented by many researchers [4]—. The oldest correlation models were established by Skempton (1944) [8] for Remoulded clays, Nishida (1956) [9] and Yamagutshi (1959) [10] for ~~Various-various~~ clay, Peck and Reed (1954) [11] for Chicago clays, Hough (1957) [12] and Moran et al. (1958) [13] for ~~Organic-organic~~ soils, Cozzolino (1961) [14] for Brazilian clays, Terzaghi and Peck (1967) [15] for ~~Normally normally~~ consolidated clays. We can also mention Sowers (1970) [16] for ~~Soils-soils~~ with low plasticity-, Azzouz et al (1976) [17] for ~~Various-various~~ clay, Wroth and Wood (1978) [18], Bowles (1979) for ~~Organic-organic~~ silt and clays [19], Al-Khafaji and Andersland (1992) [20], Hong and Onitsuka (1998) [21] and many others.

Many researchers have used linear regression to establish empirical models between soil parameters. We can mention Yoon et al. (2004) [22] who proposed regression models for predicting compression index for marine clay, Abbasi et al (2012) [23] used regression analysis to predict the compression behavior of normally consolidated fine grained soil, and Nihad (2020) [1] who ~~ad~~justed the equations of Rashed et al (2017) [24]. In addition, Yildirim and Gunaydin (2011) [25] concluded that, the correlation

equations obtained as a result of regression analyses are in satisfactory agreement with the test results and recommended that the proposed correlations will be useful for a preliminary design of a project where there is a financial limitation and limited time. It is evident in literature that prediction of compression index with regression analysis has proved to be successful and widely accepted [4].

Correlations are widely referenced by geotechnical designers, although strictly they should not be applied to soils elsewhere without considering the soil origin and sampling method [17]. In the south of Benin, a median depression called Lama depression, subdivides the bar land plateaus into two groups [26]. In this depression is found clay soils with high swelling potential, which generate various disorders in the infrastructure as mentioned (by Gbaguidi et al., 2011) [27] and (Tankpinou kiki, 2004) [28]. In addition, (Agbelele et al., 2016) [28] showed that east of this depression, the soils are composed of silt and clays of illite and montmorillonite type. Their swelling potential and pathological risk were found to be high [29]. Therefore, this current study presents empirical models involving the compression index and Atterberg limits of soils in the Issaba depression, using linear regression analysis. The models established in this study can be used to predict the compressive index for preliminary design purposes and also to verify the accuracy of consolidation tests in this depression.

2. MATERIALS AND METHODS

2.1 DESCRIPTION OF THE STUDY AREA

The Republic of Benin extends perpendicularly to the coastline of the Gulf of Benin between the meridians 1° and 4° and the parallels 6° and 12° north.

Narrowly constricted south of the 9th parallel by Togo and Nigeria (average width 120 km), it extends further north to the borders of Burkina Faso and Niger. The Median Depression is the great depression crossing southern Benin from west to east in a southwest-northeast direction. This depression leaves Nigeria, crosses Benin and continues into Togo according to (Mondjannagni, 1977) cited by (Agbelele, 2017) [26]. The median depression is oriented generally from west to east and forms a vast furrow 130 km long and varying in width from 5 km (Tchi) to 25km (Issaba). It is called Issaba depression in the east, Ko depression in the center and Tchi depression in the west. It constitutes a low region with an altitude of less than 50 m, that is covered with clay soil [28].

2.2 SAMPLING AND QUALITY ANALYSIS

The data used for the study consist of laboratory results of soils sampled during geotechnical investigations in the localities of Massè, Onigbolo, Avissa, Ita-Itèlè, Issaba, Illèmon, Kounotcho, Adogon, and Kpoulou of the depression depths variants varying from 0 to 3 m. The parameters such as the compression index, the liquidity limit, the plasticity index (PI), the plasticity limit (PL) have been determined to identify and characterize the nature of the soils of each site. In their 2016 study on the physico-mechanical characterization of clay soils and the Issaba depression in southeastern Benin published in the article *Afrique Science*, vol 12 n°2, Agbelele et al showed that the soils of Adogon, Kpoulou, Onigbolo, Issaba and Illèmon are very plastic clays of class A-7-5 (according to my-AASHTO classification) ; and in the other localities, clays of class A-7-6. Silt is also found in the Kpoulou, Issaba and Illèmon areas.

These data presented in Table 1 were used for the present study to determine the modulus of compression by an empirical model from the parameters of the Atterberg limit in the same area.

The compression index values ~~are~~ were taken from table 1 [28] and the liquid limit and plasticity limit values ~~are~~ were taken from table 3 [28]. The liquid limit is obtained through the difference between the liquid limit and the plasticity index.

From this results the table 1 below used in the context of this present work.

Formatted: Highlight

Comment [AS3]: This statement needs further clarification. It is hanging and does not make sense.

Formatted: Highlight

Table 1 results of the tests used

Sites	Deepth (m)	Compression index (Cc)	Liquidity limit (LL)	Plasticity index (PI)	Plasticity limit (PL)
Illemon	0,00-0,40	0,82	70	43	27
	0,40-1,00	0,352	86	57	29
	1,00-2,00	0,359	86	46	40
	2,00-3,00	0,357	91	48	43
Issaba	0,00-0,40	0,345	110	75	35
	0,40-1,00	0,355	92	37	55
	1,00-2,00	0,327	79	49	30
	2,00-3,00	0,34	89	31	58
Onigbolo	0,00-0,40	0,56	75	41	34
	0,40-1,00	0,49	68	39	29
	1,00-2,00	0,59	77	45	32
	2,00-3,00	0,48	70	40	30
Kpoulou	0,00-0,40	0,375	74	39	35
	0,40-1,00	0,358	107	40	67
	1,00-2,00	0,363	95	45	50
	2,00-3,00	0,416	55	31	24
Ita-Itèle	0,00-0,40	0,28	80	61	19
	0,40-1,00	0,27	91	63,2	28
	1,00-2,00	0,25	93	56	37
	2,00-3,00	0,27	84	55	29
Massè	0,00-0,40	0,29	88	62	26
	0,40-1,00	0,28	92	65	27
	1,00-2,00	0,26	86	62	24
	2,00-3,00	0,28	95	65	30
Adogon	0,00-0,40	0,31	46,4	26,3	20
	0,40-1,00	0,29	50	27	23
	1,00-2,00	0,33	45	26,8	18
	2,00-3,00	0,35	50	25	25
Avisa	0,00-0,40	0,28	91	60	31
	0,40-1,00	0,285	92,7	62	31

Comment [AS1]: There is no table 3

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Comment [AS2]: This statement does not make sense. Recheck the calculation of liquidity limit.

Formatted: Highlight

Comment [AS4]: Incomplete title. E.g. Calculated test data for the parameters a, b, etc

Comment [AS5]: Replace, with. For all data values. Restrict data to 2 decimal places.

	1,00 -2,00	0,3	89,78	63	27
	2,00-3,00	0,297	92	62	30
	0,00-0,40	0,27	69	46	23
Kounotcho	0,40-1,00	0,31	75	48	27
	1,00-2,00	0,32	79	50	29
	2,00-3,00	0,29	70	44	26

2.3 ANALYTICAL METHODS

Linear regression analysis was used to establish correlation models between the compression index and the parameters of the Atterberg limit such as: the compression index, the liquidity limit, the plasticity index

Linear Regression is a statistical tool for the investigation of relationships between dependent variable and independent variables. The dependent variables are used to predict the independent variables; the aim of linear regression is to find the value of intercept and slope of the line that best predicts independent variables from dependent variables. The form of the regression equation is commonly written as [4]:

$$Y = Mx + C$$

where Y is the independent variable, X is the dependent variable; M and C are the slope and intercept, respectively. The regression procedure finds estimates of C and M by a minimization process. This minimization is done by minimizing the sum of squares of the vertical distances between the data points and the best-fit line in X - Y space. [28].

The predictive performance is judged by the coefficient of determination, R^2 . For example an R^2

value of 0.5 means that 50 percent of the variation in Y is being explained by the X variable. R^2 values vary between 0.0 and 1.0. An R^2 value of 0.0 means that the X variable has no predictive advantage (i.e., there is no correlation between X and Y). An R^2 value of 1.0 means that the X variable is a perfect predictor of Y , with no variation (i.e., there is a perfect correlation between X and Y) [28]. The validity of correlations was also assessed on the basis of root mean square error (RMSE). RMSE is the square root of the average squared difference between the values calculated using a correlation and the corresponding observed values determined from laboratory tests. Errors in RMSE are squared before they are averaged; consequently, relatively high weight is given to large errors. This means the RMSE is most useful when large errors are particularly undesirable [7]. The RMSE has been used many researchers to evaluate the performance of empirical equations like Park and Lee (2011) [29], Ahadiyan et al (2008) [30], Ozer et al (2008) [30], and many others.

To conduct the regression analysis, Matlab R2020a software was used using 2D graph systems for the relationships between C_c and LL , PL , PI . A 3D graph system was then used to find the relationship between the three soil properties. The least squares method

Formatted: Indent: First line: 0"

was used as well as the degree 1 polynomial model for each of the

variables. The 3D trend was center and scale.


Formatted: Highlight

Comment [AS6]: Statement can not be understood. Provide clarification


Formatted: Highlight

3 RESULTS AND DISCUSSIONS

a)

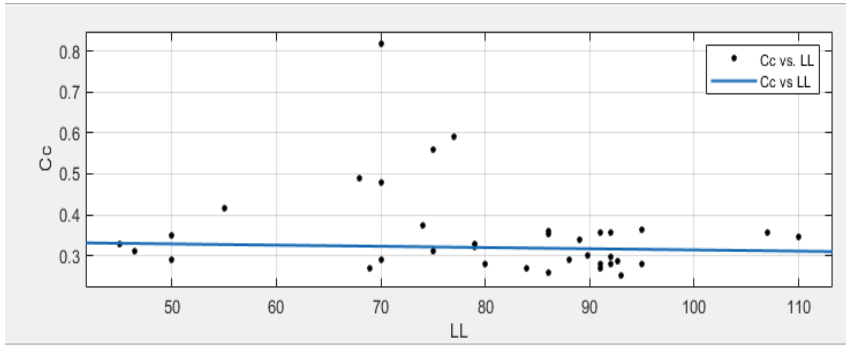

b)

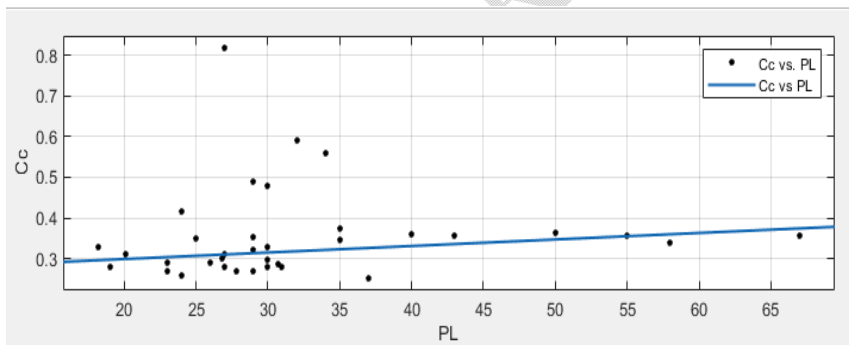

c)



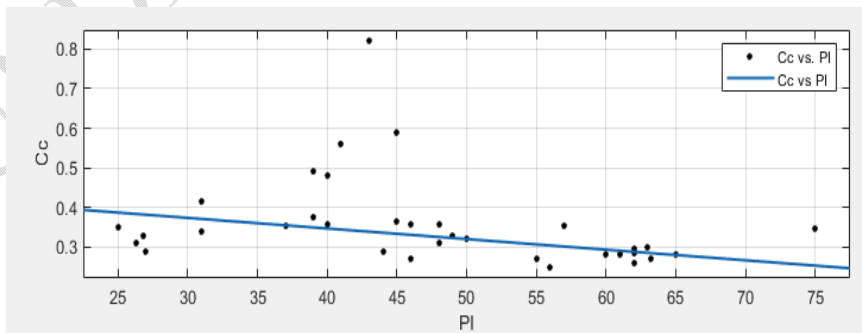


Fig. 1 Trend curves for the linear models of the the compression index against-versus (a) Liquidity limit, (b) Plasticity limit, (c) Plasticity index

d)

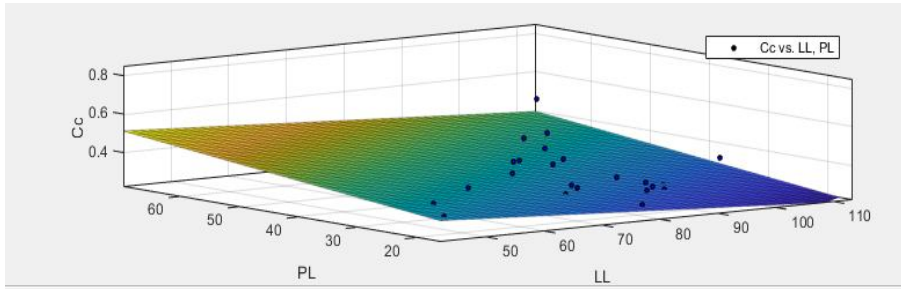

e)

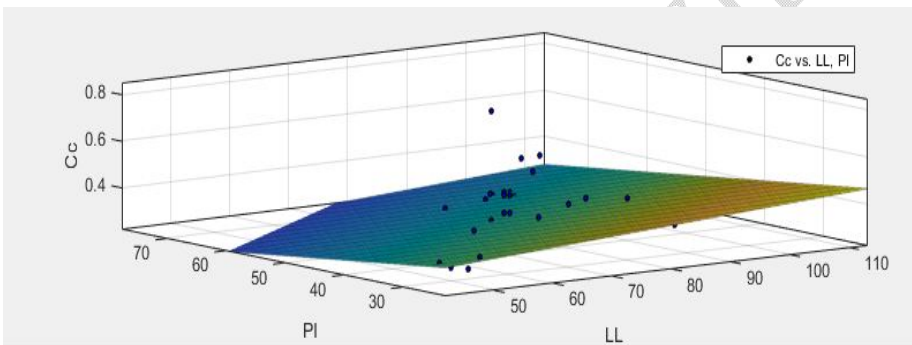

f)

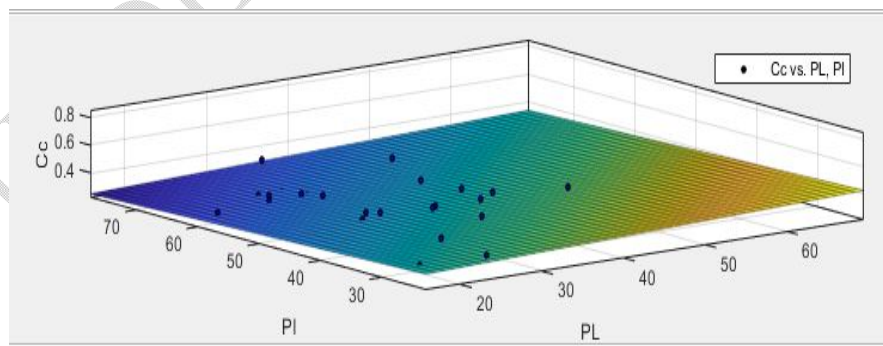


Fig. 2 ~~3D~~ Trend curves ~~3D~~ for the polynomial models of degree 1; (d) ~~Determination~~ determination of C_c via LL and PL, (e) ~~Determination-determination of~~ determination of C_c via LL and PI, and (f) ~~Determination-determination of~~ determination of C_c via PL and PI

UNDER PEER REVIEW

Table 2 Summary of Regression-regression Analysesanalyses

Independent Variable	Empirical Model	R ²	R ² adjusted	RMSE
Plastic Limit – PL	$Cc = -0.001607 PL + 0.2666$	0.9006	0.8976	0.03614
Plasticity Index – PI	$Cc = -0.002678 PI + 0.4541$	0.9103	0.9076	0.03433
Liquid Limit - LL	$Cc = -0.0002941 LL + 0.3432$	0.9045	0.9017	0.03542
LL and PL	$Cc = 0.3228 - 0.02674 LL - 0.03595 PL$	0.8209	0.81	0.04924
PL and PI	$Cc = 0.3228 + 0.01798 PL - 0.02192 PI$	0.8209	0.81	0.04924
LL and PI	$Cc = 0.3228 + 0.02674 LL - 0.04384 PI$	0.8209	0.81	0.04924

Comment [AS7]: Restrict all data to 4 decimal places

The graphs indicate that there is a significant level of correlation between the compression index and the other parameters. The points are well distributed around the regression line or plane. The coefficient of determination R² is close to 1 (greater than 0.8) and confirms the existence of a high correlation between the variables. The coefficient equal to 0.8209 for the 3D analysis means that about 82.09% of the variables LL, PL, and PI can be predicted by Cc, and about 90% in 2D analysis. As for the RMSE error, it has been minimized to a value lower than 0.5. We also note that the values of R², adjusted R², and RMSE are identical for the 3D analyses, as well as the constant value of the relation which is equal to 0.3228.

~~the~~ The Atterberg limit tests ~~that can be easily~~ was also performed. The linear regression analysis performed with a 2D graph system, obtained relationships between Cc and LL, PI, and PI, respectively with a high value of R². This confirmed the good correlation between the variables. With 3D graph systems, it was observed that Cc can be predicted almost 82% from LL, PL, and PI. With such high coefficients of determination and RMSE minimized to less than 0.5. The models developed in this study can therefore be used to accurately predict the soil compression index in the Issaba depression in Benin. These models can therefore be used to estimate this mechanical parameter during preliminary studies. The determination of the compression index from these models can contribute to the calculation of foundation

4 CONCLUSION

The study carried out showed the possibility of reliably predicting the compressive index of clayey soils, which can be difficult to determine, by means of settlements by the odometer method, where this index is included in the calculation.

REFERENCES

1. M. Uzielli, S. Lacasse, F. Nadim et K.-K. Phoon, «Soil variability analysis for geotechnical practice,» Conference of Singapore: Proceedings of the 2nd International Workshop on

Characterization and engineering properties of natural soils, p. 1653–1752, 2006.

2. B. S. Nihad, «Corrélations des caractéristiques géotechniques pour les sols à grains fins,» Série de conférences IOP : Science et génie des matériaux, 2020.

3. C. Akayuli et B. Ofosu, «Empirical Model for Estimating Compression Index from Physical Properties of Weathered

Comment [AS9]: Which foundation. The statement is incomplete.

Formatted: Highlight

Comment [AS8]: The statement is incomplete. Please provide more information. Also our conclusion is very brief. Provide a few more concise statements.

Comment [AS10]: Be consistent in referencing style.

Formatted: Highlight

- Birimian Phyllites,» *Journal of Geotechnical Engineering*, vol. 18, 2013.
4. P. T. K. Sari et Y. K. Firmansyah, «The Empirical Correlation Using Linear Regression of Compression Index for Surabaya Soft Soil,» *Advances in Structural Engineering and Mechanics*, 2013.
5. B. A. McCabe, B. B. Sheil, M. Long, F. J. Buggy et E. Farrel, «Empirical correlations for the compression index of Irish soft soils,» *Institution of Civil Engineers, Geotechnical Engineering*, vol. 167, n° 16, p. 510–517, 2014.
6. S. Onyejekwe, X. Kang et L. Ge, «Assessment of empirical equations for the compression index of fine-grained soils in Missouri,» *Bulletin of Engineering Geology and the Environment*, vol. 74, n° 13, pp. 705-716, 2015.
7. A. W. Skempton et O. Jones, «Notes on the Compressibility of Clays,» *Journal of the Geological society*, vol. 100, n° 11&2, pp. 119-135, 1944.
8. Nishida, «A brief note on the compression index of soil,» *Journal of the Soil Mechanics and Foundations Division*, vol. 82, n° 13, pp. 1-14, 1956.
9. Yamagutshi et H. T.R., «Characteristics of alluvial clay,» *Report of Kyushu Agriculture Investigation Center of Japon*, vol. 5, n° 14, pp. 349-358, 1959.
10. Peck et Reed, «Engineering properties of Chicago subsoils,» *In Engineering Experiment Station, University of Illinois*, n° 1 Bulletin 423, 1954.
11. H. B., «Basic soils engineering,» *The Ronald Press Company*, 1957.
12. Moran, Proctor, Mueser et Rutledge, *Study of deep soil stabilization by vertical sand drains*, Department of the Navy: Bureau of Yards and Docks, 1958.
13. C. VM, «Statistical forecasting of compression index,» *Proceedings of the 5th international conference on soil mechanics and foundation engineering*, vol. 1, p. 51–53, 1961.
14. K. Terzaghi et R. Peck, «*Soil Mechanics in Engineering Practice*,» *John Wiley*, 1967.
15. S. GB, *Introductory soil mechanics and foundations*, 3e éd., C. Limited, Éd., London: The Macmillan Company, 1970, p. 102.
16. A. S. Azzouz, R. Krizek et R. Corotis, «Regression Analysis of Soil,» *Soils and Foundations*, vol. 16, n° 12, p. 19–29, 1976.
17. C. P. Wroth et D. M. Wood, «The correlation of Index Properties with Some Basic Engineering Properties of Soils,» *Canadian Geotechnical Journal*, vol. 15, n° 12, pp. 137-145, 1978.
18. J. Bowles, *Physical and Geotechnical Properties of Soils*, New York: McGraw Hill, 1979, p. 478.
19. A. Al-Khafaji et A. OB, «Equations for compression index approximation,» *Journal of Geotechnical Engineering*, vol. 118, n° 11, p. 148–153, 1992.
20. Z.-S. Hong et K. Onitsuka, «A Method of Correcting Yield Stress and Compression Index of Ariake Clays for Sample Disturbance,» *Soils and Foundations*, vol. 38, n° 12, pp. 211-222, 1998.
21. G. L. Yoon, B. T. Kim et S. S. Jeon, «Empirical correlations of compression index for marine clay from regression analysis,» *Canadian Geotechnical Journal*, vol. 41, n° 16, pp. 1213-1221, 2004.
22. N. Abbasi, A. A. Javadi et R. Bahramloo, «Prediction of compression behaviour of normally consolidated fine-

grained soils,» vol. 18, n° %11, pp. 6-14, 2012.

23. K. A. Rashed, N. B. Salih et T. A. Abdalla, «Correlation of Consistency and Compressibility Properties of Soils in Sulaimani City,» Sulaimani Journal for Engineering Sciences, vol. 4, n° %15, pp. 87-95, 2017.

24. B. Yildirim et O. Gunaydin, «Estimation of california bearing ratio by using soft computing systems,» Expert Systems with Applications, vol. 38, n° %15, pp. 6381-6391, 2011

25. K. Agbelele, Etude intégrée des sols instables en vue de la maîtrise du phénomène de gonflement : cas de la dépression de la Lama au Bénin, ECOLE DOCTORALE DES SCIENCES DE L'INGENIEUR: Université d'Abomey-Calavi, 2017.

26. Gbaguidi, V. Zevounou, T. Kiki, Hendrix et Bolle, «Study of the phenomenon of swelling of clay soils in the coastal sedimentary basin in Benin,» Journal de la Recherche Scientifique de l'Universite de Lomé, 2011.

27. Y. Tankpinou KIKI, Contribution to the development of Soil Stabilization Methods: application to Lama clay soils (Onigbolo, Benin), Doctoral thesis of 3rd cycle of the Ecole Supérieure Polytechnique de THIES, 2004.

28. Koffi. Judicael AGBELELE, G. Gbaguidi, A. P'Kpla et G. Degan, «Caractérisation physico-mécanique des sols argileux de la dépression d'Issaba au Sud-Est du Bénin,» Afrique science, vol. 12, n° 2, 2016

29. S. F. Bartlett et H. S. Lee, Estimation of Compression Properties of Clayey Soils Salt Lake Valley, Utah, Utah Department of Transportation Research Division, 2004.

30. H. Park et S. Lee, «Evaluation of the compression index of soils using an artificial neural network,» Computers and Geotechnics, vol. 38, n° %14, pp. 472-481, 2011.

31. A. J. E. J et Bajestan, «Prediction determination of soil compression index Cc in Ahwaz region (in Persian),» Journal of faculty of Engineering and Technology, vol. 35, n° %13, pp. 75-80, 2008.

32. M. Ozer, N. Isik et M. Orhan, «Statistical and neural network assessment of the compression index of clay-bearing soils,» Bulletin of Engineering Geology and the Environment, vol. 67, pp. 537-545, 2008.

33. Institut Français de recherche scientifique pour le développement en coopération, Zones humides et lacs peu profonds d'Afrique, Paris, 1989.

34. R. M. Al-Kahdaar et A. F. I. Al-Ameri, «CORRELATIONS BETWEEN PHYSICAL AND MECHANICAL PROPERTIES OF AL-AMMARAH SOIL IN MESSAN GOVERNORATE,» Journal of Engineering, vol. 16, n° %14, pp. 5946-5957, 2010.

35. Z. A. Arama, M. S. Akın, S. E. Nuray et İ. Dalyan, «Estimation of consistency limits of fine-grained soils via regression analysis: A special case for high and very high plastic clayey soils in Istanbul,» International Advanced Researches and Engineering Journal, vol. 4, n° %13, 2020.

36. Nagaraj et Jayadeva, «Critical reappraisal of plasticity Index of Soils,» Journal of Geotechnical Engineering, vol. 110, n° %19, 1984

37. N. Akio, K. Takeshi et K. Osamu, «Constitutive Parameters Estimated by Plasticity Index,» Journal of Geotechnical Engineering Division, vol. 114, n° 17, pp. 844-857, 1988.

38. G. EBE, «On the need for Geotechnical Considerations Towards the provision of Building Code Suitable for the Subgrade/Structure Interactions in Ghana,» Journal of Building and Road Research, vol. 7, n° 11&2, p. 48.

39. Association Française de Normalisation, XP P94-090-1, Sols : reconnaissance et essais Essai œdométrique Partie 1 : Essai de compressibilité sur matériaux fins quasi saturés avec chargement par paliers, 1997.

40. Association Française de Normalisation, NF P 94-051, Sols : reconnaissance et essais. Détermination des limites d'Atterberg. Limite de liquidité à la coupelle - Limite de plasticité au rouleau, 1993.

41. S. M. M. Dway et D. A. A. Thant, «Soil Compression Index Prediction Model for Clayey Soils,» International Journal of Scientific Engineering and Technology Research, vol. 3, n° 111, pp. 2458-2462, 2014.

42. S. C. H., «Quick Computation of Settlement for Shallow Foundations of Alluvial Deposits,» International Conference on Chemical, Civil and Environment Engineering, Planetary Scientific Research Centre, 2012.

43. S. M., A. K. et A. m. K, «Development of Strength and Compressibility Correlations of Cohesive Soils of Some Regions in Khulna City,» International Journal of Advanced Structures and Geotechnical Engineering, vol. 3, n°13, pp. 242-245, 2014.

44. C. Lee, S. J. Hong, D. Kim et W. Lee, «Assessment of Compression Index of

Busan and Incheon Clays with Sedimentation State,» Marine Georesources & Geotechnology, vol. 33, n° 1, pp. 23-32, 2015.