

Original Research Article

Benchtop Septic System for Effluent Treatment - A Laboratory Development

ABSTRACT

One in every five households in the U.S. operates a decentralized water treatment systems which is also know as septic system, which may contribute to pollutions in water bodies if not operated properly. For this research 15.0-liter (3.97 gal.) laboratory benchtop septic systems was designed, build, installed and operated at a temperature of 23.0°C (73.4°F) to investigate the remediation of municipal wastewater. A three-week start-up phase was used prior to operating the system with unfiltered wastewater collected from primary clarifier at a wastewater treatment. The operational test phase included an hydraulic retention rate of 5, 10 and 20 days which corresponds to 3000 ml/d, 1500 ml/d, and 750 ml/d respectively. Based on the above results, the LBS system minimum effluent values for the COD-E are 18±1 mg/l, 60±10 mg/l for the TS-E, and <5±1 mg/l for the TSS-E values which correspond to the published effluent concentration range of 30% to 80% of influent concentrations of septic tanks. The results show that the LBS systems is able to reduce the COD, TS, and TSS level of municipal WW and can be a valuable tool to access the performance of septic systems utilizing different WW influent types.

Keywords: contaminants, decentralized water treatment system, remediation, septic system, sewage, wastewater

1. INTRODUCTION

One of the most significant challenges facing our world in the future pertains to clean water. Without clean water life is not sustainable. Water pollution affects local wildlife and us humans equally and we all should work on minimizing and perhaps eliminating waste and water pollution [1].

Sustaining the natural beauty and quality of our water bodies is today's biggest challenge with ever growing urban and suburban developments. Many new urban and suburban developments are too far away from existing wastewater treatment fostering the use of decentralized wastewater treatment systems, also known as septic systems. Urban and suburban governments are faced with the burden decentralized water treatment systems and how to protect waterbodies in the affected areas [2].

According to the Environmental Protection Agency (EPA) one of every five households operates a decentralized wastewater treatment system, also known as septic system [3]. Human waste from underperforming decentralized wastewater treatment systems might contribute to the pollution of nearby water bodies and can cause nitrification and increase in phosphorus components, which can increase algae growth mostly during warm summer month in the water body and can affect the environment, public health and the economy [4].

Comment [DIS1]: Please write this in full, and then abbreviate subsequently.

Comment [DIS2]: For this reserach,.....

Comment [DIS3]: What is this abbreviation stands for? Please write in full then abbreviate subsequently.

Comment [DIS4]: Showed.....

Comment [DIS5]: Write in full

Comment [DIS6]: Any reference for this?

Comment [DIS7]: A punctuation mark should be here.

Comment [DIS8]: Insert a comma

Comment [DIS9]: Give atleast one real life scenarios on such effects on the environment, public health and the economy.

Decentralized wastewater **system** are well known in the field of wastewater treatment. They consist of a tank with an influent and effluent **pile**. Liquid containing the organic degradable contaminants enter the system through **a** influent pipe and settle in the tank based on the high Hydraulic Retention Time (HRT). The process of biocenosis starts as soon as the liquid enters the system. The organic degradable constituents that are solubilized in the influent and organic degradable particles that settle on the bottom of the tank are broken down by an anaerobic bacteria regime in the tank. Because septic systems contain no **mixing** the degradation of organic compounds is a very slow process [5].

Comment [DIS10]: This should be plural

Comment [DIS11]: Pile or pipe?

Comment [DIS12]: an

The processed liquid discharges as effluent and percolates through a drain field downwards till it reaches the ground water table. Contaminants that are small enough can potentially reach aquifers as they make its way through the drain field soil layers [6,7].

Comment [DIS13]: punctuation mark here (,)

Wastewater in a domestic setting can contain many different potential pollutants which cause a risk to aquifers. These pollutants can be chemicals, household detergents from laundry and dishwashing, Phosphorous (P), Nitrogen (N), Ammonia (NH₄-N), Chemical Oxygen Demand (COD), Biochemical Oxygen Demand (BOD), Suspended Solids (SS), and pharmaceutical compounds due to medicine use of residents [8,9,10,11,12].

Comment [DIS14]: This statement needs to be check again, not all the processed liquid percolates and reaches the ground water table. Please rephrase the sentence.

The objective for this research work is to design, build, install and start up a laboratory Benchtop Septic (LBS) system which **allow** to test the degradation of organic components of various Wastewater (WW) effluent types.

Comment [DIS15]: Which will be use to test the degradation.....

The reported research could help to improve the operation and processes of current septic **systems** and improve the described complex problematics current septic systems cause in regard to release excess nutrients into the environment.

Comment [DIS16]: Will your design differ from the current system?

2. MATERIAL AND METHODS

The material and methods section describes the effluent materials, laboratory type systems and procedures that were used for this research study.

2.1. Materials

Wastewater was obtained from the Cleanwater Educational Research Facility (CERF) located at the Village of Minoa Wastewater Treatment plant in Minoa, NY.

5-gallon pail, Chlorinated Polyvinyl chloride (CPVC) pipe and fitting material from Charlotte Pipe and Foundry Company, purple PVC primer and clear cement from Oatey®, used to fuse the CPVC pipe parts together, and 3/8-inch (mm) plywood board for tank divider, and silicone sealant, was obtained from a nearby hardware store.

2.2. Laboratory Benchtop Septic Systems

For effluent treatment, a laboratory Benchtop Septic (LBS) system, as shown in Figure1., was designed.

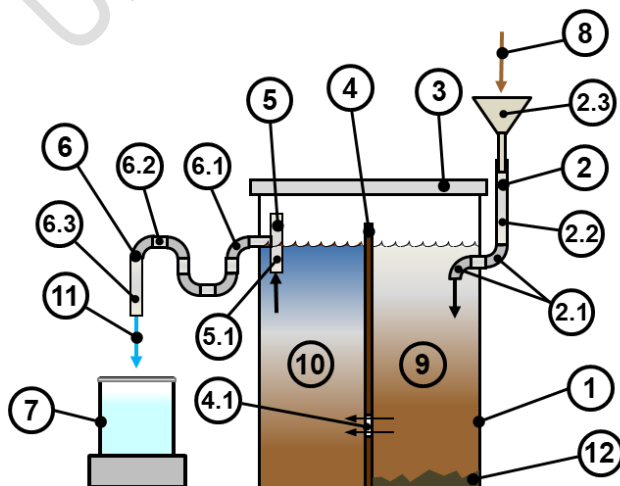


Fig. 1. Design of the Laboratory Benchtop Septic (LBS) System [xx]

For the LBS main tank (1) a 5-gallon (19.9 l) High Density Polyethylene (HDPE) pail with cover (3) was used. The LBS liquid capacity is 15 liters (3.97 gal.). A 3/8-inch (9.53 mm) plywood divider (4) with two 1.0-inch (25.4 mm) holes (4.1), spaced 4.0 inch (101.6 mm) apart, and 3-inch (76.2 mm) above the bottom of the LBS separates the LBS in two equal sized chambers (9), the settling chamber for solids (12), and the effluent chamber (10). Each chamber has a volume of 7.5-liter (1.99 gal.).

The inlet pipe assembly (2), the effluent Assembly (5), and outlet pig tail pipe assembly (6), as shown in Figure 1., was manufactured from a CPVC 0.5-inch (12.4 mm) pipe and fitting material fused together with purple PVC primer and clear cement and sealed to the LBS main tank (1) with silicon caulking material.

The inlet assembly (2), located 1.0-inch (25.4 mm) below the liquid level to prevent odor to escape the LBS, was manufactured from one 90° elbow (2.1) on the inside which is connected with a 1.0-inch (25.4 mm) long pipe to a 90° elbow (2.1) on the outside through the LBS main tank (1) wall. The outside elbow is connected to a 4.0-inch (101.6 mm) long pipe in which a PVC funnel (2.3) is inserted for easy filling in the influent liquid (8).

The effluent assembly (5), located at the 15-liter liquid level, is manufactured from a 0.5-inch (12.4 mm) tee that has a 1.0-inch pipe 0.5-inch (12.4 mm) pipe (5.1) attached to the end that faces to the bottom of the LBS).

The outlet pig tail pipe assembly (6) for sealing the LBS from odor to the outside, as shown in Figure 1., was manufactured from five 90° elbows (6.1), which are connected with four 1.0-inch (25.4 mm) long pipes (6.3). The elbow facing the 300 ml glass collection beaker (7), has a 4.0-inch (101.6 mm) long pipe attached, through which the effluent is dispersed into the collection beaker (7).

Effluent Assembly (5), and outlet pipe assembly (6) are connected with a 1.0-inch pipe CPVC 0.5-inch (12.4 mm) pipe through the LBS main tank (1) wall.

2.3. Laboratory Testing Procedures

For determining the Chemical Oxygen Demand (COD), Hach HACH COD TNTplus® Spectrophotometer Vial Test (3-150.0 mg/L) were used following HACH Method 8000 [13]. A HACH DRB200 Reactor was used to treat TNTplus® test vials according to the HACH 8000 Method, followed by analyzing the COD using a HACH DR900 Spectrophotometer.

The Total Solids (TS) was measured in triplicate. For the measurement of the TS, 300 ml aluminum sample containers were used. The containers were marked and weighted accordingly. Then approximately 200 ml to 220 ml of the prepared substrate was added to each of the corresponding aluminum sample containers prepared for the given test sample. Weighting of the sample containers followed, before they were placed in a ~105°C oven to dry for 48 hours to evaporate the moisture. After drying, the samples were weight again to determine their dry weight measurement. The remaining solids were the TS content of the substrate.

For measuring, the TSS the Cole Parmer Total Suspended Solids Method and Procedure was used [14]. Measurements were done in triplicate. A sample of maximal 1000 ml was used. The sample was filtered using a 45 µm pore size glass fiber fabric filter (HACH, Be Right, grade: MGA, 47 mm). The solids which were retained on the filter and dried at 105 °C gave then the measurement for the TSS [14].

Temperature and pH measurements were conducted using a portable Milwaukee MW102 pH/temperature meter.

Comment [DIS17]: This is a good design and well explained. However, I will suggest if the author will explain the basis for some criteria in the design. For example;

1. The LBS main tank is 19.9 L, and 15 L was utilizes leaving a free board of 4.9 L, if i may ask, what is the guiding principle for that?
2. Again, the author used a plywood for the separation between the settling chamber and the effluent chamber, other materials can fit into, like acrylic material that do not decompose. Even though, plywood is known to be water resistant (too strong term) but prolonged exposure to moisture can be disastrous, and hence will add up to the wastewater constituents, thereby changing the original characteristic of the wastewater used. This will further affect the effluent results. Having mentioned the few above (as in 1 & 2), the basis for the selection and the used of the materials to build up the LBS system as well as their sizes is paramount. If the whole design was adopted from elsewhere it should be mentoned. Please refer to "wastewater treatment and reuse" by Metcalf and Eddy.

2.4. Preparation of Selected Influent Substrates

To determine the working capacity of the designed LBS system WW was used as influent substrate.

The WW substrate was obtained from a primary clarifier at the Minoa wastewater treatment plant was used unfiltered for the start-up and operational phase. The WW was stored in a cold room at 5.0°C (41.0°F) until it was transferred to the laboratory for use in the LBS system.

Comment [DIS18]: Punctuation mark (.)

3. RESULTS AND DISCUSSION

For this research work, wastewater was used as influent substrate to characterize the degradation capability of the LBS system. The following chapter summarize and compare the degradation processes and effluent qualities of the systems during start up.

Comment [DIS19]: Chapter or section?

After the start-up of the LBS system with wastewater and the adaption time, the LBS system was operated like described in Section 2.5. with WW at an HRT of 5, 10 and 20 days. The start-up and operational results of the LBS system are being discussed in the following subsections.

Comment [DIS20]: There is no section 2.5 in this document.

Measurements showed that the TS of the unfiltered WW used for the 3-week start-up phase had on average 340±26 mg/l. and an TSS of around 0.002 %. After the initial start-up phase However, it is known that WW is changing its composition daily and is highly varying through the year, day and hour [15,16]. The reason of this lies in the nature of the wastewater system connected homes and industries and the design of wastewater system itself. In addition, the WW might change its composition while in storage until it is used in the it LBS system.

3.1. Start-Up and Operation of the Laboratory Benchtop Septic System

The LBS system was installed in the laboratory and a 3-week start-up phase was initiated using unfiltered WW collected from a primary clarifier. The laboratory room temperature of the start-up phase was 23.0°C (73.4°F). The LBS system tank (1) with its two chambers was filled till the WW was moving through effluent assembly (5), and outlet pig tail pipe assembly (6) into the 300 ml glass collection beaker (7). The LBS contained a total 15.0 liter (3.97 gal.) of WW, that was conditioned under laboratory room temperature conditioned WW at 23.0°C (73.4°F). The cover (2) was attached and the LBS was fed daily through inlet assembly (2) with 750 ml of WW with a temperature of 23.0°C (73.4°F). The daily feed rate correlates to a Hydraulic Retention Time (HRT) of 20 days.

Comment [DIS21]: Why the 3 weeks start up phase? This is to allow for what? Please explain.

Larger particles contained in the unfiltered WW stored at the cold room at 5.0°C (41.0°F) settled during the storage time. It was decided to not mix the WW prior to usage in the LBS system due to the caused inconsistency of the influent. The settled WW's TS, TSS and COD for the start-up and operational test was measured before applied in the LBS system and showed an average TS of 212±4 mg/l, a TSS of 24.1±0.5 mg/l and a COD of 74 and 80 mg/l. After the start-up phase, the laboratory LBS system was operated manually under a feed rate of 3,000 ml/d, 1,500 ml/d, and 750 ml/d which corresponds to an HRT rate of 5, 10, and 20 days accordingly.

Comment [DIS22]: Was the LBS operated as batch or continuous system?

Comment [DIS23]: From design?

3.2. Operation of the Laboratory Benchtop Septic System

During the test period of the LBS system at a HRT of 5, 10 and 20 days the pH kept stable at 8.0 ±0.2 and the temperature was between 23.0±0.5°C (73.4±0.9°F).

Figure 2. shows the performance data of the LBS system at a HRT of 5 days, 10 days, and 20-day HRT. The COD Influent (COD-I) for the 5-day HRT was 75 mg/l and for the 10-day and 20-day HRT the COD-I was 36 mg/l and 25 mg/l respectively. The TS Influent (TS-I) was for the 5-day HRT 208 mg/l and for the 10-day and 20-day HRT the TS Influent (TS-I)

Comment [DIS24]: Without agitating the stored wastewater prior to use in the LBS system does not represent Wastewater obtained from the Cleanwater Educational Research Facility (CERF) located at the Village of Minoa Wastewater Treatment plant in Minoa, NY.

Comment [DIS25]: Why BOD5 not measured? Present the wastewater characteristics in a Tabular form.

Comment [DIS26]: How did you arrived at these?

Comment [DIS27]: This bar chart presentation can only withstand if the LBS system was operated in a batch system, otherwise it should be a continuous line graph that display the trend of the contribution of each value over time.

was 127 mg/l and 25 mg/l respectively. The TSS Influent (TSS-I) was 14.5 mg/l for the 5-day, 10-day, and 20-day HRT.

The COD Effluent (COD-E) for the 5-day HRT was 18 mg/l, for the 10-day HRT 19 mg/l, and for the 20-day HRT 17 mg/l. This correlates to a reduction of 74.6%, 47.2%, and 32.0% respectively.

The TS Effluent (TS-E) was for the 5-day HRT 50 mg/l, for the 10-day 60 mg/l, and for 20-day HRT 71 mg/l. This correlates to a reduction of 75.9%, 52.8%, and 44.1% respectively.

The TSS Effluent (TSS-e) was <4 mg/l for the 5-day, <6 mg/l for the 10-day, and < 4 mg/l for the 20-day HRT, having a reduction of >72.4% for the HRT of 5 days and 20 days and a reduction of >58.6% for the HRT of 10 days.

The difference in COD, TS influent values might have been caused by the storage of the entire WW in a cold room at 5.0°C (41.0°F) until it was transferred to the laboratory for use in the LBS. The long storage time allowed particles to settle and mycobacterial degradation of the WW. However, the TSS-I was not influenced by the storage time.

Comment [DIS28]: For liquid samples, a chart is available for the collection, preservation, transportation and storage for most liquid samples. So, reason mentioned is vague

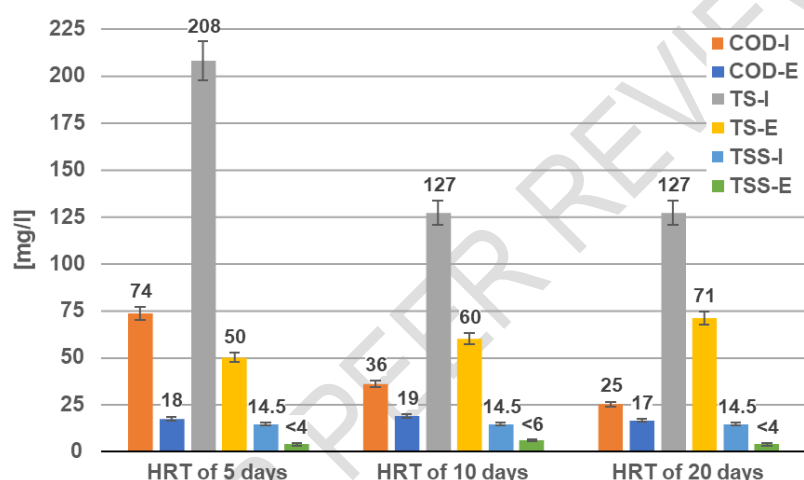


Fig. 2. Influent and Effluent Values of Laboratory Benchtop Septic (LBS) System

During the test period of the LBS system at a HRT of 5, 10 and 20 days the pH kept stable at 8.0 ± 0.2 and the temperature was between $23.0 \pm 0.5^\circ\text{C}$ ($73.4 \pm 0.9^\circ\text{F}$).

Figure 2. shows the performance data of the LBS system at a HRT of 5 days, 10 days, and 20-day HRT. The COD Influent (COD-I) for the 5-day HRT was 75 mg/l and for the 10-day and 20-day HRT the COD-I was 36 mg/l and 25 mg/l respectively. The TS Influent (TS-I) was for the 5-day HRT 208 mg/l and for the 10-day and 20-day HRT the TS Influent (TS-I) was 127 mg/l and 25 mg/l respectively. The TSS Influent (TSS-I) was 14.5 mg/l for the 5-day, 10-day, and 20-day HRT.

The COD Effluent (COD-E) for the 5-day HRT was 18 mg/l, for the 10-day HRT 19 mg/l, and for the 20-day HRT 17 mg/l. This correlates to a reduction of 74.6%, 47.2%, and 32.0% respectively.

The TS Effluent (TS-E) was for the 5-day HRT 50 mg/l, for the 10-day 60 mg/l, and for 20-day HRT 71 mg/l. This correlates to a reduction of 75.9%, 52.8%, and 44.1% respectively.

The TSS Effluent (TSS-e) was <4 mg/l for the 5-day, <6 mg/l for the 10-day, and < 4 mg/l for the 20-day HRT, having a reduction of >72.4% for the HRT of 5 days and 20 days and a reduction of >58.6% for the HRT of 10 days.

The difference in COD, TS influent values might have been caused by the storage of the entire WW in a cold room at 5.0°C (41.0°F) until it was transferred to the laboratory for use in

the LBS. The long storage time allowed particles to settle and mycobacterial degradation of the WW. However, the TSS-I was not influenced by the storage time. Based on the above results, the LBS system minimum effluent values for the COD-E are 18 ± 1 mg/l, 60 ± 10 mg/l for the TS-E, and $< 5 \pm 1$ mg/l for the TSS-E values. The LBS remediation range are in the published effluent concentration range of 30% to 80% of influent concentrations of septic tanks [16-21], and therefore the developed LBS system is usable for further investigations on septic tank system performances. However, effluent values can vary greatly and are influent specific based on the type of WW used as well as if prefiltering and removal processes such as grease traps, garbage disposals, and or biowaste composting are used prior to disposing the WW [20,21].

Comment [DIS29]: In section 3.1, the author mentioned that "It was decided to not mix the WW prior to usage in the LBS system due to the caused inconsistency of the influent". These are contradictory statements.

Comment [DIS30]: The prolonged exposure of the plywood used might have contributed to the variations.

CONCLUSION

Minimizing pollution from decentralized water treatment systems is a necessity to minimize environmental impacts on waterbodies. For this research a 15.0-liter (3.97 gal.) LBS system was designed, build, installed and operated to investigate the remediation of municipal WW. The LBS system was start-up with unfiltered WW collected from a primary clarifier. The feed rate during a 3-week start-up phase was 750 ml which corresponds to a HRT of 20 days. The TS of the unfiltered WW had on average 340 ± 26 mg/l. and an TSS of around 0.002 %. The room temperature of the laboratory was start-up phase was 23.0°C (73.4°F) for the start-up and operational phase. The operational test phase included an HRT of 5, 10 and 20 days which corresponds to 3000ml/d, 1500 ml/d, and 750 ml/d respectively. The unfiltered WW was stored at the cold room at 5.0°C (41.0°F), which allowed larger particles to settle prior to its usage during the different HRT. The settled WW's TS, TSS and COD for the start-up and operational test was measured before applied in the LBS system and showed an average TS of 212 ± 4 mg/l, a TSS of 24.1 ± 0.5 mg/l and a COD of 74 and 80 mg/l. The COD-E for the 5-day HRT was 18 mg/l, for the 10-day HRT 19 mg/l, and for the 20-day HRT 17 mg/l. This correlates to a reduction of 74.6%, 47.2%, and 32.0% respectively. The TS-E was for the 5-day HRT 50 mg/l, for the 10-day 60 mg/l, and for 20-day HRT 71 mg/l. This correlates to a reduction of 75.9%, 52.8%, and 44.1% respectively. The TSS-E was < 4 mg/l for the 5-day, < 6 mg/l for the 10-day, and < 4 mg/l for the 20-day HRT, having a reduction of $> 72.4\%$ for the HRT of 5 days and 20 days and a reduction of $> 58.6\%$ for the HRT of 10 days. Based on the above results, the LBS system minimum effluent values for the COD-E are 18 ± 1 mg/l, 60 ± 10 mg/l for the TS-E, and $< 5 \pm 1$ mg/l for the TSS-E values which correspond to the published effluent concentration range of 30% to 80% of influent concentrations of septic tanks [17-21]. The results show that the LBS systems is able to reduce the COD, TS, and TSS level of municipal WW and can be a valuable too to access the performance of septic systems utilizing different WW influent types, such as agricultural, municipal, and industrial effluents, including performance enhancer such as enzymatical products that foster degradation of biological contaminants in the effluent used.

Comment [DIS31]: This is more to methodology and results presentation. Please conclude based on the intended objectives that were set out to achieve. If possible give some recommendations for future research.

Comment [DIS32]: The author should provide a section for acknowledgement.

REFERENCES

1. Dölle K, Wang Q. Application of Subsurface Bioreactor for Wastewater Treatment. International Journal for Earth and Environmental Sciences. 2017;2(132):1-6.
2. McDowell W, Brick C, Clifford M, Frode-Hutchins M, Harvala J, Knudsen K. Septic Systems Impact on Surface Waters – A Review for the Inland Northwest. Tri-State Water Quality Council; 2005.

3. Environmental Protection Agency (EPA). Accessed June 7, 2022. Available: <https://www.epa.gov/septic/septic-systems-overview>
4. Environmental Protection Agency (EPA). Accessed June 7, 2022. Available: <https://www.epa.gov/nutrientpollution/sources-and-solutions>
5. K. Doelle and Q. Wang, "Municipal Wastewater Treatment Using a Packed Bio-tower Approach," *Asian J. Environ. Ecol.*, vol. 13, no. 2, pp. 42–50, 2020
6. Godfrey E, Woessner WW, Benotti MJ. Pharmaceuticals in on-site sewage effluent and ground water, Western Montana. *Ground Water*. 2007;45(3):263e271.
7. Phillips PJ, Schubert C, Argue D, Fisher I, Furlong ET, Foreman W, Gray J, Chalmers A. Concentrations of hormones, pharmaceuticals and other micropollutants in groundwater affected by septic systems in New England and New York. *Sci. Total Environ*. 2015;43e54, 512-513.
8. Dölle K, Wang Q, Tong J. Pharmaceuticals in Surface Water and Waste Water Plant Effluent around the World – a Review. *Asian Journal of Environment and Ecology (AJEE)*, 2017;3(3);1-17.
9. Dölle K, Wang Q. Application of Subsurface Bioreactor for Wastewater Treatment. *International Journal for Earth and Environmental Sciences*. 2017;2(132):1-6.
10. Siegrist RL, Lowe KS, Geza M, McRay JE. Soil treatment units used for effluent infiltration and purification within onsite wastewater systems: science and technology highlights. *International Symposium on Domestic Wastewater Treatment and Disposal Systems*. Dublin, Ireland. 2002.
11. Gill, L, Johnston P, Misstear B, O'Suilleabhain C. An investigation into the performance of subsoils and stratified sand filters for the treatment of wastewater from onsite systems. Project 2000-MS-15-M1. Report Prepared for the Environment Protection Agency 2004.
12. Wilhelm SR, Schiff SL, Cherry JA. Biogeochemical evolution of domestic waste water in septic systems: 1. Conceptual model. *Ground Water*. 1994;32(6):905–916.
13. HACH Method 8000 - Oxygen Demand, Chemical.
14. Cole Parmer. Total Suspended Solids (TSS) Method and Procedure. *Cole-Parmer*. 2019:10–12.
15. Dölle K, Watkins C. Algae to Remove Phosphorous in a Trickling Filter. *Journal of Advances in Biology & Biotechnology*. 2016;11(2):1-5.
16. Dölle K, Giarrusso S. Bio-tower Application for Improvement of a Decentralized Waste Water Treatment System for residential Applications-reduction of Nonpoint Source Pollution by Nitrogen. *Asian Journal of Environment and Ecology (AJEE)*. 2021;14(3):1-7.
17. Eliasson J. (2004). Septic Tank Effluent Values. Washington State Department of Health-Waste Water Management. Accessed July 4, 2022. Available:
18. Crites R, Tchobanoglous G. 1998. *Small and Decentralized Wastewater Management Systems*. WCB/McGraw Hill, San Francisco, CA. 1998:169-239.
19. Rock CA, Boyer JA. Influence of Design on Septic Tank Effluent Quality. *Proceedings 8th Northwest On-Site Wastewater Treatment Short Course and Equipment Exhibition*, University of Washington, Seattle WA. 1995:45-62.
20. United States Environmental Protection Agency. *Onsite Wastewater Treatment System Manual*. EPA/625/R-00/008. 2002.
21. United States Environmental Protection Agency. *Decentralized Systems Technology Fact Sheet*. EPA 832-F-00-079. 2000.

Comment [DIS33]: About 70% of the cited documents are very old, with only about 30% being recent (5 yrs old). Please try to reference recent articles.