

Original Research Article

DEVELOPMENT AND EVALUATION OF MODIFIED SOLAR PHOTOVOLTAIC POWERED PADDY WINNOWER

ABSTRACT

A solar photovoltaic (SPV) powered paddy winnower was developed and evaluated at CAET, BSKKV, Dapoli. ~~The developed winnower was tested for single variety of paddy (Ratnagiri-1) and operational difficulties were reported.~~ In order to eliminate the operational problems and difficulties, it was proposed to ~~modify and evaluate~~ the existing SPV photovoltaic power operated paddy winnower, for better and improved performance. The existing SPV operated paddy winnower was tested ~~to for finding~~ the operational difficulties, and the physical properties of different paddy varieties i.e., Ratnagiri-1, Ratnagiri-6, karjat-3. ~~Including the terminal velocity, angle of repose, bulk density, was determined for testing and modification.~~ It was found that improving several ~~there were various~~ parameters can ~~for improving the performance by~~ eliminating the operational difficulties from the existing SPV operated paddy winnower. The necessary modifications were incorporated in a modified SPV operated paddy winnower. The modified SPV operated paddy winnower was tested for Ratnagiri-1 Variety of paddy and its improved performances were reported.

Keywords: Paddy Winnower, Blower, ~~Solar Photovoltaic~~, Cleaning Efficiency, SPV operated Paddy winnower.

Introduction:

Paddy rice (*Oryza sativa-Asian rice*) is an important crop amongst all food grains. As one of the three most important grain crops, maize, rice, wheat, that helps to fulfil food needs all across the world. Three quarters fourth of total world population consumes rice as staple food. Rice is the staple food for 65 % of the population in India. Global rice production more than tripled between 1961 and 2010 with compound growth rate of 2.24 % per year (2.21% in Rice Producing Asia). India is the world's second largest producer and consumer next to China. In India, rice cover area was 42949.80

thousand hectares against total geographical area of 163.46 million hectares with production of 112905.50 thousand tones and productivity was 2585 kg/ha (India agristat). Maharashtra has 1446.60 lakh ha land under rice cultivation with rice production of about 2660.50 lakh tons and productivity was 1839 kg/ha for the year 2017-18 (Dept. of agriculture Gov. of Maharashtra). In Konkan region, it is grown on 0.50 million hectares with the production of 1.14 million tons per year and productivity is 2768 kg/ha.

There are several post-harvest operations carried out on paddy. The most important goals of post-harvest handling are keeping the product fresh, to avoid losses and slow down undesirable chemical changes, and avoiding physical damage such as bruising and to delay spoilage. It has been reported that about 9 per cent of paddy is lost due to use of old and outdated methods of drying and milling, improper and unscientific methods of storage, transport and handling. It has been estimated that total post-harvest losses of paddy at producers level was about 2.71 per cent of total production. To minimise post-harvest losses, precautions should be taken to follow proper post-harvest practises. It includes timely harvest at optimum moisture percentage, use of proper method of harvesting; avoid excessive drying, fast drying and rewetting of grains, ~~and~~ ensure drying of wet grain after harvest. The losses in threshing and winnowing can be avoided using better mechanical methods.

In the post-harvesting process of the paddy threshing contributes 12 % cost of production. Presently hold on type paddy thresher in some areas of Konkan region are widely use which do not have cleaning facility. Hence, winnowing operation is necessary after manual or hold on type threshing. Cleaning and winnowing is one of the important post-harvest processes for preparing paddy as food. It involves the removal of unwanted material like chaff, straws, weeds soil particle and other debris from the grain. Winnowing helps to improve grain storability, reduces dockage during milling, gives good quality milled rice and improves the milling output. It also

reduces insects, pests and disease infestation.

Winnowing may use is an agriculture method developed by ancient cultures for separating grain from foreign material like chaff, straw, husk. It involve simple process like throwing the mixture into the air so that the wind blows away the lighter chaff, while the heavier grains fall back down for recovery. There are different techniques used which include a shaped basket shaken to raise the chaff, a winnowing fan, winnowing fork or shovel. ~~This methods~~ These methods are time consuming, uncomfortable and laborious. Labours get tired within a short period of time and this operation completely depends on wind conditions.

The winnower may be hand operated or power operated. Hand operated winnower require two persons for operation, one for operating the fan and another one for feeding the grain to winnower. Effectiveness of separation of winnower may be very lowess in case of hand operated winnowing due to non-uniform speed of the blower as it was operated manually. Power operated winnower has the higher effectiveness of separation due to uniform blower speed, but requires electrical power to run the blower. In many rural locations of developing countries, grid-connected electricity and supplies of other non-renewable sources of energy are either unavailable and unreliable or too expensive.

The available solar energy in tropical countries like India can be efficiently utilize to provide the source power supply for the post-harvest operations like paddy winnowing. In such

conditions, solar photovoltaic powered paddy winnower is useful in areas with no utility lines. Photovoltaic systems are often less expensive and require less

DETAILS OF INVESTIGATION MATERIAL AND METHODS

The development and evaluation ~~were~~ conducted at Energypark, College of Agricultural Engineering and Technology, Dapoli, ~~using with the~~ three varieties of paddy i.e., Ratnagiri-1, Ratnagiri-6, Karjat-3.

Operational difficulties in the Analysis of existing SPV powered paddy winnower for operational difficulties

~~Under During~~ no load ~~and~~ field-testing operational difficulties ~~found~~ were ~~found~~ as follows:

- Irregular inflow of feed from hopper.
- Irregular outflow from outlet 1 and outlet 2.
- Absence of hooks on outlet for hanging of gunny bag.
- Variable blower speed and air velocity with solar intensity.
- Absence of auxiliary power in case of low solar intensity.

Modifications ~~to in~~ existing SPV powered paddy winnower for improved performance

- **For regulating inflow of feed from hopper:**

The ~~Paint was removed from~~ inside surface of the hopper ~~was and then~~ polished ~~after paint was removed the surface~~. The existing two side central feed control plates ~~were~~ replaced with a single sliding type feed control plate with ~~an~~ inclination

maintenance and operating cost than conventional electrical powers.

angle equal to hoppers slant angle. Four ~~no. of~~ springs was provided ~~each at the~~ four corners of the hopper and two vibration motors fixed ~~to for vibrations to~~ the hopper ~~to give for~~ smooth and continuous flow of paddy grains.

- **For regulating outflow from outlet 1 and outlet 2:**

The painted outlet 1 and outlet 2 were creating hurdle in smooth outflow; ~~to~~ facilitate smooth outflow, the paint was scrapped off from the outlet surface.

- **For hanging of gunny bag at outlet:**

~~TA~~ three ~~number of~~ hooks were attached to outlet 1 and outlet 2 for hanging of gunny bags ~~to at outlet or~~ collection of grains.

- **To regulate blower speed and air velocity ~~because of with~~ solar intensity fluctuation:**

To keep the blower speed constant there was need to ~~have a supply~~ constant ~~supply~~ voltage to the blower motor. ~~†~~To achieve this ~~objective~~, a 12 V 7.2 Ah battery was provided with maximum power point (MPP) tracking charge controller. DC to DC step up booster was incorporated to increase the voltage supply to the blower, A DC motor speed regulator was provided to control the blower speed and air velocity suitable for different varieties of paddy.

- **To provide uninterrupted power in case of low solar intensity:**

Battery backup of 12 V 7.2 Ah was provided to facilitate uninterrupted winnowing operations in case of low solar intensity

These necessary modifications required for smooth working and making trouble free operations of winnower was incorporated in the existing solar photovoltaic paddy winnower.

Performance Working of the modified solar photovoltaic powered paddy winnower:

The modified SPV operated paddy winnower was equipped with 7.2Ah maintenance free sealed lead acid battery. The battery was charged by the solar photovoltaic panel with the help of the MTTP charge controller. The charge controller gives the load output voltage of 12.6 V. In order to increase the blower speed, the voltage needs to step up; hence, a step-up booster module was added. To regulate the speed of fan blower in order to accommodate winnowing of different varieties of paddy, a DC motor speed controller module was provided. Two vibration DC motors were also connected parallel to the 12 V load output of the charge controller.

Technical specifications of the modified solar photovoltaic powered paddy winnower:

- Solar Photovoltaic Panel: Power – 80 W, Voltage – 12V, Size – 83 cm×45 cm
- D.C Motor Power – 18 W Voltage – 12 Volt
- Centrifugal Blower RPM - 2800
- Hopper Capacity – 10 Kg Size = 40×40×20 (G. I. Sheet)

- DC Motor Speed controller 12 Volt 4 amp.
- Battery 7.2 Ah, 12 V
- Solar Charge Controller 12 V/24 V
- Vibrating D.C motors Voltage 12 V
- DC to DC voltage booster 150 W, 6A, 10-32 V to 12-35 V
- Switch 1 no. On/Off
- Caster wheel 4 nos.
- Frame (Height = 100 cm, Length Breadth = 70 cm, Width = 40 cm) Mild steel.

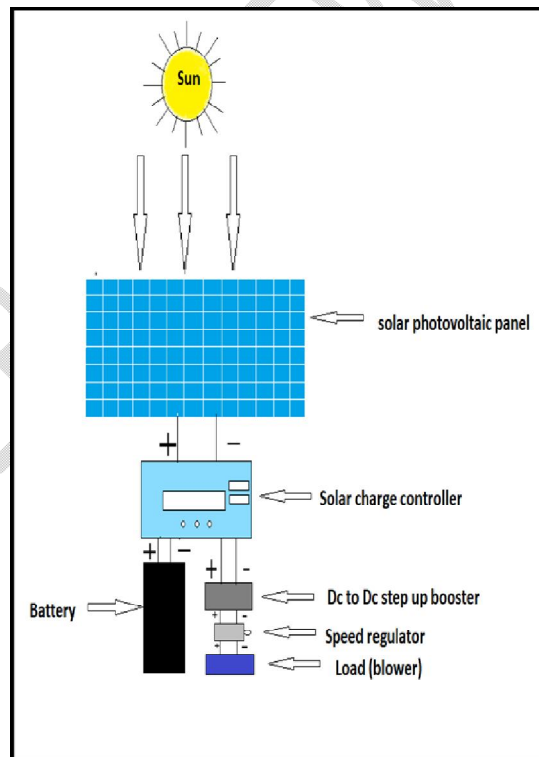


Fig. 1 Block diagram of electrical system of the modified SPV powered winnower

Name of crop - Paddy

Variety of crop – Ratnagiri-1

Grain ratio - 0.896

Operating time - 15 min

Moisture content (w.b) -11.76%

Grain input – 30 kg

The
filler
r
trial
s of
St
h
e
P
V
ope
rate

Field winnower were conducted at different positions of feed plate. It was observed that if the 100% feed plate was opened, the feed rate was found to be very high, which is beyond the capacity of the blower. Hence, the modified SPV operated winnower was evaluated only at constant feed rate of 120 kg/h.

No load tests of modified SPV paddy winnower include:

Effect of solar intensity on blower speed.

It was observed that, the solar intensity does not affect the blower speed; the blower speed in the modified winnower remains steady around 2800 rpm because the battery provided a steady voltage supply to the blower. The maximum solar intensity (542.3 W/m^2) was achieved at 13:00 h of the day.

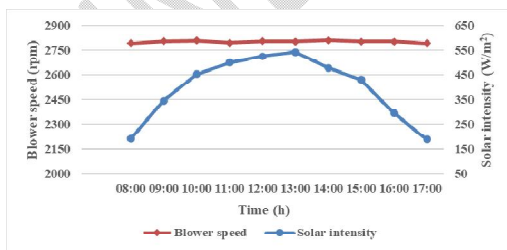


Fig. 5 Variation of blower speed with respect to time and solar intensity

Effect solar intensity on air velocity

Variation of solar intensity and air velocity with respect to time at different distances from blower. It was observed that the air velocity also remains steady with respect to time, the solar radiation varied with the time of the day. The maximum velocity of air through at 10 cm, 20 cm, 30 cm from blower was found to be 8.73 m/s, 7.43m/s, 5.40m/s, respectively.

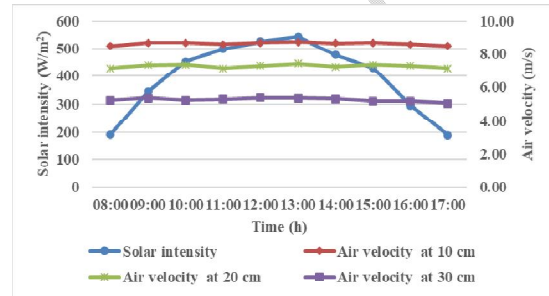


Fig.6 Effect of solar intensity on air velocity

Field testing of modified SPV operated paddy winnower

The cleaning efficiency and output capacity at outlet 1 with respect to time which reveals that the cleaning efficiency during the day was almost constant. The maximum cleaning efficiency was found to be 95.5 per cent and the minimum cleaning efficiency found to be 92 per cent. Maximum output capacity of outlet-1 found to be 40.82 kg/h. and minimum found to be 40.6 kg/h.

The cleaning efficiency and output capacity at outlet 2 with respect to time which reveals that the cleaning efficiency during the day was also almost found to be constant. The maximum cleaning efficiency was found to be 94 per cent and the minimum cleaning efficiency found to be 90 per cent. Maximum output capacity of outlet-2 was found to be 78.6

kg/h. and the minimum found to be 78.1 kg/h.

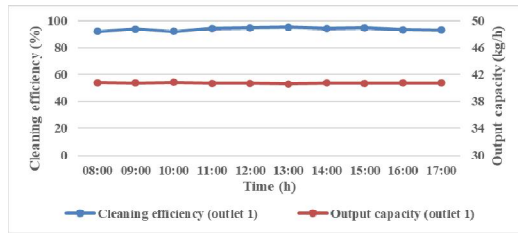


Fig.7 Cleaning efficiency and output capacity at outlet 1

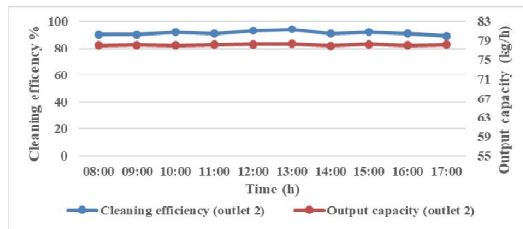


Fig.8 Cleaning efficiency and output capacity at outlet 2

Variation of percentage of blown grain with respect to time at 20 cm distance from blower

It was observed that, the percentage of blown grain from blower was found nearly constant. The percentage of blown grain was ranged from 0.1 % to 0.12 %. The variation power consumption with respect to time of operation was also studied.

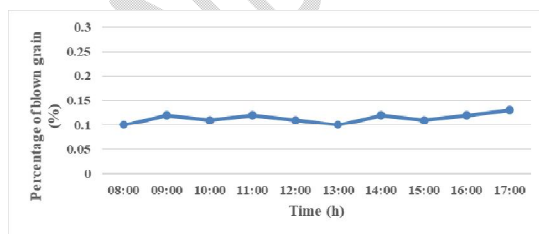


Fig.9 Variation of the percentage of blown grain with time.

CONCLUSION

As expected, the installation of a battery to provide a constant voltage supply has

removed most of the irregular operational difficulties in the unmodified SPV operated paddy winnower

As it can be concluded blower speed and distance of hopper can be controlled, the modified SPV operated paddy winnower is found suitable for winnowing of various paddy varieties by controlling blower speed and distance of hopper.

REFERENCES:

Abdul-Rasaq, A. Adebowale., Lateef, O. Sanni., Hameed, O. Owo and Olayinka, R. Karim. 2011. Effect of variety and moisture content on some engineering properties of paddy rice. Journal of Food Science and Technology, Vol.48(5):551-559.

Amin M.N., M. A. Hossain and K. C. Roy. 2004. Effects of moisture content on some physical properties of lentil seeds. Journal of Food Engineering, Vol. 65(1):83-87.

Anonymous. 1983. RNAM test codes and procedures for Farm Machinery, United Nations Development Programme Pasey city, Philippines.

Anonymous. 1995. Test code for Power thresher for cereals IS- 6284.

Anonymous, 2014. Design of a winnowing machine for west african rice farmers. Department of Bioresource Engineering.

Arafa, G. K., M. T. Ebaid and H. A. El-Gendy. 2009. Process engineering development of a local machine for winnowing and grading flax seeds. Misr J. Ag. Eng, Vol. 26(1): 343-358.

Bhanage G. B., P. U. Shahare, P. S. Deshmukh, P. B. Gaikwad and V. V. Aware. 2016. Mechanization in Harvesting and Post-Harvest Operation for Paddy in Konkan

Region and Its Economic Feasibility. J. Indian Soc. Coastal Agric. Res. Vol. 34(2): 43-49.

Bhanage Girishkumar, prashantshahare, vijay aware and prashantdeshmukh. 2017. Engineering properties of paddy for designing of threshing mechanism. International Journal of Agricultural Science and Research, Vol. 7(1): 215-224.

Bhattacharya, K. R., Sowbhagya, C. M., Swamy, and Y. M. I. 1972. Some physical properties of paddy and rice and their interrelations. Journal of the Science of Food and Agriculture, Vol. 23(2): 171-186.

Chiplunkar, V. Y. and Patil, B. S. (2003). Performance evaluation of different paddy threshers. Thesis, B.Tech. Dr. Balasaheb Sawant Konkan Krishi Vidyapeeth, Dapoli, M.S. (INDIA).

Dhananchezhian P., S. Parveen and Ravindra Naik. 2013. Study of mechanical properties of popular paddy varieties of tamilnadu relevant to development of mini paddy thresher. Current agriculture research journal, DOI: <http://dx.doi.org/10.12944/CARJ.1.1.08> ISSN: 2347-4688, Online ISSN: 2321-9971.

Dhananchezhian, P., S. Parveen, B. Shridar, A. Kumar, Surendra and K. Rangasamy. 2013. Performance of a portable power paddy thresher: a comparative study of mechanical vs traditional threshing methods. Madras Agricultural Journal, Vol. 100(4-6): 619-622.

Dhananchezhian, P., S. Parveen and K. Rangasamy. 2013. Development and performance evaluation of low cost portable paddy thresher for small farmers. International Journal of Engineering Research & Technology, Vol. 2(7) ISSN: 2278-0181.

Drambi, Saeed Hassan, A. Lawan, G. Abubakar, Anas. A. Mohammed. And Umar. Bashir. 2017. Development and Performance Evaluation of a Pedal Operated Paddy Rice Winnowing for Small Scale Rural Farmers in Nigeria. International

Journal of Science and Qualitative Analysis, Vol. 3(4): 37-41.

Edward A. and Baryeh. 2002. Physical properties of millet. Journal of Food Engineering, Vol. 51(1):39-46.

Gbabo A, Ibrahim Mohammed Gana and Matthew Suberu Amoto. 2013. Design and fabrication and testing of a millet thresher. Net Journal of Agricultural Science, Vol. 1(4):100-106. ISSN: 2315-9766.

Ghosh B. N. 1970. The performance of a bicycle operated winnower-grader. Journal of Agricultural Engineering Research, Vol. 15(3): 274-276, 277-282.

Jagdale M., A. G. Mohod, Y. P. Khandetod, R. M. Dharaskar and K. G. Dhande. 2017. Evaluation of solar photovoltaic (SPV) Operated Paddy Winnowing. Journal of Advanced Agricultural Research & Technology, Vol. 1(2): 177 -182.

Jivrag Abhishek, Vinayak Chawre and Aditya Bhagwat. 2011. Solar operated multiple granulated pesticide duster. Proceedings of the World Congress on Engineering, Vol. III. ISBN: 978-988-19251-5-2.

Kadam R. G. and Dhande K. G. 2016, Performance Evaluation of Power Operated Paddy Winnowing. International Journal of Agricultural Engineering, Vol. 9(1):47-52.

Kashayap M. M. and A.C. Pandya. 1965. A qualitative theoretical approach to the problem of winnowing. Journal of Agricultural Engineering Research, Vol. 10(4): 348-354.

Kashayap M. M. and A.C. Pandya. 1965. A study of winnowing indices. Journal of Agricultural Engineering Research, Vol. 10 (3): 255-258.

- Kashayap M. M. and A. C. Pandya. 1966. Air velocity requirement for winnowing operations. *Journal of Agricultural Engineering*, Vol. 11(1): 24-32.
- Kawase, M. 1999, A study on characteristic and internal flow condition in a winnowing fan. *The Japan Society of Mechanical Engineers*, Vol. 65 (632): 1263-1270.
- Kandalkar Sumeet S., Rahul B. Patil, Shrikrushna D. Kajale., Pravin A. Datir and Prof. Deepak S. Patil. 2018. Solar operated multipurposed agriculture machine. *International Journal of Innovative Research in Science, Engineering and Technology*, Vol. 7(2): 1622-1627.
- Kumar Jyoshi Anil, V. S. Lakshmi Ravuri and V Harshitha. 2017. Fabrication of a solar based sand sieving machine. *International journal of current engineering and scientific research*, Vol. 4(5): 57-60.
- Pachgare M. N., Kolase, S.H. Adhaoo and G. S. Ingle. 1993, Centrifugal winnower for Jowar. *Agril. Engg. Today*, Vol. 17 (5-6): 40-50.
- Pande P. C. 2003. Performance of PV Winnower cum Dryer for Processing of Agricultural Products, Central Arid Zone Research Institute Jodhpur, 342003, India.
- P. D. Phadtare, O. S. Karpe, and A. G. Mohod, "APPLICATION OF RENEWABLE ENERGY SOURCES: AGRICULTURE AND AGRO-BASED INDUSTRY", [Online]. Available: www.ycjournal.net
- Pandiselvam Ravi, Thirupathi Venkatachalam Mohan. and Striramasaarma Engineering Properties of Rice, Vol. 3(1). ([/handle/123456789/619](http://handle/123456789/619)).
- Petkevichms S. f., L. Shpokas and H. D. Kutzbach. 2008, Investigation of the maize ear threshing process. *Bio-system Engineering*, Vol. 99:532-539.
- Prasanna P. H. S. N., L. H. P. Gunaratne and W. D. R. S. Withana. 2011. Economic analysis of paddy threshing methods. *Sri Lankan Journal of Agricultural Economics*, Vol. 6(1): 52 – 66.
- Samreen, M. Madhava, and Rao A. Rama. 2017. Performance Evaluation of Solar Power Operated Paddy Winnower. *International Journal of Engineering Technology Science and Research*, Vol. 4(8) ISSN 2394 – 3386.
- Saxena J. P., B. S. Sirohi and A. K. Sharma. 1971. Power requirement of Ludhiana type thresher. *J. Agril. Engg.*, Vol. 8(2):35-43.
- Singh, B. P., P. C. Shah and A. K. Tikoo. 1980. Engineering properties of food material (Tech. Bull. CIAE /80/15), PHTS.
- Singh S. P. and L. P. Gite. 2007. Ergonomic Evaluation of a Hand Operated Paddy Winnower by Women Workers. *Journal of Agricultural Engineering*, Vol. 44(4): 67-71.
- Swain S. K., T. K. Biswal, D. K. Das and A. K. Goel. 2002. Performance evaluation of hold-on type power operated paddy thresher cum winnower. *Agricultural Engineering Today*, Vol. 26 (3): 17-24.
- Varnamkhasti, M. G., Mobli, H. Raee, S., M. A. Jafari, A. R. Keyhani, M. Heidari Soltanabadi, S. Rafiee, K. Kheiralipour. 2007. Some engineering properties of paddy (var. Sazandegi). *Journal Article*, Vol. 9(5):763-766.
- Muhammad U. S., L.G. Abubakar, M. Isiaka and R.M. Davies. 2013. Design and evaluation of a cleaning machine. *Applied Science Reports*, Vol. 1(3): 62-66.
- Zareiforoush H., M. H. Komarizadeh and M. R. Alizadeh. 2009. Effect of Moisture Content on Some Physical Properties of Paddy Grains. *Research Journal of Applied Sciences, Engineering and Technology*, Vol. 1(3): 132-139.