

Assessment of Transient and Spatial Noise Pollution Levels at Selected Junctions in Port Harcourt Metropolis, Rivers State.

ABSTRACT:

This study focused on ~~assessing the assessment of~~ transient and spatial noise ~~levels at selected Port Harcourt Metropolis junctions~~ level at selected junctions in Port Harcourt Metropolis. Transient, Spatial noise measurement and vehicle count were conducted at Eleme and Akpajo junctions. Comparative analyses of noise level and noise pollution level using line graph/t-test and determination of decline rate of noise pollution level using regression analysis were carried out. Comparative analyses of noise ~~level~~ level at the two study locations using traffic count were also done. The noise pollution level was compared with National Environmental Standards and Regulations Enforcement Agency (NESREA) and World Health Organization (WHO) noise standards and a safe zone determined at study locations. Maximum and minimum noise recorded were 88.99dB(A) and 50.05dB(A) at Eleme junction, 87.51dB(A) and 49.02dB(A) at Akpajo junction. Findings showed that the noise pollution level was relatively higher than noise level with distance away from the junctions; however, there was no significant difference between noise level and noise pollution level. Maximum noise pollution level average decline rate of -0.3691dB was observed at Eleme junction in the morning, ~~while hours while~~ the minimum noise pollution level average decline rate of -0.2656dB was observed at Akpajo junction ~~in in~~ the morning hours. External sources also contributed to noise level at the junctions. Those living or doing business within 100m and 120m of Akpajo and Eleme junctions, respectively are at risk of having ~~noise-induced noise induced~~ auditory, physiological and behavioral ~~problems~~ problem. There is need for continuous monitoring of noise level at study locations. Regular health assessment of people living within the study locations. Noise control regulations should be made and enforced by the Government.

Key words: Assessment, Transient, Spatial, Traffic count, Rivers State, Port Harcourt Metropolis, Eleme junction, Akpajo junction, Traffic noise, Noise pollution level, Safe zone and Decline rate.

Comment [MOU1]: too many keywords here, please reduce according to the research topic

1. INTRODUCTION

Exposure to high level of noise could lead to harmful effects such as hearing impairment, physiological impacts, communication interference, task interference, sleep interference and personal behavior impact. Hence, victims of high noise ~~level~~ level are likely to suffer from high blood pressure, ulcer, respiratory modification, neurological disorder, ~~increased increase~~ proneness to accident and ~~reduced reduction in~~ work efficiency. It is estimated that 3% of cases of ischaemic

heart disease in large cities are attributable to road traffic noise (Babisch, 2008). There are ever more studies that point to a significant association between urban noise and severe cardiovascular events, such as myocardial infarction and stroke (Selander et al., 2009). The risk factors which are directly related to cerebrovascular ~~accidents~~ ~~accident~~ are hypertension, arteriosclerosis and low heart-rate variability index (Tobías et al., 2015).

Traffic flow is a major source of noise pollution in Port Harcourt Metropolitan city because of ~~increased~~ ~~increase in~~ pollution from industrialization and concentration of ~~both~~ road networks and city dwellers. Noise has been recognized as a major problem for the quality of life in urban areas all over the world because of the increase in the size of the cities, number of cars and industrialization. It is not simply a local problem, but a global issue affecting everyone and calls for precautionary measures in an environmental planning situation. With the rapidity of urbanization and population growth, magnitude and harshness of noise has also continued to increase (Babisch, 2005).

Therefore, assessing transient and spatial noise from traffic source will help ~~determine if those exposed to~~ ~~determine if those expose~~ to traffic noise within the study locations are at risk of the negative impact of high noise ~~levels~~ ~~level~~. Again, it will create awareness on the level of noise road users and city dwellers are exposed to and its health implication. Furthermore, relevant information and data that will assist the Government to safely restructure the transport system and road network to reduce road traffic noise will be provided.

2. MATERIALS AND METHODS

2.1 Study Area

Eleme and Akpajo junctions (Sample locations for the study) are strategically located on the Federal Road connecting the southern and western part of the country known as the EAST - WEST ROAD. The East-West Road linked multinational companies such as the New and Old Port Harcourt Refinery Limited at Alesa-Eleme, Indorama Eleme Petrochemical and Fertilizer

Company Limited, Notore fertilizer Company Limited and Nigeria Port Authority both at Onne- Eleme. Logistic activities by these companies which include transportation of workers and passengers; conveying of petroleum, petrochemical and fertilizer raw materials and finished products; movement of import and export containers constitute concentrated traffic flow at study locations and thus, create noise induced harmful effect on road users and residents. The map of the study area is as shown in Figure 1.

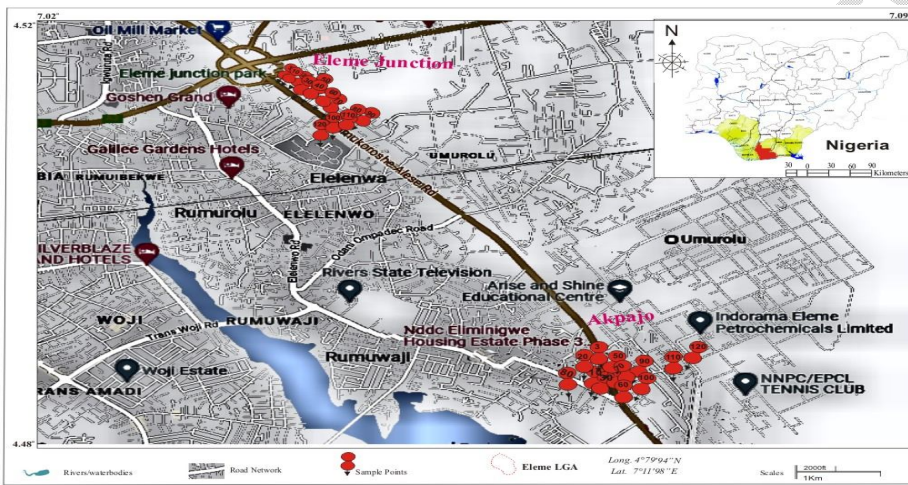


Figure1: Map of Port Harcourt Metropolis showing sampling locations.

Source: Adapted from NDDC, (2007) and Goggle map, (2022)

2.2 Data Collection and Analysis

Noise level study at selected junctions in Port Harcourt metropolis was done using qualitative and quantitative research design method. Noise readings were collected using a digital sound level metre. GPS software application was used to obtain coordinates at the sample points. Distance measurement was done using a measuring tape. Transient noise data was measured by reading the digital sound level metre at 10 seconds regular intervals to get 12 noise level readings at each sampling point, the sound level metre was set at a measuring range of 30 – 130dB. Noise readings were taken at a distance of 3 metres from the source and then 10metre thereafter apart up to 120 metres, given a total of 13 sampling points to obtain the spatial noise level.

Comment [MOU2]: what sound level meter was used in this study? brand or type?

Comment [MOU3]: metre or meter?

Comment [MOU4]: Is the sound level meter used calibrated? Please explain

Comment [MOU5]: ???

Traffic count was also carried out at study locations, various vehicle types such as trucks, tankers, tippers, buses, cars, tricycles and motorcycles were counted. Noise measurement was conducted from ~~7 am~~7am to ~~8 am~~8am and ~~4 pm~~4pm to ~~6 pm~~6pm on Monday and Wednesday at study locations. Traffic count carried out from ~~7 am~~7am to ~~10 am~~10am and ~~4 pm~~4pm to ~~6 pm~~6pm on Monday and Wednesday at study locations.


From the noise data obtained, the following were ~~conducted~~~~carried out~~: Comparative analyses of noise level and using Noise Pollution Level (NPL) graphical representation and t-test. Determination of decline rate of noise pollution level using regression analysis. Comparative analyses of noise level at the two locations using traffic count and Safe noise zone determination with reference to national and international noise level standards.

3.RESULTS AND DISCUSSION

3.1Results

3.1.1 Comparative Analyses of NL & NPL

The result of the trend of the noise level and noise pollution level for Eleme junction morning hours and Akpajo junction evening hours are presented in Figure 2. It was observed that the noise pollution level was relatively higher than the noise level for all the distances away from Eleme and Akpajo junctions.

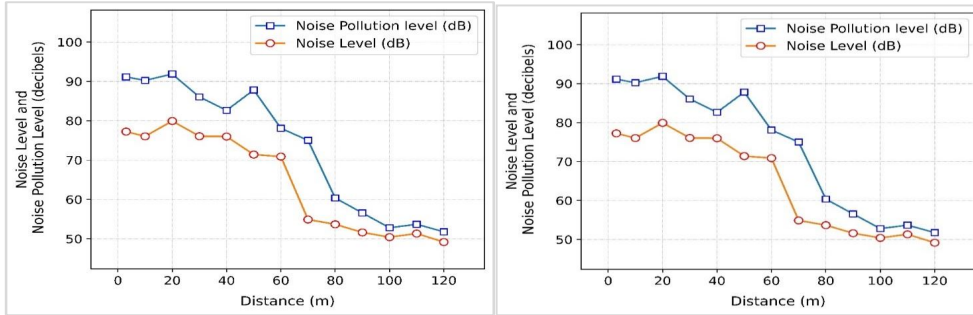

(a) Eleme Junction (Morning) (b) Akpajo Junction (Evening)

Figure 2: NPL & NL Distributions at Eleme and Akpajo Junctions

The result of t-test presented in Table 2 shows that there is no significant difference in the noise level and noise pollution level, p-value are greater than 0.05 for Akpajo morning and evening hours, Eleme morning and evening hours respectively. The result from t-test provide sufficient evidence in stating that the noise level and noise pollution level are similar. However, there is a slight difference which is not significant.

Table 1 t-test Analysis of NPL & NL for Akpajo and Eleme Junctions

Statistic	Akpajo Morning	Akpajo Evening	Eleme Morning	Eleme Evening
Difference	-6.294	-9.192	-7.351	-7.018
t (Observed value)	-1.279	-1.619	-1.376	-1.586
t (Critical value)	2.064	2.064	2.064	2.064
DF	24	24	24	24
p-value (Two-tailed)	0.213	0.118	0.181	0.126
alpha	0.05	0.05	0.05	0.05

Comment [MOU6]: in the manuscript it is mentioned in the article using the t-test, but the reviewer has not seen all the research data in the table, for example the data mean, median, min, max of the measured noise intensity

3.1.2 Determination of decline rate of NPL

Comment [MOU7]: please set the spacing well

The result of the average and Instantaneous rate of noise pollution level at Akpajo and Eleme is presented in Tables 2 and 3. The result of the average decline rate of noise pollution level showed that there was a decline in the noise pollution level with respect to distance away from the junction. The maximum average rate of decline was observed at Eleme in the morning hours (-0.3691dB/m) while the minimum was observed at Akpajo in the morning hours(-0.2656dB/m). Maximum instantaneous rates were observed at 100m, 90m, 120m and 120m at Akpajo morning and evening, Eleme morning and evening, respectively.

Table 2: Instantaneous Decline Rate of NPL at Akpajo and Eleme

Distance from Junction (metres)	Akpajo Morning	Akpajo Evening	Eleme Morning	Eleme Evening
	Functions			
	$y = 1E^{-4}X^3 - 0.0303X^2 + 1.7203X + 58.161$	$y = 8E^{-5}X^3 - 0.0206X^2 + 1.208X + 68.87$	$y = -8E^{-4}X^5 + 0.0151X^2 - 1.12X + 115.26$	$y = -2E^{-5}X^3 - 0.0001X^2 + 0.1318X + 80.824$
3	1.5412	1.08656	-1.03156	0.13066
10	1.1443	0.82	-0.842	0.1238
20	0.6283	0.48	-0.612	0.1038
30	0.1723	0.188	-0.43	0.0718
40	-0.2237	-0.056	-0.296	0.0278
50	-0.5597	-0.252	-0.21	-0.0282
60	-0.8357	-0.4	-0.172	-0.0962
70	-1.0517	-0.5	-0.182	-0.1762
80	-1.2077	-0.552	-0.24	-0.2682
90	-1.3037	-0.556	-0.346	-0.3722
100	-1.3397	-0.512	-0.5	-0.4882
110	-1.3157	-0.42	-0.702	-0.6162
120	-1.2317	-0.28	-0.952	-0.7562

Table 3: Average decline rate of NPL at Akpajo and Eleme

Junction	Daytime	Average Rate of Change (dB/m)
Akpajo	Morning	-0.2656
Akpajo	Evening	-0.3366

Eleme	Morning	-0.3691
Eleme	Evening	-0.2866

The traffic count and noise level readings for the study locations are presented in Figure 3 and 4.

The result showed a traffic count of 5179, 3343, 5234 and 3353 for Akpajo junction on Monday and Wednesday morning and evening hours. Traffic count of Eleme junction on Monday and Wednesday morning and evening hours were 3667, 2683, 3808 and 3024. The corresponding noise level readings were 71.858, 79.983, 80.417 and 74.492 for Akpajo junction and 88.992, 79.542, 87.408 and 81.975 for the Eleme junction. The results from Figure 3 and 4 **shows** that noise level was higher at Eleme Junction as compared with Akpajo junction; however, the traffic count is lower at Eleme junction than Akpajo junction.

3.1.3 Comparative analyses of NPLat Eleme and Akpajo

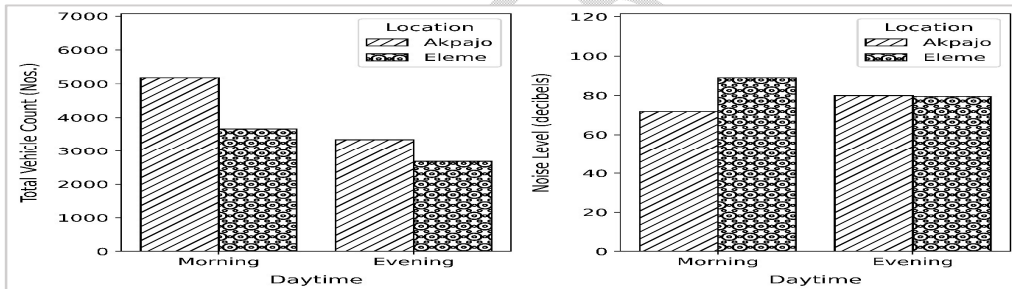


Figure 3: Traffic count and NL on a Typical day at Akpajo and Eleme junctions

3.1.4 Safe Noise zone determination

Table4: NPL and distance at Eleme & Akpajo Junctions

	Eleme Morning	Eleme Evening	Akpajo Morning	Akpajo Evening
Distance(m)	NPL(dB)	NPL(dB)	NPL(dB)	NPL(dB)
3	99.06856	88.01040167	85.40720667	91.13680167
10	95.43570667	85.425615	84.70908167	90.24620167

20	93.56700167	82.59926	94.97536	91.88352667
30	84.68232667	83.77136	80.33896	86.061015
40	86.01810667	82.00960667	84.87264	82.63792667
50	82.984375	86.20202667	81.82592667	87.82568167
60	81.38288167	79.51086	76.29072667	78.08680667
70	85.93730667	83.41948167	60.47816667	75.00744
80	79.28352667	75.75690667	60.18042667	60.36010667
90	70.27206	61.04260167	58.78962667	56.55290667
100	59.28934	59.384375	55.61824	52.78800667
110	57.70104167	55.80214	58.09204167	53.669735
120	55.88326	54.47700167	54.33712667	51.75180167

Table 4 shows Noise Pollution level obtained at Eleme and Akpajo junctions. Comparison of noise pollution level with international noise standard (World Health Organization) and National noise standard (National Environmental Standards and Regulations Enforcement Response) were presented in Table 5. Safe zone distances are also determined at study locations at Eleme and Akpajo junctions.

Table 5: Noise Level versus International and National Standards

Noise Regulator y Body	Facility	Maximum Permissible Noise Limit	Duration	Safe Zones			
				Eleme Mornin g	Eleme Evenin g	Akpajo mornin g	Akpajo Evenin g
WHO	Outdoor Living area	55dB	16 Hours	Nil	120m	120m	100m
WHO	Industrial, Commercial, shopping and traffic area	70dB	16 Hours	100m	90m	70m	80m

NESREA	Mixed residential (with some commercial and entertainment)	55dB	16 Hours	Nil	120m	120m	100m
NESREA	Residential + Industrial or Small-scale production + Commerce	60dB	16 Hours	100m	100m	90m	90m
NESREA	Industrial (Outside perimeter fence)	70dB	16 Hours (6am -10pm)	100m	90m	70m	80m

3.2 DISCUSSION

Section 3.2 considers comparative analyses of noise level and noise pollution level, decline rate determination, comparisoneomparism of study locations noise level, andas well assafe noise zone determination.

3.2.1 Comparative Analyses of NL & NPL

According to the results presented in Figure 1 and Figure 2. It was observed that noise pollution level was relatively higher than Noise level for various distances away from the junctions. This is in agreement with D. W. Robinson proposed definition of Noise pollution level as equal to $L_{eq} + K(\sigma)$, where L_{eq} is the average sound level, k is a constant which is equal to 2.56 and σ is the standard deviation (Robinson, 1971). However, there is no significant difference between Noise pollution level and noise level as presented in Table 3.

3.2.2 Determination of decline rate of NPL

From Table 3, the average rate decline of -0.3691dB/m was observed at Eleme junction in the morning hours. This was because external noise sources apart from traffic such as Gas station generator, car washing machine were not in operation by 7am during noise measurement. Minimum average rate of decline of -0.2656dB/m at Akpajo junction in the morning hours was influenced by a megaphone(Public Address System) mounted at 30m away from the junction. Generally, there was a decline in noise ~~level~~ at distances away from the junction which is similar to a research work on Effect of distance from road intersection on developed traffic noise levels, the equivalent noise levels at distances 50 and 100 m from the intersection were found to be 1.5 to 2.0 dB less than those at 0 m (Abo-Qudais & Alhiary, 2004).

3.2.3 Comparative analyses of NPL at Eleme and Akpajo

The results from Figures 3 and 4 showed that noise level was higher at Eleme Junction as compared with Akpajo junction; however, the traffic count is lower at Eleme junction than Akpajo junction. Eleme junction has a high noise level because of the contribution of external sources of noise which include car washing machine sited at 20m, auto mechanic workshop sited at 80m, and mini gas station generator sited at 100m away from the junction respectively. Low noise level at Akpajo was influenced by a noise reduction wall barrier located at 70m away from the junction. External sources contributed to the noise level at the junctions in addition to traffic noise. External noise sources contribution to noise level is in agreement with Ogunsote's classification of noise sources, stating that external sources of noise is not limited to traffic noise (Ganiyu & Ogunsote, 2010). The effect of the noise reduction barrier is in agreement with noise reduction techniques by (Nwaogazie, 1995).

3.2.4 Safe Noise zone determination

Safe noise zones as shown in Table 4 showed that safe noise zone for residential purpose at Eleme junction was 120m away from the junction while that of Akpajo junction was 100m. Safe zone for

industrial purpose ranges from 90m to 100m at Eleme junction and 70m to 80m at Akpajo junction. The determination of noise zones is similar to a research work using a noise map of oil mill market showing different noise zones such as <100dB, 100-101.9dB, 102-103.9dB, 104-105.9dB, 106-108.0, >108.0 (Ugbebor et al., 2017).

4. CONCLUSION

The range of noise level measured at Eleme and Akpajo junctions are (79.542-88.992) and (71.858-80.417); and the corresponding vehicle count are in the range of (2683-3803) and (3343-5179), respectively. Comparative analyses on the difference between noise pollution level NPL & NL, indicates a relative difference that is not significant. The average decline rate of NPL is 0.3691dB/m at Eleme junction and -0.2656dB/m at Akpajo junction respectively. The safe zone was determined by the application of WHO and NESREA noise limit standard, that is a distance greater than 120m away from Eleme and Akpajo junctions.

REFERENCES

- Abdulkarim, Z., Emeka, N., & Clementine, I. (2021). Influence of environmental factors and its associated health risks of noise pollution in Owerri Metropolis, Imo State, Nigeria. *GSC Advanced Research and Reviews*, 8(1), 1–10.
- Abo-Oudais, S., & Alhiary, A. (2004). Effect of distance from road intersection on developed traffic noise levels. *Canadian Journal of Civil Engineering*, 31(4), 533–538.
- Ackah, J. Y., Amankwa-Danquah, P., & Atianashie, M. A. (2021). Religious noise pollution in Ghana: Source, effect and control. A Case Study of the Bono Region in Ghana. *International Journal of Multidisciplinary Studies and Innovative Research*, 5, 377–387.
- Aditya, K., & Chowdary, V. (2020). Influence of honking on the road traffic noise generated at urban rotaries for heterogeneous traffic. *Rigas Tehniskas Universitates Zinatniskie Raksti*, 24(1), 23–42.
- Babisch, W. (2008). Road traffic noise and cardiovascular risk. *Noise and Health*, 10(38), 27.
- Birgitta, B., & Lindvall, H. (1995). A draft document of community noise. *WHO Environmental Health Criteria*, 12, 1–10.
- ccohs corporation. (2022). *Measurement of workplace noise*. Canadian Centre for Occupational Health and Safety.
- Design-Syntech. (2022). *Industrial noise control*. <https://www.systech-design.com>
- Digha, O., & Tabe, A. (2013). Assessment of Noise Pollution Level In Trans-Amadi Industrial Lay-Out In Port Harcourt Rivers

Comment [MOU8]: please use recent references, at least the last 10 years is a good choice

- State, Nigeria. *Journal of Environmental Sciences and Resources Management*, 5(1), 65–73.
- Discovery, B. (2021). *Measuring transient noise*. 1–3. <https://www.beyonddiscovery.org/environmental>
- Dudarewicz, A., Zaborowski, K., Rutkowska-Kaczmarek, P., Zamojska-Daniszewska, M., Śliwińska-Kowalska, M., Zamysłowska-Szmytko, E., & Pawlaczyk-Łuszczynska, M. (2017). The hearing threshold of employees exposed to noise generated by the low-frequency ultrasonic welding devices. *Archives of Acoustics*, 42.
- Fred-Nwagwu, W. F., Nwaerema, P., & Dangana, K. (2022). *Spatio-Temporal Analysis of Vehicular Noise Pollution Between Days of The Week and Weekend in Port Harcourt Metropolis of Rivers State, Nigeria*. 13(3), 301–309. <http://www.jmaterenvironsci.com>
- Fuks, K. B., Weinmayr, G., Basagaña, X., Gruziewa, O., Hampel, R., Oftedal, B., Sørensen, M., Wolf, K., Aamodt, G., & Aasvang, G. M. (2017). Long-term exposure to ambient air pollution and traffic noise and incident hypertension in seven cohorts of the European study of cohorts for air pollution effects (ESCAPE). *European Heart Journal*, 38(13), 983–990.
- Ganiyu, S. A., & Ogunsote, O. O. (2010). A Study of the Sources and Control of Environmental Noise Pollution on a Typical Street in Akure, Nigeria. *A Paper Presented in an International Conference Organised by School of Environmental Technology, Federal University of Technology, Akure*, 1–3.
- Haines, M. M., Stansfeld, S. A., Job, R. F. S., Berglund, B., & Head, J. (2001). Chronic aircraft noise exposure, stress responses, mental health and cognitive performance in school children. *Psychological Medicine*, 31(2), 265–277.
- Ibekwe, T., Folorunso, D., Ebuta, A., Amodu, J., Nwegbu, M., Mairami, Z., Liman, I., Okebaram, C., Chimdi, C., & Durogbola, B. (2016). Evaluation of the environmental noise levels in Abuja municipality using mobile phones. *Annals of Ibadan Postgraduate Medicine*, 14(2), 58–64.
- Ijaiya, H. (2014). The legal regime of noise pollution in Nigeria. *Beijing L. Rev.*, 5, 1.
- Iwuoha, C. P., & Awiri, E. (2022). *Evaluation of Noise Pollution on Health in Low and High Density Residential Area of Port Harcourt Metropolis*. 10(2), 91–98.
- Kpang, M. B. T., & Dollah, O. C. (2021). Monitoring noise level in cities: A step towards urban environmental quality management in Nigeria. *World Journal of Advanced Research and Reviews*, 10(3), 348–357.
- Kupolati, W. K., Coker, A. O., & Ogunbor, J. E. (2010). Highway traffic noise level in developing nations: A case study of university of Ibadan, Ibadan, Nigeria. *OIDA International Journal of Sustainable Development*, 2(4), 87–94.
- Lam, B., Gan, W.-S., Shi, D., Nishimura, M., & Elliott, S. (2021). Ten questions concerning active noise control in the built environment. *Building and Environment*, 200, 107928.
- Lamure, C. (1986). Road traffic noise: generation, propagation and control. *Noise Pollution Effects and Control*. New York: Wiley, 297–342.
- Lan, Y., Roberts, H., Kwan, M.-P., & Helbich, M. (2020). Transportation noise exposure and anxiety: A systematic review and meta-analysis. *Environmental Research*, 191, 110118.
- Langdon, F. J., & Scholes, W. E. (1968). *The Traffic Noise Index: A Method of Controlling Noise Nuisance*. 147, 2–3.
- Maghrour- Zefreh, M., & Torok, A. (2018). Theoretical comparison of the effects of different traffic conditions on urban road traffic noise. *Journal of Advanced Transportation*, 2018.
- Muralikrishna, I. V., Manickam, V., Muralikrishna, I. V., & Manickam, V. (2017). Noise pollution and its control. *Environmental Management*, 399–429.
- NIOSH. (2014). *Occupational noise exposure*. 98-126. <https://www.cdcgov/niosh/docs/98-126>
- Noise Pollution Civil Engineering gate. (2020). Noise Pollution. *Civil Engineering for All*. <https://civilengforall.com/noise->

pollution-civil

- Nwaogazie, I.L and I.O. Owate (1995): “Noise Pollution Modelling of Port Harcourt Refinery, Part-1: Estimates of Rates of Dispersion”, Nigerian Society of Engineers Technical Transactions, Vol. 30, No. 4, pp. 62 – 72 (1995)
- Nwaogazie, I.L and I.O. Owate (2000): “Noise Pollution Modelling of Port Harcourt Refinery, Part 11: Transient Effects”, Nigerian Society of Engineers Technical Transactions, Vol. 35, No. 1, pp 92 – 101.
- Oladokun, A. T., & Aderibigbe, N. B. (2021). Spatio-Temporal Analysis of Noise in Selected Areas of Oyo Township. *Kashere Journal of Education*, 2(2), 71–79.
- Oluwasegun, O. O., Onuu, M. U., & Oyeneke, E. O. (2015). Study of road traffic noise pollution and impacts on residents of ikeja local government area of Lagos State, Nigeria. *International Journal of Scientific & Engineering Research*, 6(5), 1108–1117.
- Omubo-Pepple, V. B., Briggs-Kamara, M. A., & Tamunobereton-ari, I. (2010). Noise pollution in Port Harcourt Metropolis: Sources, effects, and control. *Pacific Journal of Science and Technology*, 11(2), 592–600. <http://www.akamaiuniversity.us/PJST.htm>
- Orikpete, O. F., Leton, T. G., & Momoh, O. L. Y. (2022). The Assessment of Perception and Effect of Helicopter Noise in Mgbuoshimini Community, Rivers State, Nigeria. *Research Developments in Science and Technology Vol. 2*, 2, 22–52. <https://doi.org/10.9734/bpi/rdst/v2/2417>
- OSHA. (1997). *OSHA Guidelines to protect employees from noise related hazards*. www.iaent.com/about/our-practice/blog/osha-guidelines/
- Piccolo, A., Plutino, D., & Cannistraro, G. (2005). Evaluation and analysis of the environmental noise of Messina, Italy. *Applied Acoustics*, 66(4), 447–465.
- Sandberg, U., & Ejsmont, J. (2002). *Tyre/road noise. Reference book*.
- Selander, J., Nilsson, M. E., Bluhm, G., Rosenlund, M., Lindqvist, M., Nise, G., & Pershagen, G. (2009). Long-term exposure to road traffic noise and myocardial infarction. *Epidemiology*, 20(2), 272–279.
- Singh, N., & Davar, S. C. (2004). Noise pollution-sources, effects and control. *Journal of Human Ecology*, 16(3), 181–187.
- Slabbekoorn, H. (2019). Noise pollution. *Current Biology*, 29(19), R957–R960.
- T, Subramani; M, Kavitha; K P, S. (2012). Modelling of Traffic Noise Pollution. *IJERA*, 2(3), 3175–3182.
- Tobias, A., Recio, A., Díaz, J., & Linares, C. (2015). Health impact assessment of traffic noise in Madrid (Spain). *Environmental Research*, 137, 136–140.
- Tontechnik-Rechner-sengpielaudio. (n.d.). *Sound pressure distance*. www.sengpielaudio.com/calculator-SoundAndDistance.htm
- Tunde, A. M., & Abdulquadri, S. (2021). Environmental Noise Pollution and its Impacts on the Hearing Ability of Men and Women in Ilorin, Kwara State, Nigeria. *Tanzania Journal of Science*, 47(5), 1517–1529.
- Ugbebor, J. N., Yorkor, B., & Nwogu, J. N. (2017). Evaluation of noise levels in oil mill market and its environs, port harcourt, Nigeria. *Current Journal of Applied Science and Technology*, 21(1), 1–11.
- Ugwoha, E., Amah, V. E., & Nchelem, N. E. (2016). *Assessment of Noise Level in Trans-Amadi Market in Rivers State*. 1(1), 1–5.
- Van Kempen, E., Casas, M., Pershagen, G., & Foraster, M. (2018). WHO environmental noise guidelines for the European

region: a systematic review on environmental noise and cardiovascular and metabolic effects: a summary.
International Journal of Environmental Research and Public Health, 15(2), 379.

WHO. (1999). *Guidelines for community noise* (D. H. S. Birgitta Berglund, Thomas Lindvall (ed.)).
<https://apps.who.int/iris/handle/10665/66217>

UNDER PEER REVIEW