

# Ethylene Management in Fresh Produce Transport

## Abstract


Ethylene is a plant hormone that plays a significant role in the ripening and senescence of fruits and vegetables. While ethylene is essential for many agricultural processes, it can also be detrimental to fresh produce during transport and storage. High levels of ethylene exposure can lead to premature ripening, reduced shelf life, and increased spoilage, resulting in significant economic losses for growers, shippers, and retailers. This paper aims to explore the management of ethylene in fresh produce. The objectives of this study are to investigate the ethylene content in various farm produce, identify factors contributing to ethylene production, assess the impact of ethylene exposure on post-harvest quality, explore ethylene management methods and techniques, and make recommendations for ethylene management. The research hypothesis is that ethylene-sensitive produce will exhibit a decreased shelf life and accelerated ripening when exposed to higher ethylene concentrations. Conversely, implementing effective ethylene management strategies, such as reducing ethylene exposure or utilizing ethylene inhibitors, will result in a prolonged lifespan and improved post-harvest quality of the produce. The findings of this study could improve fresh produce's quality and marketability, as well as reduce waste and advance sustainable agriculture practices.

**Keywords:** Ethylene, hormone, management, storage, transportation, agricultural produce, Nigeria

## 1.0 Introduction

### 1.1 Ethylene Management in Fresh Produce Transport

Ethylene is a hormone that naturally exists in plants and plays a significant role in the maturation and ripening of plants (fruits and vegetables) (Ebrahimi et al., 2022a, Adegroye et al., 2023). While ethylene is essential for many agricultural processes, it can also be detrimental to fresh produce during transport and storage (Ferrante, 2022, Oladoyin et al., 2023). While it can have relatively positive effects such as inducing ripening in climacteric fruits and enhancing produce aroma, its action may also lead to relatively negative consequences. Consequently, extensive research has focused on reducing ethylene production and safeguarding plants from its adverse effects. In the case of climacteric fruits, ethylene serves as a major factor in prolong the storage and lifespan of fruits and vegetables. High levels of ethylene in mature leaves of leafy greens can cause certain physical problems, negatively impacting their appearance and nutritional quality. Excessive exposure to ethylene can result in premature ripening, shorter shelf life, and higher likelihood of spoilage, leading to significant financial setbacks for farmers, distributors, and sellers (Chang, 2016; Oparinde et al., 2023; Badamosi et al., 2023).

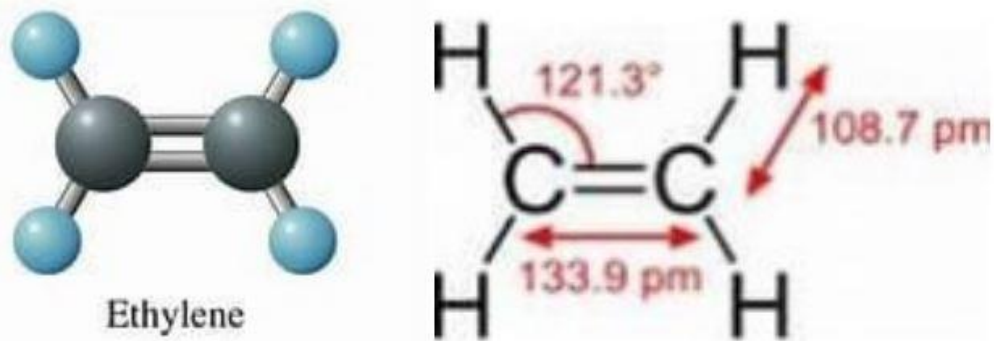

**Figure 1: The ethylene Structure**

To prevent ethylene damage to fresh produce, it is important to store it in a cool, dark place with good ventilation. To prevent ethylene-related issues, it is crucial to store produce separately from fruits and vegetables that release ethylene, like apples, bananas, and tomatoes.

### 1.2 Ethylene's Long Historical presence.

Ethylene is a simple gas that has been used by humans for centuries to induce ripening in farm produces (Qi et al., 2021). The ancient Egyptians knew about the ripening effects of ethylene. Thus, they would cut figs to make them ripen faster (Botton, Tonutti and Rupert, 2018). The Chinese in the ancient times would also burn incense in an enclosed place to hasten the ripening fruits (Moirangthem and Tucker, 2018; Akinuli et al., 2023; Yahaya et al., 2023). In the 19th century, scientists began to study the effects of ethylene on plants in more detail (Han et al., 2018). In the early 20th century, scientists finally identified ethylene as a plant hormone (Chen et al., 2018). The discovery of Ethylene led to a number its applications, Ethylene gas is very important in ripen fruits and vegetables in storage.

### 1.3 Applications of Ethylene

Ethylene is used in a variety of agricultural applications (Mahapatra, Sahu and Banik, 2022), the applications include:

#### I. Ripening fruits and vegetables

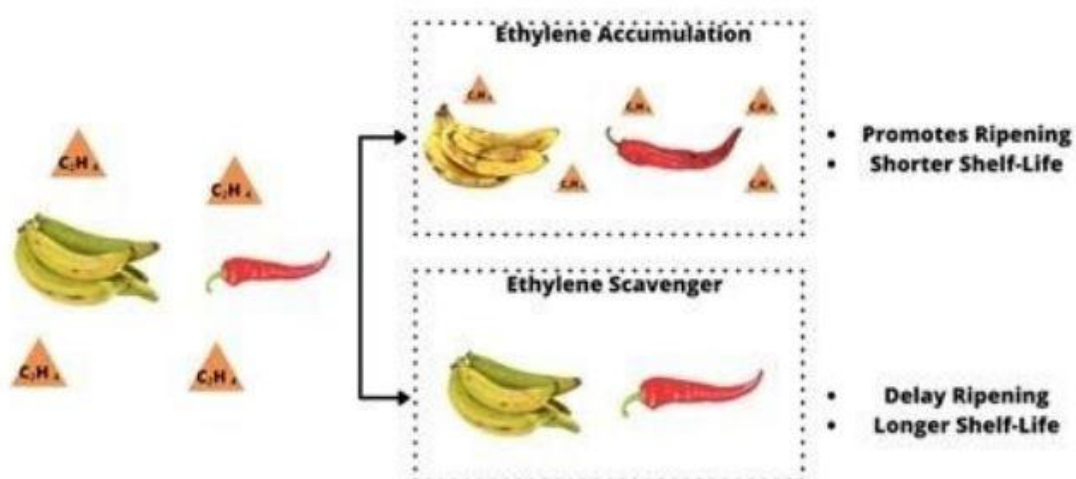


Figure 2: Ethylene promoting ripening and reducing shelf life. Figure adapted from Mariah et al., (2022).

#### II. Delaying senescence (aging) of flowers and vegetables (Dar, Nisar and Tahir, 2021).

- III. Promoting flowering in some plants (Dar, Nisar and Tahir, 2021).
- IV. Inducing abscission (leaf fall) (Botton and Ruperti, 2019).
- V. Thinning fruit crops (Nautiyal et al., 2022).

From its ancient use by the Egyptians to its modern applications in agriculture and industry, ethylene continues to be a valuable tool for humans. However as valuable as it seems to be it could be challenging if not properly managed especially in farm produce. If ethylene is not properly managed, it could result to several challenges for the farmer of which reduced lifespan of produce is a key problem.

#### **1.4 Aim and Objectives of the Study**

This project aims at exploring the management of ethylene in fresh produce. The objective of this study is to investigate the ethylene content in various farm produce and propose effective strategies to manage ethylene levels. The primary goal is to extend the shelf life of fruits and vegetables, minimize wastage, and optimize quality throughout the supply chain. The specific objectives are to:

- I. Investigate ethylene emissions in different types of produce.
- II. Identify factors contributing to ethylene production.
- III. Assess the impact of ethylene exposure on post-harvest quality.
- IV. Explore ethylene management methods and techniques.
- V. Make recommendations for ethylene management.

#### **1.5 Hypothesis**

Based on the literature, it is hypothesized that ethylene-sensitive produce will exhibit a decreased shelf life and accelerated ripening when exposed to higher ethylene concentrations. Conversely, implementing effective ethylene management strategies, such as reducing ethylene exposure or utilizing ethylene inhibitors, will result in a prolonged lifespan and improved post-harvest quality of the produce. By conducting this research and providing recommendations for ethylene management, this project aims to contribute to the development of practical guidelines for the industry, farmers, and post-harvest professionals. The outcomes of this study have the potential to enhance the quality and marketability of fresh produce, reduce waste, and promote sustainable practices within the agricultural sector.

### **2.0 Methodology**

#### **2.1 Accessing the content of ethylene in different fruits and Vegetables.**

In this study, our focus is to check ensure proper management of ethylene while transporting the produce. Therefore, for this aim to be achieved, it is important for us to know the quantity of ethylene in different plants. Having this knowledge will help us to make informed decision when transporting this produce. For different plants, there are different ethylene quantity in them, and having understood that Ethylene has a different content composition in different plants, it is important to know the quantity contained in them to make some informed decision in managing them.

Also, ethylene production in fruits and vegetables can also vary depending on several factors, such as their sensitivity, the temperature of the place where they are kept, light intensity, and storage conditions. Therefore, it is very important to always check the ethylene production levels of specific fruits and vegetables before storing them together. Also, the sensitivity of different fruits and plants to ethylene gas varies widely (Wei et al., 2021; Ogunyemi et al., 2022). Some fruits and vegetables can be very sensitive to ethylene and will start to ripen quickly if they are exposed to even small amounts of the gas or in conditions that enhances their ethylene production, while some other fruits and vegetables are less sensitive to ethylene and can tolerate higher levels of the gas without being affected. In other to reduce the production and damages of ethylene on produce, it is important to ensure the following conditions:

- I. Store ethylene-producing fruits and vegetables separately from ethylene-sensitive fruits and vegetables.
  - II. Store fruits and vegetables in a cool, dark place.
  - III. Avoid storing fruits and vegetables in plastic bags, as this can trap ethylene gas.
  - IV. Check fruits and vegetables regularly for signs of spoilage.
- This can help to extend the shelf life of the fruits and vegetables even while they are being transported and also prevent them from being damaged by ethylene gas.

## **2.2 Management of Ethylene**

Ethylene can be managed or removed from plants in different of ways. For effective Management of Ethylene, we can either ensure manage ethylene or take measures to remove them. The method that will be used will be determined by the current condition. Therefore, to mitigate the effects of ethylene on fresh produce and prolong the shelf life of fresh produce during transport, several methods can be employed which is categorized into two major methods. This includes.

I.Management of the Ethylene

II.Removal of the Ethylene.


### **2.2.1 Managing Ethylene while transporting farm produce**

Some methods that could be used in managing ethylene while transporting farm produce includes:

- I. Storing ethylene-producing fruits and vegetables separately from ethylene-sensitive fruits and vegetables.
- II. Using 1-Methylcyclopropene (1-MCP), a plant regulator used to inhibit ethylene production in cut flowers, potted flowers, bedding, nursery and foliage plants, and in stored fruits and vegetables. It is an ethylene inhibitor that protects the plant from both internal and external sources of ethylene such that when plants are in the presence of ethylene, they do not respond to it. Apple, apricot, avocado, banana, broccoli, kiwifruit, pear, mango, melon, peach, nectarine, persimmon, plum, and tomato are among the crops for which 1-MCP is approved for use.
- III. Storing fruits and vegetables in a cool, dark place. Maintaining optimal temperature conditions during transportation is crucial for ethylene management. Lowering temperatures can slow down ethylene production and reduce its effects on produce ( Majid et al., 2018; Oluwalade et al., 2023a,b).

Sr. No.	Commodity Name	Storage life (days) (10°C and 93% RH)	Shelf-Life (days) at Room temperature
1.	Capsicum cv. "Bombay Green"	11**	3
2.	Watermelon	11**	5
3.	Beetroot, Red type	11**	4
4.	Sweet Orange cv. "Mosambi"	11**	4
5.	Okra	10*	3
6.	Papaya cv. "Taiwan 786"	9	2.5
7.	Tomato, Pink stage 4	4	2.5
8.	Ivy Gourd	11**	2.5
9.	Cabbage	11**	2.5
10.	Bitter Gourd, Green Type	11*	2.5
11.	Drumstick	9*	2.5
12.	Custard apple	8	2.5
13.	Green Bean	9	2.5
14.	Mandarin cv. "Kinnow"	11**	5
15.	Acid Lime	11**	3.5
16.	Pineapple cv. "Queen"	11**	3
17.	Muskmelon	11*	3
18.	Cucumber, White colour	10*	2.5
19.	Chilli (Hot)	11**	3.5
20.	Indian Bean	9	2.5
21.	Broccoli	2.5	1
22.	Ridge Gourd	3	2
23.	Radish	11**	2.5
24.	Lettuce	2.5	1.5

Figure 3: Produce conditions: \* indicates good condition of produce and \*\* indicates very good condition of produce. Adapted from Jadhav, (2018).

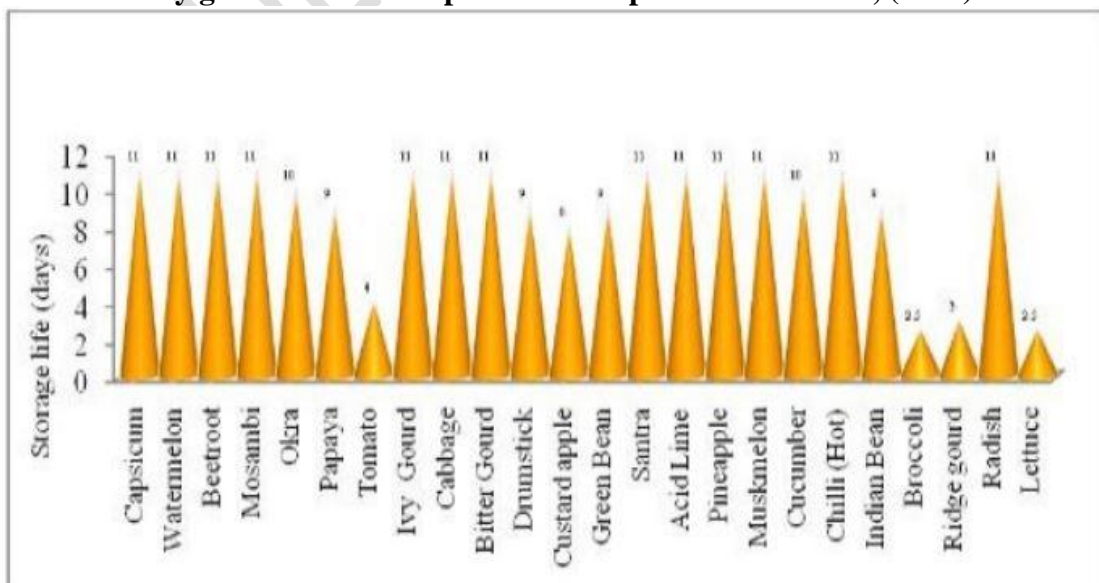

**Figure 4: Mixed fruit and vegetables storage life (days) at 10o C and 93% RH inside cold unit Eco frost. Adapted from Jadhav, (2018).**



**Figure 5: Mixed fruits and vegetables kept at cold storage (10°C and 93%). Adapted from Jadhav, (2018).**

IV. Cold storage facilities, refrigerated trucks, and insulated packaging are examples of temperature control measures (Qi et al., 2021). Dark place will help to slow down the production of ethylene and extend their shelf life.


V. Avoid storing fruits and vegetables in plastic bags while transporting them, as this can trap ethylene gas and hasten their ripening (Parven et al., 2020).

VI. Employing the use of modified Atmosphere. Modified Atmosphere refers to altering the air's chemical composition around the produce contained in packaging. By using gas barriers and adjusting oxygen and carbon dioxide levels, it helps control

ethylene production and slows down the ripening process (Falagán and Terry, 2018; de Siqueira Oliveira et al., 2019; McMillin, 2020).

### 2.2.2 Removal of Ethylene


Ethylene has both positive and negative effects on post-harvest fruit quality under different storage conditions, although it cannot be completely removed. Some compounds or process can be used to reduce their presence and increase the life span of the produces. The use of ethylene inhibitors like 1-methylcyclopropene (1-MCP) has emerged as a new technology to slow and delay fruit ripening in both climacteric and non-climacteric fruits when stored at low temperatures alone or in combination with modified atmospheres (MAs) and controlled atmospheres (CAs). On fruit physiology and biochemistry, however, the effects of temperature, MA/CA, and 1-MCP are complex and can alter the metabolism of carbohydrates, organic acids, amino acids, and lipids. Furthermore, ethylene-induced changes can also contribute to chilling injuries and carbon dioxide injuries during cold storage and MA/CA conditions. The successful application of these storage technologies requires a comprehensive understanding of the interactions between ethylene and fruit metabolism to maintain fruit quality and prevent physiological disorders (Brizzolara et al., 2020). However, 1-MCP as one of the removal methods of ethylene will not be considered in this review.

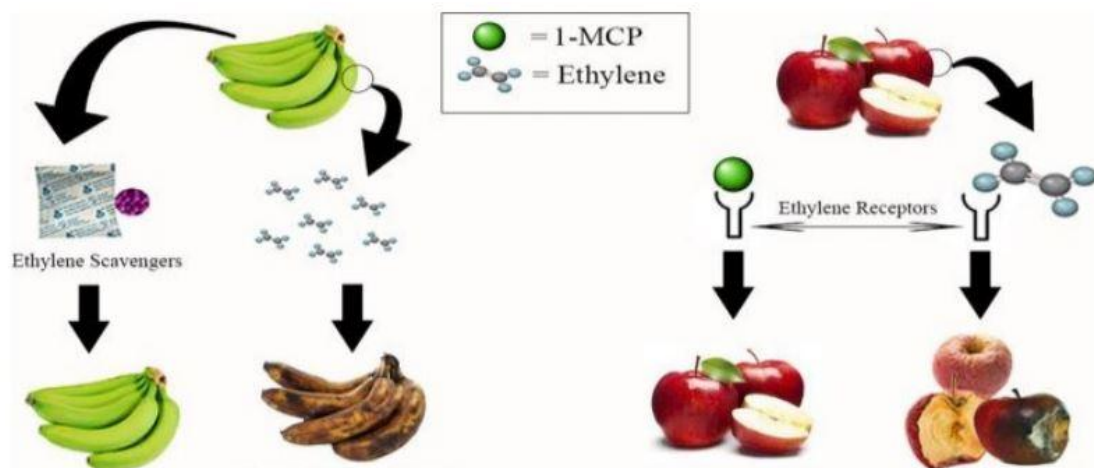

**Figure 6: Graphical representation of ethylene removal in some fruits. Adapted from Ebrahimi et al., (2022).**

A variety of methods can be used to eliminate ethylene or reduce its impact on plants. Some of these methods are:

- i. Using Ethylene Scrubbers such as potassium permanganate or activated charcoal. Ethylene scrubbers which can also be classified under ethylene scavengers (Gaikwad, Singh and Negi, 2020), are devices that actively remove ethylene from the air through chemical reactions or adsorption (Álvarez-Hernández, Martínez-Hernández, Avalos-Belmontes, Rodríguez-Hernández, et al., 2019; Brecht, 2019). Scrubbers typically use materials such as potassium permanganate (Álvarez-Hernández et al., 2018; Kumar et al., 2023), activated carbon, or zeolite (Aprilliani, Warsiki and Iskandar, 2018; de Bruijn et al., 2020) to absorb or oxidize ethylene molecules.

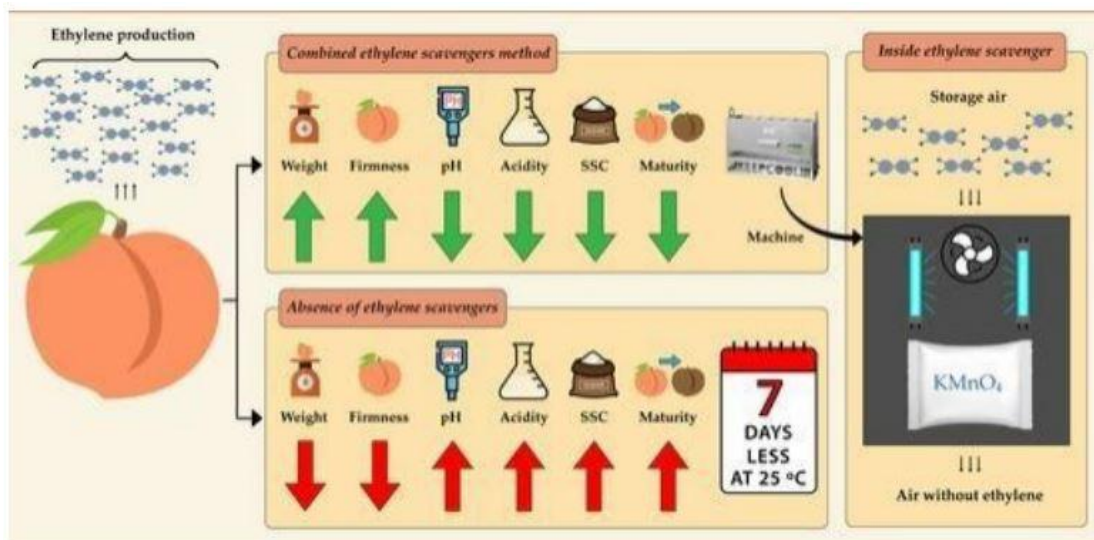

**Figure 7: Effect of KMnO<sub>2</sub> on produce, at room temperature. Adapted from Alonso-Salinas, Acosta-Motos, Núñez-Delicado, et al., (2022).**

### Advantages

- I. Efficiency: Ethylene scrubbers are very efficient at removing ethylene gas from the air. They can remove up to 99% of the ethylene gas in a given area (Álvarez-Hernández et al., 2018).
- II. Effectiveness: Ethylene scrubbers are effective at preventing fruits and vegetables from ripening too quickly. This can help to extend their shelf life by several days or even weeks (Álvarez-Hernández et al., 2018).

### Limitations

- I. Cost-effectiveness: Ethylene scrubbers are relatively cost-effective to operate. They require little maintenance and do not use a lot of energy (Martínez-López et al., 2022).
- II. Recycling: The spent cartridges from ethylene scrubbers can be difficult to recycle. This is because they often contain harmful chemicals.

### ii. Using ethylene-absorbing compounds

Ethylene absorption filters are passive devices placed within transport containers or storage units. These filters contain absorbent materials that capture and trap ethylene such as potassium permanganate salt loaded on membranes composed of alumina nanofibers (Tirgar, Han and Steckl, 2018), preventing its accumulation and reducing its concentration (Gaikwad, Singh and Negi, 2020; Ebrahimi et al., 2022a).

### 2.2.3 Ventilations

Good airflow and ventilation play a vital role in ethylene management. Proper ventilation helps remove ethylene and other respiratory gases released by fresh produce (Wills, 2021). It can promote heat dissipation and reduces moisture buildup, which can lead to accelerated ripening (Mok et al., 2020).



Figure 8: Ventilation. Adapted from Alonso-Salinas, Acosta-Motos, Núñez-Delicado, et al., (2022).

The best method for managing or removing ethylene from plants will depend on the specific situation. In some cases, it may be necessary to use a combination of methods. In this study, we will explore current research on the use of non-potassium permanganate and we will also focus on the use of Ultra-Violet light and Ozone (O<sub>3</sub>). We will evaluate the strengths and weaknesses of each method in relation to different types of fresh produce. Finally, we will synthesize our findings and identify gaps in the literature to provide recommendations for future research in this critical area.

### **2.3 Managing, Controlling, and Measuring Ethylene: Materials and Compounds**

Extending the shelf life of fresh produce (fruits and vegetables) as seen the development of various methods and applicable materials in the removal and/or management of ethylene which is a major problem in the storage of fresh produce. Some of the materials designed through extensive research on ethylene control includes:

#### **Ethylene-absorbing sachets**

These are sachets made with permeable/membranous materials that allows easy gaseous exchange and filled with specially formulated minerals which could be zeolite, activated clay, potassium permanganate or their combinations etc., that has high affinity for ethylene gas. These absorbent minerals are usually placed with the packaging of fresh produce for maximum efficacy. These sachets are commonly used in several industries like agriculture, horticulture, and supply chain.



Figure 9: Ethylene absorption sachet. (Source: Keep-It-Fresh.com).

### **Ethylene absorption balls**

Like the sachets, ethylene absorption balls are made with materials with high affinity for ethylene gas and neutralize them. Some of the materials used in making these balls include potassium permanganate, zeolite etc. Likewise, they are come in specialised containers and are placed within the packaging of fresh produce for maximum efficacy. They are used in agricultural and horticultural industries, supply chains as well as in individual homes. **Figure 10: Ethylene absorption balls. (Source: Keep-It-Fresh.com).**

### **Ethylene absorbing rods**

Commonly known as ethylene absorbers or ethylene scrubbers contain materials that traps and neutralises ethylene gas. These rods have non-woven cloth ethylene absorbers packed inside of them, acting as a membrane with holes for air to pass through. The rods are frequently used in a range of storage environments, including industrial warehouses, supermarkets, reefer containers, cold storage, and even home refrigerators. principally employed to absorb the ethylene gas inside the container.



Figure 11: Ethylene absorbing rods (KIF Curtain) (Source: Keep-It-Fresh.com).

### **Ethysorb tubes**

This is an ethylene control equipment which are metre long tubs filled with alumina beads infused with potassium permanganate.



**Figure 12: Ethysorb tube (Source: Keep-It-Fresh.com)**

### **Ethylene meter**

A tool for estimating the amount of ethylene gas in the atmosphere. Accurate ethylene levels in storage environments are usually monitored and maintained with the help of these meters. Low ethylene levels are typically found in unripe fruits. However, as fruits mature, ethylene is naturally produced as a signal to initiate the ripening process. Even after harvest, ethylene production continues to rise, resulting in reduced shelf life, decreased storability, and an increased vulnerability to pathogen attacks in fruits. Therefore, it is important to monitor and control the rate of ethylene production to prevent excessive ripening during post-harvest storage.

### Ethylene Sensitive

---

Apples  
Asparagus  
Avocados  
Bananas  
Broccoli  
Cantaloupe  
Collard Greens  
Cucumber  
Eggplant  
Grapes  
Honeydew  
Kiwi  
Lemons  
Lettuce  
Limes  
Mangos  
Onions  
Peaches  
Pears  
Peppers  
Squash  
Sweet Potatoes  
Watermelon

### Ethylene Producers

---

Apples  
Avocados  
Bananas  
Cantaloupe  
Kiwi  
Peaches  
Pears  
Peppers  
Tomatoes

### Not Ethylene Sensitive

---

Blueberries  
Cherries  
Beans (Snap)  
Garlic  
Grapefruit  
Oranges  
Pineapple  
Potatoes  
Raspberries  
Strawberries  
Tomatoes  
Yucca

Figure 13: Ethylene Sensitivity of different produce. Adapted from (UC San Diego Community Health, 2017).



Figure 14: Handheld ethylene gas detector LEGD-A10 (Source: Multi-gasdetector.com).

### **3.0 Results and Discussion**

#### **Application of Ethylene Removal/ Management**

##### **3.1. Avocado Pear**

Brecht (2019) examined the profound effects of ethylene, it's the first identified gaseous hormone in plants, on plant development, specifically fruit ripening, plant senescence, and stress responses. He also explored the commercial significance of ethylene manipulation in agriculture, focusing on its application, avoidance, and removal to minimize post-harvest effects on fruits and vegetables. Ethylene is utilized in specially designed ripening rooms to promote and coordinate the ripening process of climacteric fruits like banana, Avocado pear and tomato. Methods such as ethylene removal or scrubbing from the post-harvest environment and the application of chemicals blocking ethylene synthesis or action are employed to prevent undesired ethylene-induced ripening, senescence, and other effects. The results highlight the importance of ethylene management in agriculture for optimizing fruit quality and extending shelf life. Ochi et al. (2020) investigated the removal of ethylene in avocados and revealed that various methods have been employed to delay the ripening process and reduce losses. One study investigated the use of biopolymers as a coadjutant in ethylene control. Avocado fruits were coated with a biopolymer film containing active carbon, which acted as an adsorbent material to capture ethylene. The results showed that the biopolymer-coated avocados exhibited reduced ethylene levels compared to untreated fruits. This led to a delay in the ripening process and extended the shelf life of avocados. However, Further research is warranted to explore the long-term effectiveness and practical feasibility of this approach in commercial settings.

##### **3.2. Kiwi**

Wang et al. (2023) developed CS/SA/QDs@ZIF-8 nanocomposite films to address the problem of ethylene-induced deterioration in kiwi fruits. The films were prepared by incorporating QDs@ZIF-8 nanoparticles into a chitosan and sodium alginate matrix using the layer-by-layer assembly method. The nanocomposite films demonstrated excellent antibacterial activity (>99% antibacterial ratio) and efficient ethylene scavenging properties (>40% scavenging ratio) due to the synergistic effect of visible light-induced reactive oxygen species and the high specific surface area of ZIF-8. The preservation performance of the CS/SA/QDs@ZIF-8 nanocomposite films was validated by the extended shelf life of the kiwifruits. It was found that the addition of QDs@ZIF-8 NPs improved the mechanical strength, thermal stability, hydrophobicity, and barrier properties of the films, although it slightly decreased their colour and transparency. An edible metal-organic framework (MOF) named  $\gamma$ -CD-MOF-K was developed by Li et al. (2023) using  $K^+$  and  $\gamma$ -cyclodextrin ( $\gamma$ -CD), with the aim of removing ethylene gas and delaying kiwifruit ripening. The MOF was synthesized through ultrasonication, and its structure was analysed to confirm its adsorption capability for ethylene gas, which was found to be  $56\% \pm 0.67\%$  (w/w). Molecular docking technology revealed that the  $\gamma$ -CD-MOF-K possessed a spindle cavity structure that effectively adsorbed and stored ethylene gas. The experimental results demonstrated that this material successfully absorbed ethylene gas in storage packaging and consequently delayed the ripening process of red kiwi fruit. This research indicates the great potential of MOF in improving the post-harvest quality of fruits and vegetables by reducing ethylene levels. Mok et al. (2019) investigated the

removal of ethylene in kiwi fruit to enhance its storage stability. They employed a plasma-catalytic process consisting of two steps: adsorption and plasma catalysis. Pd/ZSM-5 catalytic adsorbent, prepared through ion exchange at room temperature without pH adjustment using PdCl<sub>2</sub> as the precursor, efficiently adsorbed highly volatile ethylene, even under humid conditions. The adsorbed ethylene was subsequently decomposed to carbon dioxide during plasma-catalysed oxidation. Experimental results demonstrated that ethylene removal significantly improved the storage stability of kiwi fruit. However, limitations or further details regarding the specific experimental conditions, duration, or other factors were not mentioned in the provided information. After investigating the effect of modified atmosphere packaging (MAP) on kiwifruit quality and ethylene management, Han et al. (2022) stored 'Hayward' kiwifruits in MAP or air at 1°C with 60-70% relative humidity for 35 days. Subsequently, the fruits were repacked in perforated film (air), non-perforated retail bags (MAP), or MAP with an ethylene scrubber (ES) and stored at 20°C with 67-70% relative humidity for 10 days to simulate retail conditions. The MAP maintained fruit firmness during cool storage and throughout the subsequent shelf life. However, in retail conditions, MAP only provided benefits in terms of reducing weight loss and maintaining soluble solids content (SSC). Ethylene was detected only in retail bags containing rotten fruit, including one with an ES, suggesting that the ES might not be sufficient for ethylene management in retail environments.

### **3.3 Strawberries**

Alamar et al. (2017) investigated the effect of controlled atmospheres (CA) on British grown strawberries cv. Sonata during post-harvest storage. Specifically, they examined how ethylene, a plant hormone known to accelerate fruit ripening and senescence, was removed using CA treatment. The strawberries were exposed to CA conditions of 15 kPa CO<sub>2</sub> + 5 kPa O<sub>2</sub> at an early and middle stage of storage. Real-time respiration rate (RR), disease severity, objective colour, and firmness were measured. The results showed that the strawberries treated with CA for 2.5 days in the middle of the storage period had reduced ethylene production and maintained firmer texture and vibrant colour, despite occasional bursts of increased RR. Also, the CA treatment extended the shelf-life of strawberries by an additional 3 days compared to the control group, as indicated by a lower incidence of disease. Reis et al. (2020) aimed to investigate the effect of ethylene and its inhibitor, 1-methylcyclopropene (1-MCP), on various physical-chemical attributes of ripe 'Albion' strawberries at different developmental stages. They conducted experiments using strawberries that were still attached to the plant and dipped them in three treatment solutions: Ethephon (a source of ethylene), 1-methylcyclopropene, and water (control). They assessed several physicochemical properties of the ripe fruits, including mass, size, firmness, colour, acidity, sugar content, organic acids, amino acids, and volatile composition. They also recorded the time taken for the fruit to ripen. The results showed that the treatments did not affect the ripening rate or several measured attributes of the ripe fruit. However, ethylene treatment with Ethephon had stage-specific effects on fruit development and metabolism. Green fruit treated with Ethephon resulted in larger diameter and mass in ripe fruit, while white fruit showed increased anthocyanin content. Pink fruit treatment led to smaller size and greater firmness in ripe fruit. While investigating the regulatory mechanisms of arginine (Arg) in strawberry fruit development, Lv et al. (2020) examined the effect of exogenous Arg on ethylene emissions and ripening. They treated 'Sweet Charlie' strawberry fruits with Arg and analysed their transcriptome and physiological parameters. The results revealed that

exogenous Arg inhibited fruit coloration and ripening, accompanied by a decrease in Arg content and changes in several physiological parameters including firmness, anthocyanin content, sugar content, indole-acetic acid (IAA) content, abscisic acid (ABA) content, and ethylene emissions. Furthermore, the researchers observed an induction of heat-shock proteins (HSPs) and antioxidant enzyme genes, leading to improved stress resistance in strawberries. Mabusela et al. (2022) focused on ethylene management in strawberries, they investigated the use of vacuum ultraviolet (VUV) photolysis technology to remove ethylene and inhibit microbial activity. The experiment involved subjecting strawberries to VUV photolysis treatment, which generated highly reactive radicals capable of oxidizing ethylene into carbon dioxide and water. Simultaneously, the treatment successfully inactivated pathogenic microorganisms present on the fruit. The results indicated that VUV photolysis effectively reduced ethylene levels, leading to extended shelf life and reduced post-harvest losses in strawberries.

### **3.4 Tomatoes**

Mansourbahmani et al. (2018) conducted a study which aimed to determine the most effective ethylene scavenger and evaluate its impact on the quality of stored tomatoes. Four levels of treatments were applied: palladium-promoted nano zeolite, KMnO<sub>4</sub>-promoted nano zeolite, 1-MCP, CaCl<sub>2</sub>, salicylic acid (SA), and UV-C. Sampling was conducted at various time points during cold storage. The results demonstrated that the 5% palladium-promoted nanozeolite, 20% KMnO<sub>4</sub>-promoted nano zeolite, 30ppm 1-MCP, 2% CaCl<sub>2</sub>, 1% SA, and 15 minutes of UV-C treatment exhibited the highest ethylene scavenging activity. The effectiveness of the treatments in ethylene removal followed this order: palladium > KMnO<sub>4</sub> > 1-MCP > SA = CaCl<sub>2</sub> > UV-C. Furthermore, the 5% palladium-promoted nano zeolite displayed positive effects on phenol content, polygalacturonase activity, lycopene content, fruit firmness, and weight loss, while the 15 minutes of UV-C treatment reduced decay severity. Consequently, the 5% palladium-promoted nano zeolite could be considered a valuable approach for extending the shelf life of tomatoes and preserving their quality characteristics during storage. Additionally, the 15 minutes of UV-C treatment proved effective in reducing decay severity and maintaining post-harvest quality. Basso et al. (2018) investigated the photocatalytic degradation of ethylene in a continuous flow reactor using TiO<sub>2</sub> under UV-A light, with a focus on its application for maintaining the shelf life of cherry tomatoes. The experiments revealed that an increase in the thickness of the TiO<sub>2</sub> catalyst deposited on the reactor's inner wall led to a linear improvement in ethylene degradation until reaching a constant value. The reaction rate was found to be influenced by both the flow rate and ethylene gas concentration, with higher rates observed at higher flow rates and lower ethylene concentrations. Increasing incident irradiance also resulted in a linear increase in ethylene conversion. Notably, the reactor with a TiO<sub>2</sub> film thickness of 0.419 μm and an incident irradiance of 5.18 W m<sup>-2</sup> effectively maintained ethylene concentration close to zero and reduced carbon dioxide levels. This indicated a decrease in the respiration rate of tomatoes, demonstrating the efficacy of this technology in improving the shelf life of cherry tomatoes. Jia et al. (2018) investigated the interaction between hydrogen sulphide (H<sub>2</sub>S) and ethylene in tomato plants under osmotic stress. They observed that ethylene induced the production of H<sub>2</sub>S in guard cells. To understand the role of H<sub>2</sub>S in ethylene-induced stomatal closure, they used hypo taurine (HT), an H<sub>2</sub>S scavenger, and DL-pro-pargylglycine (PAG), a synthetic inhibitor of H<sub>2</sub>S. The supply of HT or PAG removed the effect of ethylene or osmotic stress on stomatal closure, indicating that H<sub>2</sub>S is required for ethylene-induced stomatal closure under osmotic

stress. Furthermore, they discovered that H<sub>2</sub>S inhibits ethylene synthesis by persulfidation of 1-aminocyclopropane-1-carboxylic acid (ACC) oxidases (ACOs), which are enzymes involved in ethylene biosynthesis. The modified biotin-switch method revealed that H<sub>2</sub>S induces persulfidation of LeACO1 and LeACO2, inhibiting their activity. They identified cysteine60 as the persulfidated site on LeACO1. Additionally, H<sub>2</sub>S was found to inhibit the expression of LeACO genes. These findings demonstrate that ethylene induced H<sub>2</sub>S negatively regulates ethylene biosynthesis through persulfidation of LeACOs in tomato plants.

### **3.5 Banana**

Tzeng et al. (2019) used a nanocomposite-based palladium-modified zeolite (Pd/zeolite) by impregnating Pd into zeolite and evaluated its performance as an adsorbent/catalyst for ethylene removal and banana ripening delay. They characterized the Pd/zeolite by various techniques, such as surface area measurement, X-ray diffraction, and transmission electron microscopy, and tested its ethylene removal efficiency and reusability by using a fixed-bed reactor system. They also measured the ethylene concentration, firmness, and peel colour of banana stored with or without Pd/zeolite for 18 days at 20 ± 2 °C. They found that Pd/zeolite had a high surface area, a multi-pore structure, and a good dispersion of Pd particles over the zeolite support. They also found that Pd/zeolite could remove ethylene effectively and repeatedly, even after reaching the breakthrough point, and could delay the ripening of banana significantly. They concluded that Pd/zeolite is an effective and reusable material for ethylene removal and post-harvest preservation of banana. Zhu et al. (2019) synthesized nanofibers containing TiO<sub>2</sub> nanoparticles (1 wt%, 5 wt%, and 10 wt%) by electrospinning method, and evaluated their performance as photocatalysts for ethylene degradation and banana ripening delay. They characterized the nanofibers by various techniques, such as scanning electron microscopy, energy dispersive X-ray spectrometer, transmission electron microscopy, and X-ray diffraction, and tested their photocatalytic activity for ethylene degradation by using a photocatalytic reactor. They also measured the colour change and softening of bananas stored with or without nanofibers for 10 days at 25 °C. They found that nano fibers containing 5 wt% TiO<sub>2</sub> had a nano-scale structure, good nanoparticle uniformity, and an anatase phase. They also found that nanofibers containing 5 wt% TiO<sub>2</sub> had higher photocatalytic activity for ethylene degradation than other nanofibers. They also found that nanofibers containing 5 wt% TiO<sub>2</sub> could delay the ripening of bananas significantly. They concluded that nanofibers containing 5 wt% TiO<sub>2</sub> are effective and potential materials for photocatalytic degradation of ethylene and post-harvest preservation of bananas. Fan et al. (2022) developed a bio-based film that can scavenge ethylene, a gas that causes fruits and vegetables to rot. They used electro spraying to coat paper towel microfibers with nanoparticles made of zein and *Artemisia sphaerocephala* Krasch. gum, which have core-shell structures and many active functional groups. They tested the film on bananas and found that it reduced browning, increased hardness, and extended shelf life. They also showed that the film had high surface area, porosity, hydrophobicity, and mechanical strength, which made it suitable for fruit preservation. The film offers an efficient, safe, and sustainable solution to reduce post-harvest food waste. Nooun et al. (2023) made bio composite foam sheets from natural rubber and rice starch and added activated carbon as a filler to improve mechanical properties and ethylene absorption. They studied how different amounts of activated carbon affected the physical, morphological, mechanical, and thermal properties of the foam sheets. They found that more activated carbon increased the size, density, hardness, strength, and glass transition temperature of the

foam cells, but decreased their number and rebound resilience. The thermal stability was not affected by the activated carbon. They also tested the foam sheet with 15 phr activated carbon on bananas and found that it reduced ethylene levels, delayed ripening, and maintained quality better than a commercial foam and a control. The bio composite foam could be used as a packaging material for fresh fruits.

## **4. Conclusion and Recommendations**

### **4.1 Conclusion**

This study has explored various methods and materials for managing ethylene in fresh produce with the overarching aim of extending shelf life, minimizing wastage, and optimizing quality throughout the supply chain. The objectives of the study were successfully achieved, and the hypothesis that ethylene-sensitive produce would exhibit decreased shelf life and accelerated ripening when exposed to higher ethylene concentrations, while effective ethylene management strategies would result in a prolonged lifespan and improved post-harvest quality, was supported by the findings. The investigation into ethylene emissions in different types of produce highlighted the variability in ethylene content among various plant species. Factors contributing to ethylene production, such as temperature, light intensity, and storage conditions, were identified, emphasizing the need for tailored ethylene management strategies. The impact of ethylene exposure on post-harvest quality was substantiated through multiple studies on fruits like kiwi, strawberries, tomatoes, and bananas. Ethylene-induced ripening and senescence were found to be significant factors leading to reduced shelf life and quality deterioration. However, innovative techniques like photocatalytic degradation, the use of nanocomposites, and the application of bio-based films showed promise in mitigating these effects. Ethylene management methods and techniques were thoroughly explored, encompassing both ethylene removal and ethylene absorption approaches. Zeolite-based systems exhibited effectiveness in reducing ethylene levels during storage and transportation, though challenges related to moisture and saturation were noted. Ultraviolet (UV) light emerged as a non-conventional technique capable of breaking down ethylene molecules, preserving fruit firmness, and maintaining colour. Nevertheless, further research is required to address long-term impacts and overcome limitations.

### **4.2 Recommendation for future works**

We recommend the investigation of the use of zeolite in combination with other technologies, such as modified atmosphere packaging and coatings, to further enhance its effectiveness in ethylene removal. There is a need to evaluate the long-term effects of zeolite treatment on the quality and safety of fruits and vegetables. Additionally, there is a need to optimize UV light treatment parameters, such as wavelength, intensity, and exposure time, to maximize ethylene removal and minimize negative impacts on produce quality. It is also necessary to investigate ways to make ozone more affordable and available for use. Moreover, there is a need to provide education and training to farmers, suppliers, and post-harvest professionals on the importance of ethylene management. Promote awareness of ethylene's effects on produce and the benefits of implementing effective management strategies. Also, a need for improvement in the measurement of Ozone and to get a more user-friendly way of getting the measurement which will be of great help to farmers and the produce transporters.

### **Reference**

Adegoroye, A., Olutumise, A.I., and Aturamu, O.A. (2021). Determinants of Food Security Status and Coping Strategies to Food Insecurity among Rural Crop

- Farming Households in Ondo State, Nigeria. *European Journal of Nutrition & Food Safety*, 13(7), 39-50.
- Adegoroye, A., Olubunmi-Ajayi, T. S., Akinbola, A. E., & Oguntuase, D. T. (2023). Socioeconomic and performance of agripreneurs: A case study of dried melon value chain in Owo local government of Ondo State, Nigeria. *International Journal of Management & Entrepreneurship Research*, 5(12), 851-862.
- Akinuli, B.O., Osagiede, M., Adegoroye, A., Mope, C., Oluwatosin, A. O. (2023). The influence of Deposit money on agricultural financing in Nigeria. *ISRG Journal of Economics, Business & Management*, 11(II): 10 - 17.
- Alamar, M.C., Collings, E., Cools, K. and Terry, L.A., 2017. Impact of controlled atmosphere scheduling on strawberry and imported avocado fruit. *Post-harvest Biology and Technology*, 134, pp.76-86.
- Alonso-Salinas, R., Acosta-Motos, J.R., Núñez-Delicado, E., Gabaldón, J.A. and López-Miranda, S., 2022. Combined effect of potassium permanganate and ultraviolet light as ethylene scavengers on post-harvest quality of peach at optimal and stressful temperatures. *Agronomy*, 12(3), p.616.
- Alonso-Salinas, R., Acosta-Motos, J.R., Pérez-López, A.J., Noguera-Artiaga, L., Núñez-Delicado, E., Burló, F. and López-Miranda, S., 2022. Effect of Combination of KMnO<sub>4</sub> Oxidation and UV-C Radiation on Post-harvest Quality of Refrigerated Pears cv. 'Ercolini'. *Horticulturae*, 8(11), p.1078.
- Álvarez-Hernández, M.H., Martínez-Hernández, G.B., Avalos-Belmontes, F., Rodríguez-Hernández, A.M., Castillo-Campohermoso, M.A. and Artés-Hernández, F., 2019. An innovative ethylene scrubber made of potassium permanganate loaded on a protonated montmorillonite: A case study on blueberries. *Food and Bioprocess Technology*, 12, pp.524-538.
- Aprilliani, F., Warsiki, E. and Iskandar, A., 2018, March. Kinetic studies of potassium permanganate adsorption by activated carbon and its ability as ethylene oxidation material. In *IOP Conference Series: Earth and Environmental Science* (Vol. 141, p.012003). IOP Publishing.
- Badamosi, A. P., Olutumise, A. I., Olukoya, O. P., Adegoroye, A., and Aturamu, O. A. (2023). Socioeconomic impacts of flooding and its coping strategies in Nigeria: Evidence from Dagiri community, Gwagwalada area council of Abuja. *Natural Hazards Research*, <https://doi.org/10.1016/j.nhres.2023.09.010>
- Bai, R., Song, X., Yan, W. and Yu, J., 2022. Low-energy adsorptive separation by zeolites. *National Science Review*, 9(9), p.nwac064.
- Basso, A., Moreira, R.D.F.P.M. and José, H.J., 2018. Effect of operational conditions on photocatalytic ethylene degradation applied to control tomato ripening. *Journal of Photochemistry and Photobiology A: Chemistry*, 367, pp.294-301.
- Binder, B.M., 2020. Ethylene signaling in plants. *Journal of Biological Chemistry*, 295(22), pp.7710-7725.
- Bishop, C.F.H., 2013, September. The Use of It'sFresh! Ethylene Adsorption Pads to Reduce the Effects of Temperature Breaks in the Supply Chain. In *VI International Conference on Managing Quality in Chains 1091* (pp. 91-94).
- Botton, A. and Ruperti, B., 2019. The yes and no of the ethylene involvement in abscission. *Plants*, 8(6), p.187.
- Brecht, J.K., 2019. Ethylene technology. In *Post-harvest Technology of Perishable Horticultural Commodities* (pp. 481-497). Woodhead Publishing.
- Brizzolara, S., Manganaris, G.A., Fotopoulos, V., Watkins, C.B. and Tonutti, P., 2020. Primary metabolism in fresh fruits during storage. *Frontiers in plant science*, 11, p.80.

- Cao, S., Meng, L., Ma, C., Ba, L., Lei, J., Ji, N. and Wang, R., 2021. Effect of ozone treatment on physicochemical parameters and ethylene biosynthesis inhibition in Guichang Kiwifruit. *Food Science and Technology*, 42, p.e64820.
- Chang, C., 2016. Q&A: How do plants respond to ethylene and what is its importance?. *BMC biology*, 14, pp.1-7.
- Chen, Y., Grimplet, J., David, K., Castellarin, S.D., Terol, J., Wong, D.C., Luo, Z., Schaffer, R., Celton, J.M., Talon, M. and Gambetta, G.A., 2018. Ethylene receptors and related proteins in climacteric and non-climacteric fruits. *Plant Science*, 276, pp.63-72.
- Cisneros, L., Gao, F. and Corma, A., 2019. Silver nanocluster in zeolites. Adsorption of ethylene traces for fruit preservation. *Microporous and Mesoporous Materials*, 283, pp.25-30.
- Collings, E.R., Alamar, M.C., Márquez, M.B., Kourmpetli, S., Kevei, Z., Thompson, A.J., Mohareb, F. and Terry, L.A., 2021. Improving the tea withering process using ethylene or UV-C. *Journal of Agricultural and Food Chemistry*, 69(45), pp.13596-13607.
- Dar, R.A., Nisar, S. and Tahir, I., 2021. Ethylene: a key player in ethylene sensitive flower senescence: a review. *Scientia Horticulturae*, 290, p.110491.
- Dubois, M., Van den Broeck, L. and Inzé, D., 2018. The pivotal role of ethylene in plant growth. *Trends in plant science*, 23(4), pp.311-323.
- Ebrahimi, A., Zabihzadeh Khajavi, M., Ahmadi, S., Mortazavian, A.M., Abdolshahi, A., Rafiee, S. and Farhoodi, M., 2022. Novel strategies to control ethylene in fruit and vegetables for extending their shelf life: A review. *International Journal of Environmental Science and Technology*, 19(5), pp.4599-4610.
- Falagán, N. and Terry, L.A., 2018. Recent advances in controlled and modified atmosphere of fresh produce. *Johnson Matthey Technology Review*, 62(1), pp.107-117.
- Fan, X., Rong, L., Li, Y., Cao, Y., Kong, L., Zhu, Z. and Huang, J., 2022. Fabrication of bio-based hierarchically structured ethylene scavenger films via electrospinning for fruit preservation. *Food Hydrocolloids*, 133, p.107837.
- Ferrante, A., 2023. Ethylene and horticultural crops. In *The Plant Hormone Ethylene* (pp. 107-121). Academic Press.
- Gaikwad, K.K., Singh, S. and Negi, Y.S., 2020. Ethylene scavengers for active packaging of fresh food produce. *Environmental Chemistry Letters*, 18, pp.269-284.
- Han, Y., East, A., Nicholson, S., Jeffery, P., Glowacz, M. and Heyes, J., 2022. Benefits of modified atmosphere packaging in maintaining 'Hayward' kiwifruit quality at room temperature retail conditions. *New Zealand Journal of Crop and Horticultural Science*, 50(2-3), pp.242-258.
- Jadhav, P.B., 2018. Extending the Storage-life of Mixed Fruits and Veggies Using a Cold Room (Ecofrost). *Int. J. Curr. Microbiol. App. Sci*, 7(11), pp.25-29.
- Jia, H., Chen, S., Liu, D., Liesche, J., Shi, C., Wang, J., Ren, M., Wang, X., Yang, J., Shi, W. and Li, J., 2018. Ethylene-induced hydrogen sulfide negatively regulates ethylene biosynthesis by persulfidation of ACO in tomato under osmotic stress. *Frontiers in Plant Science*, 9, p.1517.
- Kumar, S., Kumar, R., Bibwe, B.R., Nath, P., Singh, R.K., Mandhania, S., Pal, A., Soni, R. and Kumar, A., 2023. Post-harvest handling of ethylene with oxidative and absorptive means. *Journal of Food Science and Technology*, pp.1-20.
- Li, S., Hu, X., Chen, S., Wang, X., Shang, H., Zhou, Y., Dai, J., Xiao, L., Qin, W. and Liu, Y., 2023. Synthesis of  $\gamma$ -cyclodextrin metal-organic framework as ethylene

- absorber for improving postharvest quality of kiwi fruit. *Food Hydrocolloids*, 136, p.108294.
- Lv, J., Pang, Q., Chen, X., Li, T., Fang, J., Lin, S. and Jia, H., 2020. Transcriptome analysis of strawberry fruit in response to exogenous arginine. *Planta*, 252, pp.1-16.
- Mabusela, B.P., Belay, Z.A., Godongwana, B., Pathak, N., Mahajan, P.V. and Caleb, O.J., 2022. Advances in vacuum ultraviolet photolysis in the postharvest management of fruit and vegetables along the value chains: a review. *Food and Bioprocess Technology*, pp.1-19.
- Mahapatra, A., Rout, D.S., Sahu, C. and Banik, D., 2022. *TECHNOLOGIES* (Doctoral dissertation, School of Agriculture, Centurion University of Technology and Management).
- Majid, I., Nayik, G.A., Dar, S.M. and Nanda, V., 2018. Novel food packaging technologies: Innovations and future prospective. *Journal of the Saudi Society of Agricultural Sciences*, 17(4), pp.454-462.
- Mansourbahmani, S., Ghareyazie, B., Zarinnia, V., Kalatejari, S. and Mohammadi, R.S., 2018. Study on the efficiency of ethylene scavengers on the maintenance of postharvest quality of tomato fruit. *Journal of Food Measurement and Characterization*, 12, pp.691-701.
- Mariah, M.A.A., Vonnie, J.M., Erna, K.H., Nur'Aqilah, N.M., Huda, N., Abdul Wahab, R. and Rovina, K., 2022. The emergence and impact of ethylene scavengers techniques in delaying the ripening of fruits and vegetables. *Membranes*, 12(2), p.117.
- Martínez-López, A., Marrero, Á., Martín-Cruz, Y. and González, M.M., 2022. Environmental assessment model for scrubbers versus alternative mitigation systems for feeder vessels in liner shipping. *Journal of environmental management*, 321, p.115954.
- McMillin, K.W., 2020. Modified atmosphere packaging. *Food safety engineering*, pp.693-718.
- Melin, P., Gomez, A., Loyola, C., De Bruijn, J., Valdes, H. and Solar, V., 2019. Effect of doping natural zeolite with copper and zinc cations on ethylene removal and postharvest tomato fruit quality.
- Mhemeed, A.H., 2018. A general overview on the adsorption. *Indian Journal of Natural Sciences*, 9(51), pp.16127-16131.
- Minas, I.S., Tanou, G., Krokida, A., Karagiannis, E., Belghazi, M., Vasilakakis, M., Papadopoulou, K.K. and Molassiotis, A., 2018. Ozone-induced inhibition of kiwifruit ripening is amplified by 1-methylcyclopropene and reversed by exogenous ethylene. *BMC Plant Biology*, 18(1), pp.1-19.
- Mok, Y.S., Kim, S.G., Han, J., Nguyen, D.B., Lee, H.W., Jeon, H. and Kim, S.B., 2020. Removal of dilute ethylene using repetitive cycles of adsorption and plasma-catalytic oxidation over Pd/ZSM-5 catalyst. *Journal of Physics D: Applied Physics*, 53(33), p.334002.
- Monzon, J.D., Pereyra, A.M., Gonzalez, M.R., Legnoverde, M.S., Moreno, M.S., Gargiulo, N., Peluso, A., Aprea, P., Caputo, D. and Basaldella, E.I., 2021. Ethylene adsorption onto thermally treated AgA-Zeolite. *Applied Surface Science*, 542, p.148748.
- Nautiyal, P., Sharma, U., Singh, V., Goswami, S., Agrawal, K., Krishali, V., Bisht, R., Mittal, H., Mehta, R. and Pokhriyal, A., 2022. Fruit thinning: Purpose, methods & role of plant growth regulators. *Pharma Innov. J*, 11, pp.1500-1504.

- Nooun, P., Chueangchayaphan, N., Ummarat, N. and Chueangchayaphan, W., 2023. Fabrication and properties of natural rubber/rice starch/activated carbon biocomposite-based packing foam sheets and their application to shelf life extension of 'Hom Thong' banana. *Industrial Crops and Products*, 195, p.116409.
- Ochi, D., Yassue-Cordeiro, P.H., Severino, P., Yoshida, C.M.P. and da Silva, C.F., 2020. Biopolymers applied as ethylene-scavenging films and coatings. In *Biopolymer Membranes and Films* (pp. 553-573). Elsevier.
- Ogunyemi, A. I., Olutumise, A. I. and Adegrooye, A. (2022). The extent of Vulnerability to Food Insecurity and Household Coping Strategies: Case of Yam Farmers in Ekiti State, Nigeria. *Turkish Journal of Agriculture-Food Science and Technology*, 10(10), 1921-1928.
- Oladoyin, O. P., Adegrooye, A., Akinbola, A. E., and Borokini, E. A. (2023). Unlocking the Economic Potentials of Leafy Vegetable: A Case Study of Farmers in Akoko South West Local Government Area of Ondo State, Nigeria. *Asian Journal of Research in Agriculture and Forestry*, 9(4), 327–336. <https://doi.org/10.9734/ajraf/2023/v9i4262>
- Oluwalade, T. A., Adegrooye, A., Mope, C., & Olorunfemi, O. A. (2023). Performance of Farm Business School (FBS): A Case Study of Cocoa Farmers in Nigeria. *International Journal of Advanced Economics*, 5(9), 285-297.
- Oluwalade, T. A., Adegrooye, A., Ojo, O.O., Mope, C., & Olorunfemi, O. A. (2023). Efficiencies and Barriers in Participating in Cocoa's Farm Business School (FBS) in Nigeria. *International Journal of Advanced Multidisciplinary Research and Studies*, 3(6): 1194 - 1200.
- Oparinde, L.O., Olutumise, A.I. and Adegrooye, A. (2023). Does Agroforestry Technology Adoption Affect Income Inequality among Arable Crop Farmers in Southwest, Nigeria? A Gender Perspective. *Sarhad Journal of Agriculture*, Vol.39, Iss. 4, Pages 848-860
- Parven, A., Sarker, M.R., Megharaj, M. and Meftaul, I.M., 2020. Prolonging the shelf life of Papaya (*Carica papaya* L.) using Aloe vera gel at ambient temperature. *Scientia Horticulturae*, 265, p.109228.
- Pathak, N., Caleb, O.J., Geyer, M., Herppich, W.B., Rauh, C. and Mahajan, P.V., 2017. Photocatalytic and photochemical oxidation of ethylene: Potential for storage of fresh produce—A review. *Food and Bioprocess Technology*, 10, pp.982-1001.
- Qi, Y., Li, C., Li, H., Yang, H. and Guan, J., 2021. Elimination or removal of ethylene for fruit and vegetable storage via low-temperature catalytic oxidation. *Journal of Agricultural and Food Chemistry*, 69(36), pp.10419-10439.
- Saltveit, M.E., 2018. Respiratory metabolism, in E.M.B.T.-P.P. and B. of F. and V.Yahia (ed.) *Post-harvest Physiology and Biochemistry of Fruits and Vegetables*. Woodhead Publishing, pp. 73–91. Available at: <https://doi.org/10.1016/B978-0-12-813278-4.00004-X>.
- Sanches, A.G., da Silva, M.B., Moreira, E.G.S., dos Santos, E.X., Menezes, K.R.P. and Cordeiro, C.A.M., 2019. Ethylene absorber (KMnO<sub>4</sub>) in postharvest quality of pinha (*Anona squamosa* L.). *Emirates Journal of Food and Agriculture*, pp.605-612.
- Shenoy, S., Pathak, N., Molins, A., Toncheva, A., Schouw, T., Hemberg, A., Laoutid, F. and Mahajan, P.V., 2022. Impact of relative humidity on ethylene removal kinetics of different scavenging materials for fresh produce industry. *Post-harvest Biology and Technology*, 188, p.111881.

- Shezi, S., Magwaza, L.S., Mditshwa, A. and Tesfay, S.Z., 2020. Changes in biochemistry of fresh produce in response to ozone postharvest treatment. *Scientia Horticulturae*, 269, p.109397.
- Takahashi, K., Motodate, T., Takaki, K. and Koide, S., 2017. Influence of oxygen concentration on ethylene removal using dielectric barrier discharge. *Japanese Journal of Applied Physics*, 57(1S), p.01AG04.
- Takaki, K., Miura, T., Oka, A. and Takahashi, K., 2020. Influence of relative humidity on ethylene removal using dielectric barrier discharge. *IEEE Transactions on Plasma Science*, 49(1), pp.61-68.
- Thabit, Q., Nassour, A. and Nelles, M., 2022. Flue Gas Composition and Treatment Potential of a Waste Incineration Plant. *Applied Sciences*, 12(10), p.5236.
- Tirgar, A., Han, D. and Steckl, A.J., 2018. Absorption of ethylene on membranes containing potassium permanganate loaded into alumina-nanoparticle-incorporated alumina/carbon nanofibers. *Journal of agricultural and food chemistry*, 66(22), pp.5635-5643.
- Tzeng, J.H., Weng, C.H., Huang, J.W., Shiesh, C.C., Lin, Y.H. and Lin, Y.T., 2019. Application of palladium- modified zeolite for prolonging post- harvest shelf life of banana. *Journal of the Science of Food and Agriculture*, 99(7), pp.3467-3474.
- Veerapandian, K.P.S., De Geyter, N., Giraudon, J.M., Lamonier, J.F. and Morent, R., 2019. The use of zeolites for VOCs abatement by combining non-thermal plasma, adsorption, and/or catalysis: a review. *Catalysts*, 9(1), p.98.
- Vincent, C., Mesa, T. and Munné-Bosch, S., 2020. Hormonal interplay in the regulation of fruit ripening and cold acclimation in avocados. *Journal of plant physiology*, 251, p.153225.
- Wang, M., Nian, L., Wu, J., Cheng, S., Yang, Z. and Cao, C., 2023. Visible light-responsive chitosan/sodium alginate/QDs@ ZIF-8 nanocomposite films with antibacterial and ethylene scavenging performance for kiwifruit preservation. *Food Hydrocolloids*, 145, p.109073.
- Watkins, C.B., 2008. Overview of 1-methylcyclopropene trials and uses for edible horticultural crops. *HortScience*, 43(1), pp.86-94.
- Wei, H., Seidi, F., Zhang, T., Jin, Y. and Xiao, H., 2021. Ethylene scavengers for the preservation of fruits and vegetables: A review. *Food Chemistry*, 337, p.127750.
- Widyastuti, T. and Gahayu, R., 2022, February. Extending the Shelf Life of Curly Red Chili (*Capsicum annuum*) Using KMnO<sub>4</sub>. In *IOP Conference Series: Earth and Environmental Science* (Vol. 985, No. 1, p. 012041). IOP Publishing.
- Wills, R.B.H., 2021. Potential for more sustainable energy usage in the postharvest handling of horticultural produce through management of ethylene. *Climate*, 9(10), p.147.
- Yahaya, A., John, S.A., Adegoroye, A. and Olorunfemi, O.A. (2023). Stock market liquidity and volatility on the Nigerian Exchange Limited (NGX). *World Journal of Advanced Research and Reviews*, 20(03), 147–156.
- Zhao, T., Nakano, A. and Iwasaki, Y., 2021. Differences between ethylene emission characteristics of tomato cultivars in tomato production at plant factory. *Journal of Agriculture and Food Research*, 5, p.100181.
- Zhu, Z., Zhang, Y., Shang, Y. and Wen, Y., 2019. Electrospun nanofibers containing TiO<sub>2</sub> for the photocatalytic degradation of ethylene and delaying postharvest ripening of bananas. *Food and Bioprocess Technology*, 12, pp.281-287.