

Innovative Approaches for Dynamic System Monitoring: Signal Processing and Parameter Estimation Strategies

Abstract:

Dynamic system monitoring is essential for ensuring the optimal performance and reliability of various systems across multiple domains. This Abstract introduces innovative approaches focusing on signal processing and parameter estimation strategies for dynamic system monitoring. Signal processing techniques such as wavelet transform and adaptive filtering are utilized for noise reduction and feature extraction from sensor data. Additionally, parameter estimation strategies including Kalman filtering and Bayesian inference aid in accurately estimating system parameters and states in real-time. These advanced methods, integrating machine learning and statistical inference, promise enhanced monitoring capabilities, facilitating proactive maintenance and fault detection in complex dynamic systems. Through case studies and simulation results, the effectiveness and versatility of these approaches in addressing real-world challenges are demonstrated, illustrating their potential for advancing the field of dynamic system monitoring.

Keywords: Dynamic system monitoring, Signal processing, Parameter estimation

1. Introduction

Dynamic system monitoring plays a crucial role in ensuring the optimal performance, reliability, and safety of various systems across diverse domains such as engineering, healthcare, and environmental monitoring[1]. The ability to accurately monitor and analyze the behavior of dynamic systems in real time is essential for detecting faults, predicting failures, and optimizing performance. Signal processing and parameter estimation are fundamental techniques employed in dynamic system monitoring to extract valuable information from sensor data and estimate system parameters and states[2]. However, traditional approaches often face challenges in handling non-linear dynamics, noise, and uncertainties inherent in real-world systems. This paper explores innovative approaches in signal processing and parameter estimation strategies to address these challenges and enhance the effectiveness of dynamic system monitoring. By

leveraging advancements in machine learning, optimization algorithms, and statistical inference, these approaches promise improved accuracy, efficiency, and adaptability in monitoring complex dynamic systems[3]. This introduction provides an overview of the importance of dynamic system monitoring, the role of signal processing and parameter estimation, and the motivation for exploring innovative approaches to address current limitations and advance the field[4]. Dynamic system monitoring is a critical process that involves the continuous observation, analysis, and management of various dynamic systems in real time[5, 6]. These systems encompass a wide range of applications, including mechanical, electrical, biological, environmental, and industrial processes[7]. The primary goal of dynamic system monitoring is to ensure the optimal performance, reliability, and safety of these systems by detecting anomalies, predicting potential failures, and facilitating proactive maintenance[8]. In dynamic system monitoring, sensors are typically deployed to collect data regarding system variables such as temperature, pressure, flow rates, vibration, and other relevant parameters[9, 10]. This data is then processed and analyzed using various techniques to extract valuable insights into the system's behavior. The monitoring process often involves the detection of abnormal patterns or deviations from expected behavior, which may indicate potential faults or impending failures[11]. These systems encompass a wide range of applications, including mechanical, electrical, biological, environmental, and industrial processes[12]. The significance of dynamic system monitoring lies in its ability to ensure the optimal performance, reliability, and safety of these systems by detecting anomalies, predicting potential failures, and facilitating proactive maintenance[13, 14].

The dynamic nature of these systems introduces complexities such as non-linear dynamics, time-varying behavior, uncertainties, and external disturbances[15]. Dynamic system monitoring aims to capture and understand these dynamics in real time to provide actionable insights for decision-making and control[16]. By continuously monitoring system variables such as temperature, pressure, flow rates, vibration, and other relevant parameters, dynamic system monitoring enables early detection of abnormal patterns or deviations from expected behavior[17]. This early detection allows for timely intervention to prevent or mitigate potential faults or failures, thereby reducing downtime, maintenance costs, and risks to personnel and equipment[18, 19]. Furthermore, dynamic system monitoring plays a crucial role in optimizing system performance and efficiency[20]. By analyzing real-time data and identifying inefficiencies or

suboptimal operating conditions, monitoring systems can facilitate process optimization, energy savings, and resource allocation. Additionally, dynamic system monitoring is essential for regulatory compliance, quality assurance, and risk management in various industries[21]. By ensuring that systems operate within specified limits and meet regulatory requirements, monitoring systems help mitigate environmental risks, ensure product quality, and uphold safety standards[22, 23]. Motivation for innovative approaches in signal processing and parameter estimation stems from the inherent complexity and dynamic nature of modern systems, coupled with the increasing demand for higher performance, reliability, and efficiency[24, 25]. Traditional methods often struggle to cope with the challenges posed by non-linear dynamics, noise, uncertainties, and the sheer volume of data generated by these systems[26]. Innovative approaches are thus motivated by the need to overcome these limitations and address emerging requirements in dynamic system monitoring[27]. One significant motivation is the pursuit of enhanced accuracy and efficiency in monitoring systems[28]. Conventional signal processing techniques may struggle to effectively extract relevant information from noisy sensor data or capture dynamic changes in system behavior. Similarly, simplistic parameter estimation methods may fail to accurately estimate system states or parameters, particularly in non-linear or time-varying systems[29]. Innovative approaches aim to leverage advancements in machine learning, optimization algorithms, and statistical inference to improve the accuracy and efficiency of signal processing and parameter estimation techniques[30]. Overall, the motivation for innovative approaches in signal processing and parameter estimation lies in the pursuit of improved accuracy, adaptability, and predictive capabilities in dynamic system monitoring[31, 32]. By addressing the limitations of traditional methods and leveraging advancements in technology, these approaches aim to meet the evolving needs and challenges of modern monitoring applications effectively[33].

2. Parameter Estimation Strategies for Dynamic System Monitoring

Signal processing methods are fundamental techniques used to manipulate, analyze, and interpret signals to extract valuable information or enhance signal quality[34]. Signals can represent various types of data, such as audio, video, images, sensor measurements, and more[35]. In the context of dynamic system monitoring, signal processing methods are applied to sensor data to understand the behavior of systems over time, detect anomalies, and make informed

decisions[36]. The main objectives of signal processing methods in dynamic system monitoring include

Noise Reduction: Sensor data often contains unwanted noise due to various sources such as electrical interference, environmental factors, or measurement inaccuracies[37]. Signal processing methods aim to reduce or eliminate this noise to enhance the accuracy and reliability of the data.

Feature Extraction: Signal processing techniques extract relevant features from the data that capture important characteristics or patterns indicative of system behavior[38]. These features provide insights into the underlying dynamics of the system and facilitate subsequent analysis[39].

Anomaly Detection: By analyzing the characteristics of the signals, signal processing methods can identify abnormal patterns or deviations from expected behavior[40]. Anomaly detection helps detect faults, malfunctions, or unusual events in the monitored system[41].

Parameter Estimation: Signal processing methods are used to estimate the parameters or states of the system based on observed sensor data[42]. Parameter estimation techniques enable the determination of critical system variables, aiding in understanding system dynamics and predicting future behavior.

There are various signal processing methods utilized in dynamic system monitoring, including

Time-domain analysis: Which analyzes signals in the time domain, focusing on features such as amplitude, duration, and frequency of events[43, 44].

Frequency-domain analysis: Utilizes techniques such as Fourier transforms to represent signals in terms of frequency components, revealing the frequency content and spectral characteristics of the data[45].

Wavelet transforms: Decomposes signals into different frequency bands using wavelet functions, allowing for multi-resolution analysis and localization of transient events.

Empirical mode decomposition (EMD): Breaks down signals into intrinsic mode functions (IMFs) representing oscillatory components at different scales, useful for analyzing non-stationary signals[46, 47].

Adaptive filtering: Adapts filter coefficients based on the changing characteristics of the input signal, enabling real-time noise reduction and signal enhancement[48].

Statistical methods: Utilizes statistical techniques such as regression analysis, correlation, and probability distributions to analyze signal properties and make statistical inferences[49, 50].

These signal-processing methods are essential tools for dynamic system monitoring, providing valuable insights into system behavior and facilitating effective decision-making and control[51]. By leveraging these techniques, practitioners can improve system reliability, performance, and safety across various domains[52].

2.1. Demodulation techniques for PQ monitoring

Demodulation approaches for PQ monitoring present the advantage of being able to track the evolution of the instantaneous amplitude and instantaneous frequency of the power system[53]. These two parameters are of huge interest for PQ disturbances detection[54, 55]. Figure 1, provides an overview of the demodulation technique to use for PQ monitoring based on electrical signals analysis[56]. Especially, in the case of multi-component signals, a filtering step is required to separate modes[57]. In the case where the modes cannot be separated using filtering, more sophisticated techniques are required such as Empirical Mode Decomposition (EMD), Ensemble EMD (EEMD), and Variational Mode Decomposition (VMD). Demodulation techniques for PQ (Power Quality) monitoring involve the extraction of useful information from electrical signals to analyze and diagnose power quality issues[58]. These techniques encompass various methods such as synchronous detection, FFT (Fast Fourier Transform) analysis, wavelet transforms, and digital signal processing algorithms[59]. Through demodulation, PQ monitoring systems can identify and isolate specific disturbances like harmonics, voltage sags, swells, and transients, aiding in efficient troubleshooting and maintenance[60, 61]. The process often includes filtering out noise and unwanted components and enhancing the accuracy of measurement and analysis[62]. By employing sophisticated demodulation techniques, utilities and industries can optimize power distribution, enhance equipment performance, and ensure compliance with regulatory standards[63]. Overall, demodulation plays a crucial role in comprehensive PQ monitoring, enabling proactive management of electrical systems for improved reliability and efficiency[64].

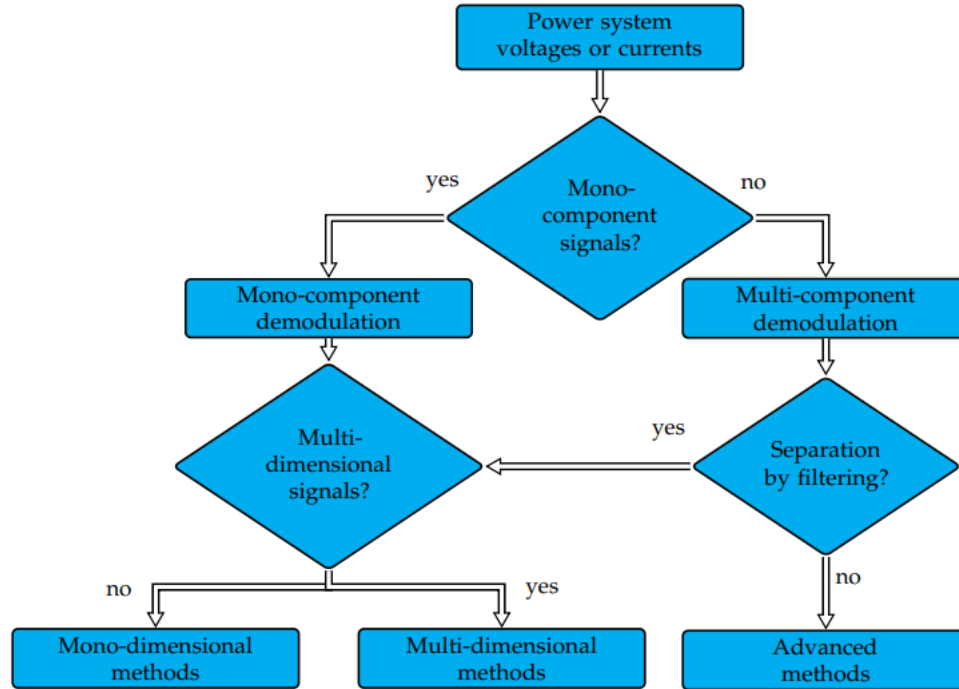


Figure 1: Demodulation techniques for PQ monitoring.

Empirical Mode Decomposition (EMD) is a signal processing technique used for adaptive time-frequency analysis and feature extraction[65, 66]. It is particularly effective for analyzing non-stationary and nonlinear signals, making it useful for dynamic system monitoring where signals often exhibit complex behavior over time[67]. The primary objective of using EMD for noise reduction is to decompose a signal into its intrinsic mode functions (IMFs), which represent the oscillatory components at different scales or frequencies[68]. The decomposition process is iterative and adaptive, with each IMF capturing a specific oscillatory mode or trend present in the signal[69]. In the context of noise reduction, EMD can help separate the desired signal components from unwanted noise[70]. The noise components are typically spread across multiple IMFs, while the signal of interest may be concentrated in a smaller subset of IMFs. By selectively reconstructing the signal using only the IMFs containing the desired information and discarding or attenuating the IMFs containing noise, EMD effectively reduces the noise level in the signal. The key steps involved in using EMD for noise reduction are as follows:

Decomposition: The input signal is decomposed into IMFs using the EMD algorithm[71]. Each IMF represents a specific frequency component or oscillatory mode present in the signal[72].

Noise Identification: The IMFs containing noise components are identified based on their

characteristics, such as high-frequency content, randomness, or lack of coherent oscillations[73].
Signal Reconstruction: The signal is reconstructed by selectively combining or filtering the IMFs containing the desired signal components while attenuating or removing the IMFs containing noise[74].
Post-processing: Additional filtering or processing may be applied to further enhance the signal quality or remove residual noise artifacts. By adaptively decomposing the signal into its constituent IMFs and selectively reconstructing the signal, EMD provides a powerful tool for noise reduction in dynamic system monitoring applications[75]. It is particularly well-suited for handling non-stationary and nonlinear signals, making it an effective technique for extracting meaningful information from complex sensor data while mitigating the effects of noise[76].

3. Integration of Machine Learning in Dynamic System Monitoring

Integration of machine learning (ML) in dynamic system monitoring has revolutionized the way systems are monitored and maintained[77]. ML techniques enable automated analysis of large volumes of sensor data, providing insights into system behavior, detecting anomalies, and predicting future events. The integration of ML in dynamic system monitoring offers several benefits:
Anomaly Detection: ML algorithms can learn normal patterns of system behavior from historical data and identify deviations or anomalies in real-time sensor readings[78]. This capability enables early detection of faults, malfunctions, or abnormal operating conditions, allowing for timely intervention and preventive maintenance.
Predictive Maintenance: ML models trained on historical sensor data can predict equipment failures or performance degradation before they occur. By analyzing patterns and trends in sensor data, ML algorithms can forecast equipment failures, optimize maintenance schedules, and reduce downtime and maintenance costs[79].
Fault Diagnosis: ML techniques such as classification and clustering can automatically identify the root causes of system faults or anomalies based on sensor data patterns. By analyzing the relationships between sensor readings and system states, ML models can diagnose faults accurately and suggest appropriate corrective actions.
Optimization of System Performance: ML algorithms can analyze sensor data to optimize system performance and energy efficiency[80, 81]. By identifying inefficiencies, ML models can suggest adjustments to control parameters or operational settings to improve system performance and reduce resource consumption[82].
Adaptive Monitoring: ML models can adapt to changing system dynamics and operating conditions by continuously updating their parameters based on new data[83]. This

adaptive capability allows ML-based monitoring systems to maintain high accuracy and reliability in dynamic environments and handle complex, non-linear systems effectively. Pattern Recognition: ML algorithms excel at identifying complex patterns and relationships in high-dimensional data. In dynamic system monitoring, ML techniques can uncover hidden patterns or correlations in sensor data that may not be apparent to human analysts, leading to deeper insights into system behavior and performance. Overall, the integration of ML in dynamic system monitoring enables more proactive, intelligent, and efficient management of complex systems[84]. By leveraging the power of data-driven insights and automation, ML-based monitoring systems can enhance system reliability, performance, and safety across a wide range of applications and industries[85].

3.1. Power Quality Monitoring Algorithm

Power quality characterization is of paramount importance in order to improve the power systems safety and reliability[86]. Figure 2 depicts power quality characterization stages, which include signal acquisition based on appropriate sensors, feature extraction stage for signal parameter estimation, detection stage, and finally the classification stage to determine PQ disturbance types. The feature extraction stage is performed based on advanced signal processing approaches, which include power spectral density estimation techniques, demodulation techniques, and time–frequency analysis. The classification stage is mainly performed using machine learning approaches[87].

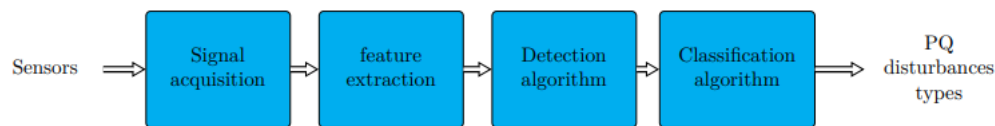


Figure 2: PQ monitoring algorithm.

Machine learning (ML) plays a significant role in signal processing and parameter estimation by providing powerful tools for analyzing complex data, extracting relevant features, and making accurate predictions[88, 89]. In the context of dynamic system monitoring, ML techniques offer several advantages in signal processing and parameter estimation tasks: Feature Extraction: ML algorithms can automatically extract relevant features from raw sensor data, capturing important characteristics that are indicative of system behavior or performance[90, 91]. By learning

patterns and relationships in the data, ML models can identify informative features that may not be apparent to human analysts, enhancing the effectiveness of signal-processing techniques.

Dimensionality Reduction: ML methods such as principal component analysis (PCA) or autoencoders can reduce the dimensionality of high-dimensional sensor data while preserving important information. This dimensionality reduction simplifies parameter estimation tasks by focusing on the most relevant features and reducing computational complexity[92].

Noise Reduction: ML algorithms can be trained to distinguish between signal and noise components in sensor data, enabling effective noise reduction or denoising[93]. Techniques such as sparse coding, dictionary learning, or deep learning-based denoising autoencoders can suppress noise while preserving signal features, improving the quality of data for parameter estimation.

Nonlinear Mapping: ML models are capable of capturing complex, non-linear relationships between input and output variables, which may be present in dynamic system behavior[94]. By learning non-linear mappings from sensor data to system parameters, ML techniques can accurately estimate system states or parameters in situations where linear models may be inadequate.

Adaptive Estimation: ML algorithms can adaptively adjust model parameters based on new observations, allowing for real-time parameter estimation in dynamic environments[95]. Techniques such as online learning, recursive least squares (RLS), or adaptive filtering enable continuous updates to parameter estimates as new data becomes available, improving the accuracy and responsiveness of monitoring systems.

Model Selection and Optimization: ML methods can assist in selecting the most appropriate models or algorithms for signal processing and parameter estimation tasks[96, 97]. By evaluating the performance of different models on training data and validating their generalization to unseen data, ML techniques help optimize model selection and parameter tuning for optimal performance.

Uncertainty Quantification: ML techniques can estimate the uncertainty associated with parameter estimates, providing confidence intervals or probability distributions that quantify the reliability of predictions[98]. Bayesian methods, ensemble learning, or Monte Carlo simulations can be used to assess uncertainty in parameter estimation, enabling more robust decision-making in dynamic system monitoring[99].

Overall, machine learning plays a crucial role in signal processing and parameter estimation by leveraging data-driven insights, capturing complex relationships, and adapting to changing system dynamics[100]. By integrating ML techniques with traditional signal processing methods, monitoring systems can achieve enhanced accuracy, efficiency, and

adaptability in analyzing sensor data and estimating system parameters in dynamic environments.

4. Conclusion

In conclusion, the innovative approaches presented for dynamic system monitoring, focusing on signal processing and parameter estimation strategies, hold significant promise for advancing the state-of-the-art in this critical field. Through the utilization of advanced signal processing techniques such as wavelet transforms and adaptive filtering, alongside sophisticated parameter estimation methods including Kalman filtering and Bayesian inference, these approaches enable the extraction of valuable insights from raw sensor data in real-time. The integration of machine learning and statistical inference further enhances the accuracy and efficiency of monitoring systems, facilitating proactive maintenance and fault detection in complex dynamic systems. By leveraging these innovative strategies, practitioners can achieve improved performance, reliability, and safety across a wide range of applications, thereby contributing to the continued evolution and optimization of dynamic system monitoring practices.

Reference

- [1] L. Xu, "Separable multi-innovation Newton iterative modeling algorithm for multi-frequency signals based on the sliding measurement window," *Circuits, Systems, and Signal Processing*, vol. 41, no. 2, pp. 805-830, 2022.
- [2] H. M. Khalid, J. C. H. Peng, and M. S. Mahmoud, "Enhanced distributed estimation based on prior information," *IET Signal Processing*, vol. 9, no. 1, pp. 60-72, 2015.
- [3] J. Zhao *et al.*, "Roles of dynamic state estimation in power system modeling, monitoring and operation," *IEEE Transactions on Power Systems*, vol. 36, no. 3, pp. 2462-2472, 2020.
- [4] H. Krim and M. Viberg, "Two decades of array signal processing research: the parametric approach," *IEEE signal processing magazine*, vol. 13, no. 4, pp. 67-94, 1996.
- [5] E. Skordilis, "Bayesian Filtering Methods For Dynamic System Monitoring and Control," University of Miami, 2019.
- [6] M. Mahmoud and H. Khalid, "Bibliographic review on distributed Kalman filtering," *IET Control Theory Appl*, vol. 7, no. 4, pp. 483-501, 2013.
- [7] X. Dai and Z. Gao, "From model, signal to knowledge: A data-driven perspective of fault detection and diagnosis," *IEEE Transactions on Industrial Informatics*, vol. 9, no. 4, pp. 2226-2238, 2013.

- [8] T. Li, M. Bolic, and P. M. Djuric, "Resampling methods for particle filtering: classification, implementation, and strategies," *IEEE Signal processing magazine*, vol. 32, no. 3, pp. 70-86, 2015.
- [9] H. Sarmadi and K.-V. Yuen, "Structural health monitoring by a novel probabilistic machine learning method based on extreme value theory and mixture quantile modeling," *Mechanical Systems and Signal Processing*, vol. 173, p. 109049, 2022.
- [10] J. V. Candy, *Bayesian signal processing: classical, modern, and particle filtering methods*. John Wiley & Sons, 2016.
- [11] H. M. Khalid *et al.*, "WAMS operations in power grids: A track fusion-based mixture density estimation-driven grid resilient approach toward cyberattacks," *IEEE Systems Journal*, 2023.
- [12] M. Candon, O. Levinski, H. Ogawa, R. Carrese, and P. Marzocca, "A nonlinear signal processing framework for rapid identification and diagnosis of structural freeplay," *Mechanical Systems and Signal Processing*, vol. 163, p. 107999, 2022.
- [13] J. Zhao *et al.*, "Power system dynamic state estimation: Motivations, definitions, methodologies, and future work," *IEEE Transactions on Power Systems*, vol. 34, no. 4, pp. 3188-3198, 2019.
- [14] M. S. Arulampalam, S. Maskell, N. Gordon, and T. Clapp, "A tutorial on particle filters for online nonlinear/non-Gaussian Bayesian tracking," *IEEE Transactions on signal processing*, vol. 50, no. 2, pp. 174-188, 2002.
- [15] H. Khalid, F. Flitti, M. Mahmoud, M. Hamdan, S. Muyeen, and Z. Dong, "WAMS Operations in Modern Power Grids: A Median Regression Function-Based State Estimation Approach Towards Cyber Attacks," *El-Sevier–Sustainable Energy, Grid, and Networks*, vol. 34, p. 101009, 2023.
- [16] M. F. Yakhni *et al.*, "Variable speed induction motors' fault detection based on transient motor current signatures analysis: A review," *Mechanical Systems and Signal Processing*, vol. 184, p. 109737, 2023.
- [17] S. J. Julier and J. K. Uhlmann, "New extension of the Kalman filter to nonlinear systems," in *Signal processing, sensor fusion, and target recognition VI*, 1997, vol. 3068: Spie, pp. 182-193.
- [18] J. O. Ramsay, G. Hooker, D. Campbell, and J. Cao, "Parameter estimation for differential equations: a generalized smoothing approach," *Journal of the Royal Statistical Society Series B: Statistical Methodology*, vol. 69, no. 5, pp. 741-796, 2007.
- [19] E. Elbouchikhi, M. F. Zia, M. Benbouzid, and S. El Hani, "Overview of signal processing and machine learning for smart grid condition monitoring," *Electronics*, vol. 10, no. 21, p. 2725, 2021.
- [20] J. Vilà-Valls, N. Linty, P. Closas, F. Dosis, and J. T. Curran, "Survey on signal processing for GNSS under ionospheric scintillation: Detection, monitoring, and mitigation," *NAVIGATION: Journal of the Institute of Navigation*, vol. 67, no. 3, pp. 511-535, 2020.
- [21] H. Khalid, S. Muyeen, and I. Kamwa, "Excitation Control for Multi-Area Power Systems: An Improved Decentralized Finite-Time Approach," *El-Sevier–Sustainable Energy, Grid, and Networks*, vol. 31, p. 100692, 2022.
- [22] K. Huang and K.-V. Yuen, "Online decentralized parameter estimation of structural systems using asynchronous data," *Mechanical Systems and Signal Processing*, vol. 145, p. 106933, 2020.
- [23] A. K. Jardine, D. Lin, and D. Banjevic, "A review on machinery diagnostics and prognostics implementing condition-based maintenance," *Mechanical systems and signal processing*, vol. 20, no. 7, pp. 1483-1510, 2006.
- [24] F. Lorenzoni, F. Casarin, M. Caldon, K. Islami, and C. Modena, "Uncertainty quantification in structural health monitoring: Applications on cultural heritage buildings," *Mechanical Systems and Signal Processing*, vol. 66, pp. 268-281, 2016.

- [25] M. Khoshzaban-Zavarehi, "On-line condition monitoring and fault diagnosis in hydraulic system components using parameter estimation and pattern classification," University of British Columbia, 1997.
- [26] H. M. Khalid, F. Flitti, S. Muyeen, M. S. Elmoursi, O. S. Tha'er, and X. Yu, "Parameter estimation of vehicle batteries in V2G systems: An exogenous function-based approach," *IEEE Transactions on Industrial Electronics*, vol. 69, no. 9, pp. 9535-9546, 2021.
- [27] J.-P. Noël and G. Kerschen, "Nonlinear system identification in structural dynamics: 10 more years of progress," *Mechanical Systems and Signal Processing*, vol. 83, pp. 2-35, 2017.
- [28] A. Rai and S. H. Upadhyay, "A review on signal processing techniques utilized in the fault diagnosis of rolling element bearings," *Tribology International*, vol. 96, pp. 289-306, 2016.
- [29] A. Rahimnejad, J. Enayati, L. Vanfretti, S. A. Gadsden, and M. AlShabi, "Reinforced Lattice Kalman Filters: A Robust Nonlinear Estimation Strategy," *IEEE Open Journal of Signal Processing*, 2023.
- [30] J. Paziewski, R. Sieradzki, and R. Baryla, "Multi-GNSS high-rate RTK, PPP and novel direct phase observation processing method: Application to precise dynamic displacement detection," *Measurement Science and technology*, vol. 29, no. 3, p. 035002, 2018.
- [31] Z. Rafique, H. M. Khalid, S. Muyeen, and I. Kamwa, "Bibliographic review on power system oscillations damping: An era of conventional grids and renewable energy integration," *International Journal of Electrical Power & Energy Systems*, vol. 136, p. 107556, 2022.
- [32] S.-i. Amari and A. Cichocki, "Adaptive blind signal processing-neural network approaches," *Proceedings of the IEEE*, vol. 86, no. 10, pp. 2026-2048, 1998.
- [33] A. Doucet, N. J. Gordon, and V. Krishnamurthy, "Particle filters for state estimation of jump Markov linear systems," *IEEE Transactions on signal processing*, vol. 49, no. 3, pp. 613-624, 2001.
- [34] R. Teti, K. Jemielniak, G. O'Donnell, and D. Dornfeld, "Advanced monitoring of machining operations," *CIRP annals*, vol. 59, no. 2, pp. 717-739, 2010.
- [35] F. Magalhães, Á. Cunha, and E. Caetano, "Vibration based structural health monitoring of an arch bridge: From automated OMA to damage detection," *Mechanical Systems and signal processing*, vol. 28, pp. 212-228, 2012.
- [36] S. Ashraf, M. H. Shawon, H. M. Khalid, and S. Muyeen, "Denial-of-service attack on IEC 61850-based substation automation system: A crucial cyber threat towards smart substation pathways," *Sensors*, vol. 21, no. 19, p. 6415, 2021.
- [37] K.-V. Yuen and S.-C. Kuok, "Online updating and uncertainty quantification using nonstationary output-only measurement," *Mechanical Systems and Signal Processing*, vol. 66, pp. 62-77, 2016.
- [38] D. Al-Ani and S. Habibi, "A New Robust Adaptive State and Parameter Estimation Algorithm."
- [39] A. Kamariotis, E. Chatzi, and D. Straub, "Value of information from vibration-based structural health monitoring extracted via Bayesian model updating," *Mechanical Systems and Signal Processing*, vol. 166, p. 108465, 2022.
- [40] W. Li *et al.*, "A perspective survey on deep transfer learning for fault diagnosis in industrial scenarios: Theories, applications and challenges," *Mechanical Systems and Signal Processing*, vol. 167, p. 108487, 2022.
- [41] H. M. Khalid and J. C.-H. Peng, "Bidirectional charging in V2G systems: An in-cell variation analysis of vehicle batteries," *IEEE Systems Journal*, vol. 14, no. 3, pp. 3665-3675, 2020.
- [42] V. R. Gharehbaghi *et al.*, "A critical review on structural health monitoring: Definitions, methods, and perspectives," *Archives of computational methods in engineering*, vol. 29, no. 4, pp. 2209-2235, 2022.
- [43] O. Avci, O. Abdeljaber, S. Kiranyaz, M. Hussein, M. Gabbouj, and D. J. Inman, "A review of vibration-based damage detection in civil structures: From traditional methods to Machine

- Learning and Deep Learning applications," *Mechanical systems and signal processing*, vol. 147, p. 107077, 2021.
- [44] Z. Gao and X. Liu, "An overview on fault diagnosis, prognosis and resilient control for wind turbine systems," *Processes*, vol. 9, no. 2, p. 300, 2021.
- [45] E. Zio, "Prognostics and Health Management (PHM): Where are we and where do we (need to) go in theory and practice," *Reliability Engineering & System Safety*, vol. 218, p. 108119, 2022.
- [46] R.-T. Wu and M. R. Jahanshahi, "Data fusion approaches for structural health monitoring and system identification: Past, present, and future," *Structural Health Monitoring*, vol. 19, no. 2, pp. 552-586, 2020.
- [47] H. M. Khalid, S. Muyeen, and J. C.-H. Peng, "Cyber-attacks in a looped energy-water nexus: An inoculated sub-observer-based approach," *IEEE Systems Journal*, vol. 14, no. 2, pp. 2054-2065, 2019.
- [48] M. Stender, M. Tiedemann, D. Spieler, D. Schoepflin, N. Hoffmann, and S. Oberst, "Deep learning for brake squeal: Brake noise detection, characterization and prediction," *Mechanical Systems and Signal Processing*, vol. 149, p. 107181, 2021.
- [49] P. Li, A.-T. Nguyen, H. Du, Y. Wang, and H. Zhang, "Polytopic LPV approaches for intelligent automotive systems: State of the art and future challenges," *Mechanical Systems and Signal Processing*, vol. 161, p. 107931, 2021.
- [50] D. Zaman, M. K. Tiwari, A. K. Gupta, and D. Sen, "A review of leakage detection strategies for pressurised pipeline in steady-state," *Engineering Failure Analysis*, vol. 109, p. 104264, 2020.
- [51] M. Talaat, A. S. Alsayyari, A. Alblawi, and A. Hatata, "Hybrid-cloud-based data processing for power system monitoring in smart grids," *Sustainable Cities and Society*, vol. 55, p. 102049, 2020.
- [52] J. Ding and W. Zhang, "Finite-time adaptive control for nonlinear systems with uncertain parameters based on the command filters," *International Journal of Adaptive Control and Signal Processing*, vol. 35, no. 9, pp. 1754-1767, 2021.
- [53] S. K. Gundewar and P. V. Kane, "Condition monitoring and fault diagnosis of induction motor," *Journal of Vibration Engineering & Technologies*, vol. 9, pp. 643-674, 2021.
- [54] Y. Wang *et al.*, "A comprehensive review of battery modeling and state estimation approaches for advanced battery management systems," *Renewable and Sustainable Energy Reviews*, vol. 131, p. 110015, 2020.
- [55] A. S. Musleh, H. M. Khalid, S. Muyeen, and A. Al-Durra, "A prediction algorithm to enhance grid resilience toward cyber attacks in WAMCS applications," *IEEE Systems Journal*, vol. 13, no. 1, pp. 710-719, 2017.
- [56] F. Ding, L. Lv, J. Pan, X. Wan, and X.-B. Jin, "Two-stage gradient-based iterative estimation methods for controlled autoregressive systems using the measurement data," *International Journal of Control, Automation and Systems*, vol. 18, no. 4, pp. 886-896, 2020.
- [57] M. H. Lipu *et al.*, "Intelligent algorithms and control strategies for battery management system in electric vehicles: Progress, challenges and future outlook," *Journal of Cleaner Production*, vol. 292, p. 126044, 2021.
- [58] H. Cui, Y. Guan, H. Chen, and W. Deng, "A novel advancing signal processing method based on coupled multi-stable stochastic resonance for fault detection," *Applied Sciences*, vol. 11, no. 12, p. 5385, 2021.
- [59] E. A. Abioye *et al.*, "A review on monitoring and advanced control strategies for precision irrigation," *Computers and Electronics in Agriculture*, vol. 173, p. 105441, 2020.
- [60] Y. Jiang, S. Yin, J. Dong, and O. Kaynak, "A review on soft sensors for monitoring, control, and optimization of industrial processes," *IEEE Sensors Journal*, vol. 21, no. 11, pp. 12868-12881, 2020.

- [61] H. M. Khalid and J. C.-H. Peng, "Immunity toward data-injection attacks using multisensor track fusion-based model prediction," *IEEE Transactions on Smart Grid*, vol. 8, no. 2, pp. 697-707, 2015.
- [62] M. Kuntoğlu *et al.*, "A review of indirect tool condition monitoring systems and decision-making methods in turning: Critical analysis and trends," *Sensors*, vol. 21, no. 1, p. 108, 2020.
- [63] C. E. Silva, D. Gomez, A. Maghareh, S. J. Dyke, and B. F. Spencer Jr, "Benchmark control problem for real-time hybrid simulation," *Mechanical Systems and Signal Processing*, vol. 135, p. 106381, 2020.
- [64] L. Xie, Z. Li, Y. Zhou, Y. He, and J. Zhu, "Computational diagnostic techniques for electrocardiogram signal analysis," *Sensors*, vol. 20, no. 21, p. 6318, 2020.
- [65] Z.-Q. Zhu, D. Liang, and K. Liu, "Online parameter estimation for permanent magnet synchronous machines: An overview," *Ieee Access*, vol. 9, pp. 59059-59084, 2021.
- [66] H. M. Khalid and J. C.-H. Peng, "A Bayesian algorithm to enhance the resilience of WAMS applications against cyber attacks," *IEEE Transactions on Smart Grid*, vol. 7, no. 4, pp. 2026-2037, 2016.
- [67] K. Feng, J. Ji, Q. Ni, and M. Beer, "A review of vibration-based gear wear monitoring and prediction techniques," *Mechanical Systems and Signal Processing*, vol. 182, p. 109605, 2023.
- [68] M. Elhoseny, "Multi-object detection and tracking (MODT) machine learning model for real-time video surveillance systems," *Circuits, Systems, and Signal Processing*, vol. 39, no. 2, pp. 611-630, 2020.
- [69] L. Lu *et al.*, "A survey on active noise control in the past decade—Part I: Linear systems," *Signal Processing*, vol. 183, p. 108039, 2021.
- [70] J. Gamba, *Radar signal processing for autonomous driving*. Springer, 2020.
- [71] H. M. Khalid and J. C.-H. Peng, "Improved recursive electromechanical oscillations monitoring scheme: A novel distributed approach," *IEEE Transactions on Power Systems*, vol. 30, no. 2, pp. 680-688, 2014.
- [72] J. Yu, Y. Song, D. Tang, and J. Dai, "A Digital Twin approach based on nonparametric Bayesian network for complex system health monitoring," *Journal of Manufacturing Systems*, vol. 58, pp. 293-304, 2021.
- [73] Q. Yao, Y. Tian, Q. Wang, and S. Wang, "Control strategies on path tracking for autonomous vehicle: State of the art and future challenges," *IEEE Access*, vol. 8, pp. 161211-161222, 2020.
- [74] A. S. Musleh, M. Debouza, H. M. Khalid, and A. Al-Durra, "Detection of false data injection attacks in smart grids: A real-time principle component analysis," in *IECON 2019-45th Annual Conference of the IEEE Industrial Electronics Society*, 2019, vol. 1: IEEE, pp. 2958-2963.
- [75] Y. Zhang, X. Shi, H. Zhang, Y. Cao, and V. Terzija, "Review on deep learning applications in frequency analysis and control of modern power system," *International Journal of Electrical Power & Energy Systems*, vol. 136, p. 107744, 2022.
- [76] H. Ahmed and A. K. Nandi, *Condition monitoring with vibration signals: Compressive sampling and learning algorithms for rotating machines*. John Wiley & Sons, 2020.
- [77] A. S. Musleh, S. Muyeen, A. Al-Durra, and H. M. Khalid, "PMU based wide area voltage control of smart grid: A real time implementation approach," in *2016 IEEE Innovative Smart Grid Technologies-Asia (ISGT-Asia)*, 2016: IEEE, pp. 365-370.
- [78] F. Engels, P. Heidenreich, M. Wintermantel, L. Stäcker, M. Al Kadi, and A. M. Zoubir, "Automotive radar signal processing: Research directions and practical challenges," *IEEE Journal of Selected Topics in Signal Processing*, vol. 15, no. 4, pp. 865-878, 2021.
- [79] A. Khoukhi and M. H. Khalid, "Hybrid computing techniques for fault detection and isolation, a review," *Computers & Electrical Engineering*, vol. 43, pp. 17-32, 2015.

- [80] H. F. Posada-Quintero and K. H. Chon, "Innovations in electrodermal activity data collection and signal processing: A systematic review," *Sensors*, vol. 20, no. 2, p. 479, 2020.
- [81] M. S. Mahmoud and H. M. Khalid, "Data-driven fault detection filter design for time-delay systems," *International Journal of Automation and Control*, vol. 8, no. 1, pp. 1-16, 2014.
- [82] S. Arena, E. Florian, I. Zennaro, P. F. Orrù, and F. Sgarbossa, "A novel decision support system for managing predictive maintenance strategies based on machine learning approaches," *Safety science*, vol. 146, p. 105529, 2022.
- [83] Y. Liu, L. Wu, and J. Li, "D-PMU based applications for emerging active distribution systems: A review," *Electric Power Systems Research*, vol. 179, p. 106063, 2020.
- [84] Y. Xia *et al.*, "Learning-based extended object tracking using hierarchical truncation measurement model with automotive radar," *IEEE Journal of Selected Topics in Signal Processing*, vol. 15, no. 4, pp. 1013-1029, 2021.
- [85] M. S. Mahmoud and H. M. Khalid, "Model prediction-based approach to fault-tolerant control with applications," *Ima journal of mathematical control and information*, vol. 31, no. 2, pp. 217-244, 2014.
- [86] C. Aydogdu *et al.*, "Radar interference mitigation for automated driving: Exploring proactive strategies," *IEEE Signal Processing Magazine*, vol. 37, no. 4, pp. 72-84, 2020.
- [87] M. S. Mahmoud and H. M. Khalid, "Expectation maximization approach to data-based fault diagnostics," *Information Sciences*, vol. 235, pp. 80-96, 2013.
- [88] Y. Du, S. Zhou, X. Jing, Y. Peng, H. Wu, and N. Kwok, "Damage detection techniques for wind turbine blades: A review," *Mechanical Systems and Signal Processing*, vol. 141, p. 106445, 2020.
- [89] H. Dahrouj *et al.*, "An overview of machine learning-based techniques for solving optimization problems in communications and signal processing," *IEEE Access*, vol. 9, pp. 74908-74938, 2021.
- [90] M. Rahim, H. M. Khalid, and M. Akram, "Sensor location optimization for fault diagnosis with a comparison to linear programming approaches," *The International Journal of Advanced Manufacturing Technology*, vol. 65, pp. 1055-1065, 2013.
- [91] L. Zou, Z. Wang, J. Hu, and Q.-L. Han, "Moving horizon estimation meets multi-sensor information fusion: Development, opportunities and challenges," *Information Fusion*, vol. 60, pp. 1-10, 2020.
- [92] M. Rahim, H. M. Khalid, and A. Khoukhi, "Nonlinear constrained optimal control problem: a PSO-GA-based discrete augmented Lagrangian approach," *The International Journal of Advanced Manufacturing Technology*, vol. 62, pp. 183-203, 2012.
- [93] H. Yuan, H. Dai, X. Wei, and P. Ming, "Model-based observers for internal states estimation and control of proton exchange membrane fuel cell system: A review," *Journal of Power Sources*, vol. 468, p. 228376, 2020.
- [94] A. Alamin, H. M. Khalid, and J. C.-H. Peng, "Power system state estimation based on Iterative Extended Kalman Filtering and bad data detection using normalized residual test," in *2015 IEEE Power and Energy Conference at Illinois (PECI)*, 2015: IEEE, pp. 1-5.
- [95] A. Simonetto, E. Dall'Anese, S. Paternain, G. Leus, and G. B. Giannakis, "Time-varying convex optimization: Time-structured algorithms and applications," *Proceedings of the IEEE*, vol. 108, no. 11, pp. 2032-2048, 2020.
- [96] X. Zhang, Z. Zhao, Z. Wang, and X. Wang, "Fault detection and identification method for quadcopter based on airframe vibration signals," *Sensors*, vol. 21, no. 2, p. 581, 2021.
- [97] M. Ghiasi, T. Niknam, Z. Wang, M. Mehrandezh, M. Dehghani, and N. Ghadimi, "A comprehensive review of cyber-attacks and defense mechanisms for improving security in smart grid energy systems: Past, present and future," *Electric Power Systems Research*, vol. 215, p. 108975, 2023.

- [98] B. Yang *et al.*, "A critical survey on proton exchange membrane fuel cell parameter estimation using meta-heuristic algorithms," *Journal of cleaner production*, vol. 265, p. 121660, 2020.
- [99] H. Sindi, M. Nour, M. Rawa, Ş. Öztürk, and K. Polat, "A novel hybrid deep learning approach including combination of 1D power signals and 2D signal images for power quality disturbance classification," *Expert Systems with Applications*, vol. 174, p. 114785, 2021.
- [100] Y. Hu, X. Miao, Y. Si, E. Pan, and E. Zio, "Prognostics and health management: A review from the perspectives of design, development and decision," *Reliability Engineering & System Safety*, vol. 217, p. 108063, 2022.

UNDER PEER REVIEW